


# Agilent E1418A 8/16-Channel D/A Converter

## Data Sheet

- 1-Slot, C-size, register based
- 8/16 independent channels, flexible and configurable
- Individual isolation per channel
- 16-bit resolution D/A per channel
- Programmable selectable voltage/current modes
- Software controlled calibration

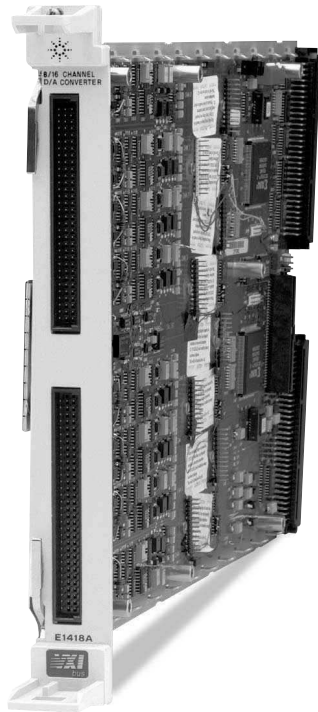

Agilent E1418A

### Description

The Agilent E1418A 8/16-Channel D/A Converter is a **C-size, 1-slot, register-based VXI module**. It consists of 8 or 16 fully independent, isolated or non-isolated, 16-bit D/As. Each channel can be set to voltage or current mode with local or remote sensing on voltage outputs. All outputs can be updated with register-level programming to allow fast backplane access. Each channel can be updated individually, or by using the internal data buffer, synchronized so that all channels change simultaneously. The channel output mode is

set with jumpers in the terminal block for each channel or by register programming. Each D/A converter can be calibrated without removal through software commands and use of the terminal block CALBUS in conjunction with a 5.5-digit multimeter. The on/off terminal block has standard screw terminals for field wiring.

Refer to the Agilent Technologies Website for instrument driver availability and downloading instructions, as well as for recent product updates, if applicable.



## Fast Updates

All outputs can be updated with register-level programming to allow fast backplane access. Rates are limited by controller speed and analog settling time. Each channel can be updated individually, or by using the internal data buffer, synchronized so that all channels change at the same time. The channel output mode is set with jumpers in the terminal block for each channel or by register programming.

## In-place Calibration

Each D/A converter can be calibrated without removal through software commands and use of the terminal block CALBUS in conjunction with a 5.5-digit multimeter. In addition, a built-in self-test command provides a high level of confidence that the module is operating properly.

## Choice of Connectors

The easy-to-use on/off terminal block, a feature of QUIC, has standard screw terminals for field wiring. Optional crimp and insert or ribbon cable connectors are available. Each channel contains a programmable output disconnect relay to open or close the channel.

## Product Specifications

### DC Voltage

<b>Amplitude:</b>	± 16 V max.
<b>Resolution:</b>	16 bits (488 µV steps) Monotonic to 2.0 mV
<b>Amplitude accuracy (dc):</b>	± (0.05% + 3.0 mV) (90 days)

### DC Current

<b>Range:</b>	0 to ± 20.00 mA
<b>Resolution:</b>	16 bit (610 nA steps) Monotonic to 25 µA
<b>Accuracy:</b>	± (% value + amps) ( <i>calibrated; temperature within ± 5 °C of calibration temperature and same load as at calibration</i> )
<b>90-day:</b>	± (0.09% + 5.0 µA)
<b>Output voltage:</b>	
<b>Compliance voltage:</b>	± 12 V
<b>Max open circuit voltage:</b>	<18 V
<b>Output current:</b>	
<b>Compliance current:</b>	>20 mA @ 0 to ± 12 V derated linearly to 5 mA @ ± 16 mV
<b>Short circuit current:</b>	<40 mA
<b>Differential ripple and noise:</b>	<2 µA rms (20 Hz - 250 kHz, into 250 Ω load)

### AC Output

<b>Sample rate:</b>	1 kSa/s per channel
<b>Modulation:</b>	No
<b>Sweep:</b>	No
<b>Amplitude accuracy (ac):</b>	not specified
<b>Standard waveforms:</b>	No
<b>Arbitrary waveform function:</b>	No

### General Characteristics

<b>Settling time:</b>	300 µs (+ full scale to – full scale step, single channel, to rated accuracy)
<b>Isolation:</b>	42 Vdc/ac peak (channel-to-chassis or channel-to-channel)
<b>Synchronization:</b>	Software commands, external trigger inputs, or TTL backplane trigger lines provide a choice of synchronizing event. Each individual channel can be updated by software command or all channels can be updated at the same time based upon a software or hardware trigger.

## General Specifications

### VXI Characteristics

<b>VXI device type:</b>	Register based
<b>Data transfer bus:</b>	A16 or A24, D16
<b>Size:</b>	C
<b>Slots:</b>	1
<b>Connectors:</b>	P1/2
<b>Shared memory:</b>	n/a
<b>VXI busses:</b>	n/a
<b>C-size compatibility:</b>	n/a

## Instrument Drivers

See the Agilent Technologies Website ([http://www.agilent.com/find/inst\\_drivers](http://www.agilent.com/find/inst_drivers)) for driver availability and downloading.

Command module firmware:	Downloadable
Command module firmware rev:	A.08
I-SCPI Win 3.1:	Yes
I-SCPI Series 700:	Yes
C-SCPI LynxOS:	Yes
C-SCPI Series 700:	Yes
Panel Drivers:	No
VXI plug&play Win Framework:	Yes
VXI plug&play Win 95/NT Framework:	Yes
VXI plug&play HP-UX Framework:	No

## Module Current

	$I_{PM}$	$I_{DM}$
+5 V:	0.7	0.01
+12 V:	0.04	0.01
-12 V:	0	0
+24 V:	0.44	0.01
-24 V:	0.44	0.01
-5.2 V:	0	0
-2 V:	0	0

## Cooling/Slot

Watts/slot:	25.4
$\Delta P$ mm H <sub>2</sub> O:	0.10
Air Flow liter/s:	2.00

## Ordering Information

Description	Product No.
8/16-Channel D/A Converter	E1418A
Add 8 Channels for total of 16, Non-isolated***	E1418A 001***
Convert 8 Channels to Isolated***	E1418A 002***
Add 8 Channels and convert all 16 to Isolated***	E1418A 003***
Crimp/Insert Connectors****	E1418A A3E****
Ribbon Cable Connectors	E1418A A3H
1-Channel Isolation Plug-on for E1418A*	E1523A*
8-Non-Isolated-Channel Expan. Kit for E1418A**	E1524A**
8-Isolated-Channel Expan. Kit for E1418A**	E1525A**
Service Manual	E1418A-0B3


### Notes:

\* You can add isolation to single channels with the E1523A.

\*\* You can add an 8-channel expansion kit to existing 8-channel units with the E1524A and E1525A.

\*\*\* Factory-installed option. *Must* be ordered with the E1418A.

\*\*\*\* Crimp-and-insert contacts are not included. See the Interconnect and Wiring section for information on ordering Crimp-and-Insert Contacts.

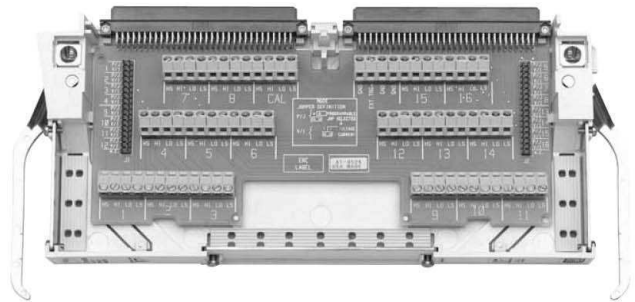

## **Agilent Technologies' Test and Measurement Support, Services, and Assistance**

Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Two concepts underlie Agilent's overall support policy: "Our Promise" and "Your Advantage."

### **Our Promise**

Our Promise means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you receive your new Agilent equipment, we can help verify that it works properly, and help with initial product operation.

### **Your Advantage**

Your Advantage means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and onsite education and training, as well as design, system integration, project management, and other professional engineering services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.



### **Agilent Email Updates**

[www.agilent.com/find/emailupdates](http://www.agilent.com/find/emailupdates)

Get the latest information on the products and applications you select.

### **Agilent T&M Software and Connectivity**

Agilent's Test and Measurement software and connectivity products, solutions and developer network allows you to take time out of connecting your instruments to your computer with tools based on PC standards, so you can focus on your tasks, not on your connections.

Visit [www.agilent.com/find/connectivity](http://www.agilent.com/find/connectivity) for more information.

For more assistance with all your test and measurement needs or to find your local Agilent office go to [www.agilent.com/find/assist](http://www.agilent.com/find/assist)

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2005  
Printed in the USA May 1, 2005  
5965-5534E



**Agilent Technologies**