




160 School House Road, Souderton, PA 18964-9990 USA
Phone 215-723-8181•FAX 215-723-5688

MODELS 50W1000B
M1 M2 M3 M4
50 WATTS CW
1 - 1000 MHz

The Model 50W1000B is a portable, self-contained, air-cooled, broadband, solid state amplifier designed for applications where instantaneous bandwidth and high gain are required. Push-pull circuitry is utilized in the high power stages to lower distortion and improve stability. The 50W1000B, when used with an RF sweep generator, will provide a minimum of 50 watts of swept power. Included is a front panel gain control which permits the operator to conveniently set the desired output level. The 50W1000B is protected from RF input overdrive by limiting diodes and an RF input leveling circuit which controls the RF input level to the RF amplifier first stage when the RF input level is increased above 0 dBm. The RF Amplifier stages are protected from over temperature by removing the DC voltage to them if an over temperature condition occurs due to cooling blockage or fan failure. There is a digital display on the front panel to indicate the operate status and fault conditions when an over temperature, power supply, or amplifier fault has occurred. The unit can be returned to operate when the condition has been cleared. The 50W1000B includes digital control for both local and remote control of the amplifier. This 8-bit RISC microprocessor controlled board provides both IEEE-488 (GPIB) and asynchronous, full duplex RS-232 control of all amplifier functions.

50W1000B TYPICAL POWER OUTPUT

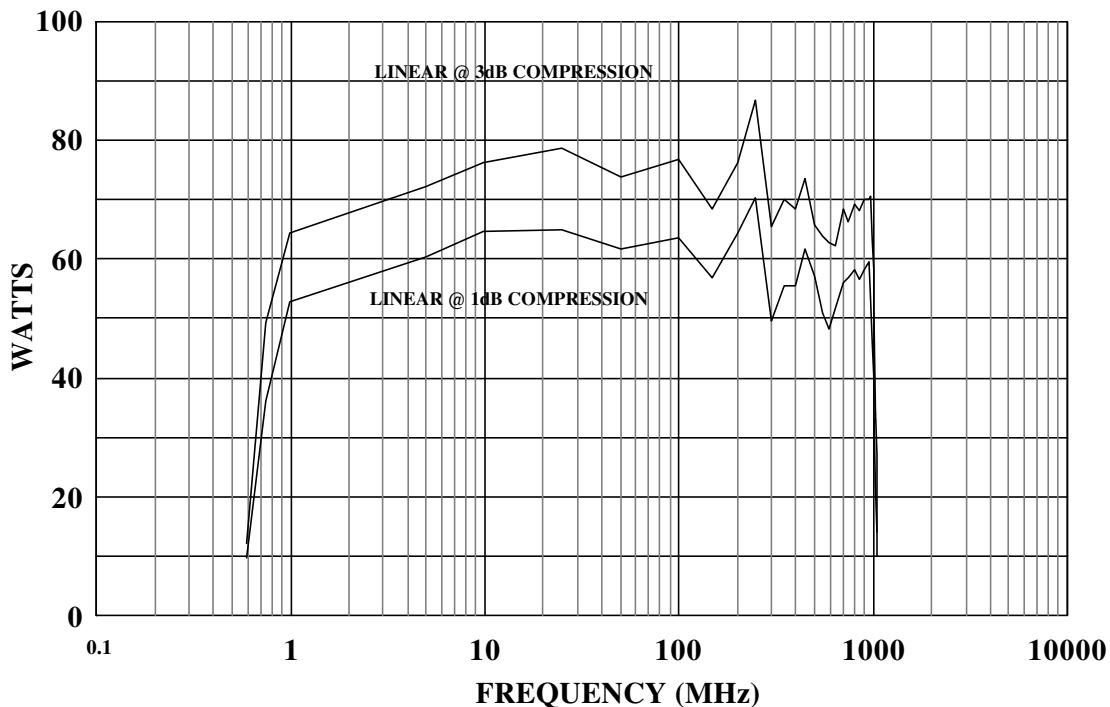

REV081000

SPECIFICATIONS

RATED OUTPUT POWER..... 50 watts minimum

INPUT FOR RATED OUTPUT..... *1.0 milliwatt maximum*

POWER OUTPUT @ 3dB COMPRESSION

Nominal..... 70 watts
Minimum..... 50 watts

POWER OUTPUT @ 1dB COMPRESSION

Nominal..... 55 watts
Minimum..... 40 watts

FLATNESS..... $\pm 1.0 \text{ dB typical}$
 $\pm 1.5 \text{ dB maximum}$

FREQUENCY RESPONSE **1-1000 MHz instantaneously**

GAIN (at maximum setting)..... 47 dB minimum

GAIN ADJUSTMENT (Continuous Range)..... 20 dB minimum (4096 steps remote)

INPUT IMPEDANCE..... 50 ohms, VSWR 2.0:1 maximum

OUTPUT IMPEDANCE 50 ohms, nominal

MISMATCH TOLERANCE * *100% of rated power without foldback. Will operate without damage or oscillation with any magnitude and phase of source and load impedance.*

MODULATION CAPABILITY..... Will faithfully reproduce AM, FM, or pulse modulation appearing on the input signal

HARMONIC DISTORTION..... Minus 20 dBc maximum at 50 watts

THIRD ORDER INTERCEPT POINT 57 dBm typical

PRIMARY POWER (*selected automatically*)..... **90-132, 180-264 VAC
50/60 Hz, single phase
600 watts maximum**

REMOTE INTERFACES..... IEEE-488, RS-232

CONNECTORS

RF *Type N female*

REMOTE CONTROL

IEEE-488..... 24 pin female

RS-232..... 9 pin Subminiature D (female)

REMOTE INTERLOCK..... 15 Pin Subminiature D

COOLING *Forced air (self contained fans)*

WEIGHT *See Model Configurations*

SIZE (WxHxD)..... See Model Configurations

MODEL CONFIGURATIONS

ANSWER

MODEL CONFIGURATIONS

MODEL NUMBER	RF INPUT	RF OUTPUT	WEIGHT	WEIGHT
50W1000B	<i>Type N female on front panel</i>	<i>Type N female on front panel</i>	<i>25.9 kg (57.0 lb)</i>	<i>50.3 x 20.3 x 45.7 cm 19.8 x 8.0 x 18.1 in</i>
50W1000BM1	<i>Type N female on rear panel</i>	<i>Type N female on rear panel</i>	<i>25.9 kg (57.0 lb)</i>	<i>50.3 x 20.3 x 45.7 cm 19.8 x 8.0 x 18.1 in</i>
50W1000BM2	<i>Same as 50W1000B with enclosure removed for rack mounting</i>		<i>16.4 kg (36.0 lb)</i>	<i>48.3 x 17.8 x 46.0 cm 19.0 x 7.0 x 18.1 in</i>
50W1000BM3	<i>Same as 50W1000BM1 with enclosure removed for rack mounting</i>		<i>16.4 kg (36.0 lb)</i>	<i>48.3 x 17.8 x 46.0 cm 19.0 x 7.0 x 18.1 in</i>
50W1000BM4	<i>Same as 50W1000BM2 with gain control removed</i>		<i>16.4 kg (36.0 lb)</i>	<i>48.3 x 17.8 x 46.0 cm 19.0 x 7.0 x 18.1 in</i>