


# SPECTRUM ANALYZERS

## SPECTRUM ANALYZER MS2601A/J 10 kHz to 2.2 GHz

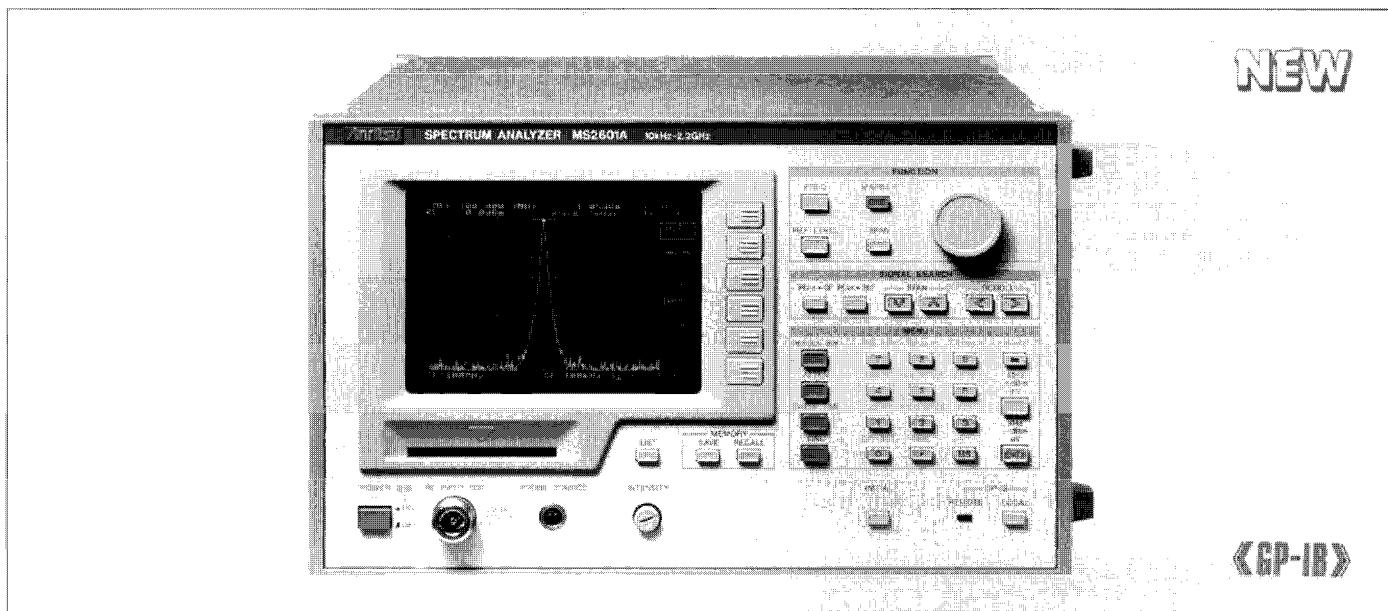

The MS2601A/J is a wide-band spectrum analyzer which covers the video to VHF/UHF bands. The synthesized local oscillator and automatic calibration, which uses a highly-accurate signal source, enable accurate frequency and level measurement. In addition, the MS2601A/J has new and original functions such as the zone marker and scroll function, that shorten measurement time. Furthermore, Plug-in Memory Cards (PMCs) for storing measurement conditions and waveform data offer excellent operability.

### Advanced functions

#### • High-level built-in automatic calibration

The MS2601A/J automatically calibrates itself using the calibration signal from the built-in signal source each time the CAL key is pressed. The calibration data is processed at high speed by a 16-bit microprocessor and the compensation value is added to the displayed measured value. The reliability of measurements has been greatly improved and the measurement error has been reduced to about one third of conventional models resulting in a general level measurement accuracy of 1 dB.

Furthermore, when the working temperature changes drastically, an accurate measurement can be made just by pressing the CAL key.

#### • Digital technology supports high-accuracy measurement

Digital technology including a synthesized local signal has been used to greatly improve the level measurement accuracy.

Also, the signal peak-level frequency can be measured with 1 Hz resolution even at a 2.2 GHz full sweep. Furthermore, in addition to having a QP detector, three resolution bandwidths, and time constants based on CISPR standards, the antenna calibration coefficients are automatically calculated to facilitate the best EMI measurement.

#### • IC cards for spectrum analyzers

The age of spectrum analyzers operated by IC cards has now arrived. The MS2601A/J uses IC memory cards called PMCs to store measurement conditions and waveform data. For example, once the test procedures are stored in the PMCs, measurements can be made under the same conditions at any time.

You can keep your hard-earned measurement conditions as your personal know-how. Also, if these PMCs are used with the Personal Test Automation (PTA) program memory, automatic measurement can be packaged in a card.

#### • PTA widens realm of automatic measurements

The PTA function is a high-level language for measurement and a computer integrated in a spectrum analyzer. Programs for measurement, operation, and display, etc. can be input to the MS2601A/J via the keyboard or a personal computer. Thus, the spectrum analyzer can be configured quickly into automatic test equipment. PTA supports complicated measurements as well as preparation of final test results. The MS2601A/J can be used as a frequency counter, power meter, and real-time computer for measurement operations, or as ATE combining these functions, as well as a spectrum analyzer. Also, various support software is available to enable connection to factory automation LANs (Local Area Networks).


### Main applications

- Measuring transmission quality such as spurious emissions from radio communication equipment
- Measuring electromagnetic interference (EMI)
- Testing high-frequency parts such as RF converters and tuners
- Measuring various devices such as filters and ICs

## SPECTRUM ANALYZERS


### Correct frequency count even at 2.2 GHz-span sweep

The zone markers can be aligned with the desired signal even while observing the entire signal at full span sweep. A 2.2 GHz signal frequency can be measured at 1 Hz resolution.

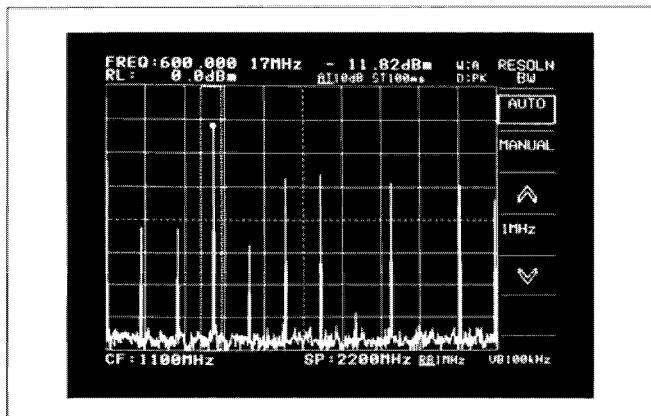


### EMI measurement

In addition to providing a QP detector and three resolution bandwidths and time constants based on CISPR standards, antenna calibration coefficients are automatically calculated to facilitate easy EMI measurement.

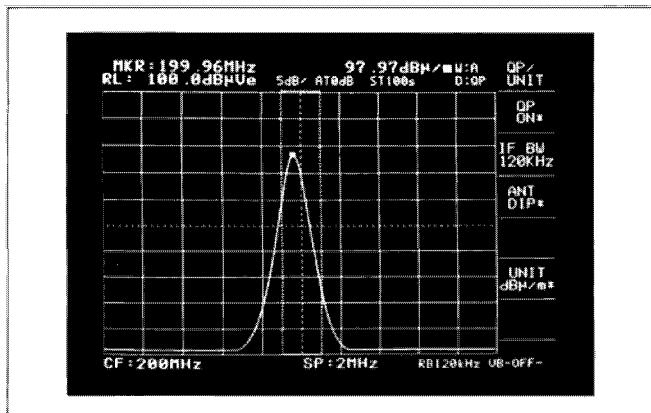


### Zone marker easily locates signals

This zone marker function (patent pending) has been developed by Anritsu to reduce the measurement time. Simply enter zone markers around the signal frequency and the peak value within that zone will be measured with 0.03 dB resolution and displayed, even if the exact frequency varies. This eliminates troublesome marker adjustment to the signal peak each time you want to read the frequency and level. The frequency-adjustment capability for an oscillator under test has been increased remarkably, and the frequency display remains visible during adjustment.

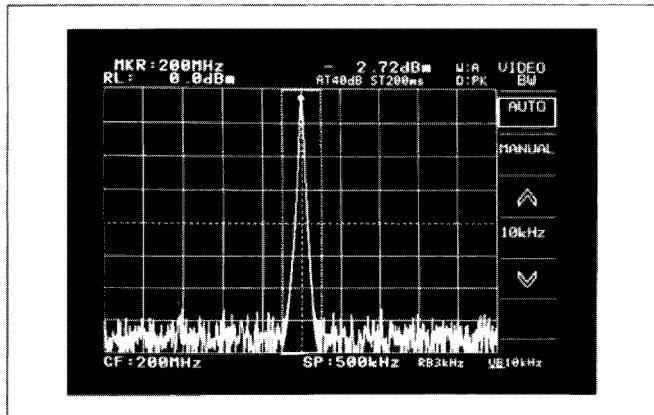

### Frequency axis scroll function

Sometimes the signal on the left or right of the displayed portion must be examined in detail during a slow sweep. Just press the scroll key to move the display two divisions left or right on the screen. This permits areas beyond the edge of the screen to be displayed without waiting for a new sweep to display the entire waveform.

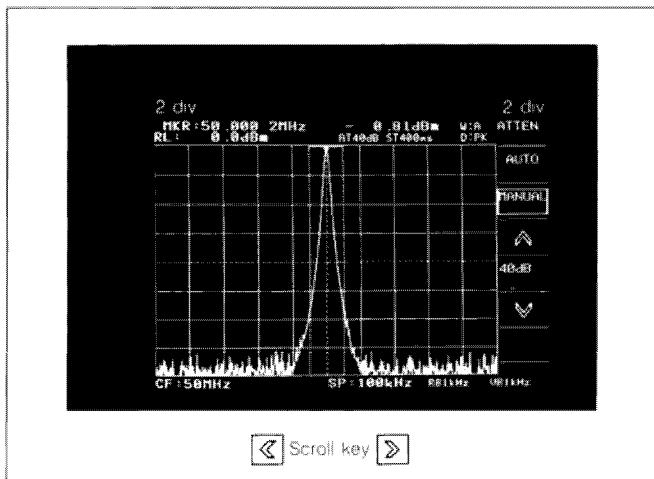

## SPECTRUM ANALYZERS

### MS2601A/J Specifications

Model		MS2601A	MS2601J
Frequency	Measurement frequency range	9 kHz to 2.2 GHz	
	Readout modes	Center-span, start-span	
Center frequency/ start frequency	Setting range	0 to 2210 MHz (readout resolution 20 Hz)	
	Readout accuracy	$\pm(100 \text{ Hz} + 2\% \text{ of frequency span} + \text{tuning frequency} \times \text{reference frequency accuracy})$ at frequency span $\geq 10 \text{ kHz}$ , after automatic calibration	
Frequency span	Setting range	1 kHz to 2200 MHz for horizontal 10 divisions, 2-digit (10 to 99) variable, and 0 Hz (fixed tuning) 1 kHz to 2000 MHz, 1-2-5 sequence at step keys	
	Readout accuracy	$\pm 2\%$	
Resolution	Resolution bandwidth	30 Hz to 1 MHz (3 dB bandwidth), variable in 1-3 sequence, can be selected manually or automatically coupled to frequency span	
	Resolution bandwidth accuracy	$\pm 20\%$	
	Selectivity	$\leq 15 : 1$ (ratio of 60 dB and 3 dB bandwidth)	
Stability	Residual FM	$\leq 20 \text{ Hz p-p}/0.1 \text{ s}$ (frequency span $\leq 500 \text{ kHz}$ )	
	Drift	$\leq 300 \text{ Hz}/\text{min}$ (frequency span $\leq 500 \text{ kHz}$ , after 1-hour warm-up at constant ambient temperature)	
	Sideband noise	$\leq -80 \text{ dBc}$ (at 100 Hz resolution bandwidth, 1 Hz video bandwidth, 10 kHz from signal)	
Reference oscillator	Frequency	10 MHz	
	Starting characteristic	$\leq 5 \times 10^{-8}$ (after 20-minute warm-up, referred to frequency after 1-hour warm-up)	
	Stability	$\leq 2 \times 10^{-8}/\text{day}$ , $\leq 1 \times 10^{-7}/\text{year}$ (referred to frequency after 24-hour warm-up)	
	Aging rate	$\leq 5 \times 10^{-8}$ (referred to frequency at 25°C)	
	Temperature characteristic		
	External reference input	Frequency: 10 MHz, level: 2 to 5 Vp-p	
Markers	NORMAL	Function	Displays frequency at tunable marker
		Readout accuracy	Same as center frequency
	Δ(delta)	Function	Displays frequency difference between reference marker and tunable marker
		Readout accuracy	Same as frequency span accuracy
	COUNT	Function	Displays received signal frequency at marker
		Resolution	1 Hz, 10 Hz, 100 Hz selectable
		Readout accuracy	Tuning frequency $\times$ reference frequency accuracy $\pm (2 \text{ counts or } 20 \text{ Hz, whichever is greater})$
Measurement range	-130 to +20 dBm		-124 to +20 dBm
Display	Divisions	8 divisions on vertical axis when top line is reference level and scale is 10 dB/div 10 divisions on vertical axis for other scales	
	LOG	10 dB/div	0 to -70 dB, referred to reference level
		5 dB/div	0 to -50 dB, referred to reference level
		2 dB/div	0 to -20 dB, referred to reference level
		1 dB/div	0 to -10 dB, referred to reference level
	LIN	10%/div of reference level (calibrated in voltage, unit: V)	
	Linearity	LOG: $\pm 0.2 \text{ dB}/0$ to -10 dB, $\pm 0.3 \text{ dB}/0$ to -20 dB, $\pm 0.5 \text{ dB}/0$ to -50 dB, (resolution bandwidth of 100 Hz to 1 MHz), $\pm 1 \text{ dB}/0$ to -70 dB, (resolution bandwidth of 100 Hz to 100 kHz), after automatic calibration LIN: $\pm 3\%$ of reference level (fullscale)	
Amplitude	Frequency response	$\pm 0.5 \text{ dB}$ (100 kHz to 2.0 GHz), input ATT at 20 dB, temperature range 20° to 30°C	$\pm 0.5 \text{ dB}$ (100 kHz to 1.5 GHz), input ATT at 20 dB, temperature range 20° to 30°C
Reference level	Setting range	LOG: +20 to -100 dBm (setting resolution 0.1 dB) LIN: 2240 mV to 70.8 μV	LOG: +20 to -100 dBm (setting resolution 0.1 dB) LIN: 2750 mV to 87.1 μV
	Accuracy	$\pm 0.3 \text{ dB}$ (0 to -50 dBm), $\pm 0.75 \text{ dB}$ (+20 to -70 dBm) after automatic calibration at frequency of 50 MHz and frequency span $\geq 2 \text{ MHz}$ (resolution bandwidth, video bandwidth, sweep time, and input ATT settings at AUTO)	
	Resolution bandwidth switching deviation	$\pm 0.3 \text{ dB}$ (after automatic calibration)	
Dynamic range	Average noise level	$\leq -120 \text{ dBm}$ (frequency 1 MHz to 2 GHz) with 0 dB input ATT, 300 Hz resolution bandwidth, 1 Hz video bandwidth	$\leq -114 \text{ dBm}$ (frequency 1 MHz to 2 GHz) with 0 dB input ATT, 300 Hz resolution bandwidth, 1 Hz video bandwidth
	2nd and 3rd harmonic distortion	$\leq -75 \text{ dB}$ (frequency 5 to 800 MHz) when 0 dB input ATT and -30 dBm input level	
	Residual response	$\leq -100 \text{ dBm}$ (frequency $\geq 500 \text{ kHz}$ ) when 0 dB input ATT and 50 Ω input termination	$\leq -95 \text{ dBm}$ (frequency $\geq 500 \text{ kHz}$ ) when 0 dB input ATT and 75 Ω input termination

Continued on next page

## SPECTRUM ANALYZERS

Model			MS2601A	MS2601J		
Amplitude	Marker	NORMAL	Displays level at tunable marker			
		Δ(delta)	Displays level difference between tunable marker and reference marker			
	Video bandwidth		1 Hz, 10 Hz, 100 Hz, 1 kHz, 10 kHz, 100 kHz, OFF (selected manually or automatically coupled to resolution bandwidth)			
	Level unit		dBm, dB $\mu$ V, dBmV, V, dB $\mu$ V (emf), dB $\mu$ V/m			
	QP detection		The charge, discharge, and display time constants conforming to CISPR standards are provided at 200 Hz, 9 kHz, and 120 kHz resolution bandwidth.			
	RF input	Impedance	50 Ω VSWR ≤ 1.5 (input ATT ≥ 10 dB, frequency ≥ 30 kHz), N-type connector	75 Ω VSWR ≤ 1.5 (input ATT ≥ 10 dB, frequency 30 kHz to 2 GHz), NC-type connector		
		Maximum input level	+25 dBm (input ATT ≥ 10 dB), DC: ±50 V			
	Input ATT	Attenuation	0 to 50 dB, in 10 dB steps (selected manually or automatically coupled to reference level)			
		Switching accuracy	±1 dB (100 kHz to 1.5 GHz), ±2.0 dB (1.5 to 2 GHz)			
Sweep	Sweep time		50 ms to 100 s variable in 1, 1.5, 2, 3, 5, 7 sequence Selected manually or automatically coupled to frequency span, resolution bandwidth, and video bandwidth			
	Trigger		FREE RUN, LINE, VIDEO, SINGLE, EXT TRIGGER			
	Sweep range		Normal: sweeps entire range Zone sweep: sweeps range between zone markers			
CRT display	CRT		Six-inch electromagnetic deflection type (amber display color)			
	Display items		Graticule (grid), waveform data, setting conditions, menu, title			
	Waveform data display method		Digital storage, two channels (A and B), horizontal axis: 501 points			
Direct plotting		Screen data hard-copied to X-Y plotter or dot-matrix printer (compatible models only) via GP-IB				
Function memory		Internal memory: save/recall 6 setting conditions PMC (32 kB): save/recall 12 setting conditions and measurement data				
External control		GPI-B (IEEE488, IEC625-1, 24 pins) (All functions except power switch, CRT intensity, PMC control, GPI-B address, and direct plotting controlled) Interface: SH1, AH1, T6, L4, SR1, RL1, PP0, DC1, DT1, C0				
External output	Video output		Composite and separate			
	X-Y-Z outputs		X-axis output: Left edge 0 V to right edge approx. 10 V Y-axis output: Lower edge 0 V to upper edge approx. 1 V Z-axis output: TTL level			
	IF output		Frequency: 3.6 MHz, output level: 0 dBm (at reference level line on CRT)			
	CHECK signal output		Frequency: 50 MHz, output level: -2 dBm			
	TG output		FIRST LOCAL frequency: 2.5214 to 4.7214 GHz, SECOND LOCAL frequency: 2.5 GHz			
	Probe power supply		+5 V, +15 V, -15 V			
Power*		AC 100 V ±10%, 50/60 Hz, ≤ 145 VA (DC operation with MZ144A Battery Pack or MZ145B DC/DC Converter)				
Dimensions and weight		177H × 284W × 451D mm, < 18.5 kg				
Ambient temperature, rated range of use		0° to 50°C				

\* Specify one nominal line voltage between 100 and 250 V when ordering.

### Options

#### • Option 01: PTA (with external keyboard)

PTA model	PTA-S201	
Display	Number of display characters	57 characters × 25 lines (small) 48 characters × 25 lines (medium) 41 characters × 25 lines (large)
	Displayable characters	Upper-case and lower-case characters, numerals, special symbols, and cursor
	Character font	7 × 11 dot matrix (small) 9 × 13 dot matrix (medium) 10 × 13 dot matrix (large)
	Graphic	4 screens, 400 × 575 dots
Keyboard	Character keys	Upper-case and lower-case characters, numerals, and special symbols
	Editing keys	DEL, INS, <, >, ^, V
	Command keys	RUN, STEP, RETURN, RES

Continued on next page

# SPECTRUM ANALYZERS

PTA model	PTA-S201
PTL	Program area
	Commands
	Functions
	System subroutines
	Variables
	Interfaces
PMC	Storage capacity
	Program file

2

## • Option 02: RS-232C Interface

Communication mode	Start-stop, full-duplex
Baud rate	300, 600, 1200, 2400, 4800 bps
Data bit	7, 8
Parity bit	Odd, even and none
Start bit	1 bit
Stop bit	1, 1.5 and 2 bits
Control items	All items except power on/off, CRT intensity, PMC management, direct plotting and RS-232C parameters
Connector	DP-25P or equivalent

## • Option 04: PTA (without keyboard)

## • Option 05: Following changes to specifications

Option	MS2601A Option 05		MS2601J Option 05
Frequency	Measurement range		100 Hz to 2.2 GHz
Amplitude	Frequency response		±0.5 dB (100 Hz to 2.0 GHz), input ATT at 20 dB, temperature range 20° to 30°C
	Dynamic range	Average noise level	Following added to standard model ≤ -80 dBm (1 to 10 kHz) ≤ -100 dBm (10 to 100 kHz) ≤ -110 dBm (100 kHz to 1 MHz) At 0 dB input ATT, 30 Hz RBW, 1 Hz VBW
			Following added to standard model ≤ -74 dBm (1 to 10 kHz) ≤ -94 dBm (10 to 100 kHz) ≤ -104 dBm (100 kHz to 1 MHz) At 0 dB input ATT, 30 Hz RBW, 1 Hz VBW
	RF input	Impedance	50 Ω VSWR ≤ 1.5 At ≥ 10 dB input ATT, ≥ 100 Hz frequency
		Maximum input level	+25 dBm (≥ 10 dB input ATT) DC ± 0 V
	Input ATT switching accuracy		±1.0 dB (1 kHz to 1.5 GHz) ±2.0 dB (1.5 to 2.0 GHz)

## Ordering information

Please specify model/order number, name and quantity when ordering.

Model/Order No.	Name	Remarks
MS2601A MS2601J	<b>Main frame</b> Spectrum Analyzer Spectrum Analyzer	RF input 50 Ω RF input 75 Ω
J0025A J0104 J0017 F0012 P0001 W0270AE W0270BE	<b>MS2601A standard accessories</b> Coaxial Cord, 1 m: Coaxial Cord, 1 m: Power Cord, 2.5 m: Fuse, 3.15 A: Memory Card, 32 kbyte: MS2601A/J Operation Manual: MS2601A/J Service Manual:	1 pc 1 pc 1 pc 2 pcs 1 pc 1 copy 1 copy
J0308 J0121 J0017 F0012 P0001 W0270AE W0270BE	<b>MS2601J standard accessories</b> Coaxial Cord, 1 m: Coaxial Cord, 1 m: Power Cord, 2.5 m: Fuse, 3.15 A: Memory Card, 32 kbyte: MS2601A/J Operation Manual: MS2601A/J Service Manual:	1 pc 1 pc 1 pc 2 pcs 1 pc 1 copy 1 copy
		N-P-5W•5D-2W•N-P-5W UG-88U•RG55/U•N-P-55U T3.15A250V BS32C1-A-30  BNC-P620•3C-2WS•NC-P-3W NCP-3W•3C-2WS•NCP-3W T3.15A250V BS32C1-A-30

Continued on next page

## SPECTRUM ANALYZERS

Model/Order No	Name	Remarks
MS2601-01	<b>Options</b> PTA RS-232C Interface	With external PTA Keyboard
MS2601-02	PTA	Without PTA Keyboard
MS2601-04	DC Coupled Input	Frequency range: 100 Hz to 2.2 GHz (with MA8601A)
MS2601-05		
P0001	<b>Optional instruments and parts</b>	
P0002	Memory Card, 32 kbyte	BS32C1-A-30
MA8601A	Memory Card, 128 kbyte	BS128C1-C-56
MA8601J	DC Block Adaptor	50 Ω
G0044	DC Block Adaptor	75 Ω
MH680A	PTA Keyboard	
MH648A	Tracking Generator	0.1 to 2000 MHz
MZ144A	Pre-amplifier	0.1 to 1200 MHz
MZ145B	Battery Pack	
MP534A	DC/DC Converter	25 to 520 MHz
MP651A	Dipole Antenna	470 to 1200 MHz, 50 Ω (N)
3104P	Dipole Antenna	20 to 200 MHz, 50 Ω
6502	Biconical Antenna	10 kHz to 30 MHz, 50 Ω
MP635A	Loop Antenna	80 to 1000 MHz
MP666A	Log-periodic Antenna	200 to 2000 MHz
MB18A	Pole	for MP666A
MB9A	Tripod	
MB19A	Tripod	With a pole, for MP635A/MP666A
MN423B	Artificial Mains Network	CISPR Pub.1, 150 kHz to 30 MHz
MN424B	Artificial Mains Network	FCC Part 15, 450 kHz to 30 MHz
MN425B	Artificial Mains Network	VOE 0876, 10 kHz to 30 MHz
MP414B	Loop Antenna	9 kHz to 30 MHz, 3 bands
MP415B	Rod Antenna	9 kHz to 30 MHz, 3 bands
MZ126A	Band Selector	For MP414B
MP612A	RF Fuse Holder	DC to 1000 MHz, 50 Ω
MP613A	Fuse Element	5 pc/set, for MP612A
MP640A	Branch	40 dB, DC to 1.7 GHz
MP654A	Coupler	30 dB, 0.8 to 3 GHz
J0063	Fixed Attenuator for High Power Measurement	10 W, DC to 12.4 GHz
J0079	Fixed Attenuator for High Power Measurement	30 W, DC to 9 GHz
MP526A	High-Pass Filter	For 60 MHz band
MP526B	High-Pass Filter	For 150 MHz band
MP526C	High-Pass Filter	For 250 MHz band
MP526D	High-Pass Filter	For 400 MHz band
MP526G	High-pass Filter	For 27 MHz band
UA455A	Video Plotter	
B0215	Rack Mount	
J0007	GP-IB Cable, 1 m	408JE-101
J0008	GP-IB Cable, 2 m	408JE-102
B0213	Carrying Case	With casters
B0214	Carrying Case	Without casters
B0225	Carrying Bag	With casters
B0226	Carrying Bag	Without casters
B0025	Protective Front Cover	
B0029	Stacking Feet	
B0038	Front Handle Kit	
B0231	CRT Hood	
MP520A	CM Directional Coupler	25 to 500 MHz, 75 Ω (NC)
MP520B	CM Directional Coupler	25 to 1000 MHz, 75 Ω (NC)
MP520C	CM Directional Coupler	25 to 500 MHz, 50 Ω (N)
MP520D	CM Directional Coupler	100 to 1000 MHz, 50 Ω (N)
MP614A	50/75 Ω Impedance Transformer	10 to 1000 MHz
MB009	50/75 Ω Impedance Transformer	DC to 2000 MHz, loss: 6.2 dB
MA2601B	EMI Probe	5 to 1000 MHz
MA2601C	EMI Probe	1 to 50 MHz
KT-10	EMI Clamp	
MB18B	Pole	For MP651A
Z0047	Plotter Paper	5 rolls/set, for UA455A
GD9411	Plotter	Graphtec product
PACKET V series	Personal Technical Computer	
MH037A	BCD Converter	
P6201	FET Probe	
MZ7004A	Portable Test Rack	Sony-Tektronix product