


# Agilent E1438A/B 100 MSa/s Digitizer with DSP and Memory

## Data Sheet



The Agilent E1438A/B is ideal for application in signal acquisition and analysis, high resolution ATE and radar testing. This single-channel 100 MSa/s digitizer combines exceptional spurious-free dynamic range with alias-protected signal conditioning, center frequency tunable digital filtering, and a large signal capture memory, in a single-wide C-size VXI module. The only difference between the A and B versions is the E1438B includes a 2.5 Gbit/sec optical front panel data port.

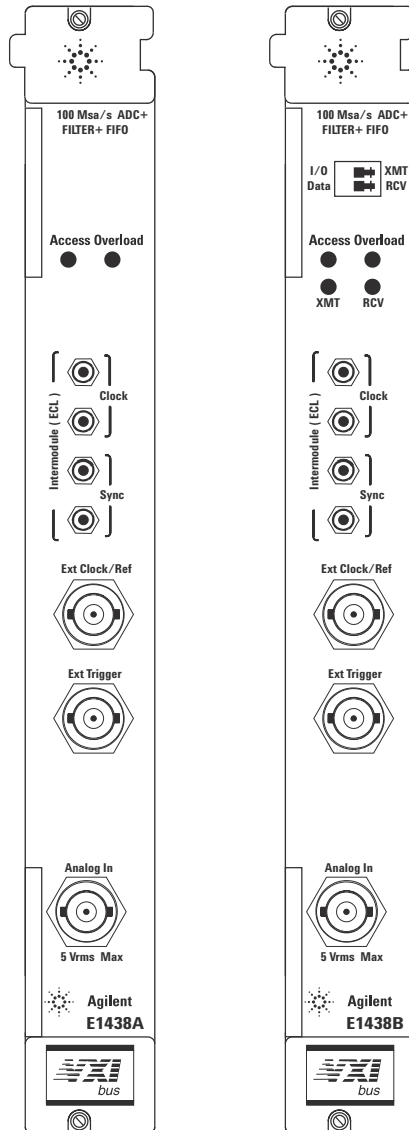

Agilent Technologies

# Specifications

| <b>Input Specification</b>  |  |
|---|--|
| <b>Input Characteristics</b>  | BNC connector, shell grounded to chassis.<br>50Ω impedance.<br>dc coupled or ac coupled through 0.2 μF capacitor.<br>Input signal can be switched to ground.<br>40 MHz anti-alias filter with bypass switch. |
| <b>Input Ranges</b>   | <b>+30 to -21 dBm in 3 dB steps</b>  |
| <b>dBm 50Ω</b>  | <b>Volts peak</b>  |
| 30 dBm  | 10.0 Vp  |
| 27 dBm  | 7.08 Vp  |
| 24 dBm  | 5.01 Vp  |
| 21 dBm  | 3.55 Vp  |
| 18 dBm  | 2.51 Vp  |
| 15 dBm  | 1.78 Vp  |
| 12 dBm  | 1.26 Vp  |
| 9 dBm   | 891 mVp  |
| 6 dBm   | 631 mVp  |
| 3 dBm   | 447 mVp  |
| 0 dBm   | 316 mVp  |
| -3 dBm  | 224 mVp  |
| -6 dBm  | 158 mVp  |
| -9 dBm  | 112 mVp  |
| -12 dBm   | 79.4 mVp   |
| -15 dBm   | 56.2 mVp   |
| -18 dBm   | 39.8 mVp   |
| -21 dBm   | 28.2 mVp   |
| <b>ADC Overload Level</b>   | 0 dBfs (typical)   |
| <b>Return Loss of 50Ω Input Impedance</b>   |  |
| <b>0.1—40 MHz</b>   | >18 dB (1.3 VSWR)  |
| <b>Amplitude Accuracy</b><br>(Power measurement, at 10 MHz, 0—40 dBfs)                                |  |
| <b>Alias filter on</b>  | ±0.7 dB  |
| <b>Flatness</b><br>(dB relative to 10 MHz, excluding digital filter response)                         |  |
| <b>Alias filter on, freq &lt;40 MHz</b>   | ±1.0 dB  |
| <b>Alias filter off, freq &lt;40 MHz</b>  | ±2.0 dB  |
| <b>Alias filter off, at 100 MHz</b>   | -18 dB (typical)   |
| <b>DC Offset</b>  |  |
| <b>Auto-zero accuracy</b>   | ±2% fs (typical)   |
| <b>Temperature drift</b>  | <±0.1 mV/°C (typical)  |
| <b>Input Bias Current</b>   | <50 μA (typical)   |
| <b>Anti Alias Filter Stopband Rejection</b><br>(60—200 MHz, typical value for +27 and +30 dBm ranges) | >90 dB   |

|  |                            |
|--|----------------------------|
| <b>Signal-to-Noise Ratio</b>   |                            |
| (full scale input, full bandwidth, excluding distortion.<br>See noise, distortion and spur specs)                                    |                            |
| <b>Alias filter on</b>   | >60 dB (typical)           |
| <b>Alias filter off</b>  | >55 dB (typical)           |
| <b>Input Noise Density</b>   |                            |
| (Alias filter on, internal sample clock)   |                            |
| <b>100 kHz to 40 MHz</b>   | <-133 dBfs/Hz              |
| <b>10 kHz to 100 kHz</b>   | <-130 dBfs/Hz              |
| <b>1 kHz to 10 kHz</b>   | <-122 dBfs/Hz              |
| <b>100 Hz to 1 kHz</b>   | <(-92 -10 LOG(f)) dBfs/Hz  |
| <b>Sensitivity</b>   | <-155 dBm/Hz (typical)     |
| <b>Residual Responses</b>  |                            |
| (with 50Ω termination at input connector,<br>2 kHz to 40 MHz)  |                            |
| <-90 dBfs  |                            |
| <b>Harmonic Distortion, Aliased Harmonic Distortion,<br/>and Spurious Responses.</b>   |                            |
| <b>Input signals &gt;-10 dBfs</b>  | <-65 dBc                   |
| <b>Input signals -10 to -20 dBfs</b>   | <-70 dBc                   |
| <b>Input signals &lt;-20 dBfs</b>  | <-70 dBc or <-90 dBfs      |
| <b>Intermodulation Distortion</b>  |                            |
| (Two in-band signals 1 MHz apart.<br>Measured in dBc, relative to one signal.)   |                            |
| <b>0—30 MHz input signals</b>  |                            |
| each signal -6 to -14 dBfs   | <-65 dBc                   |
| each signal -14 to -20 dBfs  | <-70 dBc                   |
| each signal <-20 dBfs  | <-70 dBc or <-90 dBfs      |
| <b>30—40 MHz input signals</b>   |                            |
| each signal -6 to -14 dBfs   | <-62 dBc                   |
| each signal -14 to -23 dBfs  | <-67 dBc                   |
| each signal <-23 dBfs  | <-67 dBc or <-90 dBfs      |
| <b>3<sup>rd</sup> Order products, each input -16 dBfs</b>  | -85 dBc (typical)          |
| <b>Phase Noise Density</b>   |                            |
| (single sideband power density of 10 MHz signal,<br><0.05G vibration, absolute or residual. Block data<br>transfer mode, see Note 1) |                            |
| <b>Δf = 10 kHz</b>   | <-128 dBc/Hz (typical)     |
| <b>Δf = 1 kHz</b>  | <-120 dBc/Hz (typical)     |
| <b>Δf = 100 Hz, residual only</b>  | <-110 dBc/Hz (typical)     |
| <b>Discrete Sidebands</b>  |                            |
| (5 Hz to 100 kHz Δf, see Notes 1 and 2)  |                            |
| <b>Δf &gt;20 kHz</b>   | <-90 dBc                   |
| <b>Δf &lt;20 kHz</b>   | <-90 dBc (typical, Note 1) |
| <b>Inter-module clock via VXI lines</b>  | <-80 dBc (typical)         |

Note 1. Phase noise and sidebands performance at frequency offsets of less than 20 kHz may be degraded by noise and ripple on the VXI power supplies.

Note 2. Specifications for Dynamic Range, Spurious Responses and Sidebands require the mainframe containing the E1438 to have Option 918 (connector shields E1400-80920) installed. In addition, all modules in the mainframe must comply with the VXI 1.4 specification for ECL trigger lines, the 10 MHz VXI system clock must be turned off, and the E1438 External Clock input must be disconnected when not being used. Dynamic range specifications require 24-bit data resolution.

| <b>Sample Clock and DSP Specifications</b>                |  |
|---|--|
| <b>Clock Sources</b>                                      |  |
| Internal sample clock frequency                           | 100 MSa/s or 102.4 MSa/s (program control)   |
| External reference for internal clock                     | 10 MHz for 100 MSa/s, 10.24 MHz for 102.4 MSa/s  |
| External sample clock frequency range                     | 10—102.4 MHz   |
| <b>Internal Clock Specifications</b>                      |  |
| Frequency accuracy, 0—40° C                               | ±7 ppm   |
| Frequency accuracy, 40—55° C                              | ±10 ppm  |
| External reference lock range                             | ±6 ppm (typical)   |
| <b>Clock Input/Output Characteristics</b>                 |  |
| External sample clock/reference input                     | BNC connector. ac-coupled comparator with 1 KΩ impedance. Accepts TTL, ECL, or >−6 dBm sine waves  |
| External trigger input                                    | For ECL, the input is ac coupled, 1 kΩ, edge sensitive. For TTL, the input is dc coupled, 1 kΩ, TTL levels. (TTL trigger is currently only available on the E1438B.) |
| Inter-module front panel clock/sync                       | SMB connector, ECL-10K compatible.   |
| Inter-module VXI backplane clock/Sync                     | VXI backplane ECLTRG lines.  |
| 10 MHz reference output                                   | SMB connector +8 dBm   |
| <b>Multi-module Sampling Skew</b>                         |  |
| Within mainframe, uncorrected                             | < 10 ns (typical)  |
| Between mainframes, 1 meter cable, uncorrected            | < 25 ns (typical)  |
| Resolution of correction                                  | 5 ps (nominal)   |
| Digital Decimation Filters                                | 17 octave steps (40 MHz to 305 Hz), <0.215 dB ripple, software correctable   |
| Digital Local Oscillator                                  | <0.01 Hz tuning resolution   |
| <b>Regulatory Compliance</b>                              |  |
| Safety Standards  | Designed for compliance to EN 61010-1(1993)  |
| Radiated Emissions and Immunity                           | EN 61326-1 (see Note 2, page 3)  |
| <b>Environmental</b>                                      |  |
| <b>Operating Restrictions</b>                             |  |
| Maximum altitude  | 4600 meters, above 2285 meters derate operating temperature by −3.6° C per 1000 meters   |
| Ambient Temperature                                       | 0—55° C  |
| Humidity  | 10—90% at 40° C, non-condensing  |
| <b>Optical serial front panel data port (E1438B only)</b> |  |
| Standard support  | Draft standard VITA 17.1, 1 Gbit/sec and 2.5 Gbit/sec  |
| Connector   | Dual LC receptacle   |
| Optical type  | Multi-mode fiber, 850 nm wavelength  |
| Maximum length  | 100 meters   |

# Typical Performance Charts

The following charts are included as supplemental, non-warranted characteristics)

## Performance Benchmarks

(Benchmarks are included as supplemental, non-warranted characteristics)

**VXI/VME continous data transfer rate** 2.2 MBytes/s  
(From E1438A/B to MXI-II VXI controller, D32 VME word size)


**Local bus data transfer rate** 66 MBytes/s  
(From E1438A/B to ideal consumer)

**Library function control of module**  
(MXI-II VXI controller)

**Measurement start** 8.5  $\mu$ s


**Center frequency change (raw)** 600  $\mu$ s

## Harmonic Distortion

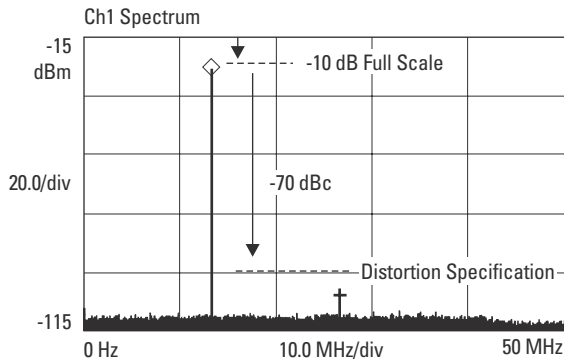


Harmonic Distortion performance with a -25 dBm 13 MHz signal on the -15 dBm range

## Intermodulation Distortion

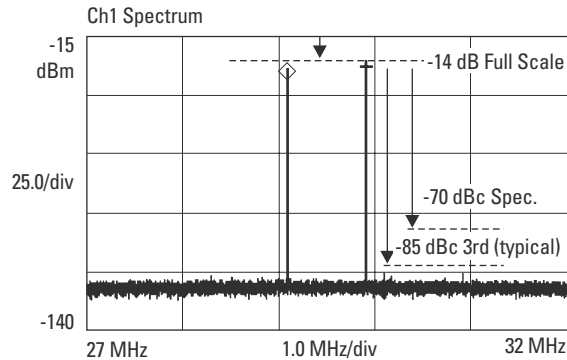


Intermodulation Distortion performance with two -14 dBfs tones near 30 MHz on the -15 dBm range.


## Response versus Frequency - Pass Band

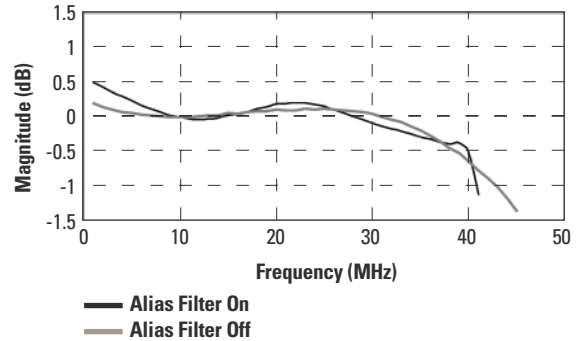


## Filter Characteristics for Analog Anti Alias Filter, Magnitude (dB) versus Frequency (MHz)

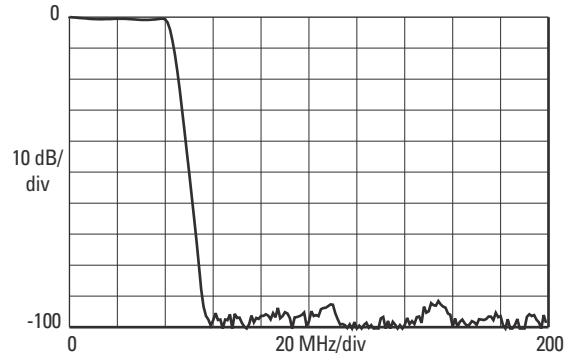

## Analog Anti Alias Filter Group Delay vs. Frequency

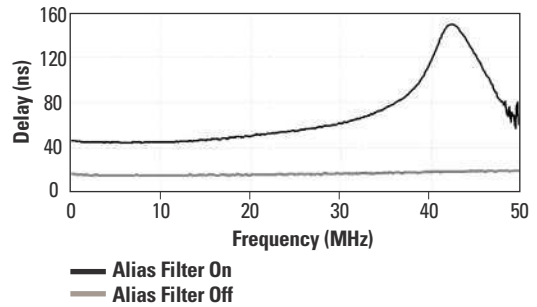


## Input Noise Performance

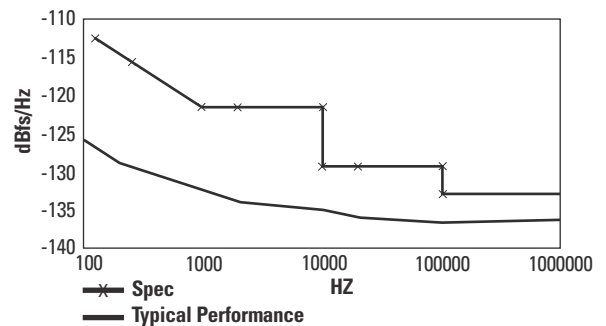


# Filter Characteristics for Low-pass Digital Filter Without Decimation $\text{sigBw} = 3$


Magnitude (dB) versus Frequency (f/fs)

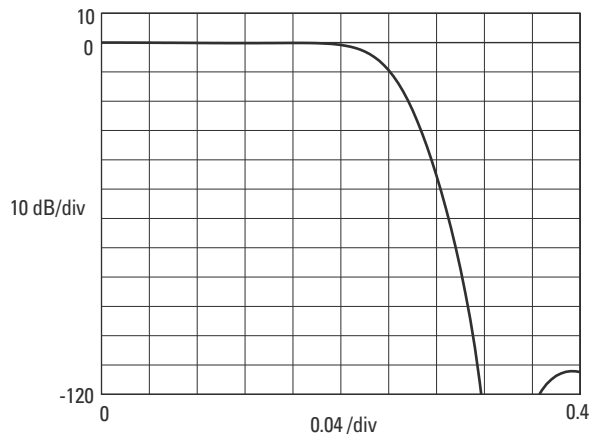


Magnitude (dB) versus Frequency (f/fs)

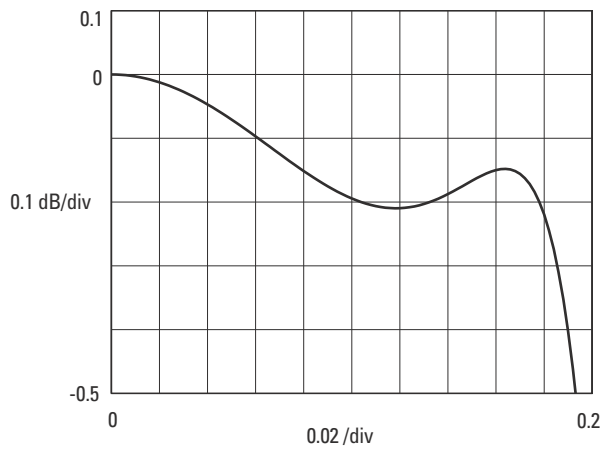


Delay (samples versus Frequency (f/fs))

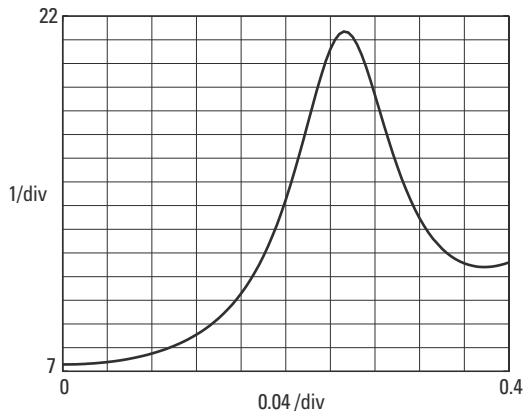

Response versus Time (sample (normalized to step size))

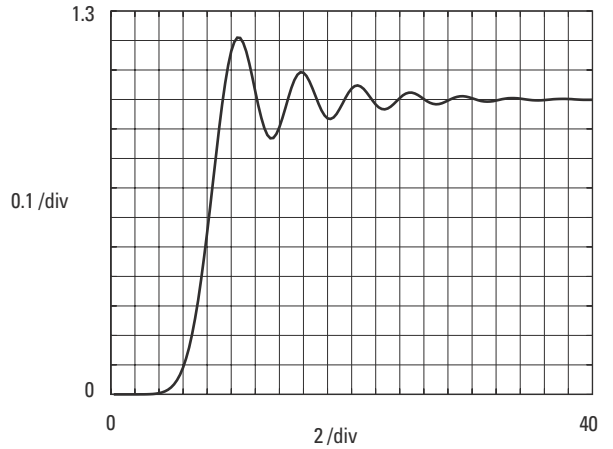

Response versus Time (sample) (normalized to step size)

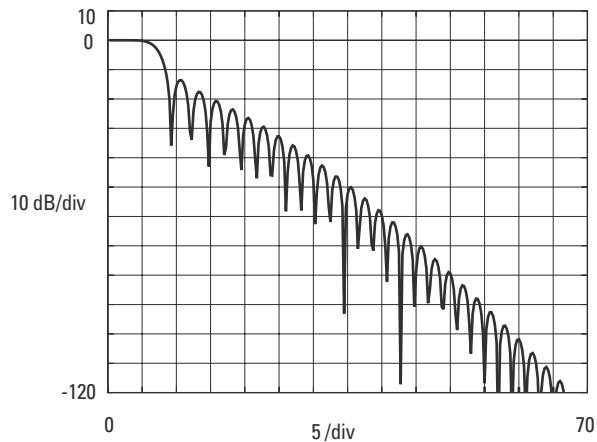

fs = output sample rate

| <b>General</b>                  |   |                        |
|---------------------------------|---|------------------------|
| <b>VXI Standard Information</b> | <p>Conforms to VXI revision 1.4. See Note 1, page 3 concerning section B.8.6, Conducted Susceptibility.</p> <p>C-size, single slot width.</p> <p>Register based programming.</p> <p>“Slave” Data Transfer Bus functionality.</p> <p>A16 address capability.</p> <p>D16/D32 data capability.</p> <p>Local Bus capability</p> <p>Requires ECLTRG0 and ECLTRG1 lines for module synchronization.</p> |                        |
| <b>VXI Power Requirements</b>   | <b>dc Current</b>   | <b>Dynamic Current</b> |
| +5V (E1438A):                   | 5.7 A   | 0.8 A                  |
| +5V (E1438B):                   | 7.1 A   | 0.8 A                  |
| -5.2V:                          | 3.0 A   | 0.1 A                  |
| -2V:                            | 1.0 A   | 0.1 A                  |
| +12V:                           | 0.6 A   | 0.3 A                  |
| -12V:                           | 0.3 A   | 0.02 A                 |
| +24V:                           | 0.04 A  | 0.02 A                 |
| -24V:                           | 0.04 A  | 0.02 A                 |
| +5V Standby:                    | 0.0 A   | 0.0 A                  |
| <b>VXI Cooling Requirements</b> |   |                        |
| <b>E1438A</b>                   |   |                        |
| For 10° C rise above <55° C:    | 3.3 liters/second, 0.67 mm H <sub>2</sub> O   |                        |
| For 15° C rise above <50° C:    | 2.2 liters/second, 0.30 mm H <sub>2</sub> O   |                        |
| <b>E1438B</b>                   |   |                        |
| For 10° C rise above <55° C:    | 4.2 liters/second, 1.00 mm H <sub>2</sub> O   |                        |
| For 15° C rise above <50° C:    | 2.8 liters/second, 0.50 mm H <sub>2</sub> O   |                        |
| <b>Warm-up Time</b>             | 15 Minutes  |                        |
| <b>Calibration Interval</b>     | 1 Year (no field adjustments)   |                        |

## Agilent accessories available

The E1438A/B “sync” and “clk” connectors may be connected to other E1438A/B modules in synchronized multi-channel applications. The following cable and terminator to connect the modules are available from Agilent. (See the Agilent VXI Source Book for additional cables.)

|                  |                                  |
|------------------|----------------------------------|
| <b>1250-0676</b> | SMB 50Ω load                     |
| <b>8120-5623</b> | 175 mm cable with SMB connectors |

## Backplane connector shields

The backplane connector shields are required for RFI compliance with the EN55011 and CISPR11 standards. Specify one Option 918 with the purchase of an Agilent VXI mainframe. Specify this kit for retrofitting an existing mainframe (E1400-80920 or E1421-80920).

## Warranty

This product is distributed, warranted, and supported by Agilent Technologies.

The E1438A/B comes with a 3-year warranty. During that period, the unit will either be replaced or repaired, at Agilent Technologies' option, and returned to the customer without charge.

## Ordering Information

|                         |                                     |
|-------------------------|-------------------------------------|
| <b>Agilent E1438A/B</b> | 100 MSa/s AD with filter and memory |
| <b>Option 001</b>       | 1.2 GB FIFO memory                  |
| <b>Option 144</b>       | 144 MB FIFO memory                  |
| <b>Option 288</b>       | 288 MB FIFO memory                  |

## Related Agilent Literature

*E1437A 20 MSample/Second ADC with Filter and FIFO Product Overview*  
literature number 5965-6893E

*E1437A 20 MSample/Second ADC with Filter and FIFO Technical Specifications*  
literature number 5965-9774E

*E1438A/B 100 MSample/Second Digitizer with DSP and Memory Product Overview*  
literature number 5968-7348E

*E1439A/B VXI 70MHz IF ADC with Filters and Memory Product Overview*  
literature number 5980-1261E

*E1439A/B VXI 70MHz IF ADC with Filters and Memory Data Sheet*  
literature number 5980-1260E

*E9830A Delay Memory Module Product Overview*  
literature number 5968-7349E

*Agilent Test System and VXI Products Catalog*  
literature number 5980-0307E

## Visit our Websites

Agilent Communications Intelligence Information – [www.agilent.com/find/COMINT](http://www.agilent.com/find/COMINT)

Agilent VXI Product Information – [www.agilent.com/find/vxi](http://www.agilent.com/find/vxi)

## Agilent Technologies' Test and Measurement Support, Services, and Assistance

Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Support is available for at least five years beyond the production life of the product. Two concepts underlie Agilent's overall support policy: “Our Promise” and “Your Advantage.”

### Our Promise

Our Promise means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you use Agilent equipment, we can verify that it works properly, help with product operation, and provide basic measurement assistance for the use of specified capabilities, at no extra cost upon request. Many self-help tools are available.

### Your Advantage

Your Advantage means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and on-site education and training, as well as design, system integration, project management, and other professional engineering services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.

### By internet, phone, or fax, get assistance with all your test & measurement needs

Online assistance:  
[www.agilent.com/find/assist](http://www.agilent.com/find/assist)

#### Phone or Fax

**United States:**  
(tel) 1 800 452 4844

**Latin America:**  
(tel) (305) 269 7500  
(fax) (305) 269 7599

**Canada:**  
(tel) 1 877 894 4414  
(fax) (905) 282 6495

**Australia:**  
(tel) 1 800 629 485  
(fax) (61 3) 9210 5947

**Europe:**  
(tel) (31 20) 547 2323  
(fax) (31 20) 547 2390

**New Zealand:**  
(tel) 0 800 738 378  
(fax) 64 4 495 8950

**Japan:**  
(tel) (81) 426 56 7832  
(fax) (81) 426 56 7840

**Asia Pacific:**  
(tel) (852) 3197 7777  
(fax) (852) 2506 9284

This information is subject to change without notice.

Copyright © 2001 Agilent Technologies Inc.  
Printed in USA April 25, 2001  
5968-8233E



**Agilent Technologies**