

Agilent E1458A 96-Channel Digital I/O

Data Sheet

- 1-Slot, C-size, register based
- Twelve 8-bit input or output data ports for acquisition
- Wide variety of output data types
- Data port readback on a per-port basis
- Control of interface driver tri-state capability
- Block mode transfer to/from memory


Description

The Agilent Technologies E1458A 96-Channel Digital Input/Output module is a **C-size, 1-slot, register-based VXI module** that offers twelve 8-bit bi-directional data ports. It provides block memory transfers and six GPIO handshake protocols (none, leading edge, trailing edge, pulse, partial, and strobe) for a wide range of applications.

Functionally similar to the E1330B, the E1458A is intended for digital I/O control applications such as digital subassembly test or data acquisition and control. Each of the 12 identical ports consists of eight data lines and six handshake/control lines.

Each 8-bit port is individually configured for positive/negative true logic and read/write or tri-state condition. The E1458A is arranged into three banks of four ports each. Ports can be combined within a bank, allowing data transmission using bytes, words (16-bit), or long words (32-bit). Data transmission can be from a single port (8 bits) or from multiple ports up to all 12 ports.

Refer to the Agilent Technologies Website for instrument driver availability and downloading instructions, as well as for recent product updates, if applicable.

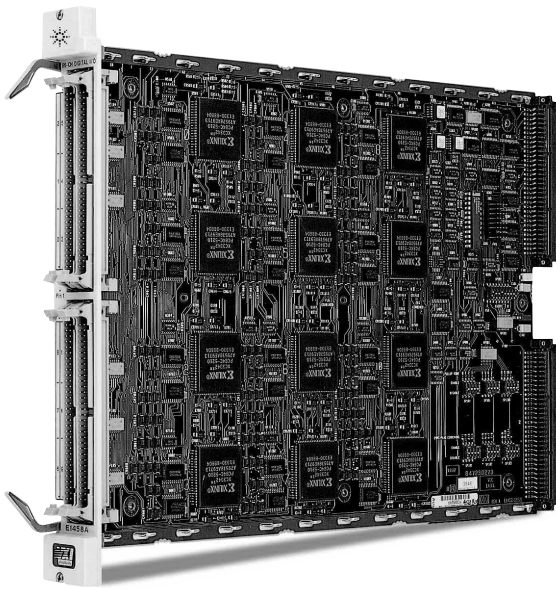

Agilent E1458A



Agilent Technologies

Handshake and Control Lines

Three handshake and control lines for each port can be controlled with SCPI programming. These lines provide the following functions:

FLAG: Data handshaking line input to the digital I/O module

CTL: Data handshaking line output by the digital I/O module

I/O: Input/output status line

Each port has three additional control lines available for custom handshaking and interrupt functions: **PIR** (peripheral interrupt), **/RES** (peripheral reset), and **STS** (status). Control of these three lines is done through register-based programming.

Cables

The E1458A ships with four 2-meter cables. For ordering each additional 2-meter cable, order Agilent part number E1458-61601. An Opto 22 component cable may be ordered separately as Option 022.

SCPI

The E1458A SCPI command set is a superset of the E1330B, allowing existing SCPI application programs to run on the E1458A. The E1458A SCPI command set supports additional queries to read back port data and control values, plus new E1458A capabilities, including monitoring of actual output port data. The E1458A driver is supported on all C-SCPI/I-SCPI platforms and also as a downloadable driver for the Agilent E1406A command modules.

Product Specifications

General

Number of channels:	96
Channel type:	Input or Output
Output or input type:	TTL
Memory:	none
Max. pattern rate:	n/a
32-bit block transfer:	325 Kb/s
Test synchronization:	Software triggers, hardware handshaking
Logic Levels:	TTL compatible, 5 V maximum

Data Lines

Output characteristics:

I_{out} (High):	-5.2 mA @ $V_{out} = 2.5$ V (pull-up enabled)
I_{out} (Low):	48 mA @ $V_{out} = 0.5$ V

Input characteristics:

I_{in} (High):	<2.5 mA @ $V_{in} = 2.5$ V
I_{in} (Low):	<-3.2 mA @ $V_{in} = 0.4$ V
I_{in} (Low):	>2.0 V (5.0 V maximum)
V_{in} (Low):	<0.8 V

Handshake Lines

Output characteristics:

I_{out} (High):	250 μ A @ V_{out} (high): 5 V
I_{out} (Low):	40 mA @ V_{out} (low): 0.7 V
I_{out} (Low):	16 mA @ V_{out} (low): 0.4 V

Input characteristics:

V_{in} (High):	>2.0 V
V_{in} (Low):	<0.8 V
I_{in} (Low):	<1.75 mA

Block Mode Transfers

8-bit wide:	@ 90 KB/s
32-bit wide:	@ 325 KB/s

General Specifications

VXI Characteristics

VXI device type:	Register based
Size:	C
Slots:	1
Connectors:	P1/2
Shared memory:	No
VXI buses:	No

Instrument Drivers - See the Agilent Technologies Website (http://www.agilent.com/find/inst_drivers) for driver availability and downloading.

Command module firmware:	Downloadable
Command module firmware rev:	A.06
I-SCPI Win 3.1:	Yes
I-SCPI Series 700:	Yes
C-SCPI LynxOS:	Yes
C-SCPI Series 700:	Yes
Panel Drivers:	Yes
VXI plug&play Win Framework:	Yes
VXI plug&play Win 95/NT Framework:	Yes
VXI plug&play HP-UX Framework:	No

Module Current


	I_{PM}	I_{DM}
+5 V:	1.2	0.1
+12 V:	0	0
-12 V:	0	0
+24 V:	0	0
-24 V:	0	0
-5.2 V	0	0
-2 V:	0	0

Cooling/Slot

Watts/slot:	2.50
ΔP mm H ₂ O:	0.04
Air Flow liter/s:	0.21

Ordering Information

Description	Product No.
96-Channel Digital Input/Output	E1458A
Opto 22 Components Cable	E1458A 022
Service Manual	E1458A 0B3
Additional 2-Meter Cable	E1458-61601

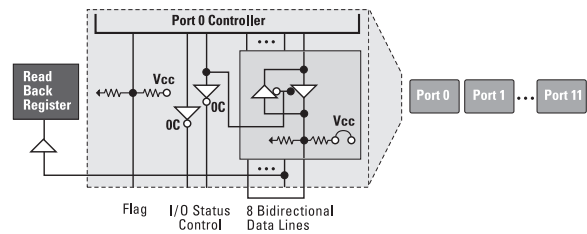

Agilent E1458A Block Diagram

Agilent Technologies' Test and Measurement Support, Services, and Assistance

Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Support is available for at least five years beyond the production life of the product. Two concepts underlie Agilent's overall support policy: "Our Promise" and "Your Advantage."

Our Promise

Our Promise means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you use Agilent equipment, we can verify that it works properly, help with product operation, and provide basic measurement assistance for the use of specified capabilities, at no extra cost upon request. Many self-help tools are available.

Your Advantage

Your Advantage means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and on-site education and training, as well as design, system integration, project management, and other professional engineering services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.

By internet, phone, or fax, get assistance with all your test & measurement needs.

Online assistance:
www.agilent.com/find/assist

Phone or Fax

United States:
(tel) 1 800 829 4444

Canada:
(tel) 1 877 894 4414
(fax) (905) 282 6495

China:
(tel) 800 810 0189
(fax) 800 820 2816

Europe:
(tel) (31 20) 547 2323
(fax) (31 20) 547 2390

Japan:
(tel) (81) 426 56 7832
(fax) (81) 426 56 7840

Korea:
(tel) (82 2) 2004 5004
(fax) (82 2) 2004 5115

Latin America:
(tel) (305) 269 7500
(fax) (305) 269 7599

Taiwan:
(tel) 0800 047 866
(fax) 0800 286 331

Other Asia Pacific Countries:
(tel) (65) 6375 8100
(fax) (65) 6836 0252
(e-mail) tm_asia@agilent.com

Data Subject to Change
© Agilent Technologies, Inc. 2001
Printed in the U.S.A. May 1, 2004
5965-5558E



Agilent Technologies