


Agilent E1459A

64-Channel Isolated Digital Input/Interrupt

Data Sheet

- 1-Slot, C-size, register based
- 64 interrupts, maskable and edge-selectable
- Jumper-selectable input levels
- Time-programmable debounce
- On-board 5 V supply for pull-up capability
- Handshake lines for each word (16 channels)

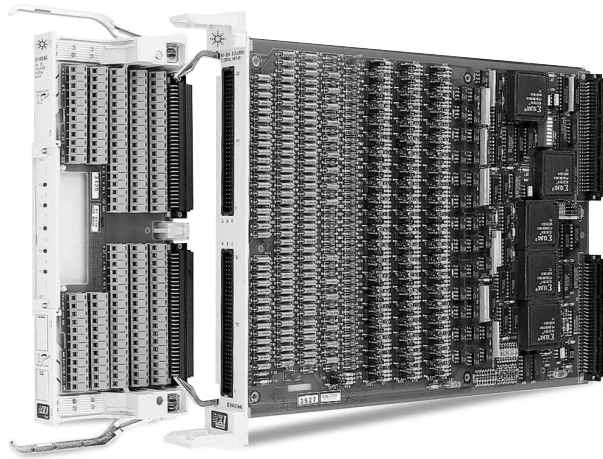

Agilent E1459A


Description

The Agilent E1459A 64-Channel Isolated Digital Input/Interrupt is a **C-size, 1-slot, register-based VXI module**. It is used to sense dc levels and edge transitions up to 48 Vdc. All inputs are optically isolated to withstand up to 125 V rms or Vdc. Plus, using the module's built-in 5 V supply with 9.4 k Ω effective pull-up resistance, you can detect whether external switches are open or closed.

The debounce feature is programmable for periods of 16 μ s to 1074 s in binary increments. Channel groups 1 to 32 and 33 to 64 can each have a unique programmed debounce period.

Each word (16-bit/channel) has strobe in, ready for data, and interrupt out. Strobe-in lines can be connected in parallel for 32- or 64-bit transfers.

Refer to the Agilent Technologies Website for instrument driver availability and downloading instructions, as well as for recent product updates, if applicable.



Agilent Technologies
Innovating the HP Way

Product Specifications

Input

Voltages:	5, 12, 24, 48 Vdc
Threshold:	
min.:	1, 2.5, 7, 14
max.:	4, 9.5, 17, 31
Currents:	0.5, 1.3, 2.8, 5.8 mA (at nominal voltages)
Maximum input voltage:	60 Vdc (Between High and Low terminal of each channel), 125 V rms or Vdc (Between channels or between any terminal and chassis)
Minimum input pulse width:	100 ms + debounce time
Debounce:	Programmable from 16 μ s to 1074 s

Output

5 volt supply:	4.5 to 5.5 Vdc (at 32 mA total maximum)
-----------------------	-----------------------------------------

General Characteristics

Number of channels:	64
Channel type:	Input
Output or input type:	Variable
Memory:	n/a
Max. pattern rate:	n/a
32-bit block transfer:	n/a
Test synchronization:	n/a
Typical time to read 16-bit word:	1 ms, using register access
Terminal module:	Removable, with screw-type terminals
Maximum wire size:	16 AWG (1.5mm)

General Specifications

VXI Characteristics

VXI device type:	Register based
Data transfer bus:	A16, slave only
Size:	C
Slots:	1
Connectors:	P1/P2
Shared memory:	None
VXI busses:	None
C-size compatibility:	n/a

Instrument Drivers

See the Agilent Technologies Website (http://www.agilent.com/find/inst_drivers) for driver availability and downloading.

Command module firmware:	Downloadable
Command module firmware rev:	A.08
I-SCPI Win 3.1:	No
I-SCPI Series 700:	No
C-SCPI LynxOS:	No
C-SCPI Series 700:	No
Panel Drivers:	No
VXIplug&play Win Framework:	No
VXIplug&play Win 95/NT Framework:	Yes
VXIplug&play HP-UX Framework:	No

Module Current

	I _{PM} (A)	I _{DM} (A)
+5 V:	0.19	0.10
+12 V:	0	0
-12 V:	0	0
+24 V:	0	0
-24 V:	0	0
-5.2 V:	0	0
-2 V:	0	0

Cooling/Slot

Watts/slot:	1.00
ΔP mm H ₂ O:	0.05
Air flow liter/s:	0.42

Ordering Information

Description	Product No.
64-Channel Isolated Digital Input/Interrupt	E1459A
Service Manual	E1459A 0B3
3 Yr. Retn. to Agilent to 1 Yr. OnSite Warr.	E1459A W01

Related Literature

2000 Test System and VXI Catalog CD-ROM,
Agilent Pub. No. 5980-0308E (detailed specifications for VXI products)

2000 Test System and VXI Catalog,
Agilent Pub. No. 5980-0307E (overview of VXI products)

1998 Test System and VXI Products Data Book,
Agilent Pub. No. 5966-2812E

Online

Internet access for Agilent product information, services and support
www.agilent.com/find/tmdir

VXI product information
www.agilent.com/find/vxi

Defense Electronics Applications
www.agilent.com/find/defense_ATE

Agilent Technologies VXI Channel Partners
www.agilent.com/find/vxichanpart

Agilent Technologies' HP VEE Application Website
www.agilent.com/find/vee

Agilent Technologies Data Acquisition and Control Website
www.agilent.com/find/data_acq

Agilent Technologies Instrument Driver Downloads
www.agilent.com/find/inst_drivers

Agilent Technologies Electronics Manufacturing Test Solutions
www.agilent.com/go/manufacturing

Get assistance with all your test and measurement needs at
www.agilent.com/find/assist
or check your local phone book for the Agilent office
near you.

Agilent Technologies' test and measurement service/support commitment

Agilent strives to maximize the value our test and measurement products give you, while minimizing your risk and service/support problems. We work to ensure that each product is realistically described in the literature, meets its stated performance and functionality, has a clearly stated global warranty, and is supported at least five years beyond its production life. Our extensive self-help tools include many online resources (www.agilent.com).

Experienced Agilent test engineers throughout the world offer practical recommendations for product evaluation and selection. After you purchase an Agilent product, they can provide no-charge assistance with operation verification and basic measurement setups for advertised capabilities. To enhance the features, performance, and flexibility of your test and measurement products—and to help you solve application challenges—Agilent offers free or extra-cost product options and upgrades, and sell expert engineering, calibration, and other consulting services.

Phone and fax

United States:
Agilent Technologies
(tel) 1 800 452 4844

Canada:
Agilent Technologies Canada Inc.
(tel) 1 877 894 4414

Europe:
Agilent Technologies
Test & Measurement
European Marketing Organisation
(tel) (31 20) 547 2000

Japan:
Agilent Technologies Japan Ltd.
(tel) (81) 426 56 7832
(fax) (81) 426 56 7840

Latin America:
Agilent Technologies
Latin American Region Headquarters, U.S.A.
(tel) (305) 267 4245
(fax) (305) 267 4286

Australia/New Zealand:
Agilent Technologies Australia Pty Ltd.
(tel) 1 800 629 485 (Australia)
(fax) (61 3) 9272 0749
(tel) 0 800 738 378 (New Zealand)
(fax) (64 4) 802 6881

Asia Pacific:
Agilent Technologies, Hong Kong
(tel) (852) 3197-7777
(fax) (852) 2506-9284

Data Subject to Change
© Agilent Technologies 2000
Printed in the U.S.A. 04/2000
Publication No.: 5965-8832E



Agilent Technologies
Innovating the HP Way