


# Agilent E1498A V743/100 VXI Embedded Computer

## Data Sheet

- 1-Slot, C-size, message-based computer
- Direct VXI access with PA-RISC technology
- Compatibility with HP Series 700 workstations/computers
- C-SCPI and Agilent VEE support
- Includes SICL and VISA with special enhancements
- VXI *plug&play*-compatible with HP-UX drivers

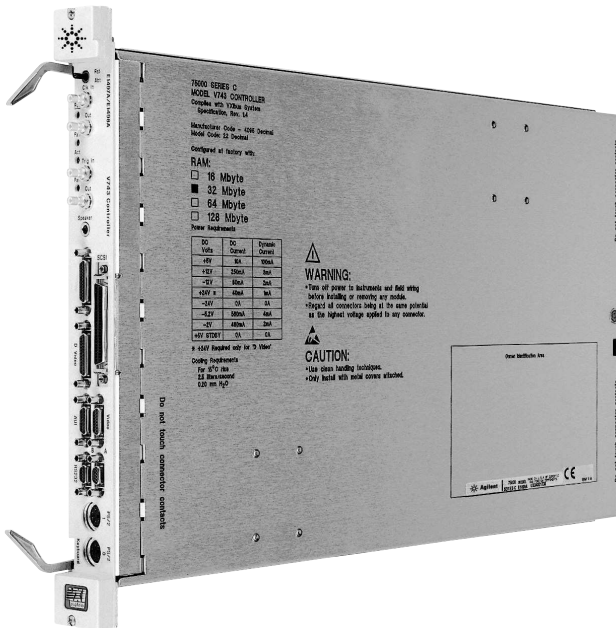

Agilent E1498A

### Description

The Agilent Technologies V743/100 embedded computer (E1498A) is a **C-size, 1-slot, VXI module**. This high-performance message-based computer uses Hewlett-Packard's PA-RISC technology to deliver extraordinary performance and direct VXI access at a very competitive price.

Developed specifically as an embedded HP-UX (UNIX) computer for VXI, the V743 computer provides the high I/O performance of direct VXI backplane support, the space savings of an embedded computer, and the high power and speed of HP PA-RISC all in an HP-UX environment. The V743 supports all VXI addressing modes (A16, A24, and A32), programmable interrupt handler, single-channel DMA for VXI extended memory devices, and a 1 MB dual-ported memory buffer for high-speed data acquisition.

**Note:** You may use only one embedded computer in a system.

The V743/100, with its high-speed 100 MHz 7100LC PA-RISC processor, is ideal for development of run-time applications. This model is completely compatible with other HP 9000 Series 700 workstations and computers. However, it requires HP-UX releases 9.05 and later. With HP-UX, you can set up industry-standard networking, windowing systems, and languages. Databases and a full range of VXI-related software are available for automated test applications.

Refer to the Agilent Technologies Website for instrument driver availability and downloading instructions, as well as for recent product updates, if applicable.



Agilent Technologies

## Software Support

- SICL and VISA are included when you order the Agilent V743.
- C-SCPI is supported on HP-UX with C language.
- Agilent VEE is supported, including special enhancements for direct VXIbus support.
- Supports HP-UX *VXIplug&play* framework.

## Operating System

HP-UX 10.20

**Note:** You may use only one embedded computer in a system.

## Product Specifications

<b>Processor:</b>	PA-7100LC
<b>Clock speed:</b>	100 MHz

### Performance:

MIPS:	77.7/121.6
MFLOPS:	24.3/37.8
SPECmark 89:	—
SPEC int92:	66.6/100.1
SPEC fp92:	96.5/137.0
X11 Xmark 93:	6.55/8.63
SPECrate int92:	1497.8/1237.3
SPECrate fp92:	281.4/3225.9

<b>Main memory:</b>	16-64 MB (64 MHz), 32-128 MB (100 MHz)
---------------------	--

<b>Built-in interfaces:</b>	GPIO, 2 RS-232, 1 SCSI-2, LAN, AUI
-----------------------------	------------------------------------

<b>Additional interfaces:</b>	SE keyboard and mouse Speaker Out Trigger I/O, Clock I/O
-------------------------------	--

<b>Optional interfaces:</b>	none
-----------------------------	------

<b>Available slots:</b>	none
-------------------------	------

<b>Supported expanders:</b>	none
-----------------------------	------

<b>Display resolution:</b>	Color 1024x768 1280x1024
----------------------------	--------------------------------

<b>Internal mass storage:</b>	Optional external: 600 MB CD-ROM 2 GB DDS tape 4-8 GB DDS w/comp
-------------------------------	---

<b>O.S. (earliest supported):</b>	HP-UX 9.05
-----------------------------------	------------

## General Specifications

### VXI Characteristics

<b>VXI device type:</b>	Message-based computer
<b>Size:</b>	C
<b>Slots:</b>	1
<b>Connectors:</b>	P1/2
<b>Shared memory:</b>	n/a
<b>VXI buses:</b>	TTL Trigger Bus ECL Trigger Bus

### Module Current

	I <sub>PM</sub>	I <sub>DM</sub>
+5 V:	10	0.1
+12 V:	0.25	0
-12 V:	0.08	0.6
+24 V:	0.04	0
-24 V:	0	0
-5.2 V:	0.56	0
-2 V:	0.48	0

### Cooling/Slot

<b>Watts/slot:</b>	59.00
<b>ΔP mm H<sub>2</sub>O:</b>	0.30
<b>Air Flow liter/s:</b>	4.70

## Ordering Information

Description	Product No.
V743/100 VXI Embedded Computer	E1498A
Delete SICL media and manuals	E1498A 002
64 MB total RAM	E1498A ANE
128 MB total RAM	E1498A ANS
3 yr. retn. to Agilent to 1 yr. OnSite warr.	E1498A W01

## **Agilent Technologies' Test and Measurement Support, Services, and Assistance**

Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Support is available for at least five years beyond the production life of the product. Two concepts underlie Agilent's overall support policy: "Our Promise" and "Your Advantage."

### **Our Promise**

Our Promise means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you use Agilent equipment, we can verify that it works properly, help with product operation, and provide basic measurement assistance for the use of specified capabilities, at no extra cost upon request. Many self-help tools are available.

### **Your Advantage**

Your Advantage means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and on-site education and training, as well as design, system integration, project management, and other professional engineering services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.

**By internet, phone, or fax, get assistance with all your test & measurement needs.**

### **Online assistance:**

***[www.agilent.com/find/assist](http://www.agilent.com/find/assist)***

### **Phone or Fax**

United States:  
(tel) 1 800 452 4844

Canada:  
(tel) 1 877 894 4414  
(fax) (905) 282 6495

China:  
(tel) 800 810 0189  
(fax) 1 0800 650 0121

Europe:  
(tel) (31 20) 547 2323  
(fax) (31 20) 547 2390

Japan:  
(tel) (81) 426 56 7832  
(fax) (81) 426 56 7840

Korea:  
(tel) (82 2) 2004 5004  
(fax) (82 2) 2004 5115

Latin America:  
(tel) (305) 269 7500  
(fax) (305) 269 7599

Taiwan:  
(tel) 080 004 7866  
(fax) (886 2) 2545 6723

Other Asia Pacific Countries:  
(tel) (65) 375 8100  
(fax) (65) 836 0252  
Email: [tm\\_asia@agilent.com](mailto:tm_asia@agilent.com)

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2001  
Printed in USA September 1, 2001  
5965-6546E



**Agilent Technologies**