




LOW VOLTAGE RACK SUPPLIES

LVR Series

Models 6256B - 6274A

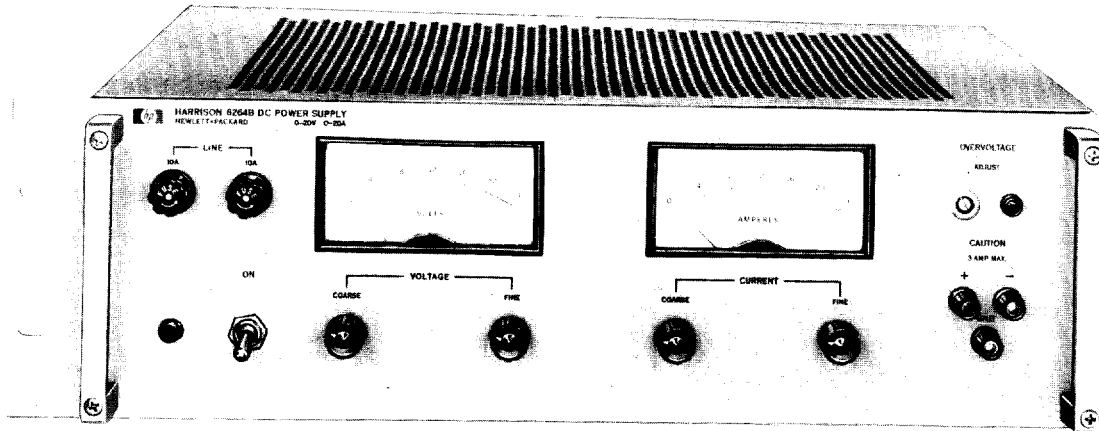

Model 6264B

NOTE: Chief difference in "A" model appearance is absence of crowbar adjust; crowbars are optional on "A" models.

| Model | | 6256B | 6259B | 6260A | 6263B | 6264B |
|--|--------------|--|---------------------------|--|--|--|
| DC output | | 0-10 volts @ 0-20 amps | 0-10 volts @ 0-50 amps | 0-10 volts @ 0-100 amps | 0-20 volts @ 0-10 amps | 0-20 volts @ 0-20 amps |
| AC input | | 115 ±10% V ac 57-63 Hz 5 A, 375 W | 115 ±10% V ac 57-63 Hz | 230 ±10% V ac 57-63 Hz 11 A, 1700 W | 115 V ac ±10% 57-63 Hz, 4 A, 350 W | 115 V ac ±10% 57-63 Hz, 8 A, 600 W |
| Load regulation: the constant voltage load current change equal to the current rating of the supply. The constant current load regulation specification is given for the load voltage change equal to the voltage rating of the supply | CV | 0.01% plus 200 μV | 0.01% + 200 μV | 0.01% plus 200 μV | 0.01% plus 200 μV | 0.01% plus 200 μV |
| | CC | 0.02% plus 500 μA | 0.02% + 1 mA | 0.03% plus 2 mA | 0.02% plus 500 μA | 0.02% plus 500 μA |
| Line regulation: for a change in line voltage from 100 to 130 or 200 to 260 at any output voltage and current within rating. | CV | 0.01% plus 200 μV | 0.01% plus 200 μV | 0.01% plus 200 μV | 0.01% plus 200 μV | 0.01% plus 200 μV |
| | CC | 0.02% plus 500 μA | 0.02% plus 1 mA | 0.03% plus 2 mA | 0.02% plus 500 μA | 0.02% plus 500 μA |
| Ripple and noise: at any line voltage and under any load condition within rating. | CV | 200 μV rms/10 mV p-p | 500 μV rms/10 mV p-p | 1 mV rms/50 V p-p | 200 μV rms/10 mV p-p | 200 μV rms/10 mV p-p |
| | CC | 5 μA rms | 25 μA rms | 50 mA rms | 3 mA rms | 5 mA rms |
| Temperature coefficient: output change per degree centigrade change in ambient following 30 minutes warmup | CV | 0.01% plus 200 μV | 0.01% plus 200 μV | 0.01% plus 200 μV | 0.01% plus 200 μV | 0.01% plus 200 μV |
| | CC | 0.01% plus 2 mA | 0.01% plus 4 mA | 0.01% plus 8 mA | 0.01% plus 2 mA | 0.01% plus 2 mA |
| Remote programming: all programming terminals are located on rear barrier strips | CV | 200 ohms/volts | 200 ohms/volts | 200 ohms/volt | 200 ohms/volt | 200 ohms/volt |
| | CC | 10 ohms/amp | 4 ohms/amp | 2 ohms/amp | 100 ohms/amp | 10 ohms/amp |
| Meters | accuracy: 2% | 0-12 V and 0-24 A | 0-12 V and 0-60 A | 0-12 V and 0-120 A | 0-24 V and 0-12 A | 0-24 V and 0-25 A |
| Input power connections | | 3-wire, 5-foot cord | Barrier strip | Barrier strip | 3-wire, 5-foot cord | 3-wire, 5-foot cord |
| Size: height x depth x width | inches | 5¼ H x 17½ D x 19 W | 7 H x 17½ D x 19 W | 7 H x 17½ D x 19 W | 3½ H x 17½ D x 19 W | 5¼ H x 17½ D x 19 W |
| | centimeters | 14 H x 44,4 D x 48,3 W | 17,8 H x 44,4 D x 48,3 W | 17,8 H x 44,4 D x 48,3 W | 8,9 H x 44,4 D x 48,3 W | 14 H x 44,4 D x 48,3 W |
| Weight: (lbs) (net/shipping) | | 42 (19,1 kg)/57 (25,9 kg) | — | 90 (44,8 kg)/115 (52,2 kg) | 34 (15,4 kg)/48 (12,7 kg) | 42 (19,1 kg)/51 (25,9 kg) |
| Price | | \$450 | \$650 | \$775 | \$435 | \$525 |
| Options: refer to page 561 for descriptions | | 05-\$10, 07-\$25, 08-\$25, 09-\$45, 10-\$50, | | 05-\$90, 06-\$175, 10-\$125, | 05-\$10, 07-\$25, 08-\$25, 09-\$45, 10-\$50, | |
| | | 13-\$60, 14-\$60, 27-\$10, 28-\$10 | | 13-\$35, 14-\$35, 16-\$50, 27-\$15, 55-\$20 | 13-\$60, 14-\$60, 27-\$10, 28-\$10 | |

CV = constant voltage CC = constant current

Advantages

Overvoltage Protection Crowbar*

Low peak-to-peak ripple

Continuously variable output voltage and current—
no range switching

Auto-series, auto-parallel and auto-tracking operation

Remote programming—voltage and current can be
controlled by external resistance or control voltage

Remote error sensing

Low output impedance

Constant voltage constant current operation with
automatic crossover

Fully rated for any overload condition including
continuous short circuit operation

Front panel voltmeter and ammeter

RFI conformance to MIL-I-6181D

*Internal and standard on "B" models, external and optional on "A" models.

Specifications

Radio frequency interference: all models are free from conducted and radiated RFI to the extent that they meet all the requirements of MIL-I-6181D.

Maximum operating temperature: 0 to 55°C. Storage: -20 to +71°C.

Internal impedance as a constant voltage source: 0.1 mΩ in series with 1 μH.

Transient recovery time: less than 50 microseconds is required for output voltage recovery (in constant voltage operation) to within

10 millivolts of the nominal output voltage following a 5 amp change in output current.

Output terminals: an output terminal strip is located on the rear of the chassis. All power supply terminals are isolated from the chassis and either the positive or negative terminal may be connected to the chassis through a separate ground terminal located adjacent to the output terminals. All models include front panel output terminals. They are banana jack type and limited to 3 amps maximum current output.

Finish: light gray front panel with dark gray case.

| 6265B | 6266B | 6267B | 6268A | 6269A | 6271B | 6274A |
|--|---|---|--|--|--|---|
| 0-40 volts @ 0-3 amps | 0-40 volts @ 0-5 amps | 0-40 volts @ 0-10 amps | 0-40 volts @ 0-30 amps | 0-40 volts @ 0-50 amps | 0-60 volts @ 0-3 amps | 0-60 volts @ 0-15 amps |
| 115 V ac, ±10% 57-63 Hz, 3 A, 180 W | 115 V ac, ±10% 57-63 Hz, 4 A, 325 W | 115 V ac, ±10% 57-63 Hz, 8 A, 550 W | 230 ±10% V ac 57-63 Hz, 11 A, 1600 W | 230 ±10% V ac 57-63 Hz, 18 A, 2600 W | 115 V ac ±10% 57-63 Hz, 4 A, 300 W | 115 V ac, ±10% 57-63 Hz, 16 A, 1700 W |
| 0.01% plus 200 μV | 0.01% plus 200 μV | 0.01% plus 200 μV | 0.01% plus 200 μV | 0.01% plus 200 μV | 0.01% plus 200 μV | 0.01% plus 200 μV |
| 0.02% plus 500 μA | 0.02% plus 500 μA | 0.02% plus 500 μA | 0.02% plus 3 mA | 0.02% plus 3 mA | 0.02% plus 500 μA | 0.02% plus 2 mA |
| 0.01% plus 200 μV | 0.01% plus 200 μV | 0.01% plus 200 μV | 0.01% plus 200 μV | 0.01% plus 200 μV | 0.01% plus 200 μV | 0.01% plus 200 μV |
| 0.02% plus 500 μA | 0.02% plus 500 μA | 0.02% plus 500 μV | 0.02% plus 3 mA | 0.02% plus 3 mA | 0.02% plus 500 μA | 0.02% plus 2 mA |
| 200 μV rms/10 mV p-p | 200 μV rms/10 mV p-p | 200 μV rms/10 mV p-p | 1 μV rms | 1 μV rms/20 mV p-p | 200 μV rms/10 mV p-p | 500 μV rms |
| 3 mA rms | 3 mA rms | 3 mA rms | 20 mA rms | 30 mA rms | 3 mA rms | 10 mA rms |
| 0.01% plus 200 μV | 0.01% plus 200 μV | 0.01% plus 200 μV | 0.01% plus 500 μV | 0.01% plus 200 μV | 0.01% plus 200 μV | 0.01% plus 200 μV |
| 0.01% plus 1 mA | 0.01% plus 1 mA | 0.01% plus 1 mA | 0.01% plus 2 mA | 0.01% plus 4 mA | 0.01% plus 1 mA | 0.01% plus 2 mA |
| 200 ohms/volt | 200 ohms/volt | 200 ohms/volt | 200 ohms/volt | 200 ohms/volt | 300 ohms/volt | 300 ohms/volt |
| 300 ohms/amp | 200 ohms/amp | 100 ohms/amp | 6 ohms/amp | 4 ohms/amp | 300 ohms/amp | 62 ohms/amp |
| 0-50 V and 0-4A | 0-50 V and 0-6 A | 0-50 V and 0-12 A | 0-50 V and 0-40 A | 0-50 V and 0-60 A | 0-70 V and 0-4 A | 0-70 V and 0-18 A |
| 3-wire, 5-foot cord | 3-wire, 5-foot cord | 3-wire, 5-foot cord | Barrier strip | Barrier strip | 3-wire, 5-foot cord | Barrier strip |
| 3½ H x 17½ D x 19 W | 3½ H x 17½ D x 19 W | 5¼ H x 17½ D x 19 W | 7 H x 16¾ D x 19 W | 7 H x 17½ D x 19 W | 3½ H x 17½ D x 19 W | 5¼ H x 17½ D x 19 W |
| 8,9 H x 44,4 D x 48,3 W | 8,9 H x 44,4 D x 48,3 W | 14 H x 44,4 D x 48,3 W | 17,8 H x 42,7 D x 48,3 W | 17,8 H x 44,4 D x 48,3 W | 8,9 H x 44,4 D x 48,3 W | 14 H x 44,4 D x 48,3 W |
| 34 (15,4 kg)/48 (21,7 kg) | 34 (15,4 kg)/48 (21,7 kg) | 42 (19,1 kg)/57 (25,9 kg) | 93 (42,2 kg)/120 (54,5 kg) | 93 (42,4 kg)/120 (54,5 kg) | 34 (15,4 kg)/48 (21,7 kg) | 75 (34 kg)/95 (43,1 kg) |
| \$350 | \$435 | \$525 | \$695 | \$875 | \$435 | \$695 |
| 05-\$10, 07-\$25, 08-\$25, 09-\$45, 10-\$50, | | | 05-\$10, 06-\$175, 10-\$125, 13-\$35, | | 05-\$10, 07-\$25, 09-\$45, | 05-\$10, 06-\$175, 10-\$125, |
| 13-\$60, 14-\$60, 27-\$10, 28-\$10 | | | 14-\$35, 27-\$15 | | 10-\$50, 13-\$60, 14-\$60, | 13-\$35, 14-\$35, 17-\$50, |
| | | | | | 27-\$10, 28-\$10 | 18-\$50 |