



A range of RF and Microwave Spectrum Analyzers that offer value and performance to both field and bench users.

2390A Series Spectrum Analyzers



- Fully synthesized Spectrum Analyzers to 26.5 GHz
- 3 Hz to 30 MHz resolution bandwidth filters
- Excellent intermodulation performance
- +30 to -135 dBm measurement range
- Measurements to 300 GHz with external mixers
- Optional built-in tracking generator
- Receiver mode with AM and FM demodulators
- Optional quasi-peak detector and EMC filters

The 2390A series of spectrum analyzers from IFR combine exceptional performance with excellent value for money. There are three instruments in the range:-

2392A	9 kHz to 2.9 GHz
2390A	9 kHz to 22 GHz
2393A	9 kHz to 26.5 GHz

Frequency Accuracy


All three instruments are fully synthesized to give accurate frequency measurements. Even on wide spans the 2390A series gives precise frequency measurements and an integral frequency counter enables the measurement of individual signals to 1 Hz resolution.

Fundamental mixing to 12 GHz enables the microwave versions to reach their maximum frequency in only two harmonic

sweeps. This gives excellent sensitivity and accuracy right up to 26.5 GHz.

Narrow Resolution

The 2390A series all have resolution bandwidths down to 3 Hz. Narrow resolution bandwidths provide the ability to resolve closely spaced signals or sidebands.

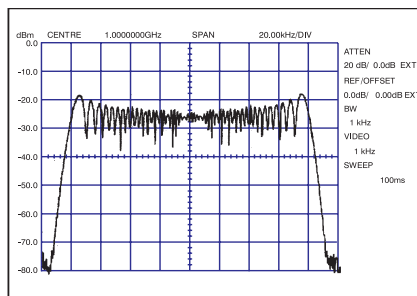


FM spectrum

The 3 Hz filter is also used for close in signal analysis, for example it can be used to identify 50 or 60 Hz power line sidebands on oscillators. The average displayed noise level when using a 3 Hz filter is less than -135 dBm at 2.9 GHz and below -125 dBm at 26.5 GHz. This makes 2390A series suitable for locating and identifying low level spurious and harmonic signals.

Wideband Filters for Spread Spectrum and Pulsed Signals

When analyzing signals with wide spectrum bandwidths such as digitally modulated carriers or pulsed radar, the resolution bandwidth of the spectrum analyzer can limit the measurement. The 2390A series have 10 MHz and 30 MHz

bandwidth filters. These give the best available characterization of wideband signals and have an impulse bandwidth >5 MHz. In zero span mode a minimum sweep time of 200 ns/div makes displaying radar pulses precise and straightforward.

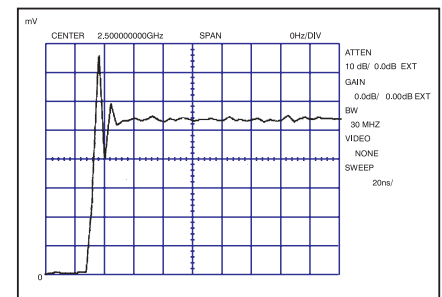

200 ns sweep clearly shows ringing on demodulated radar pulse

AM and FM Receiver Modes

The 2390A series features built-in receivers for both AM and FM signals. Modulation detection can be set to narrowband or wideband mode.

For an FM transmission a modulation scale of 1 kHz to 5 MHz per division allows direct measurement of the modulation component of carrier signals up to ±20 MHz deviation. Frequency synthesizer settling time can be measured using the DC coupled output from the FM detector.


A high quality audio output through either a built-in speaker or headphone connector allows audible detection of noise or distortion. It can also be used to identify the source of interfering transmissions.

2390A Series

Harmonic and Spurious Measurements

When monitoring the frequency spectrum or installing and maintaining radio systems it is important to check the spurious and harmonic signals. The 2390A series has fundamental mixing to 12 GHz and sweeps to 26.5 GHz in only two harmonic steps. This means that good sensitivity is maintained across the whole frequency band revealing interfering signals that may otherwise have been lost in noise.

Internally generated intermodulation distorting products are minimized by the high performance input mixer. This gives more than 80 dBc intermodulation free dynamic range. As a result the user can be confident that all displayed signals are true signals even when measuring at busy transmitter sites.

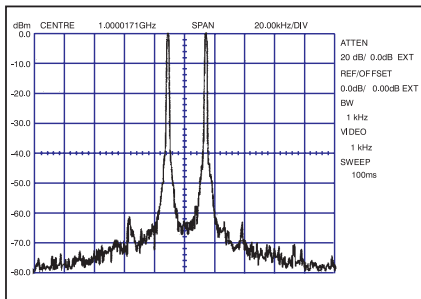


Third order intermodulation measurement of a 1 GHz amplifier

Network Measurements

An optional built-in tracking generator is available covering from 100 kHz to 2.9 GHz. It is ideal for frequency response measurements on filters, amplifiers and couplers. A normalization function sets a 0 dB reference level which can be used for absolute measurements of insertion loss or gain.

If used with a bridge the return loss of devices such as antennas or loads can also be measured.

The output level of the tracking generator is adjustable from -70 dBm to 0 dBm. It can be used as a low level input for amplifiers, or in CW mode as a synthesized local oscillator.

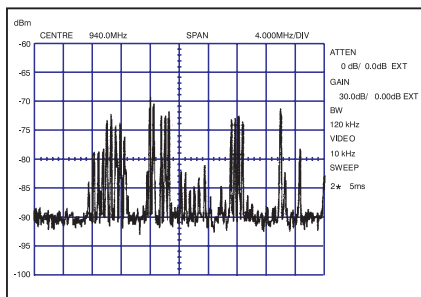


Filters can be characterized using the optional tracking generator

Field Measurements

For measurements at remote sites in the field the 2390A series is portable and rugged. Mobile and cellular radio base stations demand 24 hour reliability. The

2392A is ideal for field measurements of spurious, harmonics and intermodulation products. Integral frequency counter and receiver modes mean that interfering signals can be identified quickly and easily.

For microwave radio links the 2390A or 2393A offer frequency coverage to 22 GHz and 26.5 GHz respectively. A wide 30 MHz resolution bandwidth filter, and limit mask, facilitate testing of modulated point-to-point or trunk radio links.

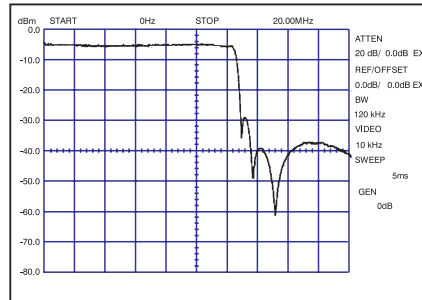

Monitoring signals at a cellular radio base station

EMC Measurements

2390A series can be used for pre-compliance testing of electronic products to meet stringent EMC specifications. Before sending a product to an expensive test house a pre-compliance test will indicate if the product is likely to pass.

Option 08 provides quasi-peak detection and five extra resolution bandwidth filters. These comply with the CISPR recommendations for measurements of RF emissions.

In-built FFT and Oscilloscope

When analyzing communications systems it is often necessary to test the audio and IF frequencies, as well as the RF signal. With its built-in 20 kHz FFT analyzer and 5 MHz oscilloscope, audio analysis and fault finding is possible. The FFT analyzer enables harmonic distortion measurements on audio signals and the scope provides a general fault finding and diagnostic tool.

Clear Operation

The 2390A series has a large 7" TFT colour display for clear viewing of signals and instrument settings. All key elements such as sweep speed, resolution bandwidth, input attenuation and IF gain are automatically set, depending on the users span and reference level. Two markers can be used to measure signals as well as provide standard operations such as peak find, marker to centre and delta marker. This speeds up and simplifies measurements.

99 traces and 99 instrument settings can be stored into the non-volatile memory of the 2390A series. In this way tests can be stored in the instrument and results saved to memory for printout at a later time. The 2390A series spectrum analyzer is also equipped with both RS-232 and IEEE-488 interfaces.

Applications Software

Accessory AC 1047 provides an additional 10 measurement applications to the 2390A series. The applications are:-

- Adjacent Channel Power
- Occupied Bandwidth
- Voltage Standing Wave Ratio
- Cable Fault
- Pulse Identification
- Noise Marker
- Carrier/Noise 1Hz Normalized
- Carrier/Noise 1.23 MHz
- Normalized
- Amps Cellular Channel Mode Increment

All applications are supplied on a single 3.5" disk. They are downloaded into non volatile memory in the 2390A series spectrum analyzer.

EasySpan Software

The EasySpan software is a Windows based program for PCs. It facilitates viewing 2390A series traces on the PC display without the need for spreadsheets. Traces and set-ups may be recorded to disk for future reference. An interactive window allows macros to be written allowing automatic trace acquisition. The instrument may be connected to a modem allowing traces to be viewed and recorded from a remote location, for remote site monitoring.

Active Probe

The AC2388 Active Probe covers from 50 kHz to 1.25 GHz. It enables accurate measurements of devices from HF to UHF without loading the circuit. A built-in continuously variable attenuator minimizes probe distortion during measurement.

Specification

Frequency	
FREQUENCY RANGE	
2392A	9 kHz to 2.9 GHz
2390A	9 kHz to 22 GHz
2393A	9 kHz to 26.5 GHz
Internal Mixing (version dependent)	
Band 0	0 Hz to 2.9 GHz
Band 1	2.6 GHz to 12.0 GHz
Band 2	11.5 GHz to 26.5 GHz
EXTERNAL MIXING (ALL INSTRUMENTS)	3 GHz to 300 GHz
FREQUENCY READOUT ACCURACY	±(3% of Span Width + Frequency Standard Accuracy + 50 % of RBW)
FREQUENCY SPAN RANGE	
2392A	10 Hz/div to 290 MHz/div
2390A	10 Hz/div to 2.2 GHz/div
2393A	10 Hz/div to 2.65 GHz/div
All versions have continuously variable span and zero span (0 Hz)	
ACCURACY	±5% of indicated span
FREQUENCY COUNTER	
Resolution	1 Hz, 10 Hz, 100 Hz, 1 kHz
Accuracy	±(Frequency Standard Accuracy + Counter Resolution)
Sensitivity	(at 120 MHz with 0 dB attenuation) <-85 dBm with 3 kHz RBW

<-65 dBm with 5 MHz RBW

FREQUENCY STANDARD**Temperature Stability (0°C - 50°C)**

±0.2 ppm
±0.02 ppm (Option 09)

Ageing

First year
±2 ppm/year
±1 ppm/year (Option 09)
Thereafter
±1 ppm/year
±0.5 ppm/year (Option 09)

RESIDUAL FM

(peak to peak in 20 ms, spans <1 MHz/div,
100 Hz video filter)
<10 Hz, below 6 GHz
<20 Hz, 6 GHz to 12 GHz
<40 Hz, 12 GHz to 26.5 GHz

NOISE SIDEBANDS

(Span <100 kHz/div)

	10 kHz offset	30 kHz offset
0.1 to 1.0 GHz	-97 dBc/Hz	-101 dBc/Hz
1.0 to 2.8 GHz	-92 dBc/Hz	-95 dBc/Hz
2.8 to 6.0 GHz	-93 dBc/Hz	-100 dBc/Hz
6.0 to 12.0 GHz	-88 dBc/Hz	-95 dBc/Hz
12.0 to 26.5 GHz	-81 dBc/Hz	-88 dBc/Hz

SYSTEM RELATED SIDEBANDS

(at 300 Hz RBW)
<-65 dBc below 12 GHz
<-60 dBc 12 GHz to 26.5 GHz

Sweep**TIME****Span >200 Hz/div**

1 ms to 10 s/div in 1-2-5 sequence

Zero Span

200 ns/div to 10s/div in 1-2-5 sequence
(Resolution reduced <2 μs/div)

ACCURACY

±1% >1 μs/div

TRIGGER SOURCE

Internal (Video), External (front panel), External (rear panel) or line (AC input)

TRIGGER MODE

Free Run, Auto Normal or Single

TRIGGER COUPLING

AC, DC, High-Pass Filter, Low-Pass Filter, TV line, TV field

TRIGGER BANDWIDTH

>5 MHz @ -3 dB (at EXTERNAL INPUT connector)

TRIGGER LEVEL RANGE**Video**

Adjustable over 8 divisions, positive or negative polarity

Front Panel BNC

User settable threshold: -2.5 V, -1.0 V, -0.5 V, 0 V, +0.5 V, +1.0 V, +2.5 V; nominal

Rear Panel BNC

+2.5 V nominal

TRIGGER SENSITIVITY**Internal**

1 division

Front Panel BNC

200 mV peak

Rear Panel BNC

+2 V (TTL)

TRIGGER DELAY (using Zero Span)

0 to ±300 divisions in time/div to a maximum of ±200 second

Amplitude**MAXIMUM INPUT LEVEL**

0 V DC,
+20 dBm,
+30 dBm CW >0 dB input attenuation
+50 dBm peak; 10 μs, <1% duty cycle,
>0 dB input attenuation

DISPLAYED AVERAGE NOISE LEVEL

(in 10 Hz Video Resolution Bandwidth)

	3 Hz RBW	300 Hz RBW
9 kHz to 100 kHz	<-115 dBm	<-95 dBm
100 kHz to 2.9 GHz	<-135 dBm	<-115 dBm
2.9 to 12.0 GHz	<-130 dBm	<-110 dBm
12.0 to 26.5 GHz	<-125 dBm	<-105 dBm

GAIN COMPRESSION

<1.0 dB with -5 dBm (0 dB attenuation)

AMPLITUDE UNITS

Logarithmic display
dBm, dBμW, dBmV, dBmV
Linear display
mW, μW, mV, μV

DISPLAY LINEARITY**Log**

5 or 10 dB/div
±0.15 dB/dB, ≤1.5 dB over 8 divisions
1 or 2 dB/div
±0.5 dB over 8 divisions

Linear**<10 MHz RBW**

±2% of Reference Level over 8 divisions
10 MHz and 30 MHz RBW
±10% of Reference Level over 8 divisions
(<10 dB IF Gain)

FREQUENCY RESPONSE**(with 10 dB attenuation, relative to REF OUT)**

±1.5 dB, 9 kHz to 2.9 GHz
±2.0 dB, 2.9 GHz to 12 GHz
±3.0 dB, 12 GHz to 18 GHz
±4.0 dB, 18 GHz to 26.5 GHz

RESOLUTION BANDWIDTH**Range**

3 Hz, 10 Hz, 30 Hz, 100 Hz (Digital Resolution);
300 Hz, 3 kHz, 30 kHz, 300 kHz and 5 MHz (at 3 dB);
10 MHz and 30 MHz (at 3 dB) (Linear display and FM modes)

Option 08

Additional 1 kHz and 1 MHz (at 3 dB);
200 Hz, 9 kHz and 120 kHz (at 6 dB)

Accuracy

±20%, 300 Hz to 30 kHz;
±30%, 300 kHz to 30 MHz;
±10%, 200 Hz, 9 kHz and 120 kHz

Selectivity

60 dB/3 dB ratio
<5:1, 3 kHz, 30 kHz, 300 kHz, 1 MHz, 5 MHz;
<12:1, 1 kHz;
60 dB/6 dB ratio <5:1, 9 kHz and 120 kHz;
50 dB/3 dB ratio <10:1, 300 Hz;
50 dB/6 dB ratio <10:1, 200 Hz

Switching Error

(referenced to 30 kHz RBW)
±0.5 dB, 1 kHz to 5 MHz;
±1.0 dB, <1 kHz;
±2.0 dB, 10 MHz, 30 MHz;

VIDEO BANDWIDTH**Range**

10 Hz to 1 MHz in decade steps plus NONE
(no Video Filter activated)

INPUT ATTENUATOR**Range**

0 to 60 dB in 10 dB steps

Accuracy

Greater of ±0.5 dB or ±2%, 9 kHz to 2.9 GHz
Greater of ±1.0 dB or ±4%, 2.9 GHz to 18 GHz
Greater of ±1.5 dB or ±7%, 18 GHz to 26.5 GHz

REFERENCE LEVEL**Range**

<10 MHz RBW
-95 to +30 dBm in 0.1 dB steps
10 MHz, 30 MHz, RBW
-50 to +30 dBm in 0.2 steps

Accuracy

With 10 dB attenuation and RBW <10 MHz
±0.25 dB, -20 to -40 dBm
±0.5 dB, -40 to -85 dBm
RBW 10 MHz, 30 MHz
±2.0 dB

Offset

0 to ±99.9 dB in 0.1 dB steps

SPURIOUS RESPONSES**Harmonic Distortion**

<-70 dBc, 9 kHz to 2.9 GHz
(-30 dBm input and 10 dB attenuation)
<-100 dBc, 2.9 GHz and 26.5 GHz
(-10 dBm input and 10 dB attenuation)

Third Order Intermodulation Distortion

<-80 dBc (-30 dBm input and 10 dB attenuation)
<-75 dBc (9 - 12 GHz only)

Residual Response

(input terminated with 50 Ω)
<-90 dBm, 9 to 100 kHz;
<-100 dBm, 100 kHz to 26.5 GHz

Other Input Related Spurious

(-30 dBm input and -10 dB attenuation)
<-70 dBc below 18 GHz
<-60 dBc 18 GHz to 26.5 GHz

DISPLAY BANDWIDTH**Linear mode**

>5 MHz (-3 dB), 30 MHz RBW;
>2.5 MHz (-3 dB), 5 MHz RBW;
at <5 μs/div Sweep Time

Log mode

>1 MHz (-3 dB), 5 MHz RBW;
at <20 μs/div Sweep Time

Receiver**FREQUENCY RANGE**

2392A 9 kHz to 2.9 GHz
2390A 9 kHz to 22 GHz
2393A 9 kHz to 26.5 GHz

SENSITIVITY

5 μV at 100 MHz (30 kHz RBW, 3 kHz Video Bandwidth, 5 kHz FM deviation at 1 kHz rate, 10 dB SINAD with 10 dB IF Gain)

SELECTIVITY

Available analyzer RBW between 200 Hz and 300 MHz

DEMODULATION**AM Scales**

10%, 20 %, 50 %/div

FM Scales

(in 1-2-5 sequence)
1 kHz to 100 kHz, <10 MHz RBW;
200 kHz to 5 MHz, 10 MHz, 30 MHz RBW

Memory**TRACE STORAGE CAPACITY**

99 traces (including user defined traces and test limits)

RECALL TO DISPLAY AT ONE TIME

4 traces

SET-UP STORAGE CAPACITY

99 set-ups

MACRO PROGRAM CAPACITY

64 kbytes

Oscilloscope**INPUT****Type**

BNC (f)

Impedance

1 MΩ and 27 pF nominal

Coupling

AC, DC, GND

Voltage Range

5 mV/div to 5 V/div (±3% of Full Scale) in 1-2-5 sequence

Frequency Range

DC to >5 MHz (-3 dB) at <5 μs/div Sweep Time

FFT Analyzer**INPUT**

(as per oscilloscope)

AMPLITUDE**Attenuation**

0 to 60 dB in 20 dB steps

Reference Level Range

2.23 mV to 22.3 V Full Scale
(-40 to +40 dBm/50 Ω reference voltage)

2390A Series

Response

+0/-3 dB (0 Hz to 20 kHz)

DYNAMIC RANGE

80 dB

Average Noise Level

<1 μ V

Spurious

<7 μ V

FREQUENCY

Range

0 to 20 kHz

Span

10 to 200 Hz/div continuously variable

Bandwidth

3, 10, 30 or 100 Hz

TRIGGER FUNCTION

Selectable external trigger (time-gate) capabilities

PULSE WIDTH

>100 ns

External Mixer

EXTERNAL MIXER IF INPUT

Type

SMA (f)

Frequency

410.7 MHz at -30 dBm \pm 3 dB for top of screen display

Compression

1 dB at >-5 dBm

EXTERNAL MIXER LO OUTPUT

Type

SMA, 50 Ω nominal (must be terminated when not in use)

Frequency

3 to 12 GHz

Amplitude

\geq +8 dBm

Input/Output

ANALYZER INPUT

2392, Precision Type N (f)
2390A, Precision Type N (f)
2393, Field replaceable Planar Crown™ with 3.5 mm (f) and Type N (f) both supplied

INPUT VSWR

(>0 dB input attenuation)
<1.3:1 <2.9 GHz - (2390A, 2393A)
<1.45:1 <2.9 GHz - (2392A)
<1.5:1 2.9 GHz to 8 GHz
<2.0:1 8 GHz to 18 GHz
<2.5:1 18 GHz to 26.5 GHz

EXTERNAL REAR TRIGGER INPUT

10 k Ω nominal

EXT REF INPUT

Type

BNC (f), 1 k Ω nominal 10 MHz at 1 to 10 Vpk-pk

PHONES OUTPUT

1/8" (3.2 mm) phone jack

REF OUT (CALIBRATOR)

Type

BNC (f), 50 Ω nominal

Frequency

100 MHz

Accuracy

Same as Frequency Standard

Amplitude

-30 dBm

Accuracy

\pm 0.5 dB

10.7 MHz IF OUTPUT

Type BNC (f), 50 Ω nominal

410.7 MHz IF OUTPUT

Type BNC (f), 50 Ω nominal

EXT DISPLAY OUTPUT

15 pin VGA format for external color display

VIDEO OUTPUT

100 mV/div \pm 10% into 1 M Ω

FUNCTION CONNECTOR

External Rear Trigger, pin 8 10 k Ω nominal
Upper Limit Relay Drive, pin 13 50 V, 200 mA max
Lower Limit Relay Drive, pin 5 50 V, 200 mA max
Sweep, pin 14 0 to +5 V ramp \pm 0.5 V
Sweep Hold, pin 6 TTL Level
Auxiliary Video, pin 7 100 mV/div \pm 10% into 1 M Ω

IEEE-488 GPIB

Conforms to

IEEE-Standard 488-1987

Implemented Subsets

SH1, AH1, T1, TE0, L2, LE0, SR1, RL2, PP0, DC1, DT1 and CO

Compatibility

IEEE-488.2 Command Set.
High Speed waveform transfer supported.

RS-232

Type

Half-duplex RS-232 (operates as slave to controller [DTE])

Baud Rate

110, 150, 300, 600, 1200, 2400, 4800, 9600, 19200 or 38400

Handshake Modes

XON/XOFF (Software), CTS/RTS (Hardware)

Parity Check

Odd, Even or None

General Characteristics

DIMENSIONS (ALL VERSIONS)

40.64 cm (16") wide (including handle);
19.05 cm (7.5") high; 55.88 cm (22") deep

WEIGHT (WITHOUT OPTIONS)

2392 15.5 kg (34.1 lbs)
2390A 16.6 kg (36.6 lbs)
2393 16.7 kg (36.8 lbs)

POWER REQUIREMENTS

AC Line

90 to 132 Vac, 50 to 60 Hz / 400 Hz, <170 W
198 to 264 Vac, 50 to 60 Hz / 400 Hz, <170 W

ENVIRONMENT

Operating Temperature

0 to 50°C

Storage Temperature

-40 to 71°C

Temperature Change

1°C/minute for specified accuracy

Altitude

Operational 3,048 m (10,000 ft)
Nonoperational 12,192 m (40,000 ft)

ELECTRO-MAGNETIC COMPATIBILITY

Conforms with the protection requirements of EEC Council Directive 89/336/EEC.

Complies with the limits specified in the following standards:

EN55011-1:1991 (Emissions)	CISPR11
EN50082-1:1992 (Immunity)	IEC801-2 1991 IEC801-3: 1984 IEC801-4: 1988 IEC555-2

EN60555-2: 1987

SAFETY

Complies with IEC 1010-1:1991 BSEN 61010-1 for class 1 portable equipment and is for use in a pollution degree 2 environment. The instrument is designed to operate from an installation category 2 supply.

NOTE: The 2390A series requires 15 minutes of warm-up time to meet specifications. Specifications only apply with TIME CALIBRATION set to ENABLE in the Analyzer Configuration Screen Option Menu or immediately after manually activating a TIME CALIBRATION.

Options

TRACKING GENERATOR (Option 02)

Frequency Range

100 kHz to 2.9 GHz

Flatness (at -10 dBm)

\pm 2.0 dB, 100 kHz to 1 MHz;
 \pm 1.5 dB, 1 MHz to 2.9 GHz

Output Level

0 to -70 dBm in 1 dB steps

Attenuator Accuracy

\pm 1 dB or 0.05 dB/dB

Nonharmonic Spurious

<-30 dBc

Harmonics

<-20 dBc

Leakage (Dynamic range)

-120 dBm

QUASI-PEAK DETECTOR (Option 08)

Selected Bandwidth	Freq Range	Charge Time*	Discharge Time*	Display Time*
200 Hz	10 to 150 kHz	45	500	160
9 kHz	0.15 to 30 MHz	1	160	160
120 kHz	0.03 to 1 GHz	1	550	100

* Time is given in ms \pm 20%

HIGH STABILITY TIMEBASE (Option 09)

Temperature Stability

\pm 0.02 ppm/°C

Ageing

First year \pm 1 ppm/year
Thereafter \pm 0.5 ppm/year

Versions and Accessories

When ordering please quote the full ordering number information.

Ordering

Numbers	Versions
2392A-110	9 kHz to 2.9 GHz Spectrum Analyzer, 110 VAC
2392A-110-C	9 kHz to 2.9 GHz Spectrum Analyzer 110 VAC with certificate of calibration
2392A-220	9 kHz to 2.9 GHz Spectrum Analyzer, 220 VAC operation
2392A-220-C	9 kHz to 2.9 GHz Spectrum Analyzer, 220 VAC with certificate of calibration
2392AT-110	9 kHz to 2.9 GHz Spectrum Analyzer, Tracking generator, 110 VAC
2392AT-110-C	9 kHz to 2.9 GHz Spectrum Analyzer, Tracking generator, 110 VAC, certificate of calibration
2392AT-220	9 kHz to 2.9 GHz Spectrum Analyzer, Tracking Generator, 220 VAC
2392AT-220-C	9 kHz to 2.9 GHz Spectrum Analyzer, Tracking Generator, 220 VAC, Certificate of Calibration
2392AP-110	2392A Premium (Tracking generator; 200 Hz, 1, 9 and 120 kHz Filters; Quasi-peak Detector) 110 VAC
2392AP-110-C	2392A Premium (Tracking generator; 200 Hz, 1, 9 and 120 kHz Filters; Quasi-peak Detector) with certificate of calibration
2392AP-220	2392A Premium, 220 VAC operation
2392AP-220-C	2392A Premium, 220 VAC with certificate of calibration
2390A-110	9 kHz to 22 GHz Spectrum Analyzer, 110 VAC operation
2390A-110-C	9 kHz to 22 GHz Spectrum Analyzer, 110 VAC with certificate of operation
2390A-220	9 kHz to 22 GHz Spectrum Analyzer, 220 VAC operation
2390A-220-C	9 kHz to 22 GHz Spectrum Analyzer, 220 VAC with certificate of calibration
2390AT-110	9 kHz to 22 GHz Spectrum Analyzer, Tracking generator, 110 VAC
2390AT-110-C	9 kHz to 22 GHz Spectrum Analyzer, Tracking generator, 110 VAC, with certificate of calibration
2390AT-220	9 kHz to 22 GHz Spectrum Analyzer, Tracking generator, 220 VAC
2390AT-220-C	9 kHz to 22 GHz Spectrum Analyzer, Tracking generator, 220 VAC, with certificate of calibration
2390AP-110	2390A Premium (Tracking generator; 200 Hz, 1, 9, 120 kHz Filters; Quasi-peak Detector, 0.02 ppm high stability time base), 110 VAC operation
2390AP-110-C	2390A Premium (Tracking generator; 200 Hz, 1, 9, 120 kHz Filters; Quasi-peak Detector, 0.02 ppm high stability time base), 110VAC with certificate of calibration
2390AP-220	2390A Premium, 220VAC operation
2390AP-220-C	2390A Premium, 220VAC with certificate of calibration
2393A-110	9 kHz to 26.5 GHz Spectrum Analyzer, 110 VAC operation
2393A-110-C	9 kHz to 26.5 GHz Spectrum Analyzer, 110 VAC with certificate of calibration
2393A-220	9 kHz to 26.5 GHz Spectrum Analyzer, 220

	VAC operation
2393A-220-C	9 kHz to 26.5 GHz Spectrum Analyzer, 220 VAC operation with certificate of calibration
2393AT-110	9 kHz to 26.5 GHz Spectrum Analyzer, Tracking generator, 110 VAC
2393AT-110-C	9 kHz to 26.5 GHz Spectrum Analyzer, Tracking generator, 110 VAC, with certificate of calibration
2393AT-220	9 kHz to 26.5 GHz Spectrum Analyzer, Tracking generator, 220 VAC
2393AT-220-C	9 kHz to 26.5 GHz Spectrum Analyzer, Tracking generator, 220 VAC, with certificate of calibration
2393AP-110	2393A Premium (Tracking generator; 200 Hz, 1, 9, 120 kHz filters; Quasi-peak Detector, 0.02 ppm high stability time base) 110 VAC
2393AP-110-C	2393AP-110, Cert. Cal
2393AP-220	2393A Premium (Tracking generator; 200 Hz, 1, 9, 120 kHz filters; Quasi-peak Detector, 0.02 ppm high stability time base), 220 VAC
2393AP-220-C	2393AP-220, Cert. Cal
	Accessories
AC0100M	Near Field Probe Set
AC0410	Maintenance Manual
AC1009M	EasySpan (Waveform Transfer Software)
AC 1047	Applications library
AC1600M	TMAC Programming Manual
AC2388	1 GHz Active Probe supplied with accessory power supply
AC4101T	Return Loss Bridge (5 MHz to 1 GHz)
AC4103T	Return Loss Bridge (5 MHz to 2 GHz)
AC4250	75 Ω Adapter BNC/N
AC4700	Rack Mount Adapter
AC5007	Soft Padded Carrying Case
AC5009	Type SMA PLANAR CROWN Adapter (2393A only)
AC5010	Type N PLANAR CROWN Adapter (2393A only)
AC7800	75 Ω Adapter F/N
AC8700	UHF Antenna
5900/327	MI Plot Measurement Presentation Software.

2390A Series



IFR Americas, Inc., 10200 West York Street, Wichita, Kansas
67215-8999, USA. E-mail: info@ifrsys.com
Tel: +1 316 522 4981 Toll Free USA: 1 800 835 2352 Fax: +1 316 522 1360

IFR Ltd, Longacres House, Norton Green Road, Stevenage, Herts
SG1 2BA, United Kingdom. E-mail: info@ifrinternational.co.uk
Tel: +44 (0) 1438 742200 Freephone UK: 0800 282 388 Fax: +44 (0) 1438 727601

As we are always seeking to improve our products, the information in this document gives only a general indication of the product capacity, performance and suitability, none of which shall form part of any contract. We reserve the right to make design changes without notice. All trademarks are acknowledged. Parent Company IFR Systems, Inc. © IFR Ltd. 1998.