



# AEL-5000 Series

AC & DC Electronic Load

## FEATURES

- CC, Linear CC, CR, CV, CP and AC Rectifier Load Mode
- Frequency Range : DC, 40~440Hz
- Turbo Mode for 2 Times the Current and Power of Electronic Load within 1 Second
- Three Units Parallel up to 90kW and Three-phase  $\Delta$  or Y Load Connection Can be Synchronized Control by One Master Unit
- Loading and Unloading Angle Control; 0~359 Degree is Settable
- Positive Half-cycle or Negative Half-cycle Loading
- Supports SCR/TRIAC Current Phase Modulation Waveforms, 90 Degree Trailing Edge and Leading Edge
- Optional Interface : GPIB、RS232、USB、LAN

**GW INSTEK**  
Simply Reliable

# AC & DC Electronic Load

## AEL-5000 Series



**AEL-5002-350-18.75    AEL-5006-350-56    AEL-5012-350-112.5    AEL-5015-350-112.5    AEL-5019-350-112.5    AEL-5023-350-112.5**  
**AEL-5003-350-28    AEL-5008-350-75    AEL-5012-425-112.5    AEL-5015-425-112.5    AEL-5019-425-112.5    AEL-5023-425-112.5**  
**AEL-5004-350-37.5    AEL-5006-425-56**  
**AEL-5002-425-18.75    AEL-5008-425-75**  
**AEL-5003-425-28**  
**AEL-5004-425-37.5**  
**AEL-5003-480-18.75**  
**AEL-5004-480-28**

MODEL	Power (W)		Current(Ampere)		Voltage(Volt)
	Turbo OFF	Turbo ON	Turbo OFF	Turbo ON	
AEL-5002-350-18.75	1875 W	3750W (x2)*	18.75 Arms / 56.25Apeak	37.5Arms/56.25Apeak (x2)*	50~350Vrms / 500Vdc
AEL-5003-350-28	2800W	5600W (x2)*	28 Arms / 84Apeak	56Arms/84Apeak (x2)*	
AEL-5004-350-37.5	3750 W	7500W (x2)*	37.5 Arms / 112.5Apeak	75.0Arms/112.5Apeak (x2)*	
AEL-5002-425-18.75	1875 W	3750W (x2)*	18.75 Arms / 56.25Apeak	37.5Arms/56.25Apeak (x2)*	
AEL-5003-425-28	2800W	5600W (x2)*	28 Arms / 84Apeak	56Arms/84Apeak (x2)*	
AEL-5004-425-37.5	3750 W	7500W (x2)*	37.5 Arms / 112.5Apeak	75.0Arms/112.5Apeak (x2)*	
AEL-5006-350-56	5600 W	11200W (x2)*	56.0 Arms / 168Apeak	112.0Arms/ 168Apeak (x2)*	50~425Vrms / 600Vdc
AEL-5008-350-75	7500 W	15000W (x2)*	75.0 Arms / 225Apeak	150.0Arms/225Apeak (x2)*	
AEL-5012-350-112.5	11250W	22500W (x2)*	112.5 Arms / 337.5Apeak	225Arms/337.5Apeak (x2)*	
AEL-5015-350-112.5	15000W	30000W (x2)*	112.5 Arms / 337.5Apeak	225Arms/337.5Apeak (x2)*	
AEL-5019-350-112.5	18750W	37500W (x2)*	112.5 Arms / 337.5Apeak	225Arms/337.5Apeak (x2)*	
AEL-5023-350-112.5	22500W	45000W (x2)*	112.5 Arms / 337.5Apeak	225Arms/337.5Apeak (x2)*	
AEL-5006-425-56	5600 W	11200W (x2)*	56.0 Arms / 168Apeak	112.0Arms/ 168Apeak (x2)*	50~425Vrms / 600Vdc
AEL-5008-425-75	7500 W	15000W (x2)*	75.0 Arms / 225Apeak	150.0Arms/225Apeak (x2)*	
AEL-5012-425-112.5	11250W	22500W (x2)*	112.5 Arms / 337.5Apeak	225Arms/337.5Apeak (x2)*	
AEL-5015-425-112.5	15000W	30000W (x2)*	112.5 Arms / 337.5Apeak	225Arms/337.5Apeak (x2)*	
AEL-5019-425-112.5	18750W	37500W (x2)*	112.5 Arms / 337.5Apeak	225Arms/337.5Apeak (x2)*	
AEL-5023-425-112.5	22500W	45000W (x2)*	112.5 Arms / 337.5Apeak	225Arms/337.5Apeak (x2)*	
AEL-5003-480-18.75	2800W	5600W (x2)*	18.75 Arms / 56.25Apeak	37.5Arms/56.25Apeak (x2)*	50~480Vrms / 700Vdc
AEL-5004-480-28	3750 W	7500W (x2)*	28 Arms / 84Apeak	56Arms/84Apeak (x2)*	

\* Power and current boost rate of Turbo ON

# AC & DC Electronic Load





## FEATURES

- 4 digit V / A/W Meter , display the Voltage (Vrms, Vpeak, Vmax., Vmin) , Current (Irms, Ipeak, Imax., Imin.) , Watt, Voltampere (VA) , Frequency , Crest Factor , Power Factor , Total Harmonic Distortion of Voltage (VTHD), Voltage Harmonic (VH) , Total Harmonic Distortion of Current (ITHD), Current Harmonic (IH)
- CC, Linear CC, CR, CV, CP and AC Rectifier Load mode
- Crest factor range : 1.414~5.0
- Power factor (PF) range : 0~1 lead or (-1~0) lag
- Built-in function test modes include UPS Efficiency, PV Inverter Efficiency, UPS Back-up time, Battery Discharge time, UPS transfer time, Fuse/Breaker Trip/Non-Trip, Short circuit , OCP, OPP test modes
- Turbo mode is able to increase to 2 times the current and power of electronic load in a short period which is the most suitable for Fuse / Breaker test and short circuit, OCP, OPP test of AC power supply
- Time measurement can be applied to batteries, UPS, fuses and circuit breakers and other tests
- Three units parallel up to 90KW and three-phase  $\Delta$  or Y load connection can be synchronized control by one master unit
- Support on-load boot; at first set Load ON to support on-load boot, inverter or uninterruptible power supply is turned on directly with the set load current, used to verify whether the starter is stable when the Inverter is connected.
- Supports the loading and unloading angle control; the loading and unloading angle control, the full range of 0-359 degrees can be set to verify whether the Inverter output voltage transient response is stable when the actual electrical plugging and unplugging, and whether Overshoot/Uundershoot is within the allowable range.
- Support positive half-cycle or negative half-cycle loading; used to verify whether the Inverter output voltage remains stable when the actual appliance has only positive half-cycle or negative half-cycle load current.
- Supports SCR/TRIAC current phase modulation waveforms, 90 degree Trailing edge and Leading Edge.
- Supports the Inrush Current of the inverter at startup and the Surge Current test when the load is suddenly plugged in (Hot Plug-in) during testing.
- Frequency Range : DC, 40~440Hz
- Voltage and current monitoring
- Can be controlled by external voltage for CC, Linear CC, CR, CV, CP operating modes
- Protection against V, I, W, and  $^{\circ}\text{C}$
- Optional interface : GPIB , RS232 , USB , LAN
- The most complete measurement capabilities

AEL-5000 Series AC & DC electronic load built-in 16-bit A/D and DSP precision measurement circuit, provides accurate measurements, measurement items have Vrms, Arms, Watt, VA, CF, PF, THD, VTHD, ITHD, Ipeak, Amax, Amin, Vmax, and Vmin In addition to these measurement functions, it also provides time measurement , products such as UPS, fuses and circuit breakers etc. trip or blow time and transfer time for Off-line UPS

# AC & DC Electronic Load

## POWER CURVE

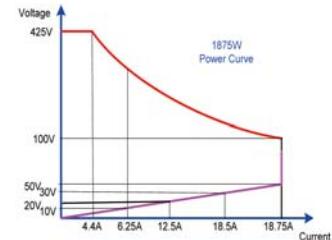
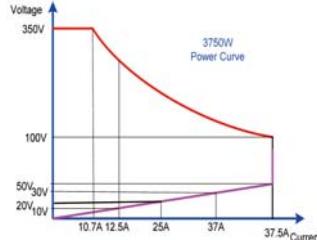
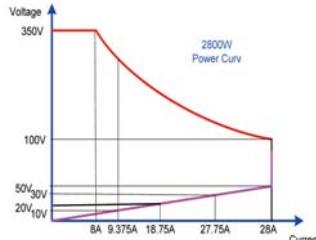
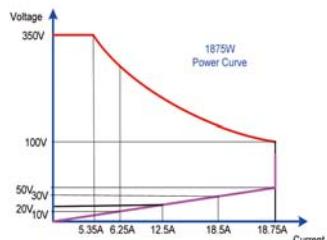


AEL-5002-350-18.75

AEL-5003-350-28

AEL-5004-350-37.5

AEL-5002-425-18.75

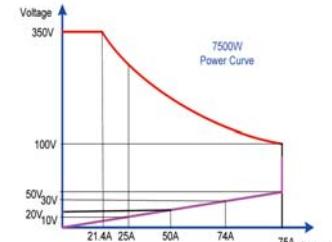
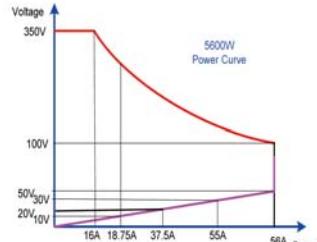
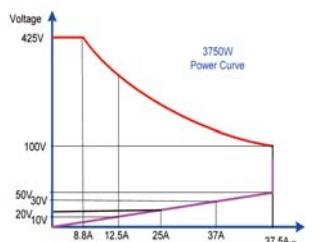
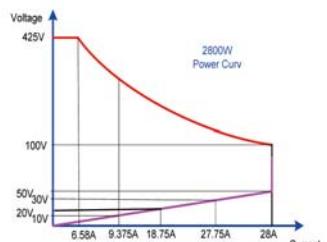


AEL-5003-425-28

AEL-5004-425-37.5

AEL-5006-350-56

AEL-5008-350-75

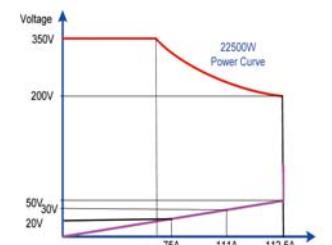
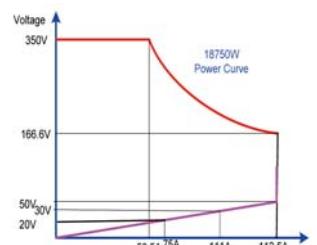
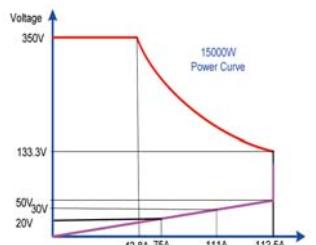
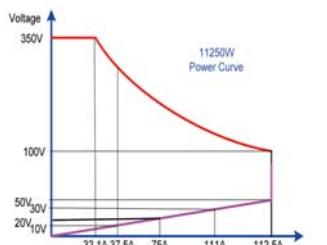


AEL-5012-350-112.5

AEL-5015-350-112.5

AEL-5019-350-112.5

AEL-5023-350-112.5

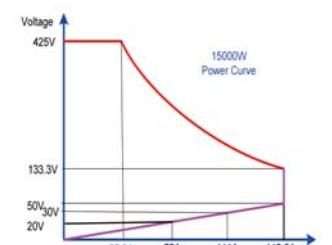
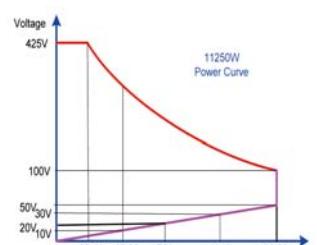
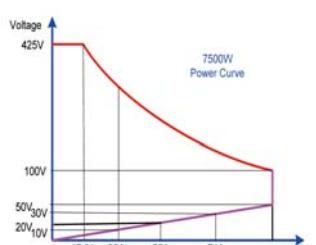
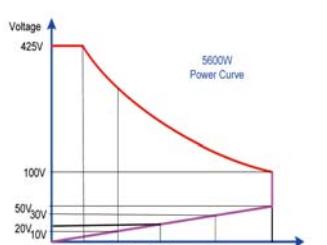


AEL-5006-425-56

AEL-5008-425-75

AEL-5012-425-112.5

AEL-5015-425-112.5

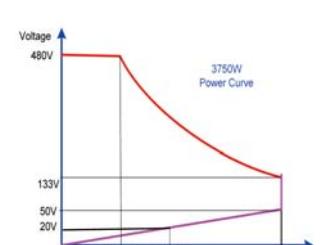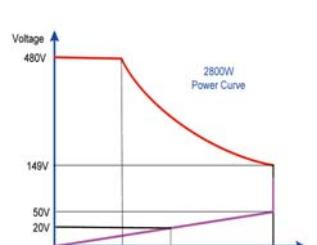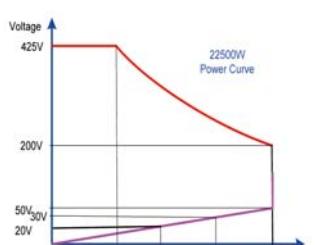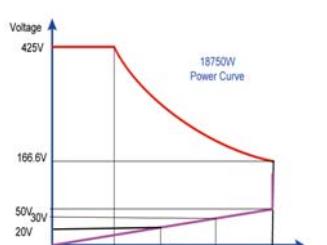

AEL-5019-425-112.5


AEL-5023-425-112.5

AEL-5003-480-18.75


AEL-5004-480-28

# AC & DC Electronic Load

## COMPLETE AC AND DC LOAD MODES

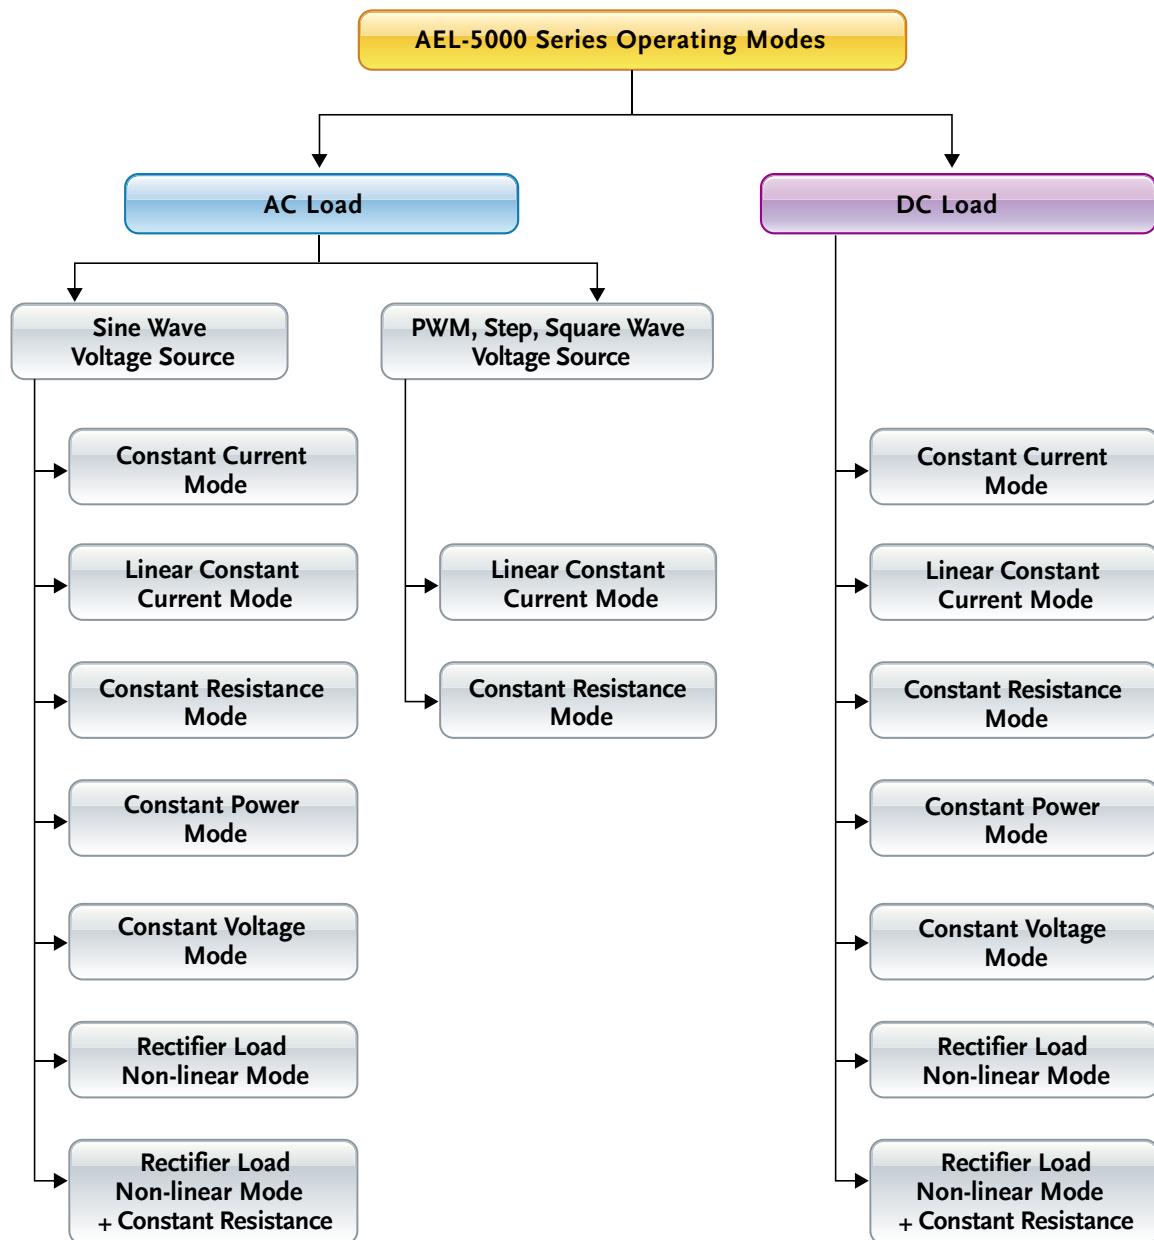


## AC LOAD MODE

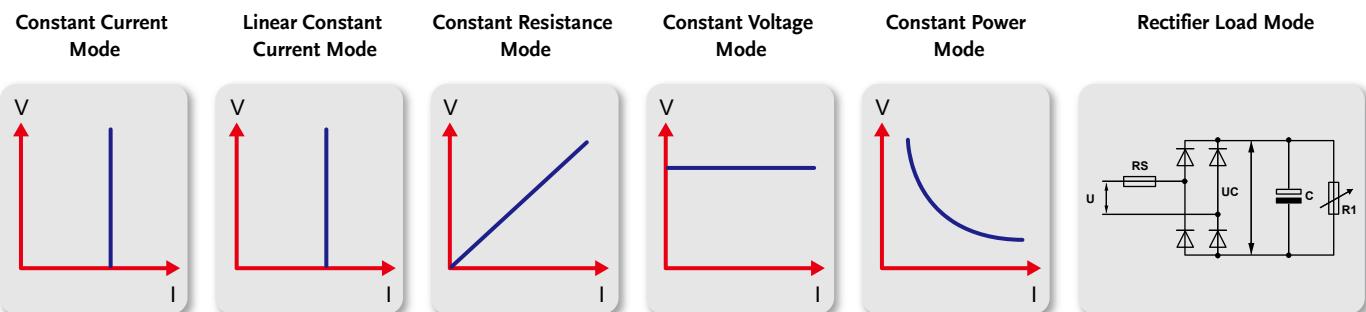


# AC & DC Electronic Load

## AC LOAD MODE


CC Mode : In the constant current mode of AC Load, can be applied to sine wave voltage source, providing CF, PF test of linear load.

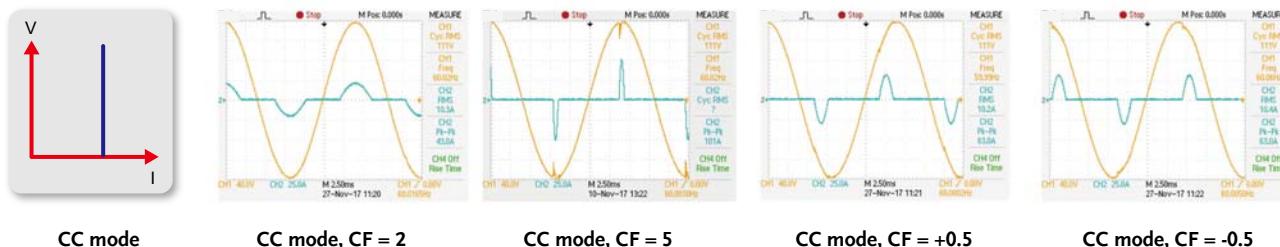

Linear Constant Current Mode : Can be applied to sine wave and non-sine wave voltage source, as shown in the PWM inverter driver, step voltage source, and off-line UPS sine wave switch to square wave, square wave switch to sine wave.

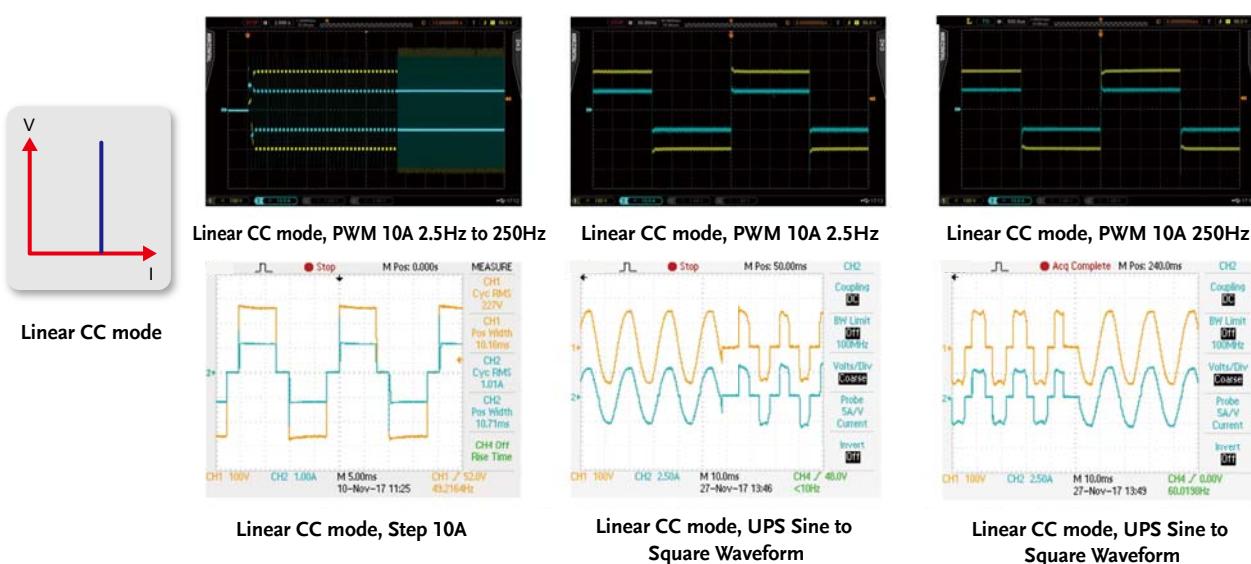


Supported on-load start-up : at first set Load ON to support on-load start-up, inverter or uninterruptible power supply is start-up directly with the set load current, used to verify whether the Inverter is stable when the load is connected during start-up.

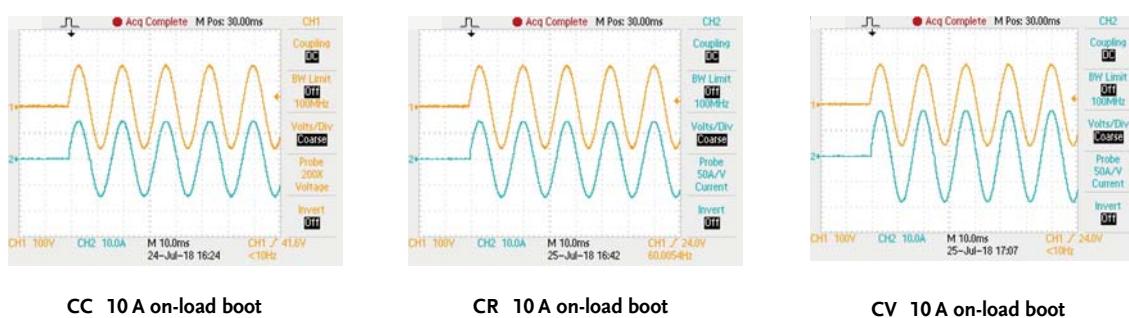


# AC & DC Electronic Load


Supports the loading and unloading current angle control ; the loading and unloading current angle range of 0-359 degrees can be programmed to verify whether the Inverter output voltage transient response is stable during the actual electrical appliance is connected or turn ON / OFF randomly it can be used to verify the Overshoot / Undershoot response is within the desire range.

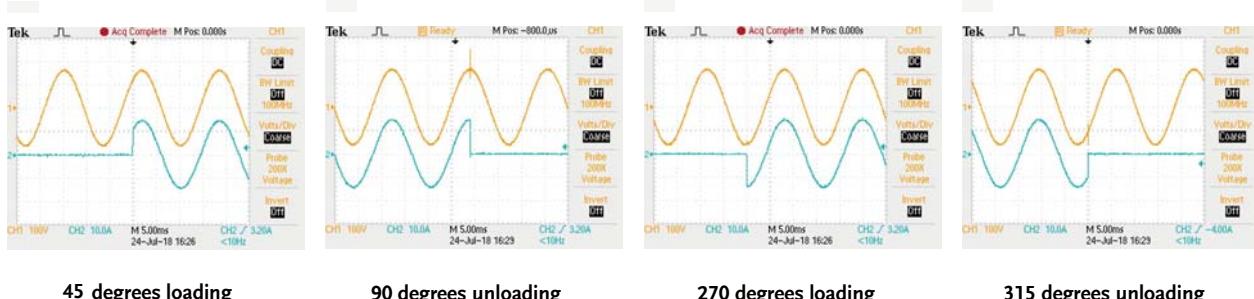

Support positive half-cycle or negative half-cycle loading ; it can be used to verify whether the Inverter output voltage remains stable when the actual appliance has only positive half-cycle or negative half-cycle load current.

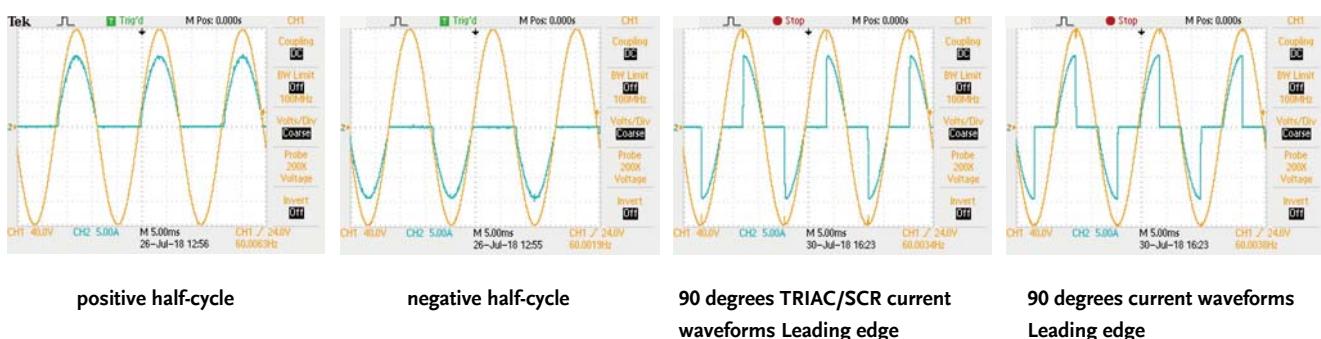


Support the Inrush Current of the inverter at startup and Power Plug-in test when the power supply is turned on to verify the Inrush Current and the sudden connection of the appliance when the power is turned on(Surge Current), to verify if whether the Inverter output voltage transient response is stable, as shown in the figure below.

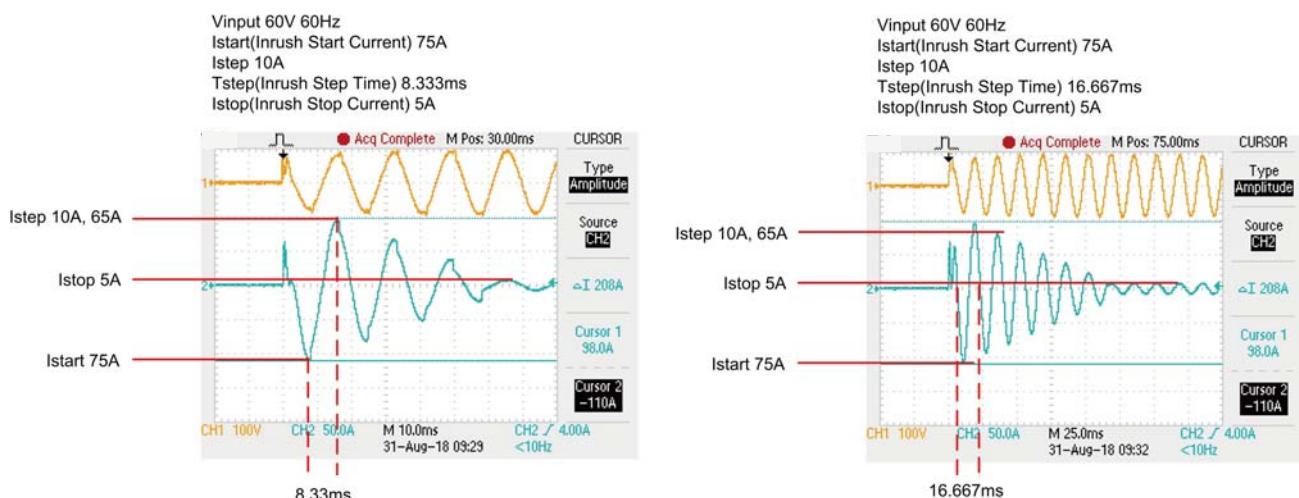

Inrush current test at boot



# AC & DC Electronic Load

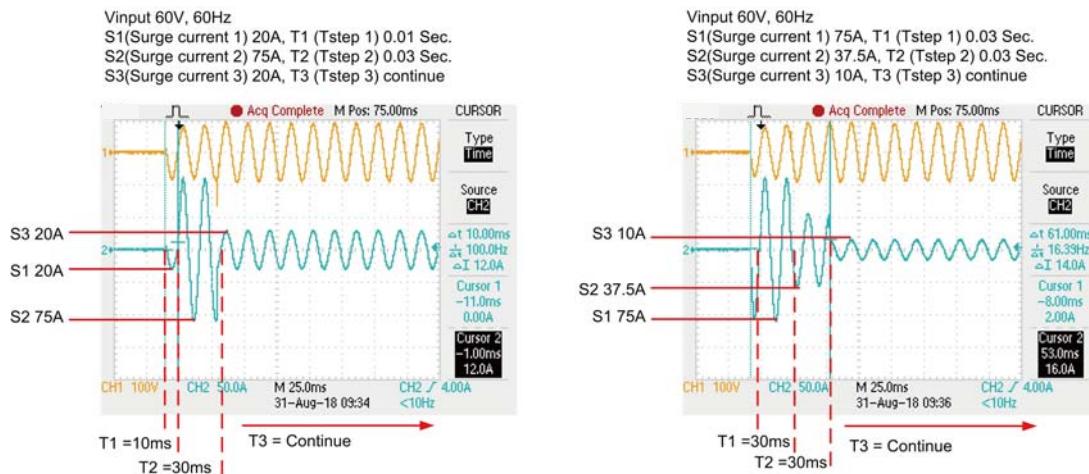


Inrush Current test at boot

## AC RECTIFIED LOAD SIMULATION MEET THE IEC62040-3 AND IEC61683 TEST SPECIFICATIONS


(IEC62040-3 UPS Efficiency Measurement non-Linear and IEC61683 Resistive Plus Non-Linear) C AC & DC electronic load AC rectified load mode is fully compliance with the IEC test specification requirements for the UPS, IEC 62040-3 UPS Efficiency Measurement Non-Linear and IEC 61683 Resistive Plus Non-Linear, respectively, AEL-5000 Series AC rectifier load mode uses CC + CR load mode and maintain current THD at 80%, to simulate the actual PV Inverter connected to the electronic device.

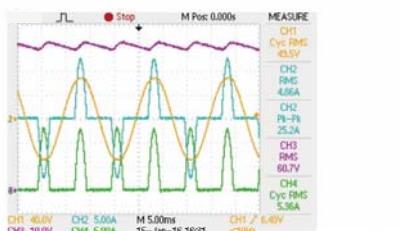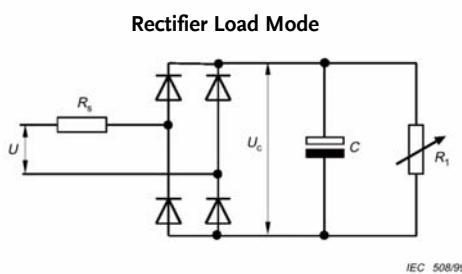

The actual V / A waveform

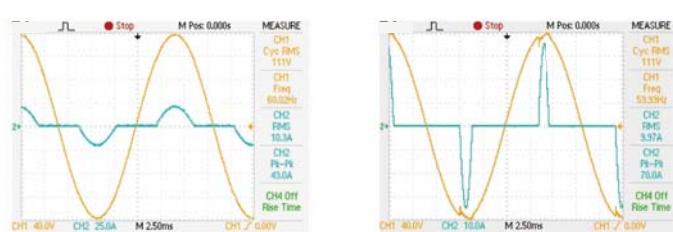

Non-Linear CC mode for UPS test

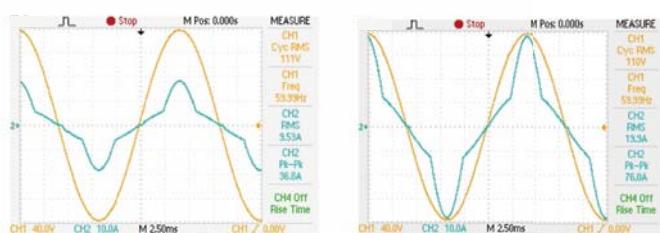


110V, 5A + 22ohm Test Waveform 110V, 10A + 11ohm Test Waveform

PV Inverter test Non-Linear CC + Resistive mode (CC+CR)

# AC & DC Electronic Load

## AEL-5000 LOAD VARIOUS TEST MODES

The AEL-5000 Series AC & DC electronic load features built-in test modes for a variety of products. Including AC Load of UPS, Inverter, Fuse/Breaker, AC Power Source , and DC Load of Battery, Fuse/Breaker, DC Power Source etc.. , as shown below.

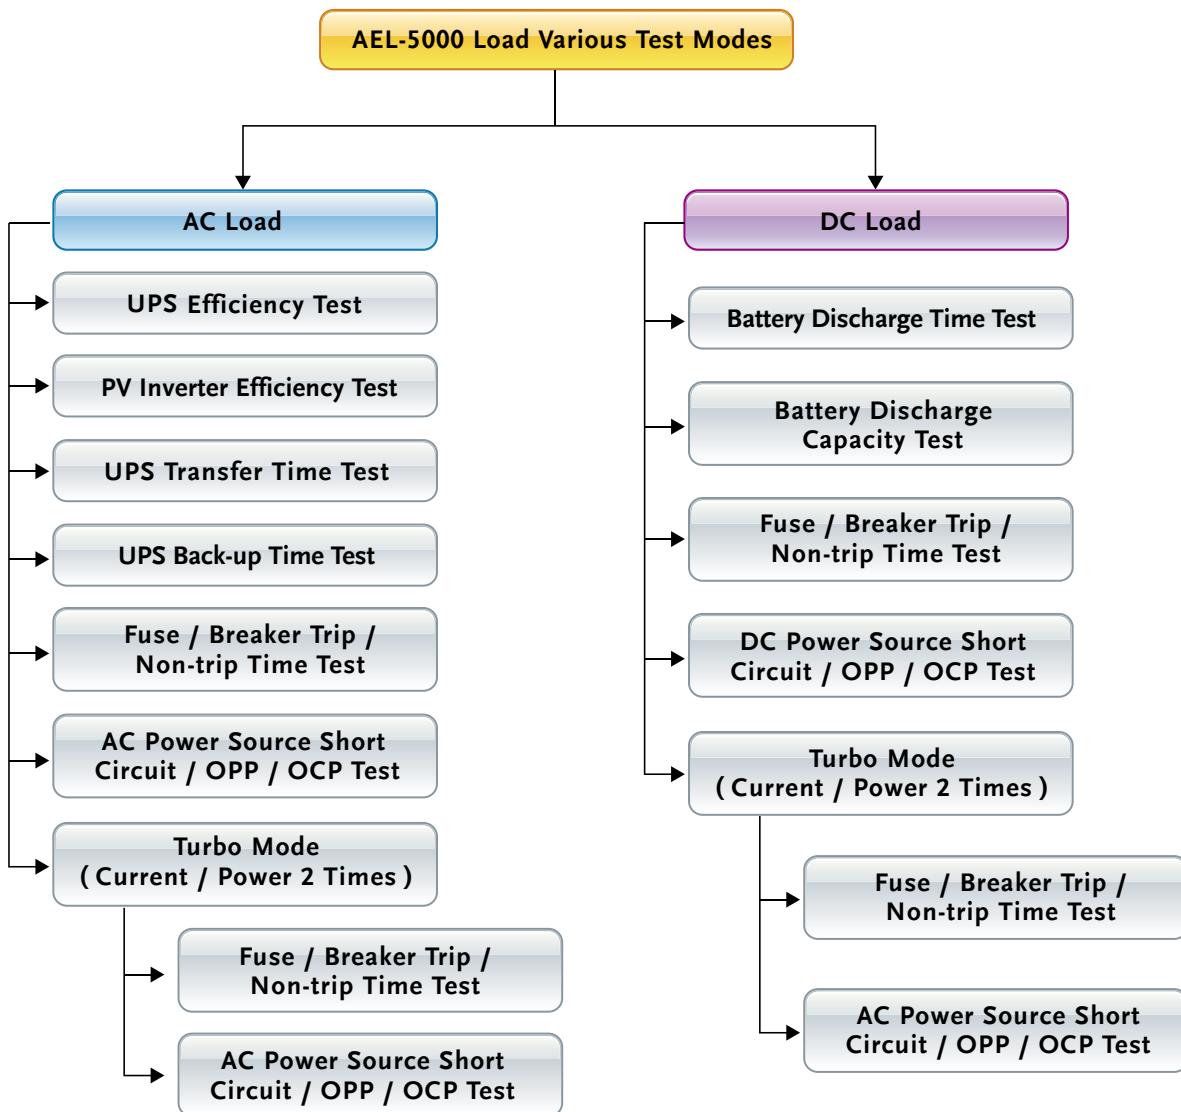

# AC & DC Electronic Load

## CURRENT PROTECTION COMPONENT TEST


Current protection component includes Fuse, Circuit breakers and a new PTC Resettable fuse etc., its function is when the circuit current exceeds the design of the rated value, that is, if the load exceeds the design of the current capacity, the circuit will be disconnected, in order to avoid overheating, even fire. Fuse is a one-time use of the protection components, Breaker and PTC can be reused.

The current protection components of the protection current value and the protection reaction time has usually a product of the relationship that is, the greater the current through the current protection component, the shorter the reaction time to protect the circuit. This is similar to energy protection components.


Due to this feature, the AEL-5000 Series AC & DC electronic load, in particular for the verification of current protection components, has developed a Fuse Test function to test and verify such protection element with an electronic load of rated current and power. When Turbo mode is set to ON, the test current can be up to double the maximum current within 1 second of test period. Take AEL-5004-350-37.5 as an example, the maximum test current can be doubled to 75A. That is, when the Turbo mode of the AEL-5000 Series is ON, the test current value can reach to 2 units AEL-5000 Series (normal mode) within 1



Turbo OFF, Short 100ms 37.5A  
Test result screen

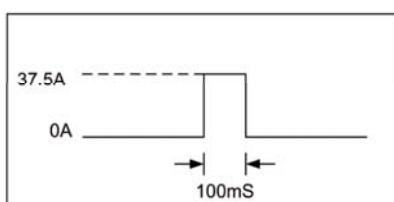


Turbo OFF, Short 100ms 37.5A Setting

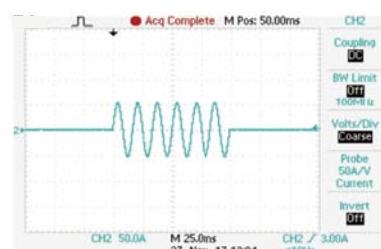


Turbo OFF, Short 100ms 37.5A  
The actual test waveform



Turbo ON, Short 100ms 75.0A  
Test result screen

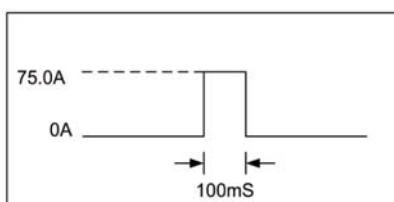

Turbo ON, Short 100ms 75.0A Setting

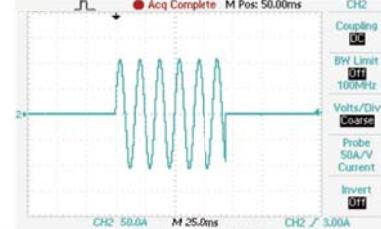


Turbo ON, Short 100ms 75.0A  
The actual test waveform


# AC & DC Electronic Load



Turbo OFF, OCP Istep 3.75 A Istop 37.5A  
Test result screen

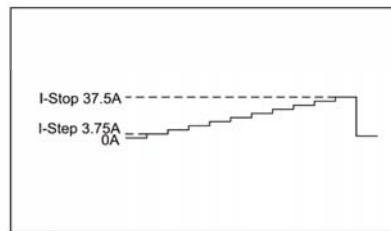


Turbo OFF, OCP Istep 3.75 A Istop 37.5A  
Setting

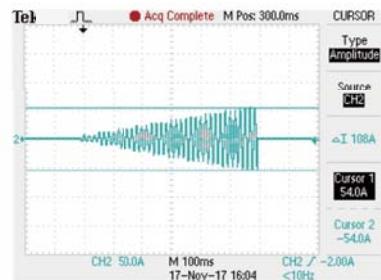


Turbo OFF, OCP Istep 3.75 A Istop 37.5A  
The actual test waveform



Turbo ON, OCP Istep 7.5 A Istop 75A  
Test result screen

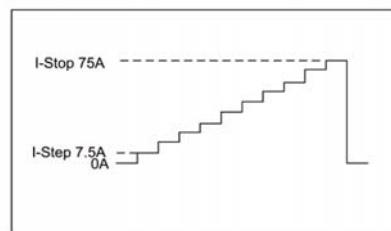

Turbo ON, OCP Istep 7.5 A Istop 75.0A  
Setting

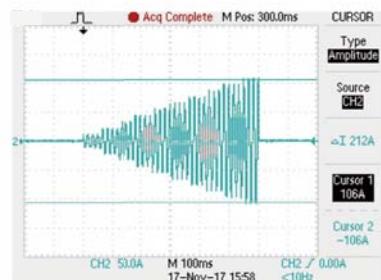

Turbo ON, OCP Istep 7.5 A Istop 75.0A  
The actual test waveform

Basically, Fuse test has Trip (Blown) and Non-Trip (no Blown) 2 types.

Fuse Test setting parameters include test current (Istart), test time (Time), test REPEAT Time etc..


In the Trip fuse test, it is used to test when there is too large abnormal current the Fuse or Breaker must be able to provide the protection of the circuit break, that means current protection components need the fuse action, therefore the test current needs to be larger than the fuse current rating.

When the AEL-5000 Series AC & DC electronic load detects a voltage lower than 1.0V, the LCD displays the number of Repeat Cycle and Current Protection Fusing Time XXXX.X sec.


In the Non-Trip (no Blown) test, the current protection component is required to achieve non-blow action, so the test current needs to be lower than the fuse current rating that is used to verify the fuse must not blow during normal current range. When the AEL-5000 Series AC & DC electronic load is not blown after the test time (Pulse Time) and the repeated Repeat number, the LCD displays the information of the Repeat number.



Turbo : OFF, Fuse mode  
Test result screen

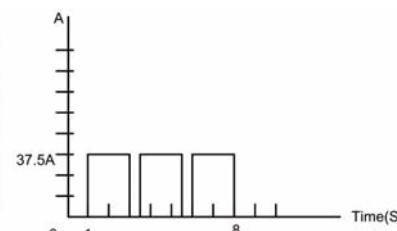


Setting : Turbo : OFF, Fuse ON  
CC pulse 37.5A, 2S, Test 3 cycles

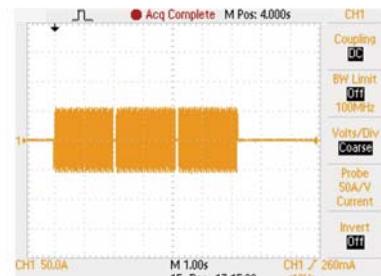


Turbo : OFF, Fuse ON, CC pulse 37.5A, 2S,  
Test 3 cycles the actual test waveform



Turbo ON, Fuse mode  
Test result screen

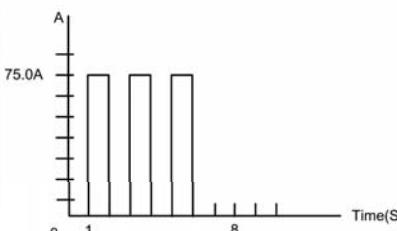

Setting : Turbo : ON, Fuse ON  
CC pulse 75.0A, 1S, Test 3 cycles

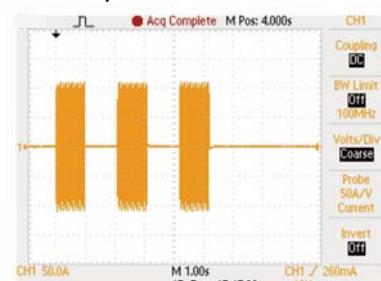


Turbo : ON, Fuse ON, CC pulse 75A, 1S,  
Test 3 cycles the actual test waveform

# AC & DC Electronic Load


## BATTERY TEST FUNCTION

AEL-5000 Series AC & DC electronic load has built-in new TYPE1 ~ TYPE3 battery discharge test, you can select the desired battery test mode, the test results can be directly displayed on the LCD display for battery AH capacity, the voltage value after discharge and the cumulative discharge time.

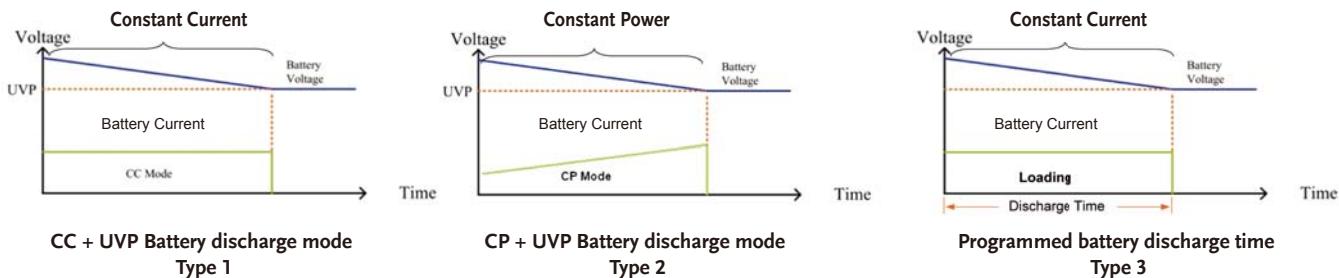


## PARALLEL AND THREE-PHASE CONTROL

The AEL-5000 Series AC & DC load provides multiple units in parallel, three-phase applications that allows users to test applications with greater power or three-phase AC power, this is more flexibility to use the AEL-5000 Series AC & DC Electronic Load for control. In parallel / three-phase operation, the user operates the unit as the operation of a single machine, as long as the Master can be operated, Slave1 and Slave2 will automatically sink the load and measurement. Parallel and three-phase connection as shown below.

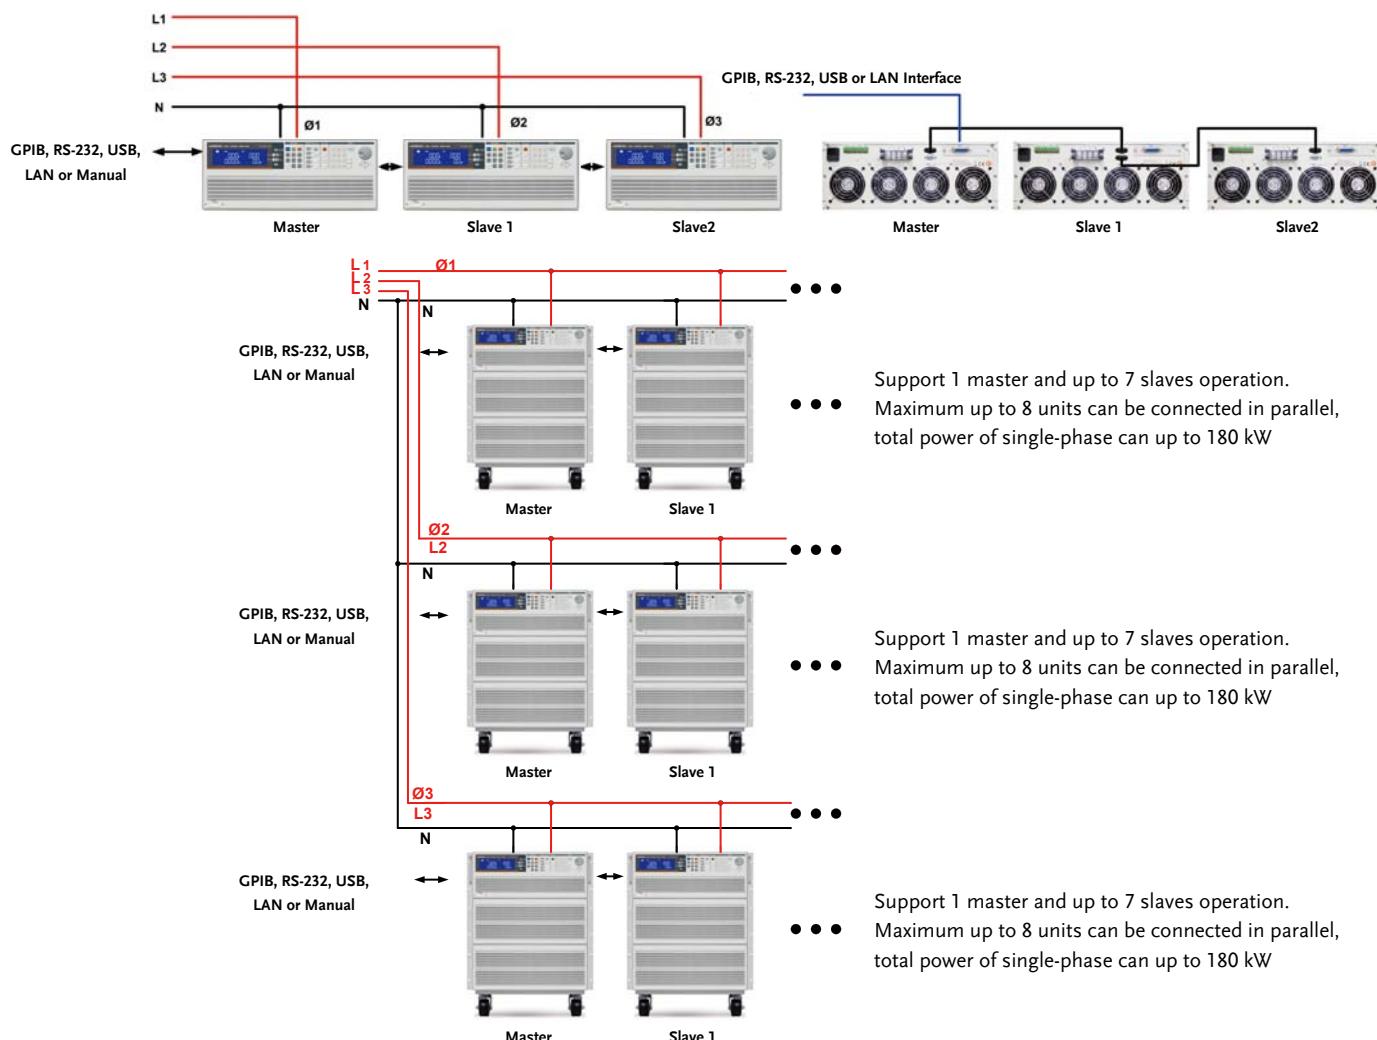


Maximum power of single-phase can up to 180KW, 3-phase total power up to 540KW 3-phase △ or Y Connection

# AC & DC Electronic Load

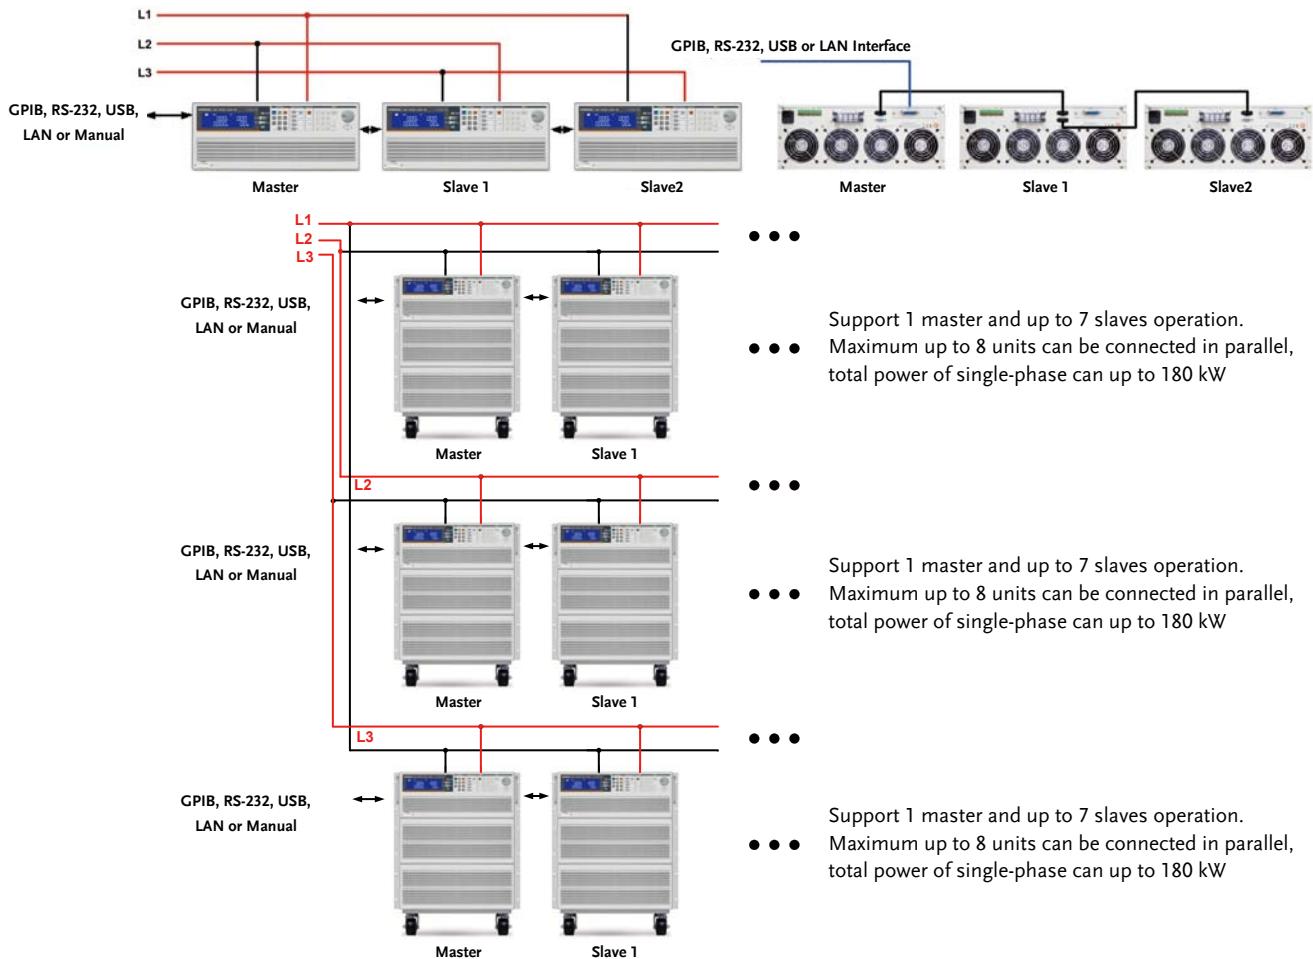

**Maximum power of single-phase can up to 180kW, 3-phase total power up to 540kW 3-phase △ or Y  
Connection parallel connection**

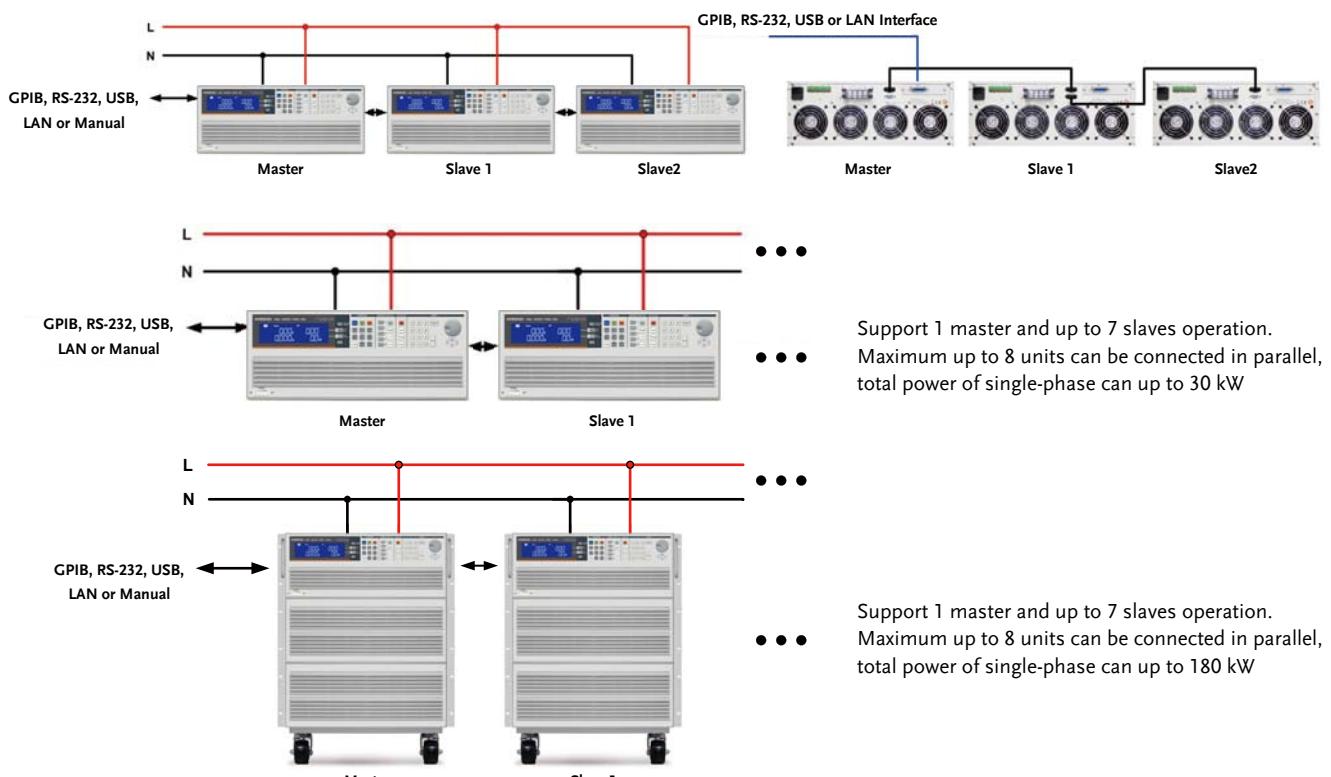

**Parallel connection**

# AC & DC Electronic Load

## PANEL INSTRUCTIONS



1	LCD Multi-function display Four meters can display the voltage value at the same time the Voltage(Vrms, Vpeak, Vmax., Vmin) ~ Current (Irms, Ipeak, Imax., Imin.) ~ Watt, Voltampere(VA) ~ Frequency ~ Crest Factor ~ Power Factor ~ Total Harmonic Distortion of Voltage(VTHD) ~ Voltage Harmonic(VH) ~ Total Harmonic Distortion of Current(ITHD) ~ Current Harmonic(IH)	3 Operate function keys Mode ~ Preset ON / OFF ~ Load ON / OFF ~ Sense ON / OFF ~ Level A / B ~ Config ~ Limit ~ Recall ~ Store ~ SEQ ~ Local ~ System operate function keys 4 Waveform library keys Can be quickly set CF $\sqrt{2}$ / 2 / 2.5 / 3 / 3.5 ~ +/- PF0.6 / 0.7 / 0.8 / 0.9 / 1.0 ~ FREQ Auto / 50Hz / 60Hz / 400Hz ~ 5 Test function keys Can select Short / OPP / OCP / Non-L / NL-CR / Fuse / Batt (Battery Discharge) / Trans (UPS transfer time) test functions.
2	Meter switch button V / A / W keys can set the display Rms / Peak / Max / Min,Meter key can select PF / CF / FREQ ~ switchable display WATT / VA / VAR keys ~ THD key choose to display THD	6 Numeric keypad
		7 Knob setting
		8 Switch
		9 Cursor and button setting



10	AC power input connector	13	Master-slave control connector Master : Connect the top or bottom to the next unit Slave : The top connects to the previous unit and the bottom connects to the next unit
11	Vmonitor ~ Imonitor ~ Analog input ~ SYNC input Input terminal		
12	Vload, Vsense Input terminal	14	Communication interface (GPIB ~ RS-232 ~ USB ~ LAN)

# AC & DC Electronic Load

## SPECIFICATIONS

MODEL	AEL-5002-350-18.75	AEL-5003-350-28	AEL-5004-350-37.5	AEL-5002-425-18.75	AEL-5003-425-28	AEL-5004-425-37.5
Power (W)	1875 W	2800W	3750 W	1875 W	2800W	3750 W
Current(Amperes)	18.75 Arms / 56.25Apeak	28 Arms / 84Apeak	37.5 Arms / 112.5Apeak	18.75 Arms / 56.25Apeak	28 Arms / 84Apeak	37.5 Arms / 112.5Apeak
Voltage(Volt)	50-350Vrms / 500Vdc	50-350Vrms / 500Vdc	50-425Vrms / 600Vdc	50-425Vrms / 600Vdc	50-425Vrms / 600Vdc	50-425Vrms / 600Vdc
FREQUENCY Range	DC,40-440Hz(CC,CP Mode), DC-440Hz(LIN,CR,CV Mode)					
<b>PROTECTIONS</b>						
Over Power Protection	≥ 1968.75Wrms or Programmable	≥ 2940Wrms or Programmable	≥ 3937.5Wrms or Programmable	≥ 1968.75Wrms or Programmable	≥ 2940Wrms or Programmable	≥ 3937.5Wrms or Programmable
Over Current Protection	≥ 19.687 Arms or Programmable	≥ 29.4 Arms or Programmable	≥ 39.375 Arms, or Programmable	≥ 19.687 Arms or Programmable	≥ 29.4 Arms or Programmable	≥ 39.375 Arms, or Programmable
Over Voltage Protection	≥ 367.5 Vrms / 525Vdc	≥ 367.5 Vrms / 525Vdc	≥ 446.25 Vrms / 630Vdc			
Over Temp. Protection	Yes	Yes	Yes	Yes	Yes	Yes
<b>OPERATION MODE</b>						
Constant Current Mode for Sine-Wave						
Range	0~18.75A	0~28A	0~37.5A	0~18.75A	0~28A	0~37.5A
Resolution	0.3125mA/16bits	0.5mA/16bits	0.625mA/16bits	0.3125mA/16bits	0.5mA/16bits	0.625mA/16bits
Accuracy	± ( 0.1% of setting + 0.2% of range ) @ 50/60Hz	± ( 0.1% of setting + 0.2% of range ) @ 50/60Hz	± ( 0.1% of setting + 0.2% of range ) @ 50/60Hz	± ( 0.1% of setting + 0.2% of range ) @ 50/60Hz	± ( 0.1% of setting + 0.2% of range ) @ 50/60Hz	± ( 0.1% of setting + 0.2% of range ) @ 50/60Hz
Linear Constant Current Mode for Sine-Wave, Square Wave or Quasi-Square Wave, PWM Wave						
Range	0~18.75A	0~28A	0~37.5A	0~18.75A	0~28A	0~37.5A
Resolution	0.3125mA/16bits	0.5mA/16bits	0.625mA/16bits	0.3125mA/16bits	0.5mA/16bits	0.625mA/16bits
Accuracy	± ( 0.1% of setting + 0.2% of range ) @ 50/60Hz	± ( 0.1% of setting + 0.2% of range ) @ 50/60Hz	± ( 0.1% of setting + 0.2% of range ) @ 50/60Hz	± ( 0.1% of setting + 0.2% of range ) @ 50/60Hz	± ( 0.1% of setting + 0.2% of range ) @ 50/60Hz	± ( 0.1% of setting + 0.2% of range ) @ 50/60Hz
Constant Resistance Mode						
Range	3.2 ohm ~ 64K ohm	2.0 ohm ~ 40K ohm	1.6 ohm ~ 32K ohm	3.2 ohm ~ 64K ohm	2.0 ohm ~ 40K ohm	1.6 ohm ~ 32K ohm
Resolution <sup>*1</sup>	0.0052083mS/16bits	0.008333mS/16bits	0.010416mS/16bits	0.0052083mS/16bits	0.008333mS/16bits	0.010416mS/16bits
Accuracy	±0.2% of ( setting + range ) @ 50/60Hz	±0.2% of ( setting + range ) @ 50/60Hz	±0.2% of ( setting + range ) @ 50/60Hz	±0.2% of ( setting + range ) @ 50/60Hz	±0.2% of ( setting + range ) @ 50/60Hz	±0.2% of ( setting + range ) @ 50/60Hz
Constant Voltage Mode						
Range	50~350Vrms / 500Vdc	50~350Vrms / 500Vdc	50~350Vrms / 500Vdc	50~350Vrms / 600Vdc	50~350Vrms / 600Vdc	50~350Vrms / 600Vdc
Resolution	0.01V	0.01V	0.01V	0.01V	0.01V	0.01V
Accuracy	±(0.1% of setting + 0.1% of range)					
Constant Power Mode						
Range	1875W	2800W	3750W	1875W	2800W	3750W
Resolution	0.1W	0.1W	0.1W	0.1W	0.1W	0.1W
Accuracy	±(0.1% of setting + 0.1% of range)					
<b>CREST FACTOR (CC &amp; CP MODE ONLY)</b>						
Range	v2~5	v2~5	v2~5	v2~5	v2~5	v2~5
Resolution	0.1	0.1	0.1	0.1	0.1	0.1
Accuracy	(0.5% / Irms) + 1% F.S.					
<b>POWER FACTOR (CC &amp; CP MODE ONLY)</b>						
Range	0~1 Lag or Lead					
Resolution	0.01	0.01	0.01	0.01	0.01	0.01
Accuracy	1%F.S.	1%F.S.	1%F.S.	1%F.S.	1%F.S.	1%F.S.
<b>TEST MODE</b>						
UPS Efficient Measurement	Non-Linear Mode					
Operating Frequency	Auto; 40~440Hz					
Current Range	0~18.75A	0~28A	0~37.5A	0~18.75A	0~28A	0~37.5A
PF Range	0~1	0~1	0~1	0~1	0~1	0~1
Measuring Efficiency For Pv Systems, Power Conditioners for THD 80%	Resistive + Non-Linear Mode					
Operating Frequency	Auto; 40~440Hz					
Current Range	0~18.75A	0~28A	0~37.5A	0~18.75A	0~28A	0~37.5A
Resistive Range	3.2 ohm ~ 64K ohm	2.0 ohm ~ 40K ohm	1.6 ohm ~ 32K ohm	3.2 ohm ~ 64K ohm	2.0 ohm ~ 40K ohm	1.6 ohm ~ 32K ohm
UPS Back-Up Function(CC,LIN,CR,CP)						
UVF (VTH)	50~350Vrms / 500Vdc	50~350Vrms / 500Vdc	50~350Vrms / 500Vdc	50~425Vrms / 600Vdc	50~425Vrms / 600Vdc	50~425Vrms / 600Vdc
UPS Back-Up Time	1~99999 Sec. (>27H)					
Battery Discharge Function(CC,LIN,CR,CP)						
UVF (VTH)	50~350Vrms / 500Vdc	50~350Vrms / 500Vdc	50~350Vrms / 500Vdc	50~425Vrms / 600Vdc	50~425Vrms / 600Vdc	50~425Vrms / 600Vdc
Battery Discharge Time	1~99999 Sec. (>27H)					
UPS Transfer Time						
Current Range	0~18.75A	0~28A	0~37.5A	0~18.75A	0~28A	0~37.5A
UVF (VTH)	2.5V	2.5V	2.5V	2.5V	2.5V	2.5V
Time Range	0.15ms~999.99ms	0.15ms~999.99ms	0.15ms~999.99ms	0.15ms~999.99ms	0.15ms~999.99ms	0.15ms~999.99ms
Fuse Test Mode						
Max. Current	Turbo OFF 18.75Arms	28.0Arms	37.5Arms	18.75Arms	28.0Arms	37.5Arms
	Turbo ON 37.5Arms (x2) *3	56.0Arms (x2) *3	75.0Arms (x2) *3	37.5Arms (x2) *3	56.0Arms (x2) *3	75.0Arms (x2) *3
Trip & Non-Trip Time	Turbo OFF 0.1~999.9sec.	0.1~999.9sec.	0.1~999.9sec.	0.1~999.9sec.	0.1~999.9sec.	0.1~999.9sec.
Mess. Accuracy	±0.003 Sec.					
Repeat Cycle	0~255	0~255	0~255	0~255	0~255	0~255
Short/OPP/OCP Test Function						
Short Time	Turbo OFF 0.1S ~ 10Sec. Or Cont.	0.1S ~ 1Sec.	0.1S ~ 1Sec.	0.1S ~ 10Sec. Or Cont.	0.1S ~ 1Sec.	0.1S ~ 1Sec.
Turbo ON	100ms	100ms	100ms	100ms	100ms	100ms
OPP/OCP Step Time	Turbo ON 100ms, up to 10 Steps	100ms, up to 10 Steps	100ms, up to 10 Steps	100ms, up to 10 Steps	100ms, up to 10 Steps	100ms, up to 10 Steps
OCP Istop	Turbo OFF 18.75Arms	28.0Arms	37.5Arms	18.75Arms	28.0Arms	37.5Arms
	Turbo ON 37.5Arms	56.0Arms	75.0Arms	37.5Arms	56.0Arms	75.0Arms
OPP Pstop	Turbo OFF 1875W	2800W	3750W	1875W	2800W	3750W
	Turbo ON 3750W	5600W	7500W	3750W	5600W	7500W
Programmable Inrush Current Simulation: Istart - Istop / Tsep						
Istart, Inrush Start Current	0~37.5A	0~56A	0~75A	0~37.5A	0~56A	0~75A
Inrush Stop Time	0.1ms~100mS	0.1ms~100mS	0.1ms~100mS	0.1ms~100mS	0.1ms~100mS	0.1ms~100mS
Istop, Inrush Stop Current	0~18.75A	0~28A	0~37.5A	0~18.75A	0~28A	0~37.5A
Programmable Surge Current Simulation: S1/T1 - S2/T2 - S3/T3						
S1 and S2 Current	0~37.5A	0~56A	0~75A	0~37.5A	0~56A	0~75A
T1 and T2 Time	0~0.1S~0.5Sec.	0~0.1S~0.5Sec.	0~0.1S~0.5Sec.	0~0.1S~0.5Sec.	0~0.1S~0.5Sec.	0~0.1S~0.5Sec.
S3 Current	0~18.75A	0~28A	0~37.5A	0~18.75A	0~28A	0~37.5A
T3 Time	0.01S ~ 9.99Sec. Or Cont.					
<b>MEASUREMENTS</b>						
<b>VOLTAGE READBACK V METER</b>						
Range	500V	500V	600V	500V	500V	600V
Resolution	0.01V	0.01V	0.01V	0.01V	0.01V	0.01V
Accuracy	±0.05% of ( reading + range )					
Parameter	Vrms,V Max/Min,+/-Vpk					
<b>CURRENT READBACK A METER</b>						
Range	9.375Arms/18.75Arms	14Arms/28Arms	18.75Arms/37.5Arms	9.375Arms/18.75Arms	14Arms/28Arms	18.75Arms/37.5Arms
Resolution	0.2mA/0.4mA	0.3mA/0.6mA	0.4mA/0.8mA	0.2mA/0.4mA	0.3mA/0.6mA	0.4mA/0.8mA
Accuracy	±0.05% of ( reading + range ) @ 50/60Hz	±0.05% of ( reading + range ) @ 50/60Hz	±0.05% of ( reading + range ) @ 50/60Hz	±0.05% of ( reading + range ) @ 50/60Hz	±0.05% of ( reading + range ) @ 50/60Hz	±0.05% of ( reading + range ) @ 50/60Hz
Parameter	Irms,I Max/Min,+/-Ipk					
<b>WATT READBACK W METER</b>						
Range	1875W	2800W	3750W	1875W	2800W	3750W
Resolution	0.03125W	0.05W	0.0625W	0.03125W	0.05W	0.0625W
Accuracy	±0.1% of ( reading + range )					
VA METER	VrmsxArms Correspond To Vrms and Arms					
<b>POWER FACTOR METER</b>						
Range	+/- 0.000~1.000	+/- 0.000~1.000	+/- 0.000~1.000	+/- 0.000~1.000	+/- 0.000~1.000	+/- 0.000~1.000
Accuracy	±0.002~(0.001/PF)*F	±0.002~(0.001/PF)*F	±0.002~(0.001/PF)*F	±0.002~(0.001/PF)*F	±0.002~(0.001/PF)*F	±0.002~(0.001/PF)*F
Frequency METER(V)	DC,40~440Hz	DC,40~440Hz	DC,40~440Hz	DC,40~440Hz	DC,40~440Hz	DC,40~440Hz
Range	0~40°C	0~40°C	0~40°C	0~40°C	0~40°C	0~40°C
Accuracy	0.1%	0.1%	0.1%	0.1%	0.1%	0.1%
Other Parameter METER	VA, VAR, CF, Ipeak, Imax, Imin, Vmax, Vmin, IHd, VHD, ITHD, VTHD	VA, VAR, CF, Ipeak, Imax, Imin, Vmax, Vmin, IHd, VHD, ITHD, VTHD	VA, VAR, CF, Ipeak, Imax, Imin, Vmax, Vmin, IHd, VHD, ITHD, VTHD	VA, VAR, CF, Ipeak, Imax, Imin, Vmax, Vmin, IHd, VHD, ITHD, VTHD	VA, VAR, CF, Ipeak, Imax, Imin, Vmax, Vmin, IHd, VHD, ITHD, VTHD	VA, VAR, CF, Ipeak, Imax, Imin, Vmax, Vmin, IHd, VHD, ITHD, VTHD
<b>OTHERS</b>						
Start up Loading	Yes , Power on loading during Inverter / UPS start up	Yes , Power on loading during Inverter / UPS start up	Yes , Power on loading during Inverter / UPS start up	Yes , Power on loading during Inverter / UPS start up	Yes , Power on loading during Inverter / UPS start up	Yes , Power on loading during Inverter / UPS start up
Load On / Off Angle	0 ~ 359 degree can be programmed for the angle of load On and load OFF loading	0 ~ 359 degree can be programmed for the angle of load On and load OFF loading	0 ~ 359 degree can be programmed for the angle of load On and load OFF loading	0 ~ 359 degree can be programmed for the angle of load On and load OFF loading	0 ~ 359 degree can be programmed for the angle of load On and load OFF loading	0 ~ 359 degree can be programmed for the angle of load On and load OFF loading
Half Cycle and SCR/TRIAC Loading	Positive or Negative half cycle, 90° Trailing edge or Leading edge current waveform can be programmed	Positive or Negative half cycle, 90° Trailing edge or Leading edge current waveform can be programmed	Positive or Negative half cycle, 90° Trailing edge or Leading edge current waveform can be programmed	Positive or Negative half cycle, 90° Trailing edge or Leading edge current waveform can be programmed	Positive or Negative half cycle, 90° Trailing edge or Leading edge current waveform can be programmed	Positive or Negative half cycle, 90° Trailing edge or Leading edge current waveform can be programmed
Master/Slave (3 Phase or Parallel Application)	Yes, 1 master and upto 7 slave units	Yes, 1 master and upto 7 slave units	Yes, 1 master and upto 7 slave units	Yes, 1 master and upto 7 slave units	Yes, 1 master and upto 7 slave units	Yes, 1 master and upto 7 slave units
External Programming Input (OPTION)	F.S / 10Vdc, Resolution 0.1V					
External SYNC Input	TTL	TTL	TTL	TTL	TTL	TTL
Vmonitor (Isolated)	±56.25Apk / ±10Vpk	±84Apk / ±10Vpk	±112.5Apk / ±10Vpk	±56.25Apk / ±10Vpk	±84Apk / ±10Vpk	±112.5Apk / ±10Vpk
Interface (OPTION)	GPIB ; RS-232 ; LAN : USB					
MAX. Power Consumption	150VA	150VA	150VA	150VA	150VA	150VA
Operation Temperature *2	-V~0.3 ; -V~2.2	-V~0.45 ; -V~3.3	-V~0.6 ; -V~4.4	-V~0.3 ; -V~2.2	-V~0.45 ; -V~3.3	-V~0.6 ; -V~4.4
Current of Input Impedance(mA)@50/60Hz ; @ 400Hz	-V~0.3 ; -V~2.2	-V~0.45 ; -V~3.3	-V~0.6 ; -V~4.4	-V~0.3 ; -V~2.2	-V~0.45 ; -V~3.3	-V~0.6 ; -V~4.4
Dimension( H x W x D )	177 x 440 x 558 mm					

# AC & DC Electronic Load

## SPECIFICATIONS

MODEL	AEL-5006-350-56	AEL-5008-350-75	AEL-5012-350-112.5	AEL-5015-350-112.5	AEL-5019-350-112.5	AEL-5023-350-112.5
Power (V)	5600 W	7500 W	11250W	15000 W	18750W	22500W
Current(Amperes)	56 Arms / 168Apeak	75 Arms / 225Apeak	112.5 Arms / 337.5Apeak	112.5 Arms / 337.5Apeak	112.5 Arms / 337.5Apeak	112.5 Arms / 337.5Apeak
Voltage(Volt)			50~350Vrms / 500Vdc			
FREQUENCY Range			DC,40~440Hz(CC,CP Mode), DC,440Hz(LIN,CR,CV Mode)			
<b>PROTECTIONS</b>						
Over Power Protection	$\geq 5880\text{Wrms}$ or Programmable	$\geq 7875\text{Wrms}$ or Programmable	$\geq 11812.5\text{Wrms}$ or Programmable	$\geq 11812.5\text{Wrms}$ or Programmable	$\geq 19687.5\text{Wrms}$ or Programmable	$\geq 23625\text{Wrms}$ or Programmable
Over Current Protection	$\geq 58.8$ Arms, or Programmable	$\geq 78.75$ Arms, or Programmable	$\geq 118.125$ Arms or Programmable	$\geq 118.125$ Arms or Programmable	$\geq 118.125$ Arms or Programmable	$\geq 118.125$ Arms or Programmable
Over Voltage Protection				$\geq 367.5$ Vrms / 525Vdc		
Over Temp. Protection				Yes		
<b>OPERATION MODE</b>						
Constant Current Mode for Sine-Wave						
Range	0~56A	0~75A	0~112.5A	0~112.5A	0~112.5A	0~112.5A
Resolution	1mA/16bits	1.25mA/16bits	1.875mA/16bits	1.875mA/16bits	1.875mA/16bits	1.875mA/16bits
Accuracy	$\pm (0.1\% \text{ of setting} + 0.2\% \text{ of range}) @ 50/60Hz$					
Linear Constant Current Mode for Sine-Wave, Square Wave or Quasi-Square Wave, PWM Wave						
Range	0~56A	0~75A	0~112.5A	0~112.5A	0~112.5A	0~112.5A
Resolution	1mA/16bits	1.25mA/16bits	1.875mA/16bits	1.875mA/16bits	1.875mA/16bits	1.875mA/16bits
Accuracy	$\pm (0.1\% \text{ of setting} + 0.2\% \text{ of range}) @ 50/60Hz$					
Constant Resistance Mode						
Range	1 ohm ~ 20K ohm	0.8 ohm ~ 16K ohm	0.533 ohm ~ 10.666K ohm	0.533 ohm ~ 10.666K ohm	0.533 ohm ~ 10.666K ohm	0.533 ohm ~ 10.666K ohm
Resolution <sup>°1</sup>	0.016666mS/16bits	0.020832mS/16bits	0.031248mS/16bits	0.031248mS/16bits	0.031248mS/16bits	0.031248mS/16bits
Accuracy	$\pm 0.2\% \text{ of ( setting + range )} @ 50/60Hz$					
Constant Voltage Mode						
Range			50~350Vrms / 500Vdc			
Resolution			0.1V			
Accuracy			$\pm 0.2\% \text{ of ( setting + range )} @ 50/60Hz$			
Constant Power Mode						
Range	5600W	7500W	11250W	15000 W	18750W	22500W
Resolution	0.1W	0.1W	1W	1W	1W	1W
Accuracy	$\pm 0.2\% \text{ of ( setting + range )} @ 50/60Hz$					
<b>CREST FACTOR (CC &amp; CP MODE ONLY)</b>						
Range			<2~5			
Resolution			0.1			
Accuracy			(0.5% / Irms) + 1%F.S.			
<b>POWER FACTOR (CC &amp; CP MODE ONLY)</b>						
Range			0~1 Lag or Lead			
Resolution			0.01			
Accuracy			1%F.S.			
<b>TEST MODE</b>						
UPS Efficient Measurement			Non-Linear Mode			
Operating Frequency			Auto ; 40~440Hz			
Current Range	0~56A	0~75A	0~112.5A	0~112.5A	0~112.5A	0~112.5A
PF Range			0~1			
Measuring Efficiency For Pv Systems, Power Conditioners For THD 80%			Resistive + Non-Linear Mode			
Operating Frequency			Auto ; 40~440Hz			
Current Range	0~56A	0~75A	0~112.5A	0~112.5A	0~112.5A	0~112.5A
Resistive Range	1 ohm ~ 20K ohm	0.8 ohm ~ 16K ohm	0.533 ohm ~ 10.666K ohm	0.533 ohm ~ 10.666K ohm	0.533 ohm ~ 10.666K ohm	0.533 ohm ~ 10.666K ohm
UPS Back-Up Function(CC,LIN,CR,CP)						
UVF (VTH)			50~350Vrms / 500Vdc			
UPS Back-Up Time			1~99999 Sec. (>27H)			
Battery Discharge Function(CC,LIN,CR,CP)						
UVF (VTH)			50~350Vrms / 500Vdc			
Battery Discharge Time			1~99999 Sec. (>27H)			
UPS Transfer Time						
Current Range	0~56A	0~75A	0~112.5A	0~112.5A	0~112.5A	0~112.5A
UVF (VTH)			2.5V			
Time range			0.15ms~999.99ms			
Fuse Test Mode						
Max. Current	Turbo OFF 75Arms 150Arms (x2) <sup>°1</sup>	75Arms 150Arms (x2) <sup>°1</sup>	112.5Arms 225Arms (x2) <sup>°3</sup>	112.5Arms 225Arms (x2) <sup>°3</sup>	112.5Arms 225Arms (x2) <sup>°3</sup>	112.5Arms 225Arms (x2) <sup>°3</sup>
Trip & Non-Trip Time	Turbo OFF Turbo ON		0.1~999.9sec. 0.1~1.0sec.			
Mess. Accuracy			$\pm 0.003$ Sec.			
Repeat Cycle			0~255			
Short/OPP/OCP Test Function						
Short Time	Turbo OFF Turbo ON		0.15 ~ 10Sec. Or Cont.			
OPP/OCP Step Time	Turbo OFF Turbo ON		0.15 ~ 1sec 100ms			
OCP Istop	Turbo OFF Turbo ON	56Arms 112Arms	112.5Arms 225Arms	112.5Arms 225Arms	112.5Arms 225Arms	112.5Arms 225Arms
OPP Pstop	Turbo OFF Turbo ON	5600W 11200W	7500W 15000W	11250W 22500W	15000W 30000W	18750W 37500W
Programmable Inrush Current Simulation: Istart - Istop / Tstep				100ms, up to 10 Steps		
Istart, Inrush Start Current		0~112A	0~150A	0~225A	0~225A	0~225A
Inrush Step Time				0.1ms~100ms		
Istop, Inrush Stop Current		0~56A	0~75A	0~112.5A	0~112.5A	0~112.5A
Programmable Surge Current Simulation: S1/T1 - S2/T2 - S3/T3				0.01S~0.5Sec.		
S1 and S2 Current		0~112A	0~150A	0~225A	0~225A	0~225A
T1 and T2 Time				0.01S~0.5Sec.		
S3 Current		0~56A	0~75A	0~112.5A	0~112.5A	0~112.5A
T3 Time				0.01S ~ 9.99Sec. Or Cont.		
<b>MEASUREMENTS</b>						
VOLTAGE READBACK A METER						
Range			500V			
Resolution			0.01V			
Accuracy			$\pm 0.05\%$ of (reading + range)			
Parameter			Vrms,V Max/Min,+/-Vpk			
CURRENT READBACK A METER						
Range	28Arms/56Arms	37.5Arms/75Arms	56.25Arms/112.5Arms	56.25Arms/112.5Arms	56.25Arms/112.5Arms	56.25Arms/112.5Arms
Resolution	0.6mA/1.2mA	0.8mA/1.6mA	1.2mA/2.4mA	1.2mA/2.4mA	1.2mA/2.4mA	1.2mA/2.4mA
Accuracy			$\pm 0.1\%$ of ( reading + range ) @ 50/60Hz			
Parameter			Irms,I Max/Min,+/-Ipk			
WATT READBACK W METER						
Range	5600W	7500W	11250W	15000W	18750W	22500W
Resolution	0.1W	0.125W	0.1875W	0.25W	0.3125W	0.375W
Accuracy			$\pm 0.2\% \text{ of ( reading + range )} @ 50/60Hz, +0.4\% \text{ of ( reading + range )}$			
VA METER			VrmsxArms Correspond To Vrms and Arms			
Power Factor METER						
Range			+/- 0.000~1.000			
Accuracy			$\pm (0.002 \pm 0.001)/PF \times F$			
Frequency METER(V)			DC,40~440Hz			
Range			0.1%			
Accuracy						
Other Parameter METER						
			VA, VAR, CF,I, Ipeak, Imax, Irmin, Vmax., Vmin, IHd, VHD, ITHd, VTHd			
<b>OTHERS</b>						
Start up Loading			Yes , Power on loading during Inverter / UPS start up			
Load ON / OFF Angle			0 ~ 359 degree can be programmed for the angle of load ON and load OFF loading			
Half Cycle and SCR/TRIAC Loading			Positive or Negative half cycle, 90° Trailing edge or Leading edge waveform can be programmed			
Master/Slave (3 Phase or Parallel Application)			Yes, 1 master and upto 7 slave unit			
External Programming Input (OPTION)			F.S / 10Vdc, Resolution 0.1V			
External SYNC Input			TTL			
Vmonitor (Isolated)			$\pm 500V / \pm 10V$			
Imonitor (Isolated)	$\pm 168Apk / \pm 10Vpk$	$\pm 225Apk / \pm 10Vpk$	$\pm 337.5Apk / \pm 10Vpk$	$\pm 337.5Apk / \pm 10Vpk$	$\pm 337.5Apk / \pm 10Vpk$	$\pm 337.5Apk / \pm 10Vpk$
Interface (OPTION)			GPIB ; RS-232 ; LAN ; USB			
MAX. Power Consumption	270VA	270VA	390VA	510VA	630VA	750VA
Operation Temperature °2			0 ~ 40 °C			
Current of Input Impedance(mA)@50/60Hz ; @ 400Hz	-V <sup>0.9</sup> ; -V <sup>6.6</sup>	-V <sup>1.2</sup> ; -V <sup>8.8</sup>	-V <sup>1.8</sup> ; -V <sup>13.2</sup>	-V <sup>2.4</sup> ; -V <sup>17.6</sup>	-V <sup>3.0</sup> ; -V <sup>22</sup>	-V <sup>3.6</sup> ; -V <sup>26.4</sup>
Dimension( H x W x D )	458 x 480 x 590 mm	458 x 480 x 590 mm	636 x 480 x 590 mm	814 x 480 x 590 mm	1283 x 600 x 600 mm	1283 x 600 x 600 mm
Weight	58 kg	70 kg	105kg	140kg	260kg	295kg

\*1 ms (millisiemens) is the unit of conductance(G), one siemens equal to 1/Ω

\* All specifications apply for 50/60Hz.

\*2 Operating temperature range is 0~40°C, all specification apply for 25°C±5°C, Except as noted

\* All specifications subject to change without notice.

\*3 Turbo mode for up to 2X Current rating & Power rating support Fuse, Short/OCP/OPP test function

# AC & DC Electronic Load

## SPECIFICATIONS

MODEL	AEL-5006-425-56	AEL-5008-425-75	AEL-5012-425-112.5	AEL-5015-425-112.5	AEL-5019-425-112.5	AEL-5023-425-112.5
Power (W)	5600 W	7500 W	11250W	15000 W	18750W	22500W
Current(Amperes)	56 Arms / 168Apeak	75 Arms / 225Apeak	112.5 Arms / 337.5Apeak	112.5 Arms / 337.5Apeak	112.5 Arms / 337.5Apeak	112.5 Arms / 337.5Apeak
Voltage(Volt)			50-425Vrms / 600Vdc			
FREQUENCY Range			DC..40..440Hz(CC,CP Mode), DC..440Hz(LIN,CRCV Mode)			
<b>PROTECTIONS</b>						
Over Power Protection	$\approx 5880\text{Wrms}$ or Programmable	$\approx 7875\text{Wrms}$ or Programmable	$\approx 11812.5\text{Wrms}$ or Programmable	$\approx 15750\text{Wrms}$ or Programmable	$\approx 19687.5\text{Wrms}$ or Programmable	$\approx 23625\text{Wrms}$ or Programmable
Over Current Protection	$\approx 58.8$ Arms, or Programmable	$\approx 78.75$ Arms, or Programmable	$\approx 118.125$ Arms or Programmable	$\approx 118.125$ Arms or Programmable	$\approx 118.125$ Arms or Programmable	$\approx 118.125$ Arms or Programmable
Over Voltage Protection			$\approx 446.25$ Vrms/630Vdc			
Over Temp. Protection			Yes			
<b>OPERATION MODE</b>						
Constant Current Mode for Sine-Wave						
Range	0~56A	0~75A	0~112.5A	0~112.5A	0~112.5A	0~112.5A
Resolution	1mA/16bits	1.25mA/16bits	1.875mA/16bits	1.875mA/16bits	1.875mA/16bits	1.875mA/16bits
Accuracy	$\pm (0.1\% \text{ of setting} + 0.2\% \text{ of range}) @ 50/60Hz$					
Linear Constant Current Mode for Sine-Wave, Square-Wave or Quasi-Square Wave, PWM Wave						
Range	0~56A	0~75A	0~112.5A	0~112.5A	0~112.5A	0~112.5A
Resolution	1mA/16bits	1.25mA/16bits	1.875mA/16bits	1.875mA/16bits	1.875mA/16bits	1.875mA/16bits
Accuracy	$\pm (0.1\% \text{ of setting} + 0.2\% \text{ of range}) @ 50/60Hz$					
Constant Resistance Mode						
Range	1 ohm ~ 20K ohm	0.8 ohm ~ 16K ohm	0.533 ohm ~ 10.666K ohm	0.533 ohm ~ 10.666K ohm	0.533 ohm ~ 10.666K ohm	0.533 ohm ~ 10.666K ohm
Resolution <sup>2</sup>	0.016666mS/16bits	0.020832mS/16bits	0.031248mS/16bits	0.031248mS/16bits	0.031248mS/16bits	0.031248mS/16bits
Accuracy	$\pm 0.2\% \text{ of ( setting + range )} @ 50/60Hz$					
Constant Voltage Mode						
Range			50~425Vrms / 600Vdc			
Resolution			0.1V			
Accuracy	$\pm 0.2\% \text{ of ( setting + range )} @ 50/60Hz$					
Constant Power Mode						
Range	5600W	7500W	11250W	15000 W	18750W	22500W
Resolution	0.1W	0.1W	1W	1W	1W	1W
Accuracy	$\pm 0.2\% \text{ of ( setting + range )} @ 50/60Hz$					
<b>CREST FACTOR (CC &amp; CP MODE ONLY)</b>						
Range			<2~5			
Resolution			0.1			
Accuracy	$(0.5\% / \text{Irms}) + 1\% \text{ F.S.}$					
<b>POWER FACTOR (CC &amp; CP MODE ONLY)</b>						
Range			0~1 Lag or Lead			
Resolution			0.01			
Accuracy	$1\% \text{ F.S.}$					
<b>TEST MODE</b>						
UPS Efficient Measurement			Non-Linear Mode			
Operating Frequency			Auto : 40~440Hz			
Current Range	0~56A	0~75A	0~112.5A	0~112.5A	0~112.5A	0~112.5A
PF Range			0~1			
Measuring Efficiency For PV Systems, Power Conditioners for THD 80%			Resistive + Non-Linear Mode			
Operating Frequency			Auto : 40~440Hz			
Current Range	0~56A	0~75A	0~112.5A	0~112.5A	0~112.5A	0~112.5A
Resistive Range	1 ohm ~ 20K ohm	0.8 ohm ~ 16K ohm	0.533 ohm ~ 10.666K ohm	0.533 ohm ~ 10.666K ohm	0.533 ohm ~ 10.666K ohm	0.533 ohm ~ 10.666K ohm
UPS Back-Up Function(CC,LIN,CR,CP)						
UVP (VTH)			50~425Vrms / 600Vdc			
UPS Back-Up Time			1~99999 Sec. (>27H)			
Battery Discharge Function(CC,LIN,CR,CP)						
UVP (VTH)			50~425Vrms / 600Vdc			
Battery Discharge Time			1~99999 Sec. (>27H)			
UPS Transfer Time						
Current Range	0~56A	0~75A	0~112.5A	0~112.5A	0~112.5A	0~112.5A
UVP (VTH)			2.5V			
Time range			0.15mS~999.99mS			
Fuse Test Mode						
Max. Current	Turbo OFF 150Arms (x2) <sup>3</sup>	75Arms 150Arms (x2) <sup>3</sup>	75Arms 150Arms (x2) <sup>3</sup>	112.5Arms 225Arms (x2) <sup>3</sup>	112.5Arms 225Arms (x2) <sup>3</sup>	112.5Arms 225Arms (x2) <sup>3</sup>
Trip & Non-Trip Time	Turbo OFF Turbo ON			0.1~9999.9sec.		
Meas. Accuracy				0.1~1.0sec.		
Repeat Cycle				<0.003 Sec.		
Short/OPP/OCP Test Function				0~255		
Short Time	Turbo OFF Turbo ON			0.1S ~ 10Sec. Or Cont.		
OPP/OCP Step Time	Turbo OFF Turbo ON			0.1S ~ 1Sec.		
OCP Istop	Turbo OFF Turbo ON	56Arms 112Arms	75Arms 150Arms	112.5Arms 225Arms	112.5Arms 225Arms	112.5Arms 225Arms
OPP Pstop	Turbo OFF Turbo ON	5600W 11200W	7500W 15000W	11250W 22500W	15000W 30000W	18750W 37500W
Programmable Inrush Current Simulation: Istart - Istop / Tstop						
Istart, Inrush Start Current	0~112A	0~150A	0~225A	0~225A	0~225A	0~225A
Inrush Step Time			0.1mS~100mS			
Istop, Inrush Stop Current	0~56A	0~75A	0~112.5A	0~112.5A	0~112.5A	0~112.5A
Programmable Surge Current Simulation: S1/T1 - S2/T2 - S3/T3						
S1 and S2 Current	0~112A	0~150A	0~225A	0~225A	0~225A	0~225A
T1 and T2 Time			0.01S~0.5Sec.			
S3 Current	0~56A	0~75A	0~112.5A	0~112.5A	0~112.5A	0~112.5A
T3 Time			0.01S ~ 9.999S. Or Cont.			
<b>MEASUREMENTS</b>						
VOLTAGE READBACK A METER						
Range			600V			
Resolution			0.01V			
Accuracy			$\pm 0.05\% \text{ of reading} + \text{range}$			
Parameter			Vrms,V Max/Min,+/-Vpk			
CURRENT READBACK A METER						
Range	28Arms/56Arms	37.5Arms/75Arms	56.25Arms/112.5Arms	56.25Arms/112.5Arms	56.25Arms/112.5Arms	56.25Arms/112.5Arms
Resolution	0.6mA/1.2mA	0.8mA/1.6mA	1.2mA/2.4mA	1.2mA/2.4mA	1.2mA/2.4mA	1.2mA/2.4mA
Accuracy			$\pm 0.1\% \text{ of ( reading + range )} @ 50/60Hz$			
Parameter			Irms,V Max/Min,+/-Vpk			
WATT READBACK W METER						
Range	5600W	7500W	11250W	15000W	18750W	22500W
Resolution	0.1W	0.125W	0.1875W	0.25W	0.3125W	0.375W
Accuracy			$\pm 0.2\% \text{ of ( reading + range )} @ 50/60Hz + \pm 0.4\% \text{ of ( reading + range )}$			
VA METER			VrmsxArms Correspond to Vrms and Arms			
Power Factor METER						
Range			+/- 0.000~1.000			
Accuracy			$\pm (0.002 \pm (0.001/\text{PF}))\%$			
Frequency METER(V)			DC,40~440Hz			
Range			0.1%			
Other Parameter METER						
			VA, VAR, CF_I, Ipeak, Imax, Imin, Vmax, Vmin, JHD, VHD, ITHD, VTHD			
<b>OTHERS</b>						
Start up Loading			Yes , Power on loading during Inverter / UPS start up			
Load ON / OFF Angle			0 ~ 359 degree can be programmed for the angle of load ON and load OFF loading			
Half Cycle and SCR/TRIAC Loading			Positive or Negative half cycle, 90° Trailing edge or Leading edge current waveform can be programmed			
Master/Slave (3 Phase or Parallel Application)			Yes, 1 master and upto 7 slave unit			
External Programming Input (OPTION)			F.S / 10Vdc. Resolution 0.1V			
External SYNC Input			TTL			
Vmonitor (Isolated)			$\pm 600V \pm 10V$			
Imonitor (Isolated)	$\pm 168Apc / \pm 10Vpk$	$\pm 225Apc / \pm 10Vpk$	$\pm 337.5Apc / \pm 10Vpk$	$\pm 337.5Apc / \pm 10Vpk$	$\pm 337.5Apc / \pm 10Vpk$	
Interface (OPTION)			GPIB ; RS-232 ; LAN ; USB			
MAX. Power Consumption	270VA	270VA	390VA	510VA	630VA	750VA
Operation Temperature *2			0 ~ 40 °C			
Current of Input Impedance(mA)@50/60Hz ; @400Hz	-V*0.9 ; -V*6.6	-V*1.2 ; -V*8.8	-V*1.8 ; -V*13.2	-V*2.4 ; -V*17.6	-V*3.0 ; -V*22	-V*3.6 ; -V*26.4
Dimension( H x W x D )	458 x 480 x 590 mm	458 x 480 x 590 mm	636 x 480 x 590 mm	814 x 480 x 590 mm	1283 x 600 x 600 mm	1283 x 600 x 600 mm
Weight	58 kg	70 kg	105kg	140kg	260kg	295kg

\*1 ms (millisiemens) is the unit of conductance(G), one siemens equal to 1/Q.

\*2 Operating temperature range is 0~40°C, all specification apply for 25°C±5°C, Except as noted

\*3 Turbo mode for up to 2X Current rating & Power rating support Fuse, Short/OCP/OPP test function

\* All specifications apply for 50/60Hz.

\* All specifications subject to change without notice.

# AC & DC Electronic Load

SPECIFICATIONS		
MODEL	AEL-5003-480-18.75	AEL-5004-480-28
Power (W)	2800W	3750W
Current(Ampere)	18.75 Arms / 56.25Apeak	28 Arms / 84Apeak
Voltage(Volt)	50~480Vrms / 700Vdc	
FREQUENCY Range	DC,40~70Hz(CC,CP Mode) , DC,~70Hz(LIN,CR,CV Mode)	
<b>PROTECTIONS</b>		
Over Power Protection	=2940W/rms or Programmable	= 3937.5W/rms or Programmable
Over Current Protection	= 19.687 Arms or Programmable	= 29.4 Arms or Programmable
Over Voltage Protection	= 504Vrms / 735Vdc	
Over Temp. Protection	Yes	
<b>OPERATION MODE</b>		
Constant Current Mode for Sine-Wave		
Range	0~18.75A	0~28A
Resolution	0.3125mA/16bits	0.5mA/16bits
Accuracy	= ( 0.1% of setting + 0.2% of range ) @ 50/60Hz	
Linear Constant Current Mode for Sine-Wave, Square-Wave or Quasi-Square Wave, PWM Wave		
Range	0~18.75A	0~28A
Resolution	0.3125mA/16bits	0.5mA/16bits
Accuracy	= ( 0.1% of setting + 0.2% of range ) @ 50/60Hz	
Constant Resistance Mode		
Range	4 ohm ~ 80K ohm	2.5 ohm ~ 50K ohm
Resolution <sup>1</sup>	0.004166mS/16bits	0.006666mS/16bits
Accuracy	=0.2% of ( setting + range ) @ 50/60Hz	
Constant Voltage Mode		
Range	50~480Vrms / 700Vdc	
Resolution	0.0125V	
Accuracy	=0.1% of setting + 0.1% of range	
Constant Power Mode		
Range	2800W	3750W
Resolution	0.1W	0.1W
Accuracy	=0.1% of setting + 0.1% of range	
<b>CREST FACTOR (CC &amp; CP MODE ONLY)</b>		
Range	v2~5	
Resolution	0.1	
Accuracy	(0.5% / rms) + 1% F.S.	
<b>POWER FACTOR (CC &amp; CP MODE ONLY)</b>		
Range	0~1 Lag or Lead	
Resolution	0.01	
Accuracy	1% F.S.	
<b>TEST MODE</b>		
UPS Efficient Measurement		Non-Linear Mode
Operating Frequency		Auto ; 40~70Hz
Current Range	0~18.75A	0~28A
PF Range	0~1	
Measuring Efficiency For PV Systems, Power Conditioners for THD 80%		Resistive + Non-Linear Mode
Operating Frequency		Auto ; 40~70Hz
Current Range	0~18.75A	0~28A
Resistive Range	4 ohm ~ 80K ohm	2.5 ohm ~ 50K ohm
UPS Back-Up Function(CC,LIN,CR,CP)		
UVP (VTH)		50~480Vrms / 700Vdc
UPS Back-Up Time		1~99999 Sec. (>7H)
Battery Discharge Function(CC,LIN,CR,CP)		
UVP (VTH)		50~480Vrms / 700Vdc
Battery Discharge Time		1~99999 Sec. (>7H)
UPS Transfer Time		
Current Range	0~18.75A	0~28A
UVP (VTH)		2.5V
Time range		0.15ms~999.99ms
Fuse Test Mode		
Max. Current	Turbo OFF : 18.75Arms Turbo ON : 37.5Arms (x2) $\approx$ 3	28.0Arms 56.0Arms (x2) $\approx$ 3
Trip & Non-Trip Time	Turbo OFF : 0.1~9999.9sec. Turbo ON : 0.1~1.0sec.	
Meas. Accuracy	=0.003 Sec.	
Repeat Cycle		0~255
Short/OPP/OCP Test Function		
Short Time	Turbo OFF : 0.1S ~ 10Sec. Or Cont. Turbo ON : 0.1S ~ 1Sec	
OPP/OCP Step Time	Turbo OFF : 100ms Turbo ON : 100ms, up to 10 Steps	
OCP Istop	Turbo OFF : 18.75Arms Turbo ON : 37.5Arms	28.0Arms 56.0Arms
OPP Pstop	Turbo OFF : 2800W Turbo ON : 5600W	3750W 7500W
Programmable Inrush Current Simulation: Istart - istop / Tsep		
Istart, Inrush Start Current	0~37.5A	0~56A
Inrush Step Time		
Istop, Inrush Stop Current	0~18.75A	0~28A
Programmable Surge Current Simulation: S1/T1 - S2/T2 - S3/T3		
S1 and S2 Current	0~37.5A	0~56A
T1 and T2 Time		
S3 Current	0~18.75A	0~28A
T3 Time		
<b>MEASUREMENTS</b>		
<b>VOLTAGE READBACK V METER</b>		
Range	700V	
Resolution	0.0125V	
Accuracy	=0.05% of reading + range	
Parameter	Vrms,V Max/Min,+/-Vpk	
<b>CURRENT READBACK A METER</b>		
Range	9.375Arms/18.75Arms	14Arms/28Arms
Resolution	0.2mA/0.4mA	0.3mA/0.6mA
Accuracy	=0.05% of ( reading + range ) @ 50/60Hz	
Parameter	Irms,I Max/Min,+/-Ipk	
<b>WATT READBACK W METER</b>		
Range	2800W	3750W
Resolution	0.05W	0.0625W
Accuracy	=0.1% of ( reading + range )	
VA METER		VrmsxArms Correspond To Vrms and Arms
Power Factor METER		+/- 0.000~1.000
Range		$\pm(0.002 \times (0.001/ PF ))\%$
Accuracy		
Frequency METER(V)		DC,40~70Hz
Range		
Accuracy		0.1%
Other Parameter METER		
VA, VAR, CF, I, Ipeak, Imax, Imin, Vmax, Vmin, IHD, VHD, ITHD, VTHD		
<b>OTHERS</b>		
Start up Loading		Yes , Power on loading during Inverter / UPS start up
Load ON / OFF Angle		0 ~ 359 degree can be programmed for the angle of load ON and load OFF loading
Half Cycle and SCR/RIAC Loading		Positive or Negative half cycle, 90° Trailing edge or Leading edge current waveform can be programmed
Master/Slave (3 Phase or Parallel Application)		Yes, 1 master and upto 7 slave units
External Programming Input (OPTION)		F.S / 10Vdc, Resolution 0.1V
External SYNC Input		TTL
Vmonitor (Isolated)		$\pm 700V / \pm 10V$
Imonitor (Isolated)	$\pm 56.25Apk / \pm 10Vpk$	$\pm 84Apk / \pm 10Vpk$
Interface (OPTION)	GPIB ; RS-232 ; LAN ; USB	
MAX. Power Consumption		150VA
Operation Temperature *2		0 ~ 40 °C
Current of Input Impedance(mA)@50/60Hz ; @ 400Hz	$-V^0.3 ; -V^0.2.2$	$-V^0.4 ; -V^0.2.95$
Dimension( H x W x D )	177 x 440 x 558 mm	177 x 440 x 558 mm
Weight	27.5Kg	33.5Kg

\*1 ms (millisiemens) is the unit of conductance(G), one siemens equal to  $1/\Omega$

\* All specifications apply for 50/60Hz.

\*2 Operating temperature range is 0~40°C, all specification apply for 25°C±5°C, Except as noted

\* All specifications subject to change without notice.

\*3 Turbo mode for up to 2X Current rating & Power rating support Fuse, Short/OCP/OPP test function

# AC & DC Electronic Load

## ORDER INFORMATION

AEL-5002-350-18.75	350V/18.75A/1875W	AC & DC Electronic Load
AEL-5003-350-28	350V/28A/2800W	AC & DC Electronic Load
AEL-5004-350-37.5	350V/37.5A/3750W	AC & DC Electronic Load
AEL-5006-350-56	350V/56A/5600W	AC & DC Electronic Load
AEL-5008-350-75	350V/75A/7500W	AC & DC Electronic Load
AEL-5012-350-112.5	350V/112.5A/11250W	AC & DC Electronic Load
AEL-5015-350-112.5	350V/112.5A/15000W	AC & DC Electronic Load
AEL-5019-350-112.5	350V/112.5A/18750W	AC & DC Electronic Load
AEL-5023-350-112.5	350V/112.5A/22500W	AC & DC Electronic Load
AEL-5002-425-18.75	425V/18.75A/1875W	AC & DC Electronic Load
AEL-5003-425-28	425V/28A/2800W	AC & DC Electronic Load
AEL-5004-425-37.5	425V/37.5A/3750W	AC & DC Electronic Load
AEL-5006-425-56	425V/56A/5600W	AC & DC Electronic Load
AEL-5008-425-75	425V/75A/7500W	AC & DC Electronic Load
AEL-5012-425-112.5	425V/112.5A/11250W	AC & DC Electronic Load
AEL-5015-425-112.5	425V/112.5A/15000W	AC & DC Electronic Load
AEL-5019-425-112.5	425V/112.5A/18750W	AC & DC Electronic Load
AEL-5023-425-112.5	425V/112.5A/22500W	AC & DC Electronic Load
AEL-5003-480-18.75	480V/18.75A/2800W	AC & DC Electronic Load
AEL-5004-480-28	480V/28A/3750W	AC & DC Electronic Load



AEL-5015-425-112.5

Power rating: 15->15kW

Maximum output current: 112.5->112.5A

Maximum output voltage: 425->425V

## OPTIONAL ACCESSORIES

PEL-022	GPIB Card	PEL-024	LAN Card
PEL-023	RS-232 Card	PEL-025	USB Card

Global Headquarters  
**GOOD WILL INSTRUMENT CO., LTD.**  
T +886-2-2268-0389 F +886-2-2268-0639

China Subsidiary  
**GOOD WILL INSTRUMENT (SUZHOU) CO., LTD.**  
T +86-512-6661-7177 F +86-512-6661-7277

Malaysia Subsidiary  
**GOOD WILL INSTRUMENT (SEA) SDN. BHD.**  
T +604-6111122 F +604-6115225

Europe Subsidiary  
**GOOD WILL INSTRUMENT EURO B.V.**  
T +31(0)40-2557790 F +31(0)40-2541194

U.S.A. Subsidiary  
**INSTEK AMERICA CORP.**  
T +1-909-399-3535 F +1-909-399-0819

Japan Subsidiary  
**TEXIO TECHNOLOGY CORPORATION.**  
T +81-45-620-2305 F +81-45-534-7181

Korea Subsidiary  
**GOOD WILL INSTRUMENT KOREA CO., LTD.**  
T +82-2-3439-2205 F +82-2-3439-2207

India Subsidiary  
**GW INSTEK INDIA LLP.**  
T +91-80-6811-0600 F +91-80-6811-0626

**GW INSTEK**  
Simply Reliable



Website



Facebook



LinkedIn