

Keysight Technologies

N8241A Arbitrary Waveform Generator Synthetic Instrument Module


1.25 GSa/s or 625 MSa/s

Technical Overview



Unlocking Measurement Insights

The Keysight Technologies, Inc. N8241A arbitrary waveform generator (AWG) is capable of creating high-resolution waveforms for radar, satellite, and frequency agile communication systems.

- 15 bits of vertical resolution per channel and either 1.25 Gigasamples per second (GSa/s) or 625 Megasample per second (MSa/s) provides exceptionally realistic wideband waveforms
- Dual output channels drive both single-ended and balanced designs without the need for baluns or hybrids
- Extended waveform memory and advanced sequencing engine offers long scenario simulations
- Multiple module synchronization provides multi-emitter simulations
- Multiple programmatic interfaces enable easy integration into existing test environments
- Fully compliant to LXI Class A standards 

Generate Wide Bandwidth and Wide Dynamic Range Signals – Simultaneously

Each channel of the N8241A operates at either 1.25 GSa/s sample rate (Option 125) or 25 MSa/s sample rate (Option 062) and features 15 bits of vertical resolution giving designers the most realistic, wideband waveforms available from a commercial AWG. This LXI synthetic instrument module offers dual differential output channels to drive both single-ended and balanced designs. The AWG also supports advanced sequencing and triggering modes to create event-based signal simulations. Multiple N8241A modules can be synchronized for the generation of phase-coherent, multi-emitter scenarios. Waveform development tasks are simplified using the AWG's numerous programmatic interfaces including complete instrument control from the MATLAB® command line. When the N8241A is combined with a wideband I/Q upconverter, modulation bandwidths of 1 GHz can be realized at microwave frequencies for authentic signal simulations for IF and RF subsystem test.¹

1. Keysight E8267D PSG signal generator with Option 016, wideband I/O inputs or Keysight N8211A performance vector upconverter with Option 016; either option could be used.

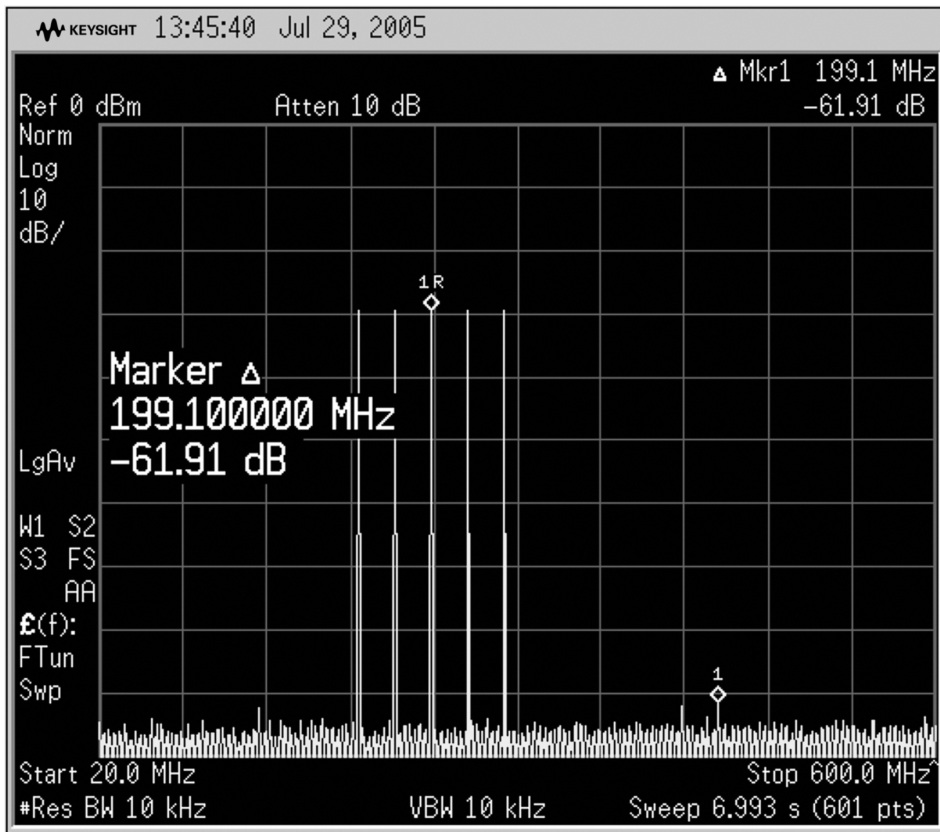


Figure 1. Generate wide band waveforms with unprecedented signal fidelity.

Unprecedented performance

The N8241A gives designers access to the most advanced Digital-to-Analog (DAC) technology available in a commercial AWG. Each module incorporates two high-speed DACs to create 500 MHz of signal bandwidth and ≤ -65 dBc spurious free dynamic range (SFDR) across each channel. Users have the choice of driving their designs differentially from the DAC outputs or single-ended through multiple signal-conditioning paths.

Although some AWGs require users to make a trade-off between the number of output channels and differential outputs, the N8241A provides both – allowing you to drive your designs and eliminating the need for baluns or hybrids in the test path. In addition, each channel can output waveforms as an IF or as a baseband signal for I/Q upconversion.

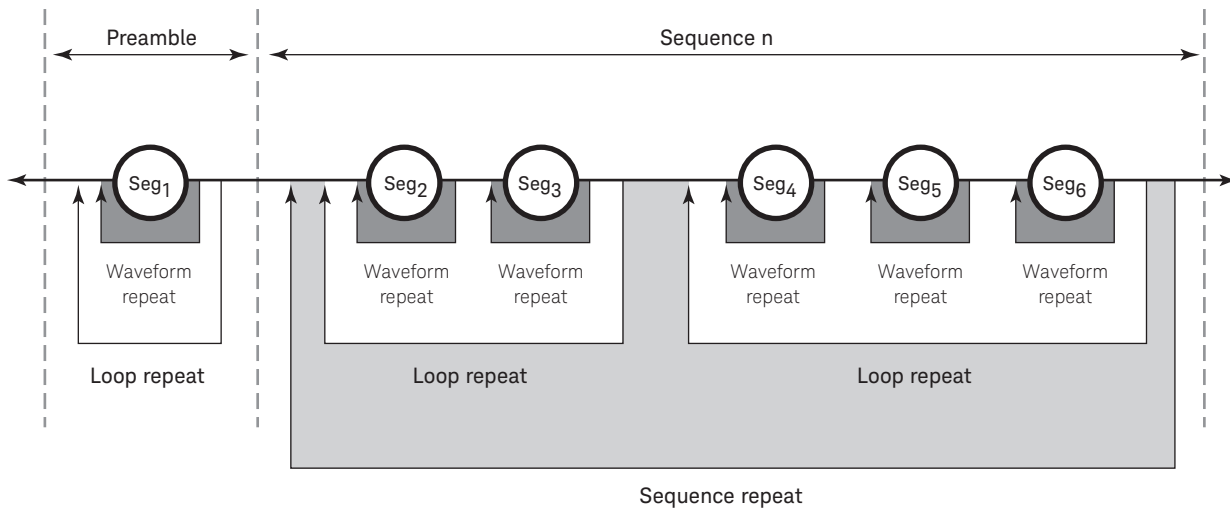


Figure 2. Create sophisticated signal scenarios by looping and nesting waveforms.

Create long scenario simulations

Multiply the effective size of on-board memory through the use of the N8241A's advanced sequencing engine. Uniquely define how waveform segments are played through looping and nesting of stored waveforms. This capability also gives users the ability to create new signals from existing waveforms by playing only subsegments of waveform memory.

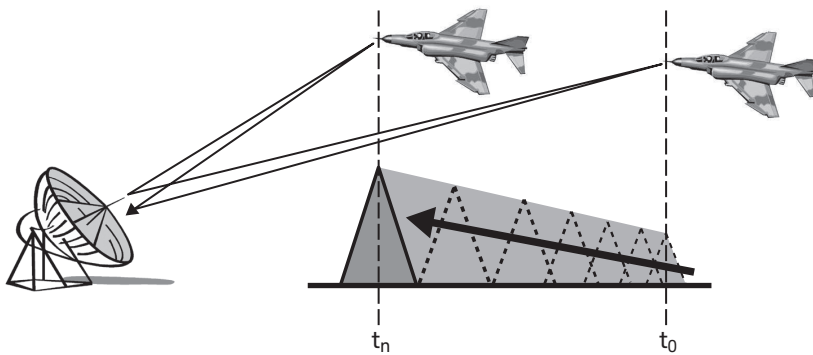


Figure 3. Closing targets can be simulated by ranging parameters on each pulse.

System scalability

Create phase-coherent, multi-emitter simulations using the N8241A's precision SYNC clock. A single N8241A can drive a total of eight AWG modules to synchronize their outputs on a sample-by-sample basis. Any number of modules can be synchronized with simple driver hardware. The AWG also includes multiple front-panel trigger and markers for complete system synchronization.

Ease-of-use

The N8241A's graphical user interface guides developers through module setup and waveform file transfers. Users can quickly configure the instrument's signal conditioning paths, marker and trigger lines, sample and reference clock sources and simple sequencing functions. More sophisticated sequencing functions are available through the instrument's numerous programmatic interfaces. The N8241A supports interfaces for MATLAB, LabView, IVI-C, and VEE framework.



Figure 4. The N8241A's compact modular size is perfect for integrating into ATE system racks.

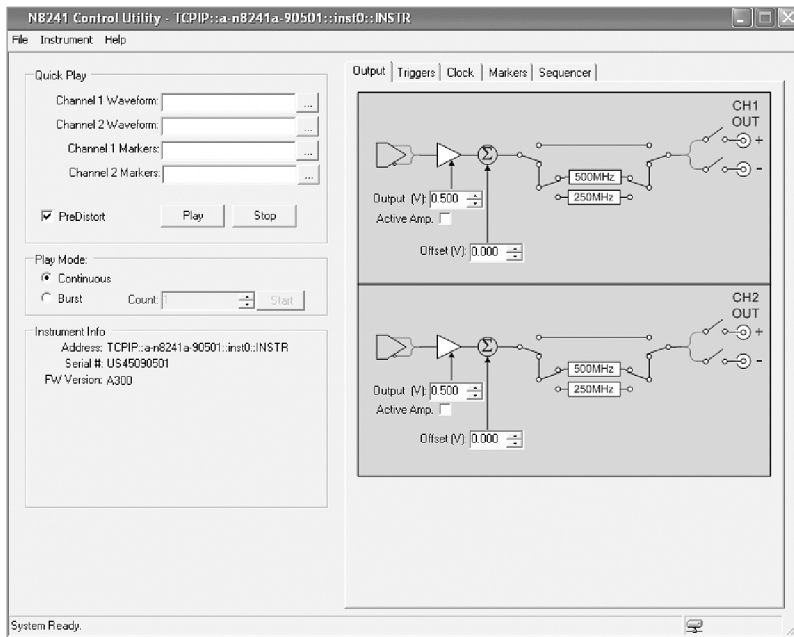


Figure 5. Directly import and play waveforms from the Quick Play menu.

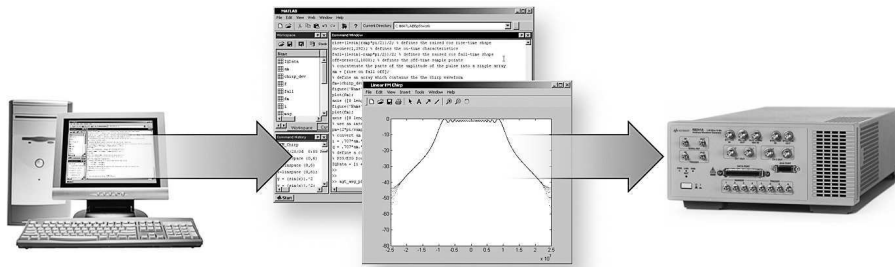


Figure 6. Play waveform files directly from the MATLAB command line.

Enhanced Capabilities for the N8241

Dynamic sequencing (Option 300)

The dynamic sequencing software enables radar and military communications engineers to build custom signal scenarios on the fly. Engineers can dynamically access up to 16 k of previously stored sequences through a 16-bit interface and replay these complex waveforms to respond to changing threat environments, or to create signals where the next waveform to be played is not known in advance.

Direct digital synthesis (Option 330)

The direct digital synthesis (DDS) software enables radar and emerging communications engineers to create basic waveforms in the AWG's memory and then modify their behavior with profiles for amplitude modulation, phase modulation, and frequency modulation. This enables engineers to simulate testing without the time and expense of field trials, such as in-flight and in-orbit testing. This option can also be used to simulate fading profiles in receiver testing for satellite and 4 G signals, such as multiple input, and multiple output formats (MIMO).

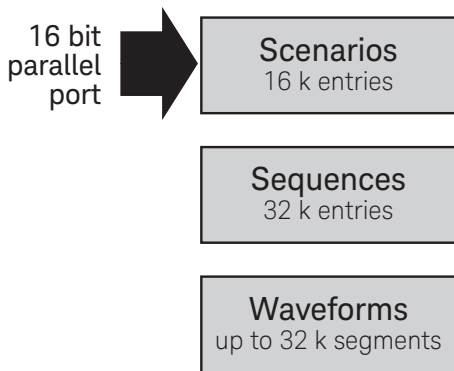


Figure 7. Create signals where the next waveform to be played is not known in advance.

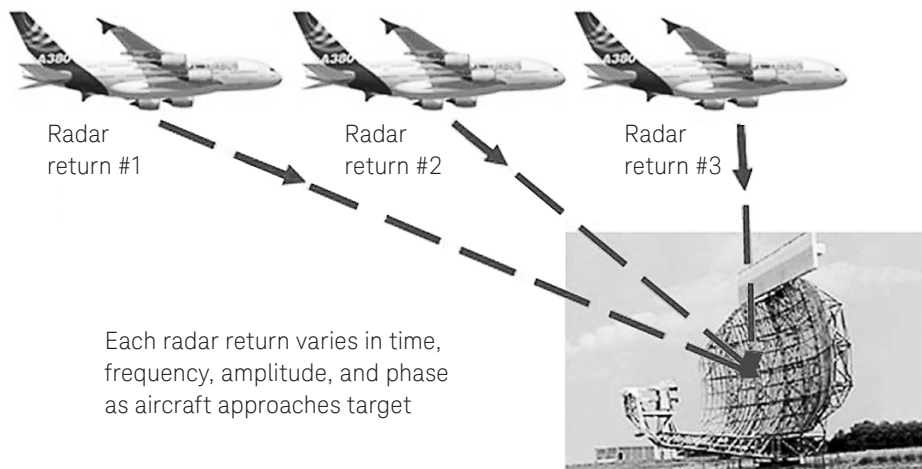


Figure 8. Define signals by carrier frequency and modulation – instant by instant.

Key Characteristics

| | | |
|--|---|--|
| Channels | Two independent channels available as baseband or IF outputs <ul style="list-style-type: none"> – CH1: Single-ended and differential – CH2: Single-ended and differential | |
| Modulation bandwidth | 1.25 GSa/s sample rate (Option 125) 500 MHz per channel (1 GHz I/Q bandwidth) | 625 MSa/s sample rate (Option 062) 250 MHz per channel (500 MHz I/Q bandwidth) |
| Resolution | 15 bits (1/32,768 levels) | |
| Output spectral purity – (CH1 and CH2) | 1.25 GSa/s sample rate (Option 125) | 625 MSa/s sample rate (Option 062) |
| Harmonic distortion <ul style="list-style-type: none"> – Non-harmonic spurious – Noise floor | ≤ -65 dBc for each channel DC to 500 MHz ≤ -75 dBc for each channel 1 kHz to 500 MHz ≤ -150 dBc/Hz across the channel bandwidth | ≤ -65 dBc for each channel DC to 250 MHz ≤ -75 dBc for each channel 1 kHz to 250 MHz ≤ -150 dBc/Hz across the channel bandwidth |

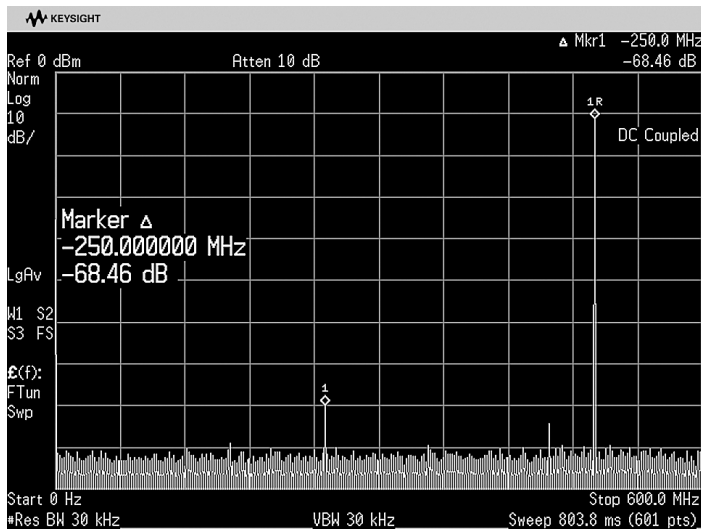


Figure 9. Excellent harmonic and spurious performance are available across the full bandwidth of each channel.

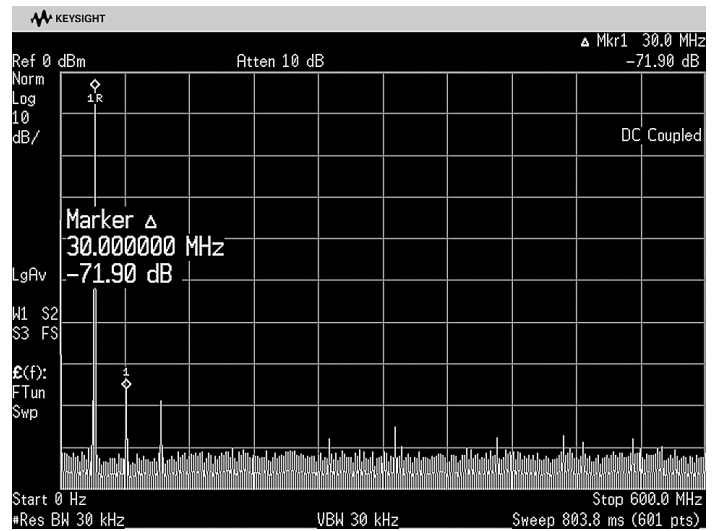


Figure 10. Spurious performance outstanding at low signal frequencies.

| | |
|----------------------------------|---|
| Sample clock | |
| Internal | Fixed 1.25 GSa/s (Option 125) Fixed 625 MSa/s (Option 062) |
| Internal clock output | +3 dBm nominal |
| External clock input | Tunable 100 MS/s to 1.25 GSa/s (Option 125) Tunable 100 MS/s to 625 MSa/s (Option 062) |
| External clock input drive level | +5 to -15 dBm typical |
| Phase noise characteristics | |
| 1 kHz | -95 dBc/Hz |
| 10 kHz | -115 dBc/Hz |
| 100 kHz | -138 dBc/Hz |
| 1 MHz | -150 dBc/Hz |
| Noise floor | -150 dBc/Hz |
| Accuracy | Same as 10 MHz timebase input |

Key Characteristics (continued)

| | |
|--|---|
| Frequency reference | |
| Input drive level | +2 to +12 dBm into 50 ohms (+2 dBm nominal) |
| Waveform length | 8 MSa per channel (16 MSa with Option 016) |
| Minimum waveform length | 128 samples |
| Waveform granularity | 8 samples |
| Segments | 1 to 32 k unique segments can be defined consisting of waveform start and stop address, repetitions, and marker enable flags. |
| Segment loops | A total of 1 million (220) loops can be defined for each segment. Loops can be configured to advance in one of four modes: |
| Single | The segment loop plays once and waits at the end of the loop for a trigger. |
| Continuous | Segment loop is repeated continuously until a trigger is received. |
| Auto | Automatically advances to the next segment after completing the specified number of loop repetitions. |
| Repeat | The waveform loop repeats until the number of waveform loop repetitions is met. |
| Sequences | Up to 32 k total unique waveform sequences can be defined. A sequence is a contiguous series of waveform segments. |
| Advanced sequencing | Enables users to build and playback scenarios, which are comprised of one or more sequences. |
| Scenarios | 1 to 16 k pointers can be assigned to play pre-defined sequences. Sequence play begins with the first sequence entry and continues uninterrupted until the last entry is played. The table repeats until stopped. |
| Sequence jump modes | Sequence jumps determine how a sequence responds to a jump trigger. There are no discontinuities in a sequence jump other than those imposed by the waveform data. Three modes are available to control sequence jumps: |
| Jump immediate | Jumps immediately to the next specified sequence address with a fixed latency. |
| End of waveform | The current segment (including waveform repeats) is completed before jumping to a new sequence. |
| End of sequence | The current sequence is completed before jumping to a new sequence. Jump latency is the longer of either the jump immediate latency or the length of the remaining sequence. |
| Dynamic sequencing (Option 300) | |
| Input | 20-pin mini-D connector |
| Input levels | All pins configured as 2.5 V LVCMOS inputs. A logic low must fall within the -0.2 to +0.5 V window. A logic high must be within the window of +2.0 to +2.8 V. |
| Number of address bits | 13 bits per channel |
| Total number of addressable scenarios | 16 k |
| Data rate for dynamic data | 100 ns |
| Data latency | Same as front panel trigger inputs. Software pointers may also be used to point to pre-defined scenarios, though latencies are not deterministic. |
| Direct digital synthesis (Option 330) | |
| Output frequency resolution | 1 Hz |
| Frequency modulation | Deviation from 0 to 125 MHz (250 MHz peak-peak) |
| Phase modulation | Deviation from -180 to +180 degrees in 0.022 degree steps |
| Amplitude modulation | Modulation depth from 0 to 100% with 15 bit resolution |
| Single channel bandwidth | 400 MHz (800 MHz I/Q) |

Key Characteristics (continued)

| External triggers | |
|---|---|
| Number of inputs | 8 each (4 SMB female front-panel connectors plus four software triggers over the LXI interface from host processor) |
| Trigger polarity | Negative/positive |
| Trigger impedance | 2 k ohms |
| Maximum input level | ± 4.5 V |
| Input sensitivity | 250 mV |
| Trigger threshold | -4.3 V to +4.3 V |
| Trigger timing resolution (clock/8) | |
| Option 125 | 6.4 ns at 1.25 GSa/s rate |
| Option 062 | 12.8 ns at 625 MSa/s rate |
| Trigger latency (34 x clock/8) | |
| Option 125 | 217.6 ns at 1.25 GSa/s rate |
| Option 062 | 435.2 ns at 625 MSa/s rate |
| Trigger uncertainty | < 50 ps |
| Minimum trigger width | |
| Option 125 | 12.8 ns at 1.25 GSa/s clock rate |
| Option 062 | 25.6 ns at 625 MSa/s clock rate |
| Trigger delay | Programmable from 1 to 256 sync clock cycles with 1 sync clock cycle resolution ¹ |
| LXI triggering modes | |
| Driver command based | A driver interface on the controlling computer is used to directly transmit a command to the module. |
| Direct LAN messaging | A data packet containing triggering information (including a time stamp) is sent directly from one module to another via the LAN. |
| Time based events | An IEEE 1588 based time trigger is set and executed internally in a module. |
| LXI trigger bus-based | A module function is triggered via a voltage on the LXI trigger bus. |
| The LXI triggering conforms to the specifications of the LXI standard, revision 1.0, www.lxistandards.org | |
| External markers | |
| Markers | Can be defined for each waveform segment. |
| Number of outputs | 4 each SMB female |
| Marker polarity | Negative, positive |
| Output impedance | 50 ohms |
| Marker low level | 100 mV nominal into high impedance load |
| Marker high level | 3.2 V nominal into high impedance load |
| Marker timing resolution (clock/8) | |
| Option 125 | 6.4 ns at 1.25 GSa/s rate |
| Option 062 | 42.8 ns at 625 MSa/s rate |
| Marker latency | Marker precedes analog output and is adjustable in 2 sample clock period steps. |
| Marker latency repeatability | < 100 ps |
| Marker width | Programmable from 1 to 256 sync clock cycles ¹ |
| Marker delay | Programmable from 8 to 502 sample clock cycles, with 2 sample clock cycle resolution |
| LXI markers | Two LXI markers are available |
| Module synchronization | Supports system scaling for any number of N8241A modules. A single module can support a fan-out of 8 N8241A modules for precise triggering and repeatability. Driver boards may be used to scale any number of modules. |
| Sync clock output level | 800 mV p-p (50 ohms, AC coupled) |
| Sync clock input sensitivity | 100 mV p-p minimum into 50 ohms AC coupled |

1. A sync clock cycle is clock/8

Key Characteristics (continued)

| Analog output | |
|----------------------------------|--|
| Output connector | SMA female |
| Output impedance | 50 ohms |
| Analog output levels | The following output levels are specified into 50 ohms |
| | Single-ended Differential |
| Passive mode | 0.5 V _{p-p} N/A |
| Active mode | 1 V _{p-p} with ± 0.2 V offset N/A |
| Direct DAC mode | N/A 1 V _{p-p} (0 V offset) |
| Uncorrected passband flatness | ± 1 dB DC to 200 MHz; ± 2.5 dB DC - 500 MHz (with 1.25 GHz clock) |
| Uncorrected passband group delay | ± 500 ps DC to 200 MHz; ± 1 ns DC - 500 MHz (with 1.25 GHz clock) |
| Reconstruction filters | 500 MHz and 250 MHz realized as 7-pole Cauer Chebychev filters plus thru-line output |
| Pulse response | |
| Rise time (10 to 90%) | < 1 ns |
| Fall time (10 to 90%) | < 1 ns |
| Amplitude | 0.5 V _{p-p} |
| LXI Class A certified | |
| Power | |
| Line power | 100/120/220/240 VAC, 50/60 Hz, 100 W maximum |
| Environmental | Samples of this product have been type tested in accordance with the Keysight Environmental Test Manual and verified to be robust against the environmental stresses of storage, transportation, and end-use; those stresses include, but are not limited to temperature, humidity, shock vibration, altitude, and power line conditions. Test methods are aligned with IEC 60068-2 and levels are similar to MIL-PRF-28800F Class 3. |
| Operating temperature | 0 to +50 °C (0 to 47 °C at 15,000 ft altitude) |
| Storage temperature | -40 to +70 °C |
| Relative humidity | |
| Type tested | 0 to 95% at 40 °C (non-condensing) |
| Altitude | 0 to 4500 m (15,000 ft) above sea level |
| Weight | 5.66 kg (12.5 lb) |
| Security | All user data stored in volatile memory |
| Dimensions | |
| Height | 89 mm (3.5 inch) |
| Width | 213 mm (8.375 inch) |
| Depth | 422 mm (16.625 inch) |
| ISO compliance | This instrument is manufactured in an ISO-9001 registered facility in concurrence with Keysight Technologies, Inc. commitment to quality. <ul style="list-style-type: none"> - Electrostatic Discharge Immunity – IEC 61000-4-2: passes criterion C Testing according to IEC 61000-4-2: showed that the exposure of the data port to electrostatic discharge may interrupt operation of the N8241A/42A. Operation can be restored by reloading the desired waveforms and restarting. This required operator intervention results in a criterion C classification. |

Ordering Information



Figure 11. Keysight N8241A 15-bit arbitrary waveform generator LXI module

N8241A 15-bit arbitrary waveform generator with 8 MS memory per channel

| Options | |
|------------|---|
| N8241A-125 | 1.25 GSa/s sample rate |
| N8241A-062 | 625 MSa/s sample rate |
| N8241A-016 | Waveform memory expansion to 16 MSa per channel |
| N8241A-300 | Enabling software for 16-bit dynamic sequencing |
| N8241A-330 | Direct digital synthesis software |

Web Resources

Visit our Web sites for additional product information and literature.

N8241A 15-bit arbitrary waveform generator:

www.keysight.com/find/synthetic

N6030A Series of arbitrary waveform generators:

www.keysight.com/find/awg

Signal simulation systems:

www.keysight.com/find/signalsimulation

Aerospace and defense test and measurement products and services:

www.keysight.com/find/ad


Test and measurement accessories:

www.keysight.com/find/accessories

Evolving Since 1939

Our unique combination of hardware, software, services, and people can help you reach your next breakthrough. We are unlocking the future of technology.

From Hewlett-Packard to Agilent to Keysight.

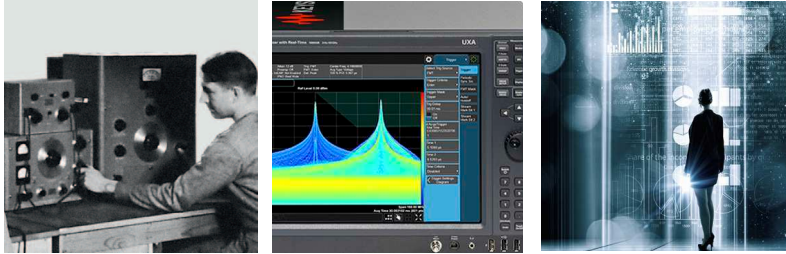

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: www.keysight.com/find/contactus

Americas

| | |
|---------------|------------------|
| Canada | (877) 894 4414 |
| Brazil | 55 11 3351 7010 |
| Mexico | 001 800 254 2440 |
| United States | (800) 829 4444 |

Asia Pacific

| | |
|--------------------|----------------|
| Australia | 1 800 629 485 |
| China | 800 810 0189 |
| Hong Kong | 800 938 693 |
| India | 1 800 11 2626 |
| Japan | 0120 (421) 345 |
| Korea | 080 769 0800 |
| Malaysia | 1 800 888 848 |
| Singapore | 1 800 375 8100 |
| Taiwan | 0800 047 866 |
| Other AP Countries | (65) 6375 8100 |

Europe & Middle East

| | |
|----------------|---------------|
| Austria | 0800 001122 |
| Belgium | 0800 58580 |
| Finland | 0800 523252 |
| France | 0805 980333 |
| Germany | 0800 6270999 |
| Ireland | 1800 832700 |
| Israel | 1 809 343051 |
| Italy | 800 599100 |
| Luxembourg | +32 800 58580 |
| Netherlands | 0800 0233200 |
| Russia | 8800 5009286 |
| Spain | 800 000154 |
| Sweden | 0200 882255 |
| Switzerland | 0800 805353 |
| | Opt. 1 (DE) |
| | Opt. 2 (FR) |
| | Opt. 3 (IT) |
| United Kingdom | 0800 0260637 |

For other unlisted countries: www.keysight.com/find/contactus (BP-9-7-17)



www.keysight.com/go/quality
Keysight Technologies, Inc.
DEKRA Certified ISO 9001:2015
Quality Management System

myKeysight

myKeysight

www.keysight.com/find/mykeysight

A personalized view into the information most relevant to you.

http://www.keysight.com/find/emt_product_registration

Register your products to get up-to-date product information and find warranty information.



Keysight Services

www.keysight.com/find/service

Keysight Services can help from acquisition to renewal across your instrument's lifecycle. Our comprehensive service offerings—one-stop calibration, repair, asset management, technology refresh, consulting, training and more—helps you improve product quality and lower costs.



Keysight Assurance Plans

www.keysight.com/find/AssurancePlans

Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.

Keysight Channel Partners

www.keysight.com/find/channelpartners

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.



Unlocking Measurement Insights

This information is subject to change without notice.
© Keysight Technologies, 2017
Published in USA, December 1, 2017
5989-2595EN
www.keysight.com