



P A T - T S E R I E S



Power factor: 0.95
Equipped with power factor correction circuit.

3 kW maximum power output even with single-phase input (4 kW type)

Maximum power output
8kW
[8kW type]


High-Efficiency, Large-Capacity Switching Power Supply PAT-T Series

- 8 kW type (seven models) and 4 kW type (four models): eleven models in total.
- Capable of operating continuously under full load even with an ambient temperature of 50°C.
- Up to five units can be operated in parallel (40 kW).
- Equipped with power factor correction circuit.
- High noise resistance.
- equipped with RS-232C interface as standard.
- USB, GPIB, and LAN interfaces available (factory option).



Tough & Eco

Large-capacity, yet compact and tough.
Large-capacity power supply that is environmentally friendly.

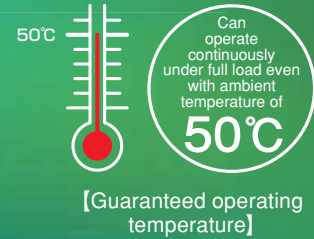

High-Efficiency, Large-Capacity Switching Power Supply

PAT-T series



Two types, with rated power outputs of 8 kW and 4 kW: eleven models in total.

Outline

The PAT-T Series is a constant voltage/constant current auto-shifting switching DC power supply. It features a soft switching system that offers greater efficiency and lower noise. At the same time, it makes full use of high-density packaging technology to greatly reduce the size and weight of the unit. It features an exceptional "power factor correction circuit" for its class, and improves the power supply environment (suppresses harmonic currents). It also greatly contributes to "energy saving," as exemplified by its simplified and miniaturized power reception and distribution modules, and lower power consumption. Furthermore, an optimized heat radiation design makes operation guaranteed at ambient temperatures of up to 50°C. It can thus be deployed in demanding usage environments where it must provide full-load, continuous operation despite high ambient temperatures.


Lineup

Rated Power	Model	Rated Voltage	Rated Current
8 kW	PAT20-400T	0 V-20 V	0 A-400 A
	PAT30-266T NEW	0 V-30 V	0 A-266 A
	PAT40-200T	0 V-40 V	0 A-200 A
	PAT60-133T	0 V-60 V	0 A-133 A
	PAT80-100T NEW	0 V-80 V	0 A-100 A
	PAT160-50T	0 V-160 V	0 A-50 A
	PAT650-12.3T NEW	0 V-650 V	0 A-12.3 A
4 kW	PAT20-200T NEW	0 V-20 V	0 A-200 A
	PAT40-100T NEW	0 V-40 V	0 A-100 A
	PAT60-67T NEW	0 V-60 V	0 A-67 A
	PAT160-25T NEW	0 V-160 V	0 A-25 A

* For the 8kW type, 400V input type is also available. For more information, please contact us.

Large capacity yet compact!

Neatly fits into smaller spaces!

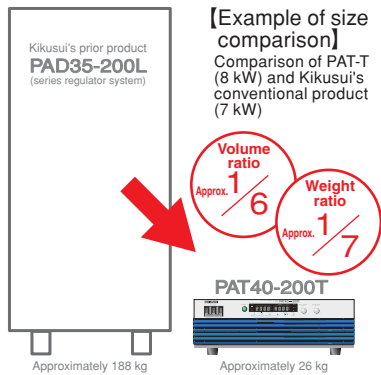

Can use vertically, too! (Optional)



Easy to carry and can use on test table side.

Compatible with all PAT-T series models. Comes with caster-equipped frame and handle kit.

Option


■ Vertical stand **NEW**

*PAT-T series main unit is not included.

Offers compactness, high efficiency, and energy saving!

Soft switching system


This power supply circuit system skillfully utilizes resonance to execute power device switching when the voltage or current is zero. Thus, in principle, the unit can operate without switching loss and without transient crossover of voltage and current. In general, switching that occurs when voltage is zero is called zero voltage switching (ZVS), while switching that occurs when current is zero is called zero current switching (ZCS). With conventional power supply circuits, problems such as increasing power loss and diminishing efficiency occur when switching operations increase in speed. A soft switching system, however, features a high-efficiency power supply circuit that reduces heat loss generated from the power supply and enables the miniaturization of circuits, not only making it possible to miniaturize equipment but to considerably minimize noise generated from the power supply.

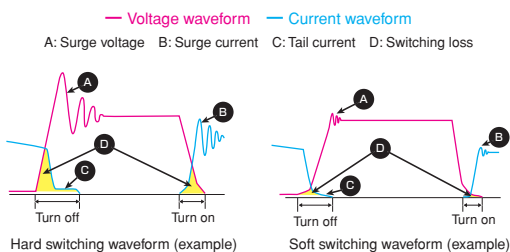

Power factor correction circuit

The power factor (PF) is a value that indicates the efficiency of an alternating current circuit, and it refers to the ratio of the effective power to the apparent power. The closer the power factor is to 1, the better will be the efficiency of electric power energy usage in the equipment (circuit). Incorporating a power factor correction circuit into a power circuit's input unit will correct AC voltage and current phase differences (waveform deviations cause reactive power), and improve the efficiency of electric power usage. Specific advantages include the following:

- Promotes energy saving.
- Downsizes power reception and distribution equipment.
- Improves the power supply environment.
- Reduces transmission loss.
- Reduces noise.

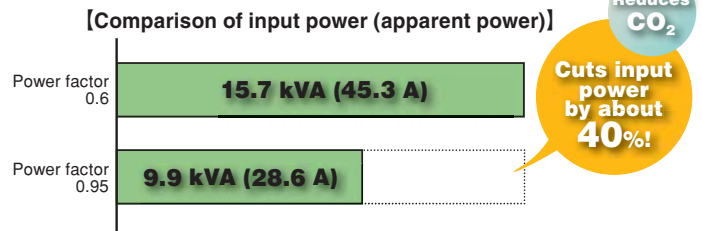


The above values apply when DC-power, full-load operation is performed with an output of 40 V and 200 A, and an efficiency of 85%.
*Values appearing in parentheses () are electric current values for each phase with three-phase, 200 volt input.

Improving the power factor from 0.6 to 0.95 reduces the required input power by about 40%. Thus, a high power factor **saves energy!**


Purpose and Application Examples/Various Functions

The output voltage lineup ranges from 20 V to 650 V. The product can be used as a power supply for various evaluations and tests.

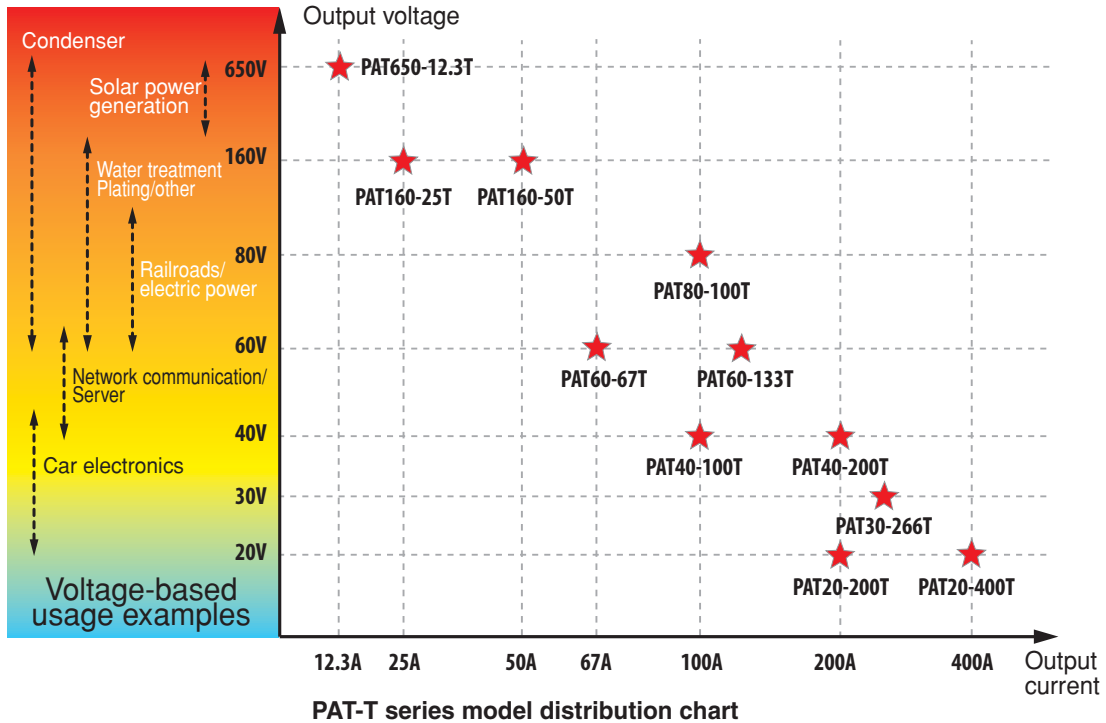

【Car electronics applications】

- Lifetime testing of headlights
- Performance and endurance testing of inverters for use in high-capacity air conditioners and motors
- Performance and endurance testing of brushless motors for use in EPS and MG units
- Performance testing of IPM, IGBT, and other power modules
- Performance testing of starter motors
- Performance testing of EV/HEV electrical components

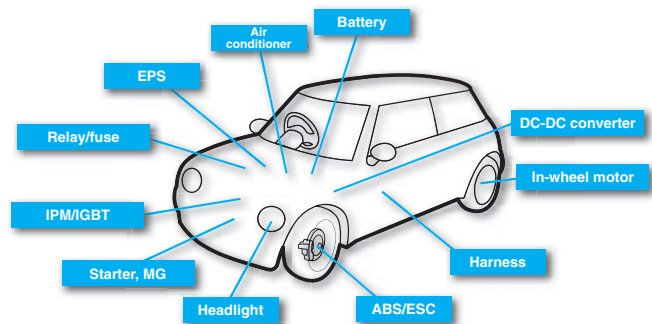


More convenient, easier to use, and safer

- 4 kW type can operate even with single-phase 200 volt input. (However, current is limited to about 75% of rated value.)
- Standardly equipped with RS-232C interface.
- Supports USB/GPIB/LAN interface. (Factory option)
- Controllable from Excel VBA and LabView with measuring instrument driver. Driver can be downloaded free at our web site.
- Capacity can be expanded through parallel operation (up to five units of the same model).
- Equipped with reliable output ON/OFF delay function during sequence operations.
- Memory function (three sets of voltage/current)
- Voltage/current monitor output
- Status signal output
- Remote sensing function
- Protective functions (shutdown, as well as protection against overvoltage, overcurrent, overheating, input phase interruption, fan malfunction, sensing, and bleeder circuit overheating)
- High noise resistance (for reassurance during car electronics testing)
- Good maintainability, including easy fan replacement

Expansion of capacity through parallel operation: supporting up to 40 kW and 2000 A!

Up to five units (of the same model) possible


Up to five units, including the master unit, can be connected in parallel. Parallel operation is enabled using parallel operation cable (optional).

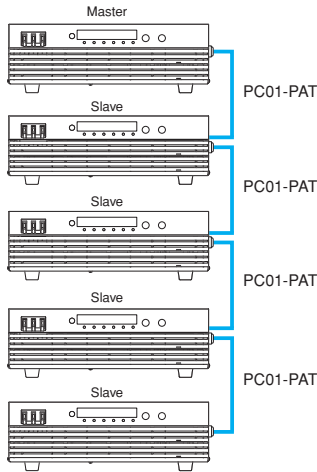


Rack installation

Installing the rack will require a rack mount bracket (optional).


■ Rack mount bracket

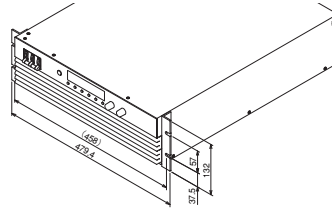

KRB3-TOS (inch size)

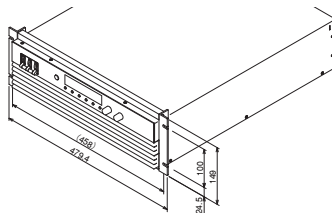

KRB150-TOS (millimeter size)

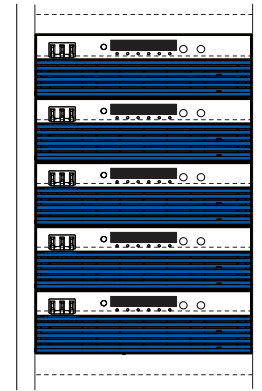

[Rack installation example (inch-size rack)]

Smart rack system

This large-current model assembles multiple PAT-T series units with special rack parts. Seven types are available, with rated voltages of 20, 30, 40, 60, 80, 160, and 650 volts. A total of fifty-six models are available, ranging from 16 kW to 40 kW.



Model with breaker

Model without breaker

● Lineup

Models without breaker

Specifications Model	Power Output	
	CV V	CC A
PAT20-800TM	0-20	0-800
PAT20-1200TM		0-1200
PAT20-1600TM		0-1600
PAT20-2000TM		0-2000
PAT30-532TM <i>Coming soon</i>	0-30	
PAT30-798TM <i>Coming soon</i>		
PAT30-1064TM <i>Coming soon</i>		
PAT30-1330TM <i>Coming soon</i>		
PAT40-400TM	0-40	0-400
PAT40-600TM		0-600
PAT40-800TM		0-800
PAT40-1000TM		0-1000
PAT60-266TM	0-60	0-266
PAT60-399TM		0-399
PAT60-532TM		0-532
PAT60-655TM		0-665
PAT80-200TM <i>Coming soon</i>	0-80	
PAT80-300TM <i>Coming soon</i>		
PAT80-400TM <i>Coming soon</i>		
PAT80-500TM <i>Coming soon</i>		
PAT160-100TM	0-160	0-100
PAT160-150TM		0-150
PAT160-200TM		0-200
PAT160-250TM		0-250
PAT650-24.6TM <i>Coming soon</i>	0-650	0-24.6
PAT650-36.9TM <i>Coming soon</i>		0-36.9
PAT650-49.2TM <i>Coming soon</i>		0-49.2
PAT650-61.5TM <i>Coming soon</i>		0-61.5

Models with breaker

Specifications Model	Power Output	
	CV V	CC A
PAT20-800TMX	0-20	0-800
PAT20-1200TMX		0-1200
PAT20-1600TMX		0-1600
PAT20-2000TMX		0-2000
PAT30-532TM <i>Coming soon</i>	0-30	
PAT30-798TM <i>Coming soon</i>		
PAT30-1064TM <i>Coming soon</i>		
PAT30-1330TM <i>Coming soon</i>		
PAT40-400TMX	0-40	0-400
PAT40-600TMX		0-600
PAT40-800TMX		0-800
PAT40-1000TMX		0-1000
PAT60-266TMX	0-60	0-266
PAT60-399TMX		0-399
PAT60-532TMX		0-532
PAT60-655TMX		0-665
PAT80-200TM <i>Coming soon</i>	0-80	
PAT80-300TM <i>Coming soon</i>		
PAT80-400TM <i>Coming soon</i>		
PAT80-500TM <i>Coming soon</i>		
PAT160-100TMX	0-160	0-100
PAT160-150TMX		0-150
PAT160-200TMX		0-200
PAT160-250TMX		0-250
PAT650-24.6TMX <i>Coming soon</i>	0-650	0-24.6
PAT650-36.9TMX <i>Coming soon</i>		0-36.9
PAT650-49.2TMX <i>Coming soon</i>		0-49.2
PAT650-61.5TMX <i>Coming soon</i>		0-61.5

* For the details, please contact us.


8 kW Type Specifications

Item		PAT20-400T	PAT30-266T	PAT40-200T	PAT60-133T	PAT80-100T	PAT160-50T	PAT650-12.3T	
Input	Nominal input rated voltage	Three-phase 200 to 240 VAC, 50-60 Hz							
	Input voltage range/Input frequency range	180 V to 250 V / 47Hz to 63 Hz							
	Efficiency	85% (min) [at input voltage of 200 VAC and rated load]							
	Power factor	0.95 (typical) [at input voltage of 200 VAC and rated load]							
	Input current	32 A (max) [rated load]							
	Inrush current	100 A peak (max)							
	Input power	10kVA (max)							
Output	Rating	8 kW							
		Rated output voltage	20.00 V	30.00 V	40.00 V	60.00 V	80.00 V	160.0 V	650.0 V
		Rated output current	400.0 A	266.0 A	200.0 A	133.0 A	100.0 A	50.0 A	12.30 A
	Constant voltage	Setting accuracy	± (0.2% of rating +50 mV)						
		Max setting voltage	105% of rating						
		Line regulation	± (0.05% of rating +5 mV)						
		Load regulation	± (0.1% of rating +5 mV)						
		Transient response time	5 ms (at an instantaneous change in the load current from 50% to 100%)						
		Ripple noise	100 mVp-p	300 mVp-p	300 mVp-p	350 mVp-p			600 mVp-p
			When the measurement frequency band is 10 Hz to 20 MHz						
			10 mVrms	20 mVrms	30 mVrms			100 mVrms	
		Raise time	100 ms (rated load)/100 ms (no load)						
		Fall time	100 ms (rated load)/2000 ms (no load)						
	Temperature coefficient	100 ppm/°C (max) [with external analog control]							
	Constant current	Setting accuracy	± (0.5% of rating +50 mA)						± (1% of rating +100 mA)
		Max setting current	105% of rating						
		Line regulation	± (0.1% of rating +30 mA)						
		Load regulation	± (0.2% of rating +30 mA)						
		Ripple noise	500 mArms	400 mArms	400 mArms	350 mArms	300 mArms	200 mArms	150 mArms
		Temperature coefficient	200 ppm/°C (typ) [with external analog control]						
OUTPUT ON/OFF delay	OFF. 0.1 to 10.0 s (resolution: 0.1 s)								
Voltage display	Maximum display	99.99					999.9		
	Accuracy	± (0.2% of reading +5 digits) at 23°C ±5°C							
Current display	Maximum display	999.9					99.99		
	Accuracy	± (0.5% of reading +5 digits) at 23°C ±5°C							
Protection function	Overvoltage protection (OVP) / Overcurrent protection (OCP) / Overheat protection (OHP) / Input open phase protection (PHASE) / Fan error protection (FAN) / Mis-connection protection (SENSE) / Breeder circuit overheat protection (BOHP) / Shutdown (SD)								
External analog control	OUTPUT ON/OFF control, etc.	OUTPUT ON/OFF, SHUTDOWN							
	Constant voltage, external voltage control	0% to 100% of the rated output voltage at 0 to 10 V							
	Constant voltage, external resistance control	0% to 100% or 100% to 0% of the rated output voltage at 0 Ω to 10 kΩ							
	Constant current, external voltage control	0% to 100% of rated output current at 0 to 10 V							
	Constant current, external resistance control	0% to 100% or 100% to 0% of rated output current at 0 Ω to 10 kΩ							
Monitor output	Output voltage	10.00 V ±0.25 V at rated voltage output							
		0.00 V ±0.25 V at 0 V output							
	Output current	10.00 V ±0.25 V at rated current output							
		0.00 V ±0.25 V at 0 A current							
Status output	OUT ON, CV, CC, ALARM, POWER ON, POWER OFF, insulated open collector								
Remote control	Equipped with RS-232C interface as standard. SCPI commands, up to 38,400 bps								
Operating temperature/humidity range	0°C to 50°C, 20% to 85%rh								
Storage temperature/humidity range	-25°C to 70°C, 90%rh or less (non-condensing)								
Dimensions (maximum)	430 (440) W × 129.2 (155) H × 550 (620) D mm								
Weight	Approx. 26 kg	Approx. 27 kg	Approx. 25 kg	Approx. 24 kg			Approx. 22 kg		

● Rear panel (8 kW type PAT40-200T rear panel example)



● Outside dimensions (same for each model)

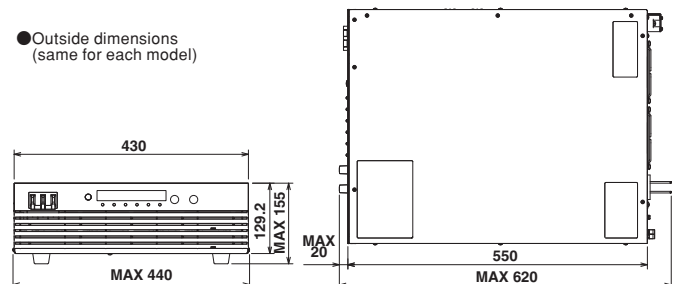

4 kW Type Specifications

4 kW type can operate with single-phase 200 volt input.
However, current is limited to about 75% of rated value.

Item		PAT20-200T	PAT40-100T	PAT60-67T	PAT160-25T		
Input	Nominal input rated voltage	Single-phase/three-phase 200 to 240 VAC, 50-60 Hz					
	Input voltage range/Input frequency range	180 V to 250 V / 47 Hz to 63 Hz					
	Efficiency	84% (min)	85% (min) [at input voltage of 200 VAC and rated load]				
	Power factor	0.95 (typical) [at input voltage of 200 VAC and rated load]					
	Input current	Single-phase 22 A (max) [at 3 kW load]/three-phase 17 A (max) [at rated load]					
	Inrush current	50 A peak (max)					
	Input power	Three-phase 4 kVA (max) [at 3 kW load]/three-phase 5 kVA (max) [at rated load]					
Output	Rating	Single-phase input mode : 4 kW, Single-phase input mode: 3kW					
		Rated output power	20.00 V	40.00 V	60.00 V	160.0 V	
		Rated output current	200.0 A	100.0 A	67.00 A	25.00 A	
	Constant voltage	Setting accuracy	± (0.2% of rating +50 mV)				
		Max setting voltage	105% of rating				
		Line regulation	± (0.05% of rating +5 mV)				
		Load regulation	± (0.1% of rating +5 mV)				
		Transient response time	5 ms (at instantaneous change in load current from 50% to 100%)				
		Ripple noise		100 mVp-p	300m Vp-p	350 mVp-p	
				When the measurement frequency band is 10 Hz to 20 MHz			
				10 mVrms	30 mVrms		
				When the measurement frequency band is 5 Hz to 1 MHz			
		Raise time	100 ms (rated load)/100 ms (no load)				
	Fall time	100 ms (rated load)/2000 ms (no load)					
	Temperature coefficient	100 ppm/°C (max) [with external analog control]					
	Constant current	Setting accuracy	± (0.5% of rating +50 mA)				
		Max setting current	105% of rating × 75% (with single-phase input) / 105% of rating (with three-phase input)				
		Line regulation	± (0.1% of rating +30 mA)				
		Load regulation	± (0.2% of rating +30 mA)				
		Ripple noise		400 mArms	300 mArms	250 mArms	200 mArms
			When the measurement frequency bandwidth is 5 Hz to 1 MHz for the output voltage from 10% to 100% of the rating.				
Temperature coefficient	200 ppm/°C (typ) [with external analog control]						
OUTPUT ON/OFF delay		OFF. 0.1 to 10.0 s (resolution: 0.1 s)					
Voltage display	Maximum display	99.99			999.9		
	Accuracy	± (0.2% of reading +5 digits) at 23°C ±5°C					
Current display	Maximum display	999.9	99.99				
	Accuracy	± (0.5% of reading +5 digits) at 23°C ±5°C					
Protection function		Overvoltage protection (OVP) / Overcurrent protection (OCP) / Overheat protection (OHP) / Input open phase protection (PHASE) / Fan error protection (FAN) / Mis-connection protection (SENSE) / Breeder circuit overheat protection (BOHP) / Shutdown (SD)					
External analog control	OUTPUT ON/OFF control, etc.	OUTPUT ON/OFF, SHUTDOWN					
	Constant voltage, external voltage control	0% to 100% of the rated output voltage at 0 to 10 V					
	Constant voltage, external resistance control	0% to 100% or 100% to 0% of the rated output voltage at 0 Ω to 10 kΩ					
	Constant current, external voltage control	0% to 100% of tared output current at 0 to 10 V					
	Constant current, external resistance control	0% to 100% or 100% to 0% of rated output currenn at 0 Ω to 10 kΩ					
Monitor output	Output voltage	10.00 V ±0.25 V at rated voltage output					
		0.00 V ±0.25 V at 0 V output					
	Output current	10.00 V ±0.25 V at rated current output					
		0.00 V ±0.25 V at 0 A current					
Status output	OUT ON, CV, CC, ALARM, POWER ON, POWER OFF, insulated open collector						
Remote control	Equipped with RS-232C interface as standard. SCPI commands, up to 38,400 bps						
Operating temperature/humidity range	0°C to 50°C, 20% to 85%rh						
Storage temperature/humidity range	-25°C to 70°C, 90%rh or less (non-condensing)						
Dimensions (maximum)	430 (440) W × 129.2 (155) H × 550 (620) D mm						
Weight	Approx. 20 kg	Approx. 19 kg	Approx. 18 kg				

Communication Interface (Each Model is the Same)	
RS-232C	Conforms to EIA232D specifications. D-SUB 9-pin connector Baud rate: 1200, 2400, 4800, 9600, 19200, 38400 bps Data length: 7 or 8 bits, Stop bit length: 1 or 2 bits, Parity: None, flow control
GPiB*	Conforms to IEEE Std 488.1-1987 specifications. SH1, AH1, T6, L4, SR1, RL1, PP0, DC1, DT1, C0, E1
USB*	Conforms to USB2.0 specifications. Communication speed: 12 Mbps (full speed) Conforms to USBTMC-USB488 device class specifications.
LAN*	Conforms to the protocol VXI-11 IEEE 802.3 100Base-TX/10Base-T Ethernet IPv4, RJ-45 connector
Common	Conforms to the messaging protocol IEEE Std 488.2-1992, SCPI Specification 1999.0


Note: An input power cable is not included with the PAT-T series. Customers should either provide an input cable themselves or request an input cable (AC8-4P4M-M6C) sold optionally by Kikusui.

* One of these will be attached to the power supply unit.

Options


■ Communication interface (factory option) *

GPIB
 USB
 LAN **NEW**

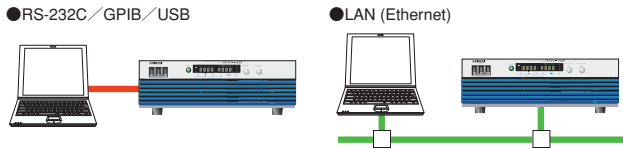

*One of these will be attached to the main power supply unit.

Command supports SCPI in addition to the IEEE 488.2 standard. Also, utilization of a measuring instrument driver (which can be downloaded at our web site) enables controlling with Excel VBA and LabView, and sequence control with "Wavy for PAT" sequence creation software is also possible. Furthermore, if a LAN interface is used, it is possible to control and monitor the power supply from a browser.

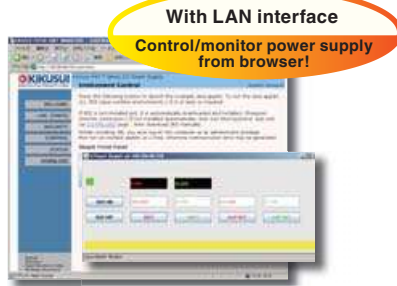

■ "Wavy" sequence creation software


Wavy for PAT-T **Coming soon**

This software is used to support sequence creation and execution with a DC power supply. You can use the Wavy to create and edit sequences with a mouse.

Creation of conditions

Sequence creation is possible by two methods: a mouse or numerical input.

A trial version can be downloaded from our web site!!

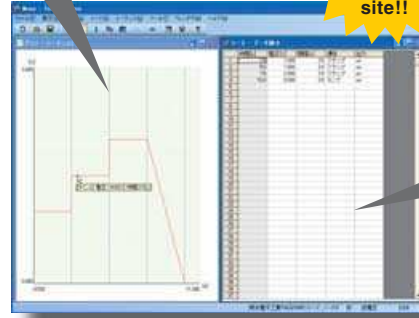

Test results
Results are saved in text format, and development is easy with spreadsheet software!!

- Makes it easy to create and edit test condition data required in sequence operations.
- A test condition data file saving function makes it easy to manage standard test conditions.
- Displays the progress of an execution sequence on an "execution graph" with setting values and a cursor.
- A "monitor graph" that plots monitored values during execution makes it possible to observe actual power output intuitively.
- Capable of saving acquired monitor data as test results.

[Operating environment] Windows 2000/XP

*See the Kikusui product catalog and web site for details.

■ Input power cable

●AC8-4P4M-M6C



(Three-phase, four-conductor, 8 mm², 4 m, M6)

■ Rack mount bracket

- KRB3-TOS (inch size)
- KRB150-TOS (millimeter size)

■ Parallel operation cable

●PC01-PAT



(Flat cable: 250 mm)

■ Power switch guard

●OP01-PAT **NEW**



■ Vertical stand

●VS01 **NEW**



*PAT-T series main unit is not included.



KIKUSUI ELECTRONICS CORPORATION

1-1-3, Higashiyamata, Tsuzuki-ku, Yokohama, 224-0023, Japan
 Phone: (+81) 45-593-7570, Facsimile: (+81) 45-593-7571, www.kikusui.co.jp

KIKUSUI AMERICA, INC. 1-877-8762807 www.kikusuiamerica.com



1633 Bayshore Highway, Suite 331, Burlingame, CA 94010
 Phone: 650-259-5900 Facsimile: 650-259-5904

KIKUSUI TRADING (SHANGHAI) Co., Ltd. www.kikusui.cn



Room, D-01,11F, Majesty Bld, No.138, Pudong Ave, Shanghai City
 Phone: 021-5887-9067 Facsimile: 021-5887-9069

For our local sales distributors and representatives, please refer to "sales network" of our website.

■ Distributor:

■ All products contained in this catalogue are equipment and devices that are premised on use under the supervision of qualified personnel, and are not designed or produced for home-use or use by general consumers. ■ Specifications, design and so forth are subject to change without prior notice to improve the quality. ■ Product names and prices are subject to change and production may be discontinued when necessary. ■ Product names, company names and brand names contained in this catalogue represent the respective registered trade name or trade mark. ■ Colors, textures and so forth of photographs shown in this catalogue may differ from actual products due to a limited fidelity in printing. ■ Although every effort has been made to provide the information as accurate as possible for this catalogue, certain details have unavoidably been omitted due to limitations in space. ■ If you find any misprints or errors in this catalogue, it would be appreciated if you would inform us. ■ Please contact our distributors to confirm specifications, price, accessories or anything that may be unclear when placing an order or concluding a purchasing agreement.