


# R&S®FSC

## Spectrum Analyzer

### Specifications

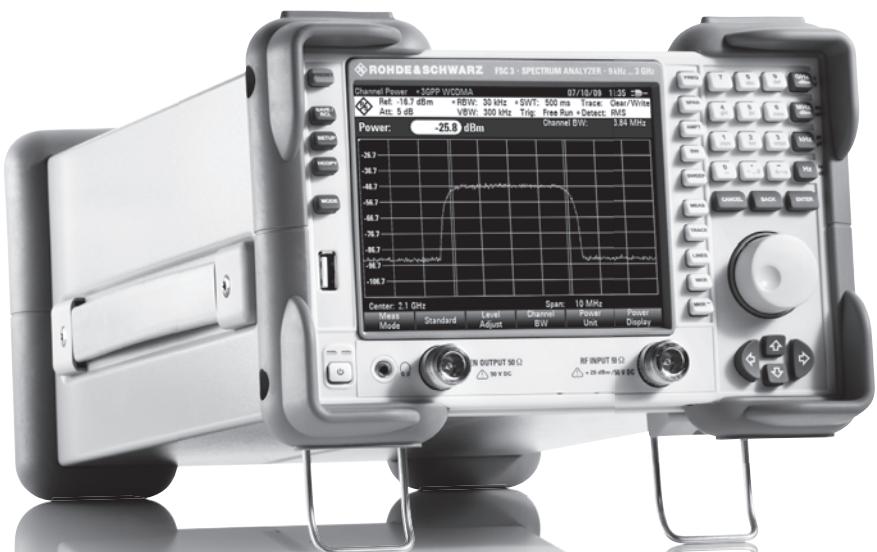

**ROHDE & SCHWARZ**

[www.valuetronics.com](http://www.valuetronics.com)

## CONTENTS

<b>Base unit.....</b>	<b>3</b>
Frequency .....	3
Sweep time .....	3
Bandwidths .....	3
Level .....	4
Trigger functions .....	5
Tracking generator (model .13/.16 only) .....	6
Inputs and outputs .....	7
<b>General data .....</b>	<b>8</b>
<b>Ordering information .....</b>	<b>9</b>
Options.....	9
Recommended extras.....	10

Specifications apply under the following conditions:

15 minutes warm-up time at ambient temperature, specified environmental conditions met, calibration cycle adhered to.

Data without tolerances: typical values only. Data designated as "nominal" applies to design parameters and is not tested.

# Base unit

## Frequency

Frequency range	model .03/.13	9 kHz to 3 GHz
	model .06/.16	9 kHz to 6 GHz
Frequency resolution		1 Hz

<b>Reference frequency, internal, nominal</b>		
Aging per year		$1 \times 10^{-6}$
Temperature drift	0 °C to +30 °C	$1 \times 10^{-6}$
	+30 °C to +50 °C	$3 \times 10^{-6}$
Achievable initial adjustment accuracy		$5 \times 10^{-7}$
Total reference uncertainty		(time since last adjustment × aging rate) + temperature drift + calibration accuracy

<b>Frequency readout</b>		
Marker resolution		0.1 Hz
Uncertainty		$\pm(\text{marker frequency} \times \text{reference uncertainty} + 10\% \times \text{resolution bandwidth} + \frac{1}{2}(\text{span}/(\text{sweep points} - 1)) + 1 \text{ Hz})$
Number of sweep (trace) points		631
Marker tuning frequency step size		span/630
Frequency counter resolution		0.1 Hz
Count uncertainty	S/N > 25 dB	$\pm(\text{frequency} \times \text{reference uncertainty} + \frac{1}{2}(\text{last digit}))$
<b>Frequency span</b>		
Span setting uncertainty		$\pm\text{span}/630$

<b>Spectral purity, SSB phase noise</b>	$f = 500 \text{ MHz, carrier offset}$		
	30 kHz	< -95 dBc (1 Hz), typ. -105 dBc (1 Hz)	
	100 kHz	< -100 dBc (1 Hz), typ. -110 dBc (1 Hz)	
	1 MHz	< -120 dBc (1 Hz), typ. -127 dBc (1 Hz)	

## Sweep time

Sweep time	span = 0 Hz	200 µs to 100 s
	10 Hz ≤ span ≤ 600 MHz	20 ms to 1000 s
	span > 600 MHz	20 ms × span/600 MHz to 1000 s
Uncertainty	span = 0 Hz	1 %, nominal
	span ≥ 10 Hz	3 %, nominal

## Bandwidths

<b>Resolution bandwidths</b>		
Range	-3 dB bandwidth	10 Hz to 3 MHz in 1/3 sequence
Bandwidth accuracy	10 Hz ≤ RBW ≤ 300 kHz	< 5 %, nominal
	RBW > 300 kHz	< 10 %, nominal
<b>Selectivity</b>		
Selectivity	60 dB:3 dB	< 5 (Gaussian type filters), nominal
<b>Video filters</b>		
Range	-3 dB bandwidth	10 Hz to 3 MHz in 1/3 sequence

## Level

Display range	displayed noise floor to +30 dBm																
<b>Maximum rated input level with RF attenuation <math>\geq 10</math> dB</b>																	
DC voltage		50 V															
CW RF power		30 dBm (= 1 W)															
Peak RF power	< 3 s duration	33 dBm (= 2 W)															
Max. pulse voltage		150 V															
Max. pulse energy	pulse width 10 $\mu$ s	10 mWs															
<b>Maximum rated input level with RF attenuation <math>&lt; 10</math> dB</b>																	
DC voltage		50 V															
CW RF power		20 dBm (= 100 mW)															
Peak RF power	< 3 s duration	23 dBm (= 200 mW)															
Max. pulse voltage		50 V															
Max. pulse energy	pulse width 10 $\mu$ s	1 mWs															
<b>Intermodulation</b>																	
Third-order intermodulation (TOI), nominal values	intermodulation-free dynamic range, signal level $2 \times -20$ dBm, RF attenuation = 0 dB, without RF preamplifier (R&S®FSC-B22 option) or RF preamplifier = OFF <table border="1"> <tr> <td><math>f_{in} &lt; 300</math> MHz</td><td>&gt; 54 dBc (TOI &gt; +7 dBm, typ. +11 dBm)</td></tr> <tr> <td><math>300</math> MHz <math>\leq f_{in} &lt; 3.6</math> GHz</td><td>&gt; 60 dBc (TOI &gt; +10 dBm, typ. +15 dBm)</td></tr> <tr> <td><math>3.6</math> GHz <math>\leq f_{in} \leq 6</math> GHz</td><td>&gt; 46 dBc (TOI &gt; +3 dBm, typ. +10 dBm)</td></tr> </table> signal level $2 \times -40$ dBm, RF attenuation = 0 dB, RF preamplifier (R&S®FSC-B22 option) = ON <table border="1"> <tr> <td><math>f_{in} &lt; 300</math> MHz</td><td>&gt; 50 dBc (TOI -15 dBm)</td></tr> <tr> <td><math>300</math> MHz <math>\leq f_{in} \leq 6</math> GHz</td><td>&gt; 56 dBc (TOI -12 dBm)</td></tr> </table>			$f_{in} < 300$ MHz	> 54 dBc (TOI > +7 dBm, typ. +11 dBm)	$300$ MHz $\leq f_{in} < 3.6$ GHz	> 60 dBc (TOI > +10 dBm, typ. +15 dBm)	$3.6$ GHz $\leq f_{in} \leq 6$ GHz	> 46 dBc (TOI > +3 dBm, typ. +10 dBm)	$f_{in} < 300$ MHz	> 50 dBc (TOI -15 dBm)	$300$ MHz $\leq f_{in} \leq 6$ GHz	> 56 dBc (TOI -12 dBm)				
$f_{in} < 300$ MHz	> 54 dBc (TOI > +7 dBm, typ. +11 dBm)																
$300$ MHz $\leq f_{in} < 3.6$ GHz	> 60 dBc (TOI > +10 dBm, typ. +15 dBm)																
$3.6$ GHz $\leq f_{in} \leq 6$ GHz	> 46 dBc (TOI > +3 dBm, typ. +10 dBm)																
$f_{in} < 300$ MHz	> 50 dBc (TOI -15 dBm)																
$300$ MHz $\leq f_{in} \leq 6$ GHz	> 56 dBc (TOI -12 dBm)																
Second harmonic intercept (SHI), nominal values	RF attenuation = 0 dB, without RF preamplifier (R&S®FSC-B22 option) or RF preamplifier = OFF <table border="1"> <tr> <td><math>f_{in} = 20</math> MHz to <math>1.5</math> GHz</td><td>+40 dBm</td></tr> <tr> <td><math>f_{in} = 1.5</math> GHz to <math>3</math> GHz</td><td>+30 dBm</td></tr> </table> RF attenuation 0 dB, RF preamplifier (R&S®FSC-B22 option) = ON <table border="1"> <tr> <td><math>f_{in} = 100</math> MHz to <math>3</math> GHz</td><td>0 dBm</td></tr> </table>			$f_{in} = 20$ MHz to $1.5$ GHz	+40 dBm	$f_{in} = 1.5$ GHz to $3$ GHz	+30 dBm	$f_{in} = 100$ MHz to $3$ GHz	0 dBm								
$f_{in} = 20$ MHz to $1.5$ GHz	+40 dBm																
$f_{in} = 1.5$ GHz to $3$ GHz	+30 dBm																
$f_{in} = 100$ MHz to $3$ GHz	0 dBm																
<b>Displayed average noise level</b>																	
frequency	RF attenuation 0 dB, termination $50 \Omega$ , RBW = 100 Hz, VBW = 10 Hz, sample detector, log scaling, tracking generator = OFF, normalized to 1 Hz, without RF preamplifier (R&S®FSC-B22 option) or RF preamplifier = OFF <table border="1"> <tr> <td>9 kHz to 100 kHz</td><td>&lt; -108 dBm, typ. -118 dBm</td></tr> <tr> <td>100 kHz to 1 MHz</td><td>&lt; -115 dBm, typ. -125 dBm</td></tr> <tr> <td>1 MHz to 10 MHz</td><td>&lt; -136 dBm, typ. -144 dBm</td></tr> <tr> <td>10 MHz to 2 GHz</td><td>&lt; -141 dBm, typ. -146 dBm</td></tr> <tr> <td>2 GHz to 3.6 GHz</td><td>&lt; -138 dBm, typ. -143 dBm</td></tr> <tr> <td>3.6 GHz to 5 GHz</td><td>&lt; -142 dBm, typ. -146 dBm</td></tr> <tr> <td>5 GHz to 6 GHz</td><td>&lt; -140 dBm, typ. -144 dBm</td></tr> </table>			9 kHz to 100 kHz	< -108 dBm, typ. -118 dBm	100 kHz to 1 MHz	< -115 dBm, typ. -125 dBm	1 MHz to 10 MHz	< -136 dBm, typ. -144 dBm	10 MHz to 2 GHz	< -141 dBm, typ. -146 dBm	2 GHz to 3.6 GHz	< -138 dBm, typ. -143 dBm	3.6 GHz to 5 GHz	< -142 dBm, typ. -146 dBm	5 GHz to 6 GHz	< -140 dBm, typ. -144 dBm
9 kHz to 100 kHz	< -108 dBm, typ. -118 dBm																
100 kHz to 1 MHz	< -115 dBm, typ. -125 dBm																
1 MHz to 10 MHz	< -136 dBm, typ. -144 dBm																
10 MHz to 2 GHz	< -141 dBm, typ. -146 dBm																
2 GHz to 3.6 GHz	< -138 dBm, typ. -143 dBm																
3.6 GHz to 5 GHz	< -142 dBm, typ. -146 dBm																
5 GHz to 6 GHz	< -140 dBm, typ. -144 dBm																
RF attenuation 0 dB, termination $50 \Omega$ , RBW = 100 Hz, VBW = 10 Hz, sample detector, log scaling, tracking generator = OFF, normalized to 1 Hz, RF preamplifier (R&S®FSC-B22 option) = ON <table border="1"> <tr> <td>100 kHz to 1 MHz</td><td>&lt; -133 dBm, typ. -143 dBm</td></tr> <tr> <td>1 MHz to 10 MHz</td><td>&lt; -157 dBm, typ. -161 dBm</td></tr> <tr> <td>10 MHz to 1 GHz</td><td>&lt; -161 dBm, typ. -165 dBm</td></tr> <tr> <td>1 GHz to 2 GHz</td><td>&lt; -159 dBm, typ. -163 dBm</td></tr> <tr> <td>2 GHz to 5 GHz</td><td>&lt; -155 dBm, typ. -159 dBm</td></tr> <tr> <td>5 GHz to 6 GHz</td><td>&lt; -151 dBm, typ. -155 dBm</td></tr> </table>			100 kHz to 1 MHz	< -133 dBm, typ. -143 dBm	1 MHz to 10 MHz	< -157 dBm, typ. -161 dBm	10 MHz to 1 GHz	< -161 dBm, typ. -165 dBm	1 GHz to 2 GHz	< -159 dBm, typ. -163 dBm	2 GHz to 5 GHz	< -155 dBm, typ. -159 dBm	5 GHz to 6 GHz	< -151 dBm, typ. -155 dBm			
100 kHz to 1 MHz	< -133 dBm, typ. -143 dBm																
1 MHz to 10 MHz	< -157 dBm, typ. -161 dBm																
10 MHz to 1 GHz	< -161 dBm, typ. -165 dBm																
1 GHz to 2 GHz	< -159 dBm, typ. -163 dBm																
2 GHz to 5 GHz	< -155 dBm, typ. -159 dBm																
5 GHz to 6 GHz	< -151 dBm, typ. -155 dBm																

<b>Immunity to interference, nominal values</b>		
Image frequencies	$f_{in} - 2 \times 21.4 \text{ MHz}$	< -70 dBc, typ. -80 dBc
	$f_{in} - 2 \times 831.4 \text{ MHz}$	< -70 dBc, typ. -90 dBc
	$f_{in} - 2 \times 4881 \text{ MHz}$	-60 dBc
Intermediate frequencies	21.4 MHz, 831.4 MHz, 4881.4 MHz	-60 dBc, typ. -80 dBc
	8931.4 MHz	-50 dBc
Other interfering signals, signal level – RF attenuation < -20 dBm	$f \leq 3.6 \text{ GHz}$ spurious at $f_{in} - 2440.7 \text{ MHz}$	< -60 dBc
	$3.6 \text{ GHz} < f \leq 6 \text{ GHz}$ spurious at $f_{in} - 4465.7 \text{ MHz}$	< -60 dBc
Other interfering signals, related to local oscillators	$f \leq 3.6 \text{ GHz}$	
	$\Delta f < 300 \text{ kHz}$	-60 dBc
	$\Delta f \geq 300 \text{ kHz}$	< -60 dBc
	$f > 3.6 \text{ GHz}$	
	$\Delta f < 300 \text{ kHz}$	-54 dBc
	$\Delta f \geq 300 \text{ kHz}$	< -54 dBc
$f = \text{receive frequency}$		
Residual spurious response	input matched with $50 \Omega$ , without input signal, RBW $\leq 30 \text{ kHz}$ , RF attenuation = 0 dB, tracking generator = OFF	< -90 dBm

<b>Level display</b>		
Logarithmic level axis		1/2/5/10/20/50/100 dB, 10 divisions
Linear level axis		0 % to 100 %, 10 divisions
Number of traces		2
Trace detectors		max peak, min peak, auto peak, sample, RMS
Trace functions		clear/write, max hold, min hold, average, view
Setting range of reference level		-80 dBm to +30 dBm
Units of level axis		dBm, dBmV, dB $\mu$ V, V, W

<b>Level measurement uncertainty</b>		
Absolute level uncertainty at 100 MHz	+20 °C to +30 °C	±0.3 dB ( $\sigma = 0.1 \text{ dB}$ )
Frequency response (+20 °C to +30 °C)	$9 \text{ kHz} \leq f < 10 \text{ MHz}$	±1.5 dB, nominal
	$10 \text{ MHz} \leq f \leq 3.6 \text{ GHz}$	±1 dB ( $\sigma = 0.33 \text{ dB}$ )
	$3.6 \text{ GHz} < f \leq 6 \text{ GHz}$	±1.5 dB ( $\sigma = 0.5 \text{ dB}$ )
Attenuator uncertainty		±0.3 dB ( $\sigma = 0.1 \text{ dB}$ )
Uncertainty of reference level setting		±0.1 dB, nominal
Display nonlinearity	S/N > 16 dB, 0 dB to -50 dB, logarithmic level display	±0.2 dB ( $\sigma = 0.067 \text{ dB}$ )
Bandwidth switching uncertainty	reference: RBW = 10 kHz	±0.1 dB, nominal
<b>Total measurement uncertainty</b>	95 % confidence level, +20 °C to +30 °C, S/N > 16 dB, 0 dB to -50 dB below reference level, RF attenuation auto	
	$10 \text{ MHz} < f \leq 3.6 \text{ GHz}$	±1 dB, typ. ±0.5 dB
	$3.6 \text{ GHz} < f \leq 6 \text{ GHz}$	±1.5 dB, typ. ±1 dB

## Trigger functions

<b>Trigger</b>		
Trigger source		free run, video, external
External trigger level	low → high transition	2.4 V, nominal
	high → low transition	0.7 V, nominal

## Tracking generator (model .13/.16 only)

Frequency range	model .13	100 kHz to 3 GHz
	model .16	100 kHz to 6 GHz
Connector		N female, 50 Ω
VSWR	100 kHz ≤ f ≤ 1 GHz	< 1.5, nominal
	1 GHz < f ≤ 3 GHz	< 2, nominal
	3 GHz < f ≤ 6 GHz (model .16 only)	< 2, nominal
Output level	tracking generator attenuation = 0 dB	0 dBm, nominal
Tracking generator attenuator		0 dB to 40 dB in 1 dB steps
Dynamic range	RF attenuation = 0 dB, tracking generator attenuation = 10 dB, RBW = 1 kHz	
	100 kHz ≤ f < 300 kHz	> 60 dB, typ. 80 dB
	300 kHz ≤ f < 3 GHz	> 70 dB, typ. 90 dB
	3 GHz ≤ f < 6 GHz (model .16 only)	> 70 dB, typ. 90 dB
Reverse power		
DC voltage		50 V
CW RF power		+20 dBm (= 0.1 W)
Max. pulse voltage		50 V
Max. pulse energy (10 μs)		1 mWs

## Inputs and outputs

<b>RF input</b>		
Impedance		50 Ω
Connector		N female
VSWR	100 kHz ≤ f ≤ 1 GHz	< 1.5, nominal
	1 GHz < f ≤ 6 GHz	< 2, nominal
Setting range of input attenuator		0 dB to 40 dB in 5 dB steps
RF preamplifier gain	with R&S®FSC-B22 option	20 dB, nominal
<b>AF output</b>		
AF demodulation types		AM and FM
Connector		3.5 mm mini jack
Output impedance		32 Ω, nominal
Voltage (open circuit)		V <sub>RMS</sub> adjustable from 0 V to > 100 mV
<b>USB interface</b>		
Front panel		USB host interface, version 1.1
Connector		USB type A plug, version 1.1
Memory sticks supported		≤ 4 Gbyte, USB version 1.1 or 2.0
Rear panel		USB device interface, version 1.1
Connector		USB type B plug, version 1.1
<b>External reference, external trigger</b>		
Connector		BNC female, 50 Ω
Mode	selectable	external reference, external trigger
External reference input	required level	0 dBm
	frequency	10 MHz
External trigger threshold	low → high transition	2.4 V, nominal
	high → low transition	0.7 V, nominal
<b>IF out</b>		
Connector		BNC female, 50 Ω
Frequency		21.4 MHz
<b>DC supply input</b>		
Connector		5 mm DIN 45323 female
Input voltage range		14 V to 16 V, nominal
Input current		0.9 A to 0.7 A

## General data

<b>Power supply</b>		
AC supply	input specifications	100 V AC to 240 V AC, 50 Hz to 60 Hz, 400 Hz, 130 VA
DC supply	input specifications	14 V to 16 V, 0.9 A to 0.7 A, nominal
Power consumption		12 W, nominal
Safety		in line with IEC 61010-1, EN 61010-1, CAN/CSA C22.2 No. 61010-1-04, UL61010-1
Test mark		VDE - GS, cCSA <sub>US</sub> ,

<b>Manual operation</b>		
Languages		Chinese, English, French, German, Italian, Hungarian, Japanese, Korean, Portuguese, Russian, Spanish
<b>Remote control</b>		
Command set		SCPI 1997.0
LAN interface		10/100BaseT, RJ-45
USB interface	rear panel	USB device, type B
<b>Display</b>		
Type		14.5 cm (5.7") LCD TFT color
Resolution		640 × 480 pixel
<b>Audio</b>		
Speaker		internal
<b>Mass memory</b>		
Mass memory		flash memory (internal) USB memory stick (not supplied)
Data storage	internal external, on 1 Gbyte USB memory stick	> 256 instrument settings and traces > 5000 instrument settings and traces
<b>Temperature</b>		
	operating temperature range permissible temperature range storage temperature range	+0 °C to +50 °C +0 °C to +55 °C −40 °C to +70 °C
Climatic loading	relative humidity	+25/+40 °C at 85 % relative humidity (IEC 60068-2-30)
<b>Mechanical resistance</b>		
Vibration	sinusoidal random	IEC 60068-2-6 IEC 60068-2-64
Shock		40 g shock spectrum, in line with MIL-STD-810E, method 516.4 procedure 1, IEC 60068-2-27
<b>EMC</b>		
		in line with EMC Directive 2004/108/EC including: IEC/EN 61326-1 <sup>1, 2</sup> , IEC/EN 61326-2-1, CISPR 11/EN 55011 <sup>1</sup> IEC/EN 61000-3-2, IEC/EN 61000-3-3

<b>Weight and dimensions</b>		
Dimensions	W × H × D	233 mm × 158.1 mm × 350 mm (9.2 in × 6.2 in × 13.8 in)
Weight		4.5 kg (9.9 lb)

<b>Recommended calibration interval</b>	1 year
-----------------------------------------	--------

<sup>1</sup> RF emission in line with EN 55011 class A, operation in residential, commercial and business areas or in small-size companies is not covered. Thus, the instrument may not be operated in residential, commercial and business areas or in small-size companies, unless additional measures are taken to ensure that EN 55011 class B is complied with.

<sup>2</sup> Immunity test requirement for industrial environment (EN 61326 table 2).

## Ordering information

Designation	Type	Order No.
Spectrum Analyzer, 9 kHz to 3 GHz	R&S®FSC3	1314.3006.03
Spectrum Analyzer, 9 kHz to 3 GHz, with tracking generator	R&S®FSC3	1314.3006.13
Spectrum Analyzer, 9 kHz to 6 GHz	R&S®FSC6	1314.3006.06
Spectrum Analyzer, 9 kHz to 6 GHz, with tracking generator	R&S®FSC6	1314.3006.16
<b>Accessories supplied</b>		
Power cable, USB cable for connection to PC, quick start guide and CD-ROM (with operating manual and service manual)		

## Options

Designation	Type	Order No.
Preamplifier, 100 kHz to 3 GHz/6 GHz (for the R&S®FSC3/6)	R&S®FSC-B22	1314.3535.02

## Recommended extras

Designation	Type	Order No.
Ethernet Cable	R&S®HA-Z210	1309.6152.00
Headphones	R&S®FSH-Z36	1145.5838.02
19" Rack Adapter for installing two R&S®FSC	R&S®ZZA-T33	1109.4458.00
19" Rack Adapter for installing one R&S®FSC	R&S®ZZA-T34	1109.4464.00
Matching pad 50/75 Ω, 0 Hz to 2700 MHz, matching at both ends, N-connectors	R&S®RAM	0358.5414.02
Matching pad 50/75 Ω, 0 Hz to 2700 MHz, matching at one end, N-connectors	R&S®RAZ	0358.5714.02
75 ohm matching pad N to BNC (female)	R&S®FSH-Z38	1300.7740.02
Near-Field Probe Set	R&S®HZ-15	1147.2736.02
Preamplifier for R&S®HZ-15	R&S®HZ-16	1147.2720.02

## Supported Power Sensors <sup>3</sup>

Designation	Type	Order No.
Universal Power Sensor, 10 MHz to 8 GHz, 200 mW	R&S®NRP-Z11	1138.3004.02
Universal Power Sensor, 10 MHz to 18 GHz, 200 mW	R&S®NRP-Z21	1137.6000.02
Universal Power Sensor, 10 MHz to 18 GHz, 2 W	R&S®NRP-Z22	1137.7506.02
Universal Power Sensor, 10 MHz to 18 GHz, 15 W	R&S®NRP-Z23	1137.8002.02
Universal Power Sensor, 10 MHz to 18 GHz, 30 W	R&S®NRP-Z24	1137.8502.02
Universal Power Sensor, 10 MHz to 33GHz, 200mW	R&S®NRP-Z31	1169.2400.02
Thermal Power Sensor, 0 Hz to 18 GHz, 100 mW	R&S®NRP-Z51	1138.0005.02
Thermal Power Sensor, 0 Hz to 40 GHz, 100 mW	R&S®NRP-Z55	1138.2008.02
Thermal Power Sensor, 0 Hz to 50 GHz, 100 mW	R&S®NRP-Z56	1171.8201.02
Thermal Power Sensor, 0 Hz to 67 GHz, 100 mW	R&S®NRP-Z57	1171.8401.02
Wideband Power Sensor, 50 MHz to 18 GHz, 100 mW	R&S®NRP-Z81	1137.9009.02
Average Power Sensor, 9 kHz to 6 GHz, 200 mW	R&S®NRP-Z91	1168.8004.02
Average Power Sensor, 9 kHz to 6 GHz, 2 W	R&S®NRP-Z92	1171.7005.02

All power sensors require the following adapter cable for operation on the FSC:

Passive USB adapter to connect NRP sensors on R&S®FSC	R&S®NRP-Z4	1146.8001.02
----------------------------------------------------------	------------	--------------

For product brochure, see PD 5214.3330.12 and at [www.rohde-schwarz.com](http://www.rohde-schwarz.com).

<sup>3</sup> For average power measurement only.



## Service you can rely on

- | Worldwide
- | Local and personalized
- | Customized and flexible
- | Uncompromising quality
- | Long-term dependability

## About Rohde & Schwarz

Rohde & Schwarz is an independent group of companies specializing in electronics. It is a leading supplier of solutions in the fields of test and measurement, broadcasting, radiomonitoring and radiolocation, as well as secure communications. Established more than 75 years ago, Rohde & Schwarz has a global presence and a dedicated service network in over 70 countries. Company headquarters are in Munich, Germany.

## Environmental commitment

- | Energy-efficient products
- | Continuous improvement in environmental sustainability
- | ISO 14001-certified environmental management system

Certified Quality System  
**ISO 9001**

## Rohde & Schwarz GmbH & Co. KG

[www.rohde-schwarz.com](http://www.rohde-schwarz.com)

## Regional contact

- | Europe, Africa, Middle East  
+49 89 4129 137 74  
[customersupport@rohde-schwarz.com](mailto:customersupport@rohde-schwarz.com)
- | North America  
1 888 TEST RSA (1 888 837 87 72)  
[customer.support@rsa.rohde-schwarz.com](mailto:customer.support@rsa.rohde-schwarz.com)
- | Latin America  
+1 410 910 79 88  
[customersupport.la@rohde-schwarz.com](mailto:customersupport.la@rohde-schwarz.com)
- | Asia/Pacific  
+65 65 13 04 88  
[customersupport.asia@rohde-schwarz.com](mailto:customersupport.asia@rohde-schwarz.com)

R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG  
Trade names are trademarks of the owners | Printed in Germany (as/we)  
PD 5214.3330.22 | Version 01.03 | August 2010 | R&S®FSC  
Subject to change  
© 2009 - 2010 Rohde & Schwarz GmbH & Co. KG | 81671 München, Germany

