

R&S® ESSENTIALS

# MXO 3 Series OSCILLOSCOPE

Next generation oscilloscope:  
Fast. Precise. Compact.



Four- and eight-  
channel models

Product Brochure  
Version 04.03

More at: [www.rohde-schwarz.com/product/mxo3](http://www.rohde-schwarz.com/product/mxo3)

**ROHDE & SCHWARZ**

Make ideas real



# MXO 3 SERIES OSCILLOSCOPE

## FAST. PRECISE. COMPACT.

Get big capabilities in a small package. Gain the freedom and versatility your work demands without compromising on results. Enjoy unmatched performance and gain an expert understanding of your device under test quickly and easily.



4-channel model



8-channel model

**Bandwidth:**  
100 MHz to 1 GHz

**Fast:**  
4.5 million acquisitions/s, up to 99 % real time capture

**Precise:**  
12-bit ADC, 18-bit HD mode, digital trigger

**Compact:**  
11.6" Full HD display and feature-packed

## WHY ENGINEERS LOVE ROHDE & SCHWARZ OSCILLOSCOPES

- ▶ A trusted, global high-quality company with a long-standing commitment to customers and continuous technological innovation
- ▶ The newest oscilloscope portfolio from 60 MHz to 16 GHz
- ▶ In-house ASICs for the world's most responsive oscilloscopes
- ▶ Frontend technology development for pristine signal integrity
- ▶ 18-bit architecture with HD mode for the highest resolution
- ▶ Digital triggers for the world's most sensitive event isolation
- ▶ Superior user interface and front panel to streamline workflows

## WHY THE MXO 3 SERIES

- ▶ Gain the freedom and versatility your work demands without compromising on results. Equipped with next-generation MXO technology, MXO 3 series delivers fast and precise measurements in a small package
- ▶ **Fast**
  - Industry's fastest update rate of up to 4.5 million acquisitions/s
  - Industry's highest real-time signal capture up to 99 %
  - Fast in both time and frequency domains
- ▶ **Precise**
  - 12-bit ADC at all sample rates, 18-bit in HD mode
  - Advanced and flexible digital trigger
  - Deep 125 Mpoints standard memory
- ▶ **Compact**
  - Save space with all models that fit comfortably on your bench
  - See and share easily with the large 11.6" Full HD display
  - Rackmount with 5U height for all models

# CONTENTS

## FEATURES AND BENEFITS

PAGE 4

## APPLICATIONS

PAGE 25

## PROBES AND ACCESSORIES

PAGE 27

## OSCILLOSCOPE PORTFOLIO

PAGE 32

## SPECIFICATIONS OF BASE UNIT

PAGE 34

## ORDERING INFORMATION

PAGE 44

- ▶ 4- and 8-channel models
- ▶ 100 MHz to 1 GHz bandwidth
- ▶ 5 Gsample/s sample rate
- ▶ 125 Mpoints per channel standard memory
- ▶ 12-bit ADC at all sample rates

# MXO 3 OSCILLOSCOPE TECHNOLOGY

## FAST. PRECISE. COMPACT.

MXO 3 series oscilloscopes blend cutting-edge hardware and software technology for fast and precise results in a compact format.



### Fast.

All MXO oscilloscopes incorporate cutting-edge ASIC technology. Get the world's fastest update rate of up to 4.5 million acquisitions/s enabled by the Rohde&Schwarz MXO-EP ASIC that processes 400 Gbit/s. This chip also enables hardware-accelerated functionality including math, spectrum, zone triggering and mask testing.



### Precise.

With low-noise frontend Rohde&Schwarz ASIC technology, 12-bit vertical resolution in Rohde&Schwarz proprietary ADC technology with up to 18-bit resolution and a digital trigger that is so sensitive it can trigger on smallest signal details, you will be equipped with the most precise oscilloscope in its class. With 125 Mpoints standard memory and up to 500 Mpoints option, capture hundreds of milliseconds of time while retaining a fast sample rate and full bandwidth.



Pencil size compared to oscilloscope dimensions

### Compact.

Engineered with innovative technology that allows for both 4- and 8-channel models in a surprising small package, MXO 3 oscilloscopes still retain a large 11.6" Full HD display. With its small footprint and light weight, easily place the oscilloscope on a crowded bench or quickly move to a new different measurement location. For rackmounting, it is just 5U high.


# FAST

## SEE MORE SIGNAL DETAILS AND SUBTLE CHANGES INSTANTLY.

- ▶ Up to 99% real-time capture
- ▶ Hardware-accelerated functionality
- ▶ Industry's fastest spectrum

### Up to 99% real-time capture


While most oscilloscopes capture less than 2% of real-time system activity, MXO oscilloscopes capture up to 99% of your signal's activity. Instantly see details that other oscilloscopes miss. With 4.5 million waveforms/s, quickly see rare events and anomalies that other oscilloscopes mask. Minimum trigger re-arm time is just 21 ns versus microseconds on other oscilloscopes.

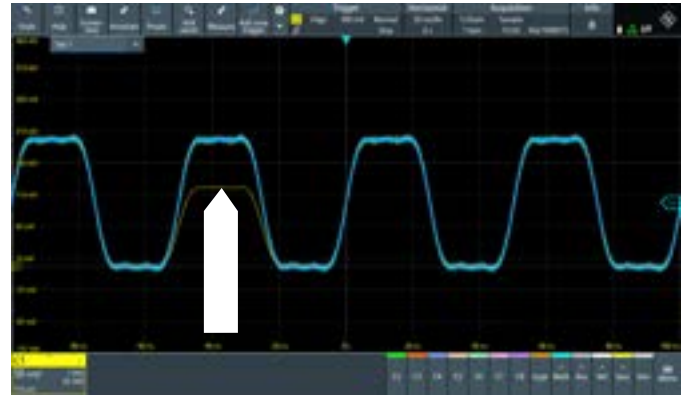

### Hardware-accelerated everything


What other companies do in software, MXO oscilloscopes do in hardware. MXO 3 incorporates hardware accelerated:

- ▶ Math (up to 700 000 operations/s)
- ▶ FFTs (up to 50 000 FFTs/s)
- ▶ HD filters (up to 4.5 million acquisitions/s)
- ▶ Zone triggering (up to 600 000 triggers/s)
- ▶ Mask testing (up to 4 000 000 tests/s)
- ▶ XY mode (up to 2 000 000 plots/s)
- ▶ Protocol decode

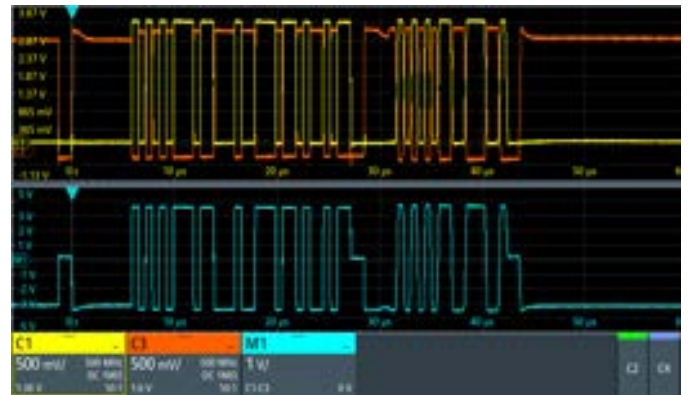

### Industry's fastest spectrum

MXO 3 creates its spectrum display by processing FFTs in hardware. See details in the frequency domain, including dynamic signal changes that other oscilloscopes do not show. Use free run trigger mode, a feature only found on Rohde&Schwarz oscilloscopes, to ensure the fastest spectrum performance of 50 000 FFTs/s.

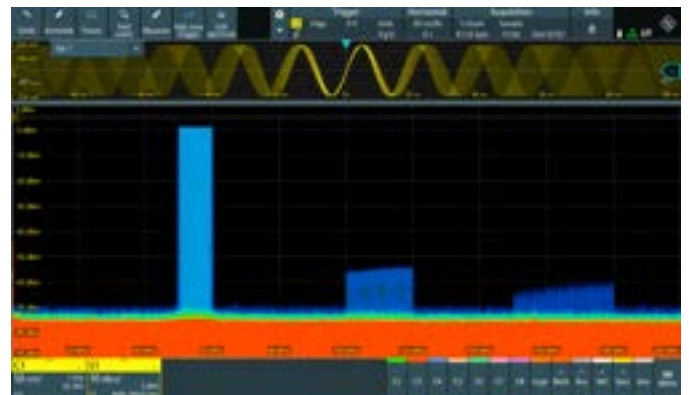

# PRECISE


## DON'T LET ANYTHING GET PAST YOU.

- **Low noise plus more vertical resolution**
- **Gain sharper view of your signals with HD mode**
- **Industry's biggest offset delivers higher SNR**

### Low noise plus more vertical resolution


See small signal changes in the presence of larger signals:

- With 12-bit vertical resolution in hardware at all sample rates, get 16x more resolution than 8-bit oscilloscopes
- Low-noise: only  $< 50 \mu\text{V}$  RMS noise on  $1 \text{ M}\Omega$  and  $50 \Omega$  paths at  $1 \text{ mV/div}$  with  $100 \text{ MHz}$  bandwidth

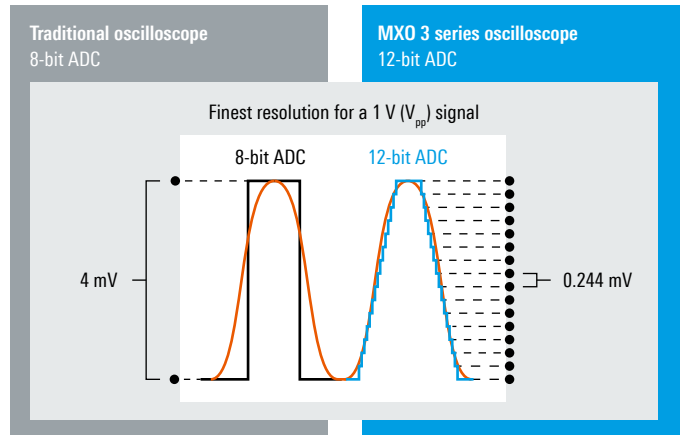

### Gain sharper view of your signals with HD mode

Use HD mode to see signal detail that would normally be buried in noise. HD mode offers both noise reduction and up to 18 bit vertical resolution. Unlike other oscilloscopes, HD mode runs at full sample rate and is done in hardware so it's both precise and fast.

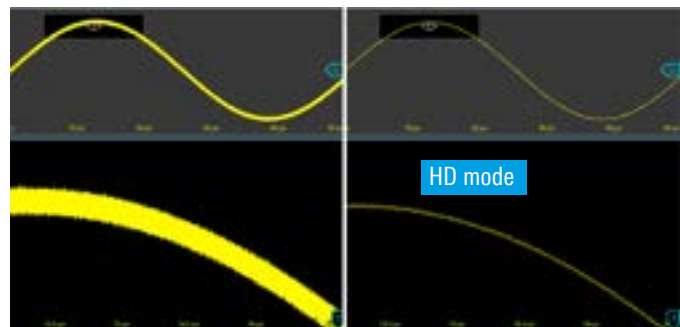

### Industry's biggest offset delivers higher SNR

Use the most sensitive vertical scale to see more of your signal and less measurement system noise. MXO 3 oscilloscopes have large  $\pm 3 \text{ V}$  offset at  $1 \text{ mV/div}$  on both  $50 \Omega$  and  $1 \text{ M}\Omega$  paths. Zoom in on small-amplitude signals to get best SNR. The offset is 2x to 3x better than other leading models in the industry.




# COMPACT

## GET BIG CAPABILITIES IN A SURPRISINGLY SMALL PACKAGE.

- Fits anywhere
- Large number of capabilities in a small size
- Still retains vibrant large 11.6" Full HD display

### Fits anywhere


MXO 3 oscilloscopes' small footprint and light weight make them easy to fit anywhere – even on crowded benches. Small footprint means more space for engineering creative mess. The instrument consumes just 5U rack height.

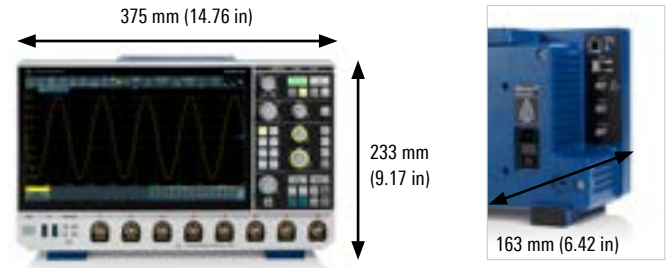

### Large number of capabilities in a small size

Use your MXO 3 oscilloscope to tackle a wide variety of challenges with n-in-1 instrument integration:

- Spectrum analyzer
- Logic analyzer (MSO)
- Protocol analyzer (serial buses)
- DMM
- Function generator
- FRA (Bode plot frequency response analyzer)

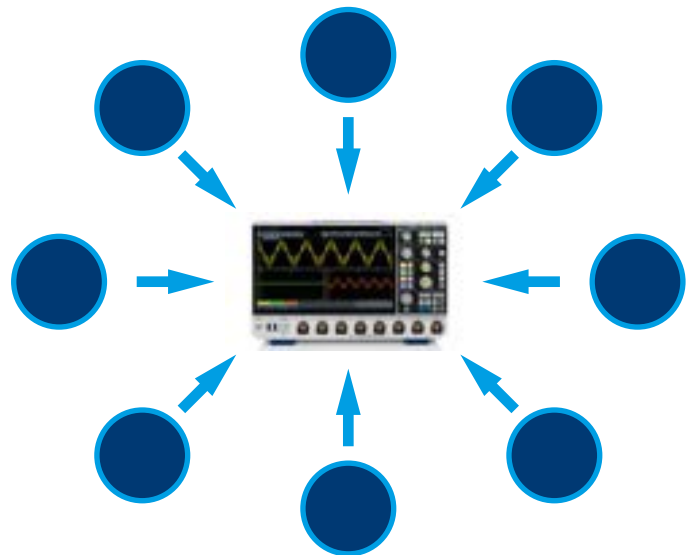

### Still retains vibrant large 11.6" Full HD display

While small in size, the MXO 3 retains a 11.6" Full HD display and a front panel harmonized with other MXO oscilloscopes. This makes it easy to use and share measurement insight others.



# DEEP ACQUISITION MEMORY

## OSCILLOSCOPE STAYS RESPONSIVE, EVEN WITH DEEP MEMORY.

- ▶ When you need it, deep memory is there
- ▶ Accurately capture long time without the headaches
- ▶ Independent sample rate, record length and timebase settings


### When you need it, deep memory is there

MXO 3 comes standard with 125 Mpoints of memory per channel with an optional upgrade to 500 Mpoints. At any sample rate, having deeper memory means your oscilloscope can acquire more time. You may not know how much time you will need to capture for a particular challenge, and having deep memory is a great insurance policy.




### Accurately capture long time without the headaches

Capturing milliseconds or longer on most oscilloscopes often results in an inaccurate capture. When an oscilloscope runs out of memory, it compensates by reducing sample rate often aliasing captured signals. With MXO 3 memory of 125 Mpoints, capture 50 ms of time at full 1 GHz bandwidth with 2.5 Gsample/s without any worry. Or, 200 ms of time with 500 Mpoints at 2.5 Gsample/s.

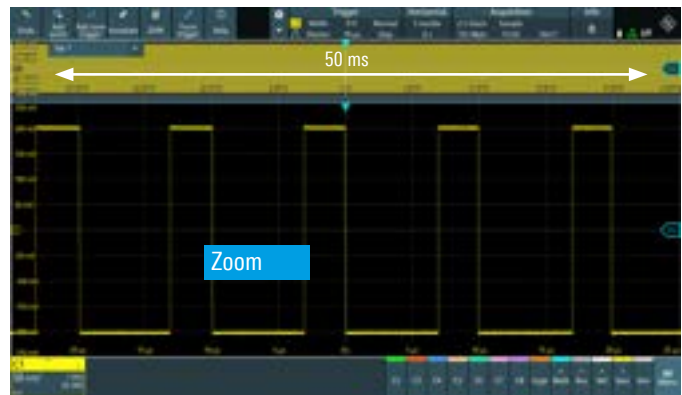

### Independent sample rate, record length and timebase settings

Easily ensure the sample rate is sufficient for your measurement. While most oscilloscopes restrict sample rate and memory with timebase settings, MXO oscilloscopes offer auto or manual control of sample rate, record length and timebase all independent of each other.

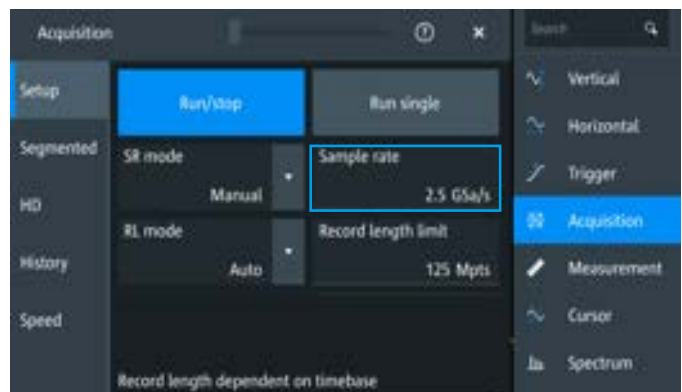


# DIGITAL TRIGGER

## GREATER TRIGGER SENSITIVITY, REDUCED JITTER, WIDER FILTERING OPTIONS

- **Single signal path**
- **Industry's most precise and sensitive trigger**
- **Adjustable digital trigger filters**


### Single signal path

Digital trigger, pioneered and patented by Rohde&Schwarz, uses a single signal path for measurement and triggering. Older analog triggers that have separate measurement and trigger paths with limitations. Users cannot see the actual trigger circuit signal, trigger levels are restricted, and noise reduction is severely limited. MXO digital triggering solves these issues to allow for more faster and more precise triggering.

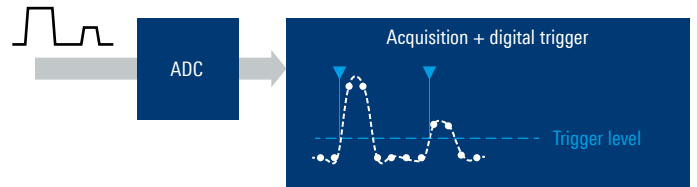


### Most precise and most sensitive trigger

Isolate small changes in the presence of large signals with trigger sensitivity down to 0.0001 vertical divisions. Trigger precisely on any analog level with interpolated based trigger detection between ADC samples. MXO oscilloscopes have an industry best < 1 ps trigger jitter for additional precision. Minimum trigger re-arm time is just 21 ns compared to other oscilloscopes with a rearm time in the microseconds.

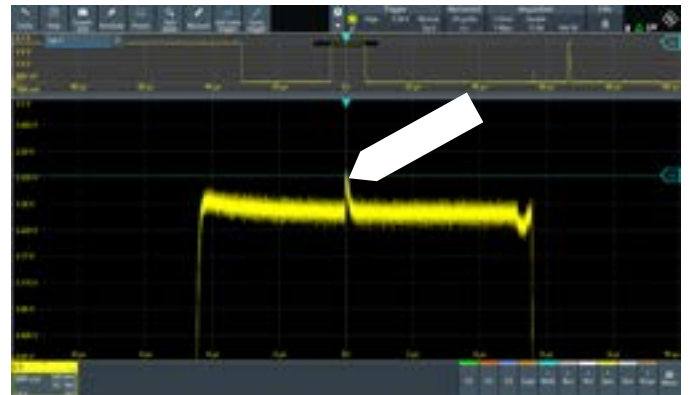

### Adjustable digital trigger filters

Use 18-bit HD mode to suppress broadband noise. Unlike conventional oscilloscopes where users only apply filter to the signal path and not the trigger path, MXO oscilloscopes allow HD and bandwidth filters to be applied. As there is a single path for triggering and measurement, see the exact signal the oscilloscope trigger sees as filtering is turned on/off.

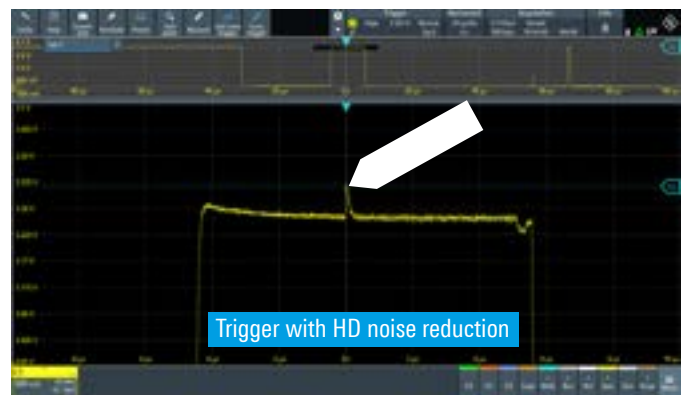


# SPECTRUM

## FAST AND PRECISE FREQUENCY DOMAIN MEASUREMENTS

- **Fast: up to 50 000 FFTs/s**
- **Independent of time domain settings**
- **Free run for effective harmonics and EMI debugging**


### Fast: up to 50 000 FFTs/s

MXO spectrum is hardware accelerated, so it is fast. With up to 50 000 FFTs/s get fast and accurate frequency domain analysis. The analysis bandwidth matches the oscilloscope frequency (max. 1 GHz) and up to four spectrum can be used simultaneously.

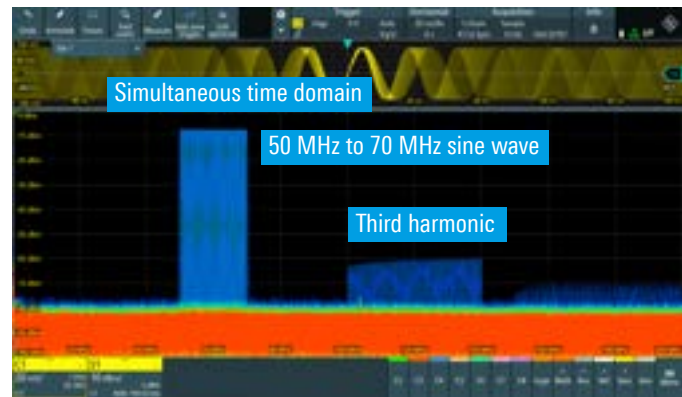


### Independent of time domain settings

Unlike other oscilloscopes where time and frequency controls are dependent, MXO 3 spectrum settings are independent of time domain settings making it easy to see both time and frequency events simultaneously. Select CF/span or start/stop just like on a spectrum analyzer. Choose your window type and adjust realtime bandwidth (RBW) if needed. Use averaging, peak list, max. hold and other spectrum settings.

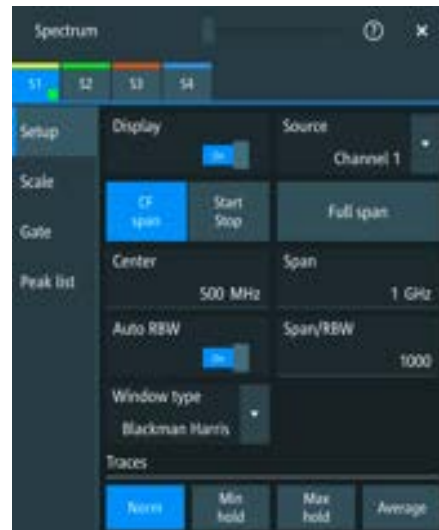

### Free run for effective harmonics and EMI debugging

MXO 3 includes a special triggerless mode called Free run that is designed for frequency domain debugging. Use it to maximize FFTs/s for faster signal build-up. Quickly see spurs, harmonics and other frequency domain signals. Combine with a near-field probe for EMI emission debugging. CF/span/RBW can be adjusted to match EMI test needs.

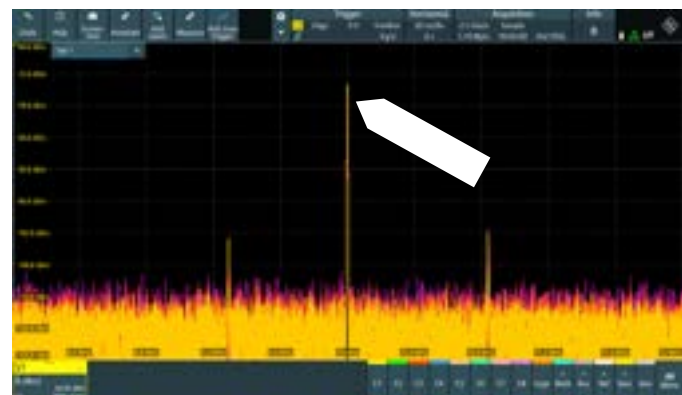

# SUPERIOR USER INTERFACE

## R&S® SmartGrid UI DESIGNED FOR HIGH PRODUCTIVITY

- ▶ Customize your layout, fast
- ▶ Quick access to settings and capabilities
- ▶ Short learning curve

### Customize your layout, fast


- 1 Tap to turn on sources and other functions
- 2 Quickly customize your display layout with drag&drop using R&S® SmartGrid
- 3 Adjust grid and result table boundaries using sliders

### Quick access to settings and capabilities

- 4 Easily navigate to all settings using the main menu
- 5 Quickly access important tools with the customizable toolbar

### Short learning curve

The MXO user interface is designed for minimal learning curve for users of other oscilloscopes. For users who need a function description or who interface to the oscilloscope programmatically, simply press on the help button on the toolbar to see both a description of the functionality and the associated SCPI command.

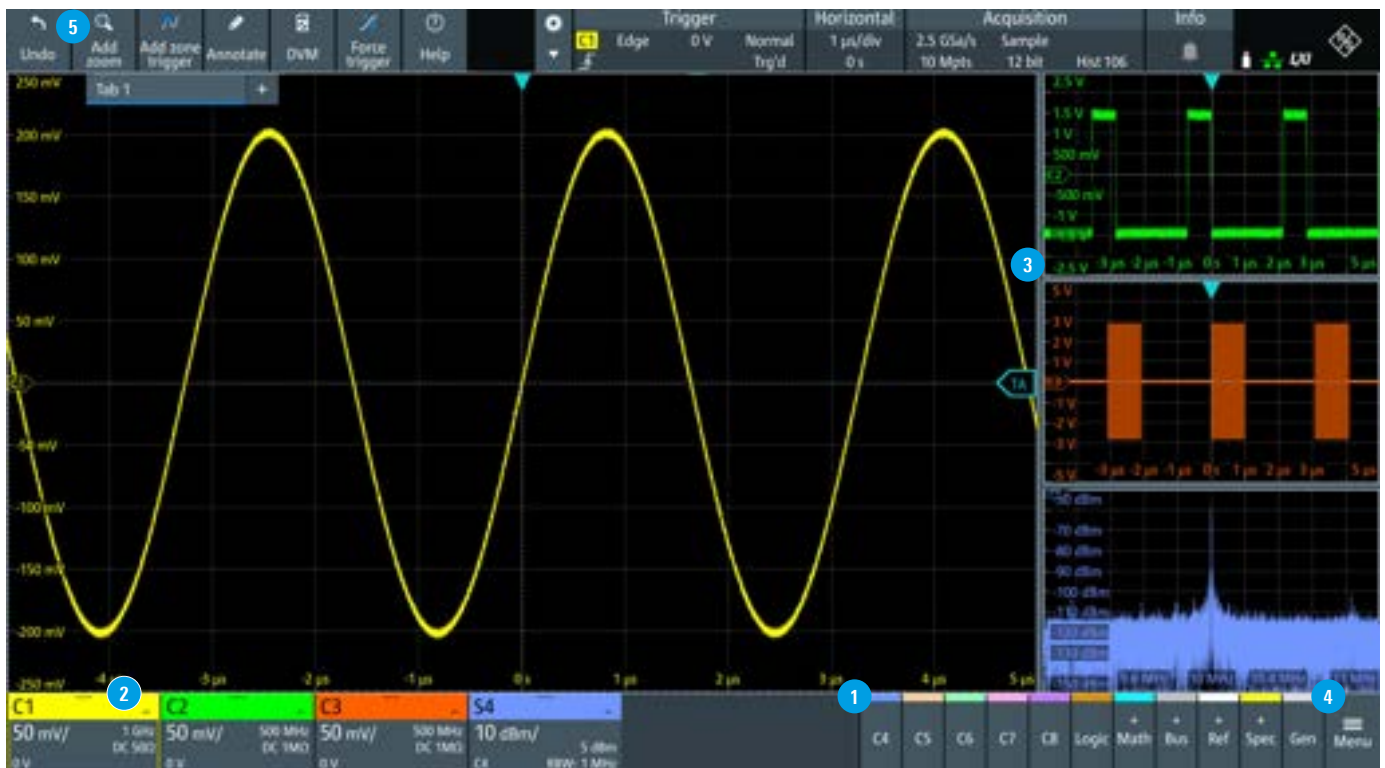

# INTUITIVE USER INTERFACE


## FAST, EASY AND SMART

- ▶ Left-hand tab maximizes waveform area
- ▶ Quickly customize your toolbar
- ▶ Fast search

### Left-hand tab maximizes waveform area


Extensive user feedback, competitive comparisons and research into the latest user interface concepts outside of test and measurement were used to develop the MXO user interface:

- ▶ Dialogs with left-hand tab design maximize waveform viewing
- ▶ Anywhere-in-box touch allow you to activate a field by touching a large target area

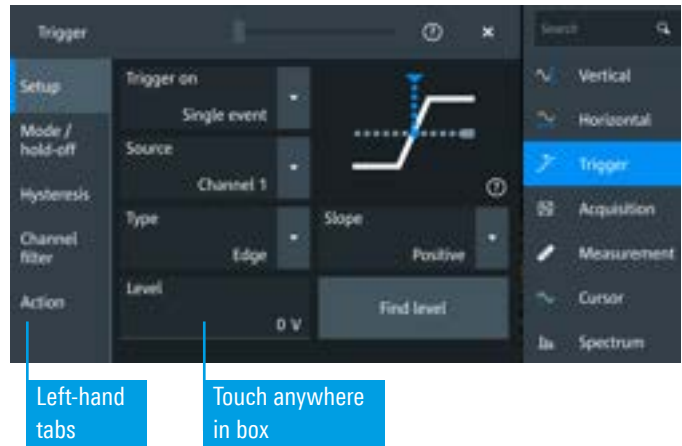


### Quickly customize your toolbar

MXO toolbar allows fast access to the toolbar. Pick from a wide range of available tool to customize which are shown.

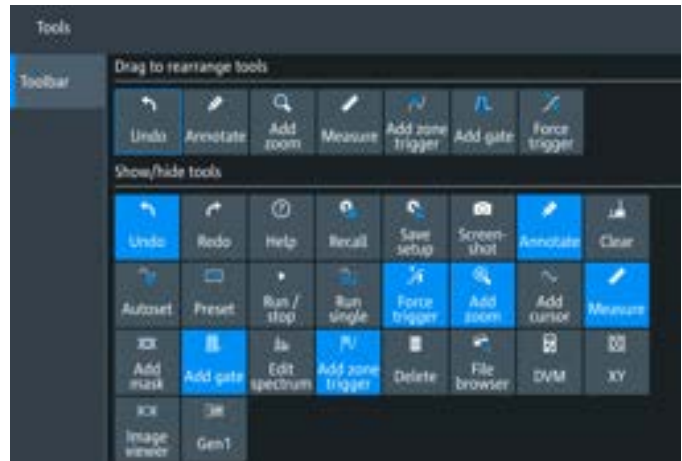

### Fast search

MXO oscilloscopes pioneered the integration of a menu search. Simply start typing the setting you are trying to find a linked list of associated dialogs appears. Simply tap on the one you want and get instant navigation.

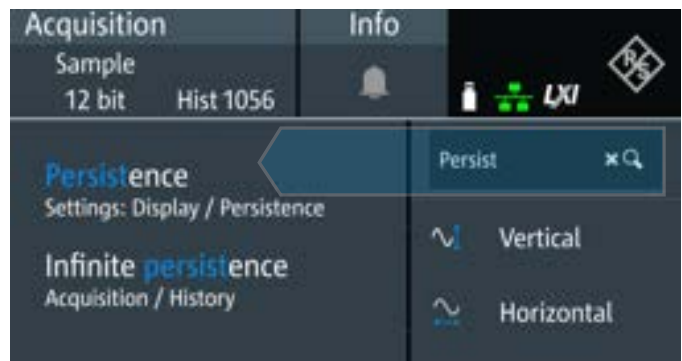

# ZONE TRIGGER

## GET INFINITE OSCILLOSCOPE TRIGGER TYPES WITH ZONE TRIGGERING

- Draw to trigger
- Trigger in the frequency domain
- Trigger on math waveforms


### Draw to trigger

Use zone triggering to quickly create triggers that are impossible using traditional triggering types. Simply draw where a signal should or should not intersect. Hardware acceleration means MXO zone trigger can trigger on up to 600 000 events/s. This is an average blind time of 1.6  $\mu$ s which is magnitudes smaller than other zone triggering blind time on other oscilloscopes.




### Trigger in the frequency domain

The Rohde&Schwarz zone trigger works in both the time domain and frequency domain or across both domains. Use zone triggering for EMI debugging to see what tones exceed a certain power level. Interestingly, zone triggering works with free run mode creating a fast 50 000 FFTs/s. With this speed quickly and easily see small details and dynamic changes that other oscilloscopes just do not show.

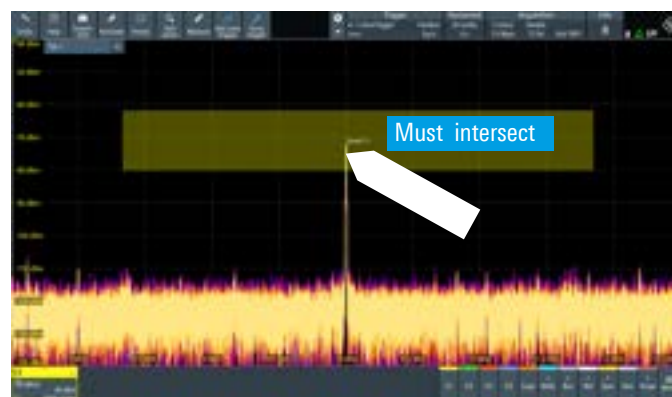

### Trigger on math waveforms


The Rohde&Schwarz zone trigger also works on math waveforms. Trigger on power (current  $\times$  voltage) or other math functions. Math triggering can be used independently or combined with zone triggering on individual sources.

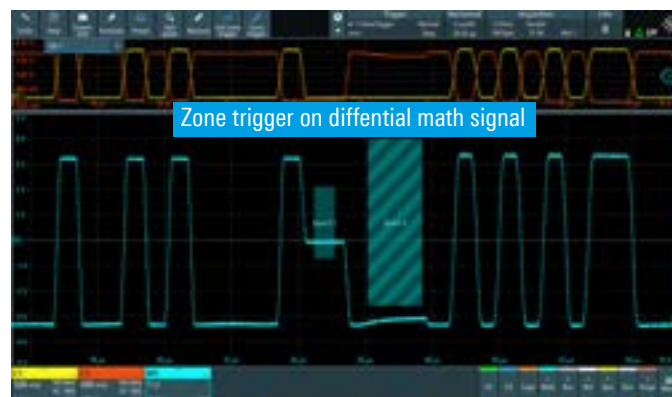

# MXO 3 Series AT A GLANCE

## 11.6" high resolution, multitouch display

- ▶ High resolution: 1920 × 1080 pixel (Full HD)
- ▶ Gesture support speeds up scaling and zooming
- ▶ Easy-to-see signal details

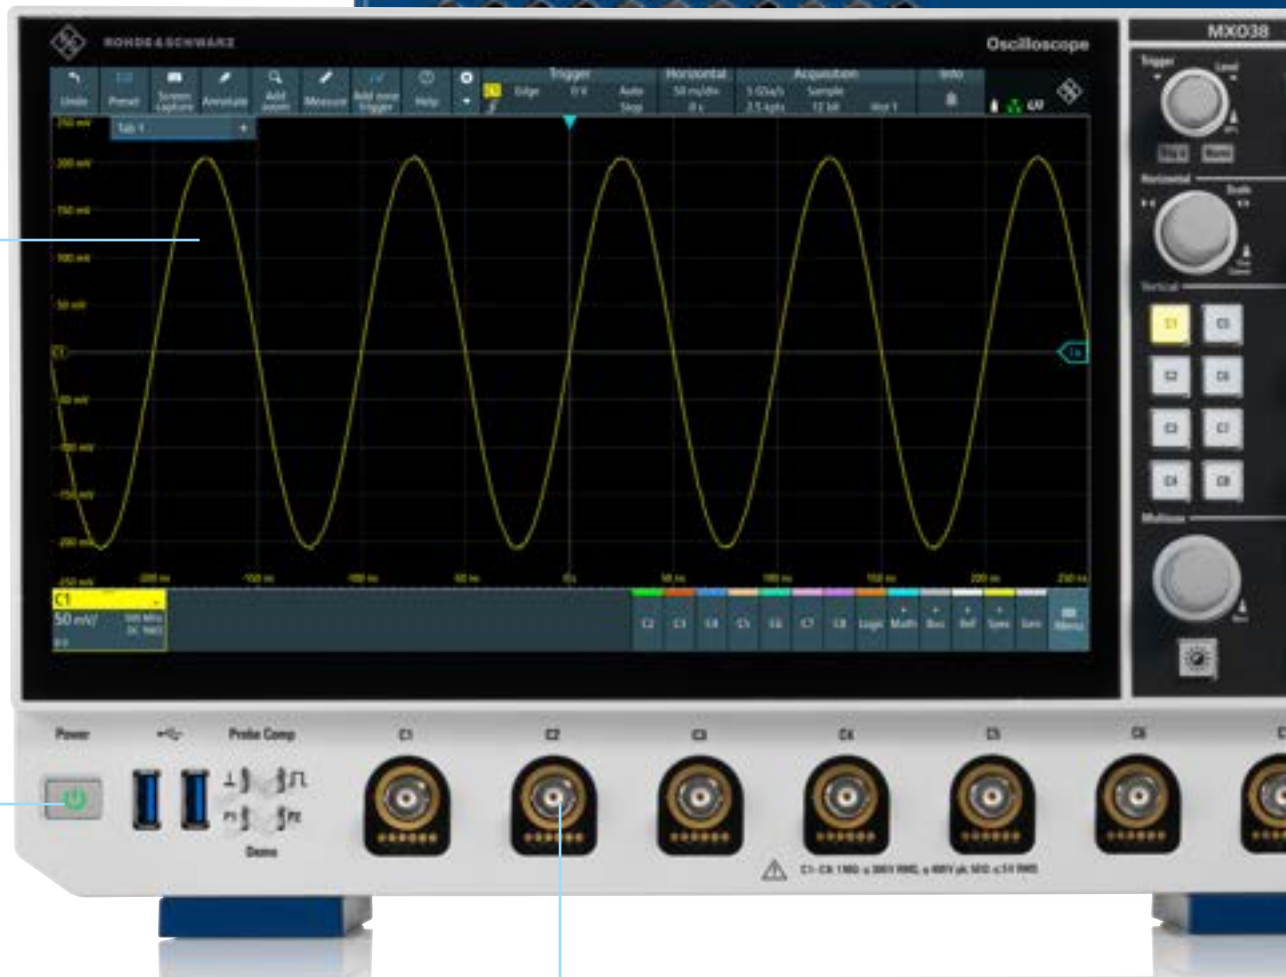

## Interfaces on front side

- ▶ Two USB 3.0 ports

## Active probe interfaces

- ▶ Support for over 30 Rohde & Schwarz current and voltage probes
- ▶ 50  $\Omega$  and 1 M $\Omega$  path enable support of an even wider range of passive and active probes, including ones from third parties

### Connectivity

- ▶ USB port
- ▶ HDMI video output
- ▶ Ethernet

### Integrated arbitrary waveform generator

- ▶ 50 MHz arbitrary waveform generator
- ▶ Wide range of waveforms and modulation types
- ▶ Easy configuration of frequency, amplitude, offset and noise

### Clear orientation with color-coded LEDs

- ▶ Color-coded keys and rotary knobs for fast correlation with signal sources
- ▶ Indication of currently selected channel
- ▶ Simple election between fine/course adjustment

### Interface on instrument side

- ▶ MSO logic probe connectors

### Intuitive front panel increases productivity

- ▶ Fast, direct access to primary instrument settings
- ▶ Quickly adjust settings with knobs and keys
- ▶ Sectional layout makes finding the right function easy



# ANALYZE SERIAL BUSES WITH PROTOCOL INNOVATION


## Dual-path protocol analysis

The MXO 3 series is a breakthrough in protocol analysis. Unlike conventional oscilloscopes, our dual-path protocol analysis revolutionizes protocol packet acquisition and decoding. Dual-path protocol analysis decouples instrument sample rates for the waveform path and automatically uses the required sample rate for the decoding path. Even with very slow sample rates or under-sampled waveforms, the protocol data is correctly decoded for alias waveforms and even longer capture times.



## Capture more data packets with deep memory


Our deep memory can capture more packets. A memory depth of up to 500 Mpoints lets the MXO 3 series capture extended time periods where cause and effect may be some distance apart. Every signal detail remains time-correlated with packet content for fast and efficient debugging.

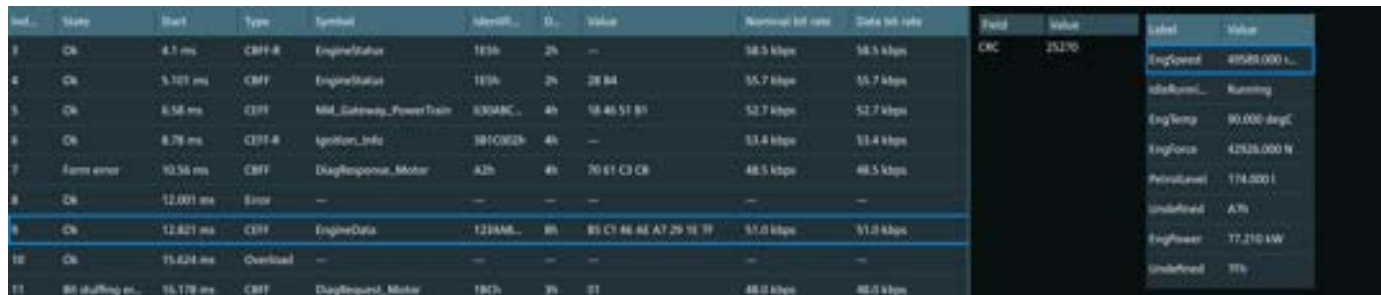

Customized display

Condense or expand the decoded layer with the vertical and horizontal control knobs or the intuitive touchscreen. Overlay the decoded bus on the captured signal and/or display it in a separate window for greater flexibility.

Unleash the power of protocol analysis innovation with MXO 3 series oscilloscopes. Experience dual-path protocol analysis, capture more packets with deep memory and customize your display to enhance your analysis workflow. Stay ahead of the curve and optimize your serial bus analysis capabilities today.

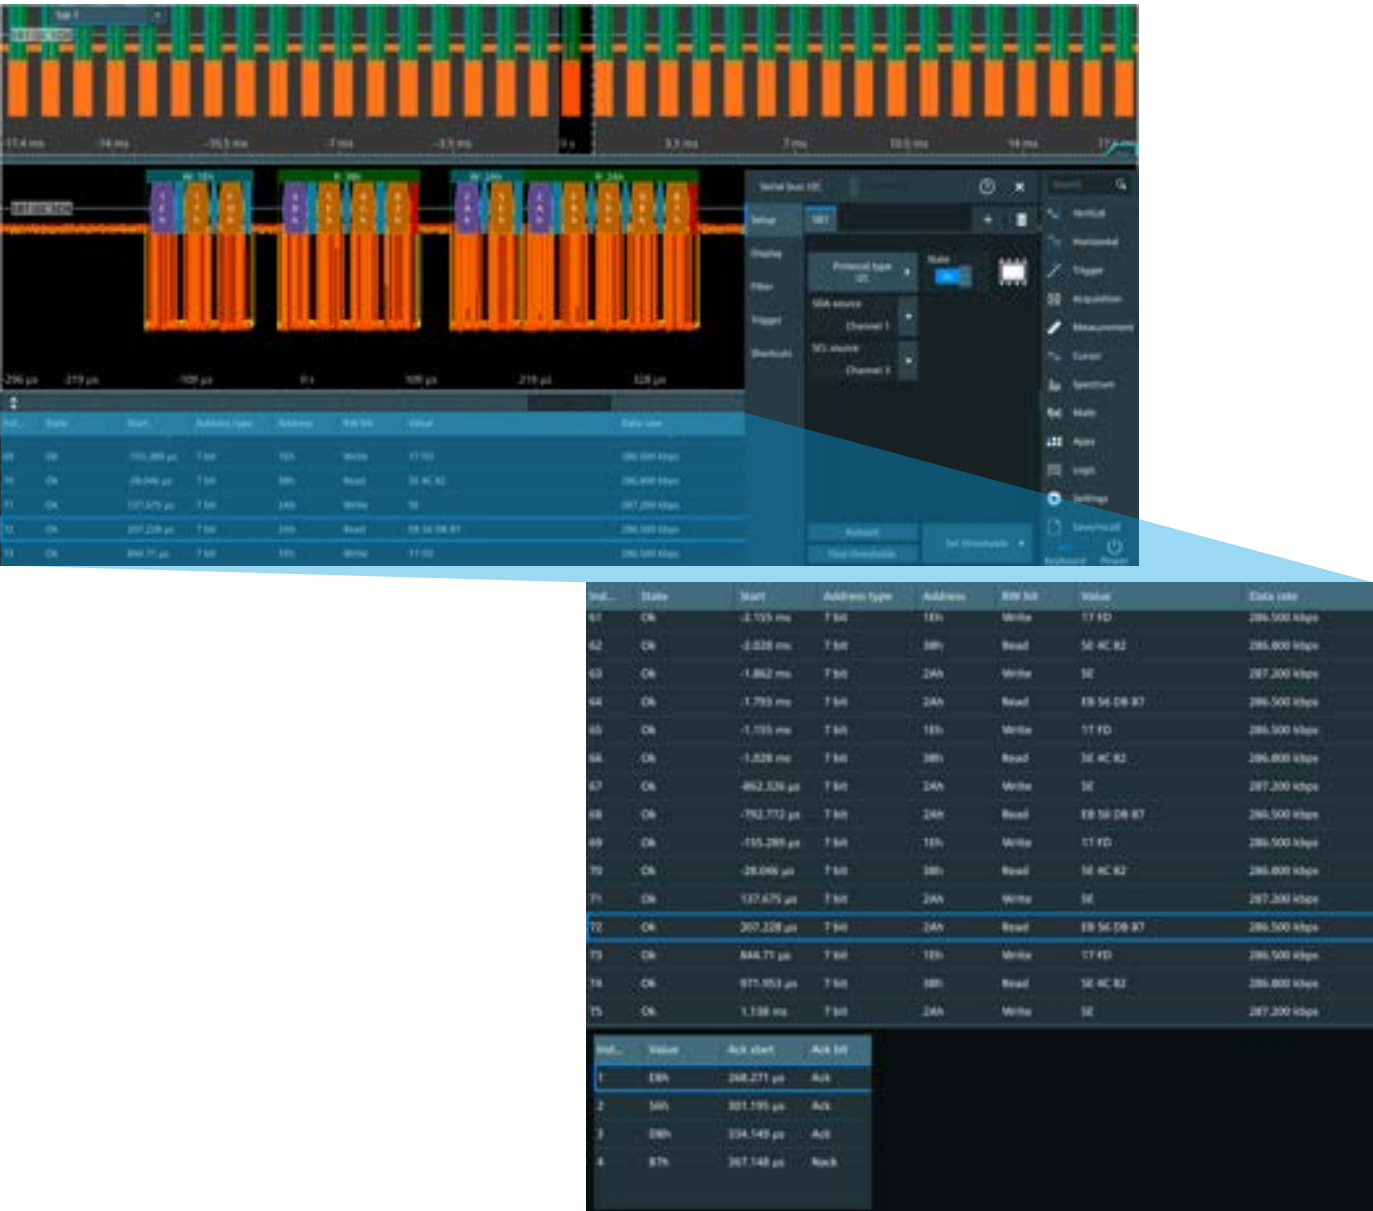

Trigger and decode packages

| Option        | Description               | Buses                                                                  |
|---------------|---------------------------|------------------------------------------------------------------------|
| R&S®MXO3-K510 | low speed serial buses    | I²C/SPI/UART/RS-232/RS-422/RS-485/NRZ clocked/NRZ unclocked/Manchester |
| R&S®MXO3-K520 | automotive buses          | CAN/CAN FD/CAN XL/LIN/SENT                                             |
| R&S®MXO3-K530 | aerospace protocols       | ARINC 429/MIL-STD-1553/SpaceWire                                       |
| R&S®MXO3-K550 | MIPI low speed protocols  | SPMI/RFFE/I³C                                                          |
| R&S®MXO3-K560 | automotive Ethernet buses | 10BASE-T1S                                                             |

# LOGIC ANALYSIS

## Built-in logic analysis

Every MXO 3 series oscilloscope comes equipped with MSO logic analysis. Just add MSO probes to get 16 digital channels. Use the MSO probes across different MXO series oscilloscopes without needing a software license.

## See precise timing relationships

The oscilloscope logic channels run at 5 Gsample/s, delivering time resolution of 200 ps. With a substantial memory depth of 125 Mpoints per channel, the sampling rate remains consistent over a large range of time base settings. Use logic triggering to isolate critical events like narrow glitches and specific pattern combinations

## Analyze low-speed serial buses

In modern devices, high-speed interfaces often coexist with low-speed control or programming buses. Digital channels with the R&S®MXO3-B1 option are tailored for precisely analyzing low-speed serial protocols such as SPI and I<sup>2</sup>C. Use analog or logic channels as sources for protocol trigger and decode with the serial bus options. Gain deep insights into serial bus events by focusing on protocol details such as start, address and data. Everything is covered from built-in logic analysis to high-resolution signal capture and low-speed serial bus analysis.



# VERSATILE INTEGRATED ARBITRARY WAVEFORM GENERATOR

## Integrated arbitrary waveform generator

Get fully a integrated 50 MHz arbitrary waveform generator with the R&S®MXO3-B6 option. The compact and configurable solution offers exceptional versatility for various applications, from hardware prototyping to classroom usage. With a sampling rate of 312.5 Msample/s and 14-bit resolution, the generator delivers reliable performance and precise control as a function or modulation generator.

## Wide range of waveforms and modulation types

Stimulate your device under test with a diverse range of waveforms. Choose from sine, square/pulse, ramp, triangle, sine cardinal (sinc), arbitrary and noise waveforms. Easily customize the frequency, amplitude, offset and noise parameters for each waveform, tailoring the stimulus to your specific needs. Get integrated arbitrary waveform generation capabilities. Take advantage of the modulation feature to explore advanced signal variations.



| R&S®MXO3-B6 arbitrary waveform generator option |                                                                                                                                                                                                                           |
|-------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Analog output                                   | 1 channel                                                                                                                                                                                                                 |
| Bandwidth                                       | 1 mHz to 50 MHz                                                                                                                                                                                                           |
| Arbitrary waveform length                       | 1 sample to 128 ksample                                                                                                                                                                                                   |
| Sample rate                                     | 312.5 Msample/s                                                                                                                                                                                                           |
| Vertical resolution                             | 14 bit                                                                                                                                                                                                                    |
| Operating modes                                 | <div>▶ function and arbitrary waveform generator (DC, sine, square/pulse, triangle, ramp, inverse ramp, sinc, arbitrary)</div> <div>▶ modulation (AM, FM, FSK, PWM)</div> <div>▶ frequency sweep</div> <div>▶ noise</div> |

# FREQUENCY RESPONSE ANALYSIS WITH BODE PLOT

## Low-frequency response analysis made easy

The R&S®MXO3-K36 frequency response analysis (FRA) option can get the job done quickly. Easily characterize the frequency response of various electronic devices, including passive filters and amplifier circuits. Precisely measure the control loop response (CLR) and power supply rejection ratio (PSRR) in switch mode power supplies.

The FRA option leverages the built-in oscilloscope waveform generator to create stimulus signals from 10 mHz to 100 MHz. By measuring the stimulus signal to output signal ratio for the device under test at each test frequency, the oscilloscope accurately plots logarithmic gain and phase for valuable insights into device behavior.

## Enhanced features and functionality

### Amplitude profile for improved SNR

The R&S®MXO3-K36 has user-configurable profiles of the amplitude output level from the generator. The signal-to-noise ratio (SNR) is optimized at different frequency ranges, ensuring high-quality CLR and PSRR measurements.

### Improved resolution and markers support

Adjust resolution and sweep time to your specific requirements with user-configurable points per decade. Markers on the traces conveniently correlate with table entries, making it easy to determine phase and gain margin with the auto placement function.

### Parallel display of time domain

Gain deeper insights by monitoring the time domain alongside the frequency domain. Identify distortion and errors in measurements caused by the injected signal, which may be difficult to detect with just the Bode plot.



### Measurement result table

Quickly access comprehensive information about each measured point, including frequency, gain and phase shift with the measurement result table. Save screenshots, table results – or both – to a USB device for reporting and efficient documentation.

### Calibration and setup

FRA calibration can help optimize measurement setups for greater accuracy with passive probes. The calibration data can be saved for future setup for repetitive measurements.

## Broad probe portfolio for accurate characterization


Choose the right probes for accurate CLR and PSRR characterization. The low-noise R&S®RT-ZP1X 38 MHz bandwidth 1:1 passive probe is recommended for the MXO 3 series oscilloscope. The probe minimizes attenuation errors and delivers the best SNR, even at low peak-to-peak amplitudes of  $V_{in}$  and  $V_{out}$ .

| R&S®MXO3-K36 frequency response analysis option           |                                                         |
|-----------------------------------------------------------|---------------------------------------------------------|
| Note: R&S®MXO3-B6 is a prerequisite for FRA applications. |                                                         |
| Frequency range                                           | 10 mHz to 50 MHz                                        |
| Amplitude mode                                            | fixed or amplitude profile                              |
| Amplitude level                                           | 10 mV to 10 V into high Z; 5 mV to 5 V into 50 $\Omega$ |
| Test points                                               | 10 points to 500 points per decade                      |

# XY MODE, MASK TEST AND DIGITAL VOLTMETER


## Hardware-accelerated XY mode

Use XY mode to quickly see the graphical relationship between two signals. Hardware-accelerated XY means you get up to 600 000 plots/s, similar or faster than analog oscilloscopes. Use XY mode to plot Lissajous and IV curves. Select any channel, math or track signals as sources to plot. Looking for an entertaining hobby? Check out oscilloscope music and oscilloscope art using XY mode and try with an MXO 3.

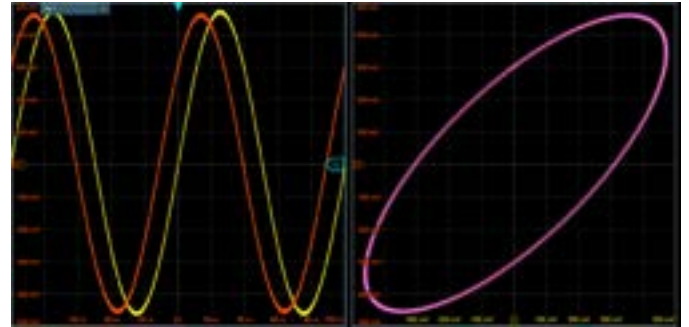

## Fastest mask test

Quickly determine how well your signals conform to physical layer requirements. The instrument provides a statistical record of all waveforms that pass and/or fail the mask test. Hardware-accelerated mask testing tests up to the fastest in the industry. Mask testing support up to 4 million mask tests/s. Mask testing supports single-channel and multichannel testing.

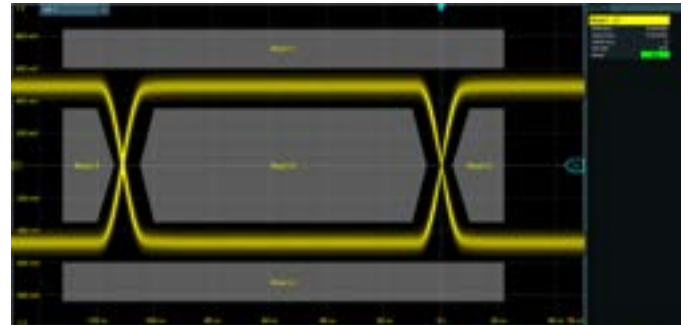

## Digital voltmeter (DVM)

Looking for a quick check of DC values? The digital voltmeter updates even when the associated channel is turned off. Dock the results on either side or at the bottom of the display. Each per-channel DVM shares a global configurable measurement bandwidth and time period.



# POWER ANALYSIS MADE EASY


## Characterizing input power quality

The numerous calculations required to determine the real, apparent and reactive power can make measuring AC circuit power quality a tedious affair. An oscilloscope provides a clear view of the waveform characteristics between voltage and current and lets engineers quickly identify and resolve problems. The R&S®MXO3-K31 enables power quality measurements and provides concurrent analysis of three pairs of voltage and current sources.



## Harmonic current analysis in line with standards

AC power supplies must meet different standards for limiting the harmonic current. Identifying distortion from harmonic content can be tedious without the right tool. The R&S®MXO3-K31 includes current harmonic analysis to help test in line with all common standards. You can setup three concurrent harmonic measurements.

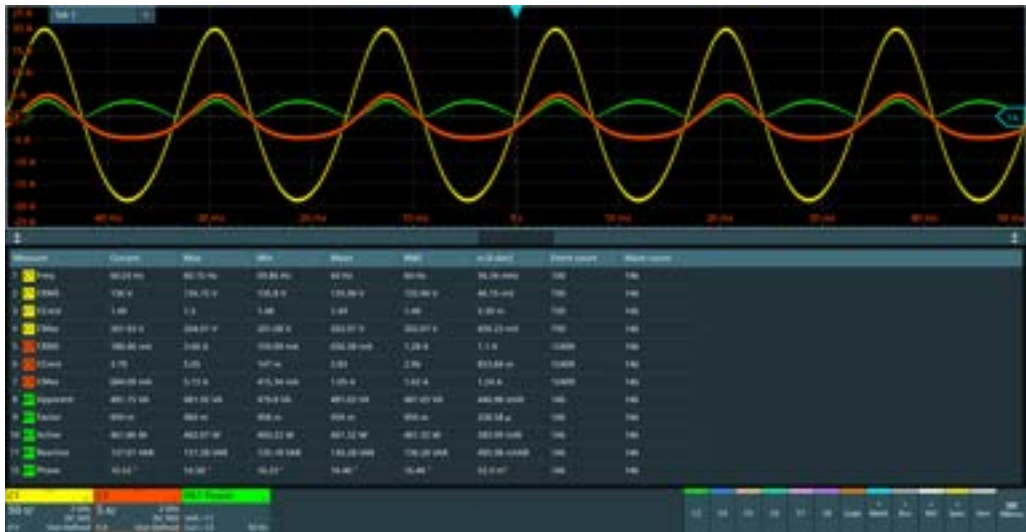

| R&S®MXO3-K31 power analysis option               |                                                                                                             |
|--------------------------------------------------|-------------------------------------------------------------------------------------------------------------|
| Power quality                                    | active, apparent and reactive power, crest factor and phase angle                                           |
| Current harmonics                                | THD RMS and fundamental functions, in line with EN6100-3-2 classes A, B, C, D, MIL-STD-1399 and RTCA DO-160 |
| Switching loss                                   | automated measurement for power devices identifying turn on, turn-off, conduction and non-conduction region |
| Turn on/off time                                 | measure time taken for device to transition from their on/off state to another                              |
| More analysis functions will be added in future. |                                                                                                             |

# CONVENIENT ACCESS

## EFFICIENT INSTRUMENT INFORMATION

### Save results fast

Save waveforms in various file formats or download them via Ethernet or USB for later analysis with MATLAB or Excel. Continuous acquisition, analysis and transmission to a PC is possible via Ethernet.

### Documentation at the press of a button

Document your measurements quickly:

- ▶ Screenshots with waveforms and results
- ▶ Reports with screenshots and instrument setup
- ▶ Clear grid annotations for easy-to-read signal characteristics
- ▶ Color-coded annotation highlights signal anomalies
- ▶ Save waveforms and measurement results in binary, XML or CSV format available for signal analysis on a PC



### Remote control access: anytime, anywhere

Remotely control the oscilloscope and view its display on a PC or mobile device with the same user interface as on the instrument. All oscilloscope functions are also available remotely via Ethernet or USB-TMC interface. LabVIEW, VXI and Python instrument drivers are also available.

### Language selection

The MXO 3 series user interface supports multiple languages. Switch languages in just a few seconds while the instrument is running. Available languages include English, German, Japanese, Korean, Chinese and Spanish. Searches will also work in different languages.



### WebDAV support

You can easily access instrument data through the web distributed authoring and versioning (WebDAV) protocol to share, copy, move and edit files on the instrument with a web server. A WebDAV client can be a file transfer client or file manager such as Dolphin or Nemo in Linux, Finder in Mac OS X and File Explorer in Windows. All can access the device through IP addresses or device hostnames.

# FIRMWARE UPDATES AND SECURITY


## Rohde & Schwarz closed-system Linux OS

MXO incorporates a closed Linux operating system for more equipment security. Created and maintained by Rohde & Schwarz, the operating system has been hardened by the company and is used across a wide range of Rohde & Schwarz instruments. No external applications nor scripts can execute enabling a highly security that works well for corporate IT teams.




## Regular firmware updates that are free

Regular firmware updates add new functionality to MXO 3 oscilloscopes. Download the latest firmware version at [www.rohde-schwarz.com](http://www.rohde-schwarz.com). Use a USB storage device or LAN connection for installation.




## Software based upgrades

Easy-to-install software licenses upgrade memory, turn on additional serial bus trigger and decode options, enable the generator and digital channels and the frequency response analysis (Bode plot). Upgrade bandwidth via a software license.



## Secure erase for media sanitization

Working in a high-security environment? The MXO 3 includes media sanitization procedures in line with NIST Special Publication 800-88: Guidelines for Media Sanitization. Find instructions in the MXO 3 Instrument Security Procedures document.



# KEY APPLICATIONS


## Power electronics

Combine MXO 3 with current probes, high voltage probe and/or optically isolated probes for power electronic measurements. With HD mode noise suppression, rich math and 8-channel models, the MXO 3 excels in power electronic measurements.



## PMIC, power integrity and sequencing

With its industry-best high offset, low noise and extensive time and frequency domain capabilities, MXO 3 excels in a variety of power measurements. Combine with an R&S®RT-ZPR power rail probe for excellent power integrity measurements. Use with passive probes for power sequencing testing. Use for voltage regulator and other on-board power tests.

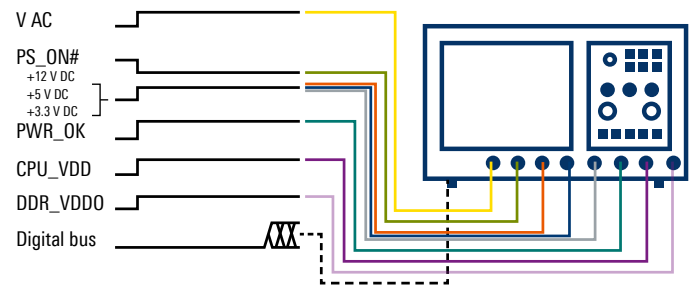

## Embedded hardware testing

With its small form and big capabilities, MXO 3 excels at a variety of embedded hardware development test needs. This includes board bring up, hardware integration testing and software hardware integration tasks. MXO 3 provides robust capabilities for embedded hardware manufacturing and troubleshooting and repair.




# QUIET AND SUSTAINABLE PERFORMANCE

## KEEP POWER CONSUMPTION IN CHECK

### Reduce power consumption

Reducing power consumption is important now and in the future. The electrical power used over the lifecycle of an electronic device can make up 90% of its CO<sub>2</sub> footprint. Minimizing power consumption reduces an oscilloscope's environmental impact. Rising energy prices make reducing power consumption essential to long-term affordability.

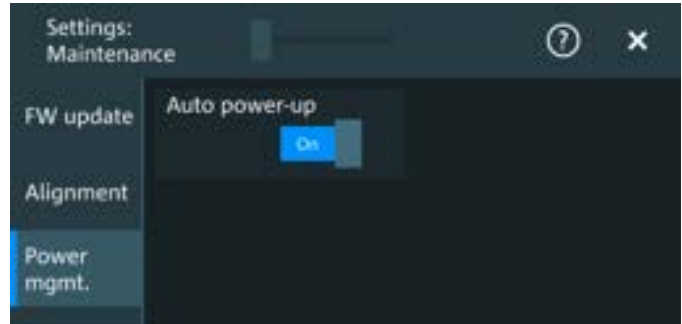


### Remotely turn on/off your Rohde & Schwarz oscilloscope

When working remotely, keeping the unit powered in the lab 24/7 can waste a lot of energy. While remote IP controlled socket power supplies are possible, most electronic equipment will only power up to a standby state with the main power switched on. The MXO 3 provides a convenient feature that allows it to be turned on automatically as soon as electric power is switched on. By simply connecting it into a smart socket system, you can enable the option of remotely turning on the device only when you intend to use it, while keeping it powered off at other times.



### Peace and quiet

Need a quiet space? Do loud instruments disturb others? Loud equipment? With a very low operating audible noise level, the MXO 3 series sounds like a soft whisper. You might not even notice that it's turned on.

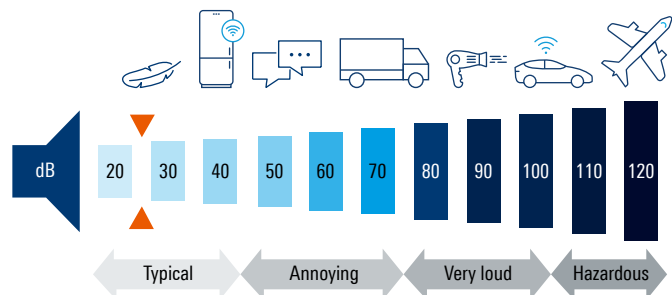

# EXTENSIVE PROBE PORTFOLIO

## THE RIGHT PROBE FOR THE YOUR MEASUREMENT

MXO 3 oscilloscope comes standard with one 700 MHz passive probe for each channel. Choose from a comprehensive portfolio of high-quality passive and active probes from Rohde&Schwarz for other probe needs



### Complete portfolio for power measurements

The portfolio of dedicated probes for power measurements includes active and passive probes for different voltage and current ranges – from  $\mu\text{A}$  to kA and from  $\mu\text{V}$  to kV. Dedicated power rail probes detect even small and sporadic distortions on DC power rails. High voltage differential probes allow isolated floating measurements.

### High voltage differential probes

The R&S®RT-ZHD series high voltage differential probes provide an excellent common mode rejection ratio (CMRR) for a broad frequency with 200 MHz bandwidth and can safely measure up to 6000 V peak voltage. Low noise makes it an ideal probe for switching power analysis with ground reference.

### Micro button and R&S®ProbeMeter for easy control

Our active probes feature a micro button, cleverly located on the probe tip. You can assign various functions to the micro button, such as run/stop, autoset and adjust offset to directly control the oscilloscope from the probe.

Most Rohde&Schwarz active probes come with the R&S®ProbeMeter that takes precision to a whole new level. The probes impressive accuracy of 0.1% ensures reliable and trustworthy measurements. When Rohde&Schwarz designs a probe, thermal drifts, filters and usability are usually the best overall. Make measurements a breeze and get precise results with confidence.



With high CMRR, R&S®RT-ZISO isolated probing excels for WBG and faster IGBT switch node testing applications.

## Rohde & Schwarz has a comprehensive probe portfolio to meet every probing need.

► For more information, see product brochure "Probes and accessories for Rohde & Schwarz oscilloscopes" (PD 3606.8866.12)



### Passive probes included as standard (38 MHz to 700 MHz)

R&S®RT-ZP11, R&S®RT-ZP1X

Passive probes come standard with every Rohde & Schwarz oscilloscope. They are low cost, general purpose probes for a broad range of applications.



### Passive broadband probes (8 GHz)

R&S®RT-ZZ80

These are an economical yet powerful alternative to active probes for measuring high speed signals on low impedance lines. They feature extremely low input capacitance, very low noise and high linearity.



### Active single-ended broadband probes (1 GHz to 6 GHz)

R&S®RT-ZS10E, R&S®RT-ZS10, R&S®RT-ZS20,  
R&S®RT-ZS30, R&S®RT-ZS60


A very high dynamic range and exceptionally low offset and gain errors combined with the right accessories make these probes ideal for Rohde & Schwarz oscilloscopes.



### Active differential broadband probes (1 GHz to 4.5 GHz)

R&S®RT-ZD10, R&S®RT-ZD20, R&S®RT-ZD30,  
R&S®RT-ZD40 and R&S®RT-ZA15 external  
attenuator

A flat frequency response and high input impedance with low input capacitance permit precise measurements on differential signals while maintaining a low load on the DUT. The CMMR for the entire probe bandwidth has high interference immunity.

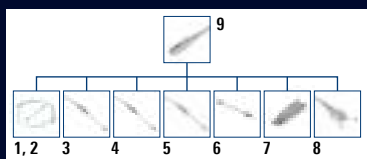

### Modular broadband probes (1.5 GHz to 16 GHz)

R&S®RT-ZM15, R&S®RT-ZM30,  
R&S®RT-ZM60, R&S®RT-ZM90,  
R&S®RT-ZM130,  
R&S®RT-ZM160

Current probing requirements need a technically sophisticated, yet easy-to-handle solution. The various probing solutions meet the demands for high probe bandwidths and dynamic range along with the need for low capacitive load.

1 R&S®RT-ZMA50; 2 R&S®RT-ZMA11; 3 R&S®RT-ZMA10; 4 R&S®RT-ZMA12;  
5 R&S®RT-ZMA15; 6 R&S®RT-ZMA14; 7 R&S®RT-ZMA30; 8 R&S®RT-ZMA40;  
9 R&S®RT-ZM



### Power rail probes (2 GHz and 4 GHz)

R&S®RT-ZPR20, R&S®RT-ZPR40

Wide bandwidth, high sensitivity, very low noise and extra-large DC offset make these probes an excellent tool for characterizing power rails. The integrated high-precision DC voltmeter (R&S®ProbeMeter) provides instantaneous DC voltage readout.



### High voltage probes (100 MHz to 400 MHz; ±750 V to ±6000 V)

R&S®RT-ZH03, R&S®RT-ZH10, R&S®RT-ZH11,  
R&S®RT-ZHD07, R&S®RT-ZHD15,  
R&S®RT-ZHD16, R&S®RT-ZHD60

The Rohde & Schwarz portfolio of high voltage probes includes passive single-ended and active differential probes for up to 6000 V (peak). Different models allow measurements in up to CAT IV environments. Differential probes provide exceptional common mode rejection over a wide bandwidth.



### Current probes (20 kHz to 120 MHz; ±1 mA to ±2000 A)

R&S®RT-ZC02, R&S®RT-ZC03, R&S®RT-ZC05B,  
R&S®RT-ZC10, R&S®RT-ZC10B, R&S®RT-ZC15B,  
R&S®RT-ZC20, R&S®RT-ZC20B, R&S®RT-ZC30,  
R&S®RT-ZC31

Rohde & Schwarz current probes enable accurate, non-intrusive measurements of DC and AC currents. Different models are available to measure currents in the range from 1 mA to 2000 A with a bandwidth of up to 120 MHz. Current probes are available with the Rohde & Schwarz probe interface or a BNC connector for an external power supply.



### EMC near-field probes (30 MHz to 3 GHz)


R&S®HZ-15, R&S®HZ-17

Powerful E and H near-field probes for the frequency range from 30 MHz to 3 GHz with an optional preamplifier expand the application range of the MXO 5 series oscilloscope to include EMI debugging.

# ACCESSORIES AND RACKMOUNT

## Safe transport and easy rack mounting

An extensive selection of storage and transportation accessories means the MXO 3 series oscilloscopes are always fully protected and easy to transport. The rackmount kit allows easy installation of the oscilloscope in integrated environments.

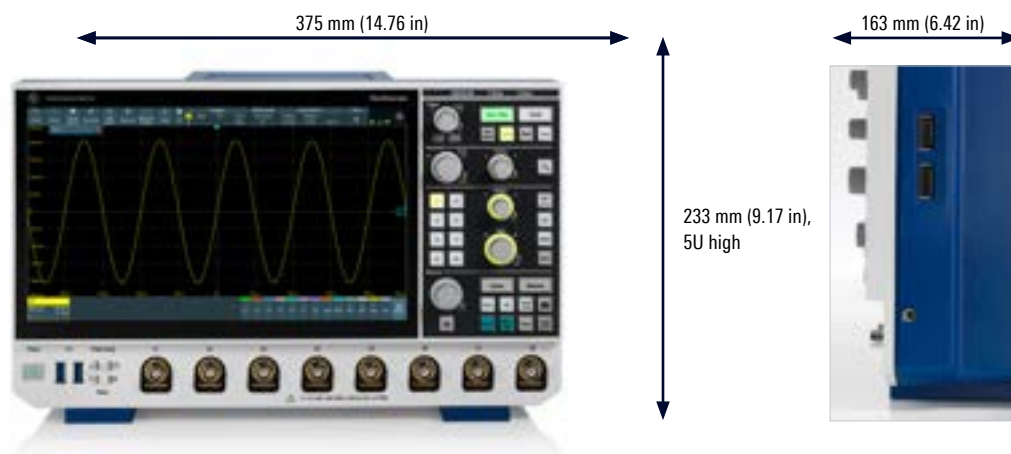

# THE MXO SERIES



## FAST AND PRECISE

# OUR OSCILLOSCOPE PORTFOLIO



# OSCILLOSCOPE PORTFOLIO



|                                                           | R&S®RTH1000                                                                                                | R&S®RTC1000                                                                       | R&S®RTB 2                                                                                | MXO 3                                                                                                                                                                                             |
|-----------------------------------------------------------|------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Vertical system</b>                                    |                                                                                                            |                                                                                   |                                                                                          |                                                                                                                                                                                                   |
| Bandwidth <sup>1)</sup>                                   | 60/100/200/350/500 MHz                                                                                     | 50/70/100/200/300 MHz                                                             | 70/100/200/300 MHz                                                                       | 100/200/350/500 MHz/1 GHz                                                                                                                                                                         |
| Number of channels                                        | 2 plus DMM/4                                                                                               | 2                                                                                 | 2/4                                                                                      | 4/8                                                                                                                                                                                               |
| Vertical resolution;<br>system architecture               | 10 bit; 16 bit                                                                                             | 8 bit; 16 bit                                                                     | 10 bit; 16 bit                                                                           | 12 bit; 18 bit                                                                                                                                                                                    |
| V/div, 1 MΩ                                               | 2 mV to 100 V                                                                                              | 1 mV to 10 V                                                                      | 1 mV to 5 V                                                                              | 1 mV to 10 V                                                                                                                                                                                      |
| V/div, 50 Ω                                               | –                                                                                                          |                                                                                   |                                                                                          | 1 mV to 1 V                                                                                                                                                                                       |
| Digital channels                                          | 8                                                                                                          | 8                                                                                 | 16                                                                                       | 16                                                                                                                                                                                                |
| <b>Horizontal system</b>                                  |                                                                                                            |                                                                                   |                                                                                          |                                                                                                                                                                                                   |
| Sampling rate per channel<br>(in Gsample/s)               | 1.25 (4-channel model);<br>2.5 (2-channel model);<br>5 (all channels interleaved)                          | 1; 2 (2 channels interleaved)                                                     | 1.25; 2.5 (2 channels<br>interleaved)                                                    | 2.5; 5 (2 channels interleaved)                                                                                                                                                                   |
| Maximum memory<br>(per channel; 1 channel<br>active)      | 125 kpoints<br>(4-channel model);<br>250 kpoints<br>(2-channel model);<br>500 kpoints                      | 1 Mpoint; 2 Mpoints                                                               | 10 Mpoints; 20 Mpoints                                                                   | standard: 125 Mpoints;<br>max. upgrade: 500 Mpoints <sup>2)</sup>                                                                                                                                 |
| Segmented memory                                          | standard, 50 Mpoints                                                                                       | –                                                                                 | standard, 160 Mpoints                                                                    | standard: 10 000 segments;<br>option: 1 000 000 segments                                                                                                                                          |
| Acquisition rate<br>(in waveforms/s)                      | 50 000                                                                                                     | 10 000                                                                            | 50 000 (300 000 in fast seg-<br>mented memory mode)                                      | > 4 500 000 on 4 channels                                                                                                                                                                         |
| <b>Trigger</b>                                            |                                                                                                            |                                                                                   |                                                                                          |                                                                                                                                                                                                   |
| Types                                                     | digital                                                                                                    | analog                                                                            | analog                                                                                   | advanced (includes zone trigger),<br>digital trigger (15 trigger types)                                                                                                                           |
| Sensitivity                                               | –                                                                                                          | –                                                                                 | at 1 mV/div: > 2 div                                                                     | 0.0001 div, across full bandwidth,<br>user controllable                                                                                                                                           |
| <b>Analysis</b>                                           |                                                                                                            |                                                                                   |                                                                                          |                                                                                                                                                                                                   |
| Mask test                                                 | tolerance mask                                                                                             | tolerance mask                                                                    | tolerance mask                                                                           | user configurable, hardware based                                                                                                                                                                 |
| Mathematics                                               | elementary                                                                                                 | elementary                                                                        | basic (math on math)                                                                     | advanced (formula editor)                                                                                                                                                                         |
| Serial protocols triggering<br>and decoding <sup>1)</sup> | I <sup>2</sup> C, SPI, UART/RS-232/RS-422/<br>RS-485, CAN, LIN, CAN FD,<br>SENT                            | I <sup>2</sup> C, SPI, UART/RS-232/RS-422/<br>RS-485, CAN, LIN                    | I <sup>2</sup> C, SPI, UART/RS-232/RS-422/<br>RS-485, CAN, LIN                           | I <sup>2</sup> C, SPI, UART/RS-232/RS-422/RS-485,<br>CAN, CAN FD, CAN XL, LIN, ARINC 429,<br>MIL-STD-1553, SPMI, 10BASE-T1S, QUAD-SPI,<br>SENT, RFFE I <sup>2</sup> C, NRZ, SpaceWire, Manchester |
| Applications <sup>1), 2)</sup>                            | high-resolution frequency<br>counter, advanced spectrum<br>analysis, harmonics analysis,<br>user scripting | digital voltmeter (DVM), com-<br>ponent tester, fast Fourier trans-<br>form (FFT) | digital voltmeter (DVM),<br>fast Fourier transform (FFT),<br>frequency response analysis | power, digital voltmeter (DVM),<br>frequency response analysis                                                                                                                                    |
| Compliance testing <sup>1), 2)</sup>                      | –                                                                                                          | –                                                                                 | –                                                                                        | –                                                                                                                                                                                                 |
| <b>Display and operation</b>                              |                                                                                                            |                                                                                   |                                                                                          |                                                                                                                                                                                                   |
| Size and resolution                                       | 7" touchscreen,<br>800 × 480 pixel                                                                         | 6.5",<br>640 × 480 pixel                                                          | 10.1" touchscreen,<br>1280 × 800 pixel                                                   | 11.6" touchscreen,<br>1920 × 1080 pixel (Full HD)                                                                                                                                                 |
| <b>General data</b>                                       |                                                                                                            |                                                                                   |                                                                                          |                                                                                                                                                                                                   |
| Dimensions in mm<br>(W × H × D)                           | 201 × 293 × 74                                                                                             | 285 × 175 × 140                                                                   | 390 × 220 × 152                                                                          | 375 × 233 × 163                                                                                                                                                                                   |
| Weight in kg                                              | 2.4                                                                                                        | 1.7                                                                               | 2.5                                                                                      | 4                                                                                                                                                                                                 |
| Battery                                                   | lithium-ion, > 4 h                                                                                         | –                                                                                 | –                                                                                        | –                                                                                                                                                                                                 |

<sup>1)</sup> Upgradeable.

<sup>2)</sup> Requires an option.



| MXO 4                                                                                                                                                                         | MXO 5/MXO 5C                                                                                                                                                                              | R&S®RT06                                                                                                                                                                                                                                                                                                                                      | R&S®RTP                                                                                                                                                                                                                                                                                              |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 200/350/500 MHz/1/1.5 GHz                                                                                                                                                     | 100/200/350/500 MHz/1/2 GHz                                                                                                                                                               | 600 MHz/1/2/3/4/6 GHz                                                                                                                                                                                                                                                                                                                         | 4/6/8/13/16 GHz                                                                                                                                                                                                                                                                                      |
| 4                                                                                                                                                                             | 4/8                                                                                                                                                                                       | 4                                                                                                                                                                                                                                                                                                                                             | 4                                                                                                                                                                                                                                                                                                    |
| 12 bit; 18 bit                                                                                                                                                                | 12 bit; 18 bit                                                                                                                                                                            | 8 bit; 16 bit                                                                                                                                                                                                                                                                                                                                 | 8 bit; 16 bit                                                                                                                                                                                                                                                                                        |
| 500 $\mu$ V to 10 V                                                                                                                                                           | 500 $\mu$ V to 10 V                                                                                                                                                                       | 1 mV to 10 V (HD mode: 500 $\mu$ V to 10 V)                                                                                                                                                                                                                                                                                                   |                                                                                                                                                                                                                                                                                                      |
| 500 $\mu$ V to 1 V                                                                                                                                                            | 500 $\mu$ V to 1 V                                                                                                                                                                        | 1 mV to 1 V (HD mode: 500 $\mu$ V to 1 V)                                                                                                                                                                                                                                                                                                     | 2 mV to 1 V (HD mode: 1 mV to 1 V)                                                                                                                                                                                                                                                                   |
| 16                                                                                                                                                                            | 16                                                                                                                                                                                        | 16                                                                                                                                                                                                                                                                                                                                            | 16                                                                                                                                                                                                                                                                                                   |
| 2.5; 5 (2 channels interleaved)                                                                                                                                               | 5 on 4 channels; 2.5 on 8 channels (2 channels interleaved)                                                                                                                               | 10; 20 (2 channels interleaved in 4 GHz and 6 GHz model)                                                                                                                                                                                                                                                                                      | 20; 40 (2 channels interleaved)                                                                                                                                                                                                                                                                      |
| standard: 400 Mpoints;<br>max. upgrade: 800 Mpoints <sup>2)</sup>                                                                                                             | standard: 500 Mpoints<br>max. upgrade: 1 Gpoint <sup>2)</sup>                                                                                                                             | standard: 200 Mpoints/800 Mpoints;<br>max. upgrade: 1 Gpoint/2 Gpoints                                                                                                                                                                                                                                                                        | standard: 100 Mpoints/400 Mpoints;<br>max. upgrade: 3 Gpoints                                                                                                                                                                                                                                        |
| standard: 10000 segments;<br>option: 1000000 segments                                                                                                                         | standard: 10000 segments;<br>option: 1000000 segments                                                                                                                                     | standard                                                                                                                                                                                                                                                                                                                                      | standard                                                                                                                                                                                                                                                                                             |
| > 4500000                                                                                                                                                                     | > 4500000 on 4 channels                                                                                                                                                                   | 1000000 (2500000 in ultra-segmented memory mode)                                                                                                                                                                                                                                                                                              | 750000 (> 3000000 in ultra-segmented memory mode)                                                                                                                                                                                                                                                    |
| advanced (includes zone trigger),<br>digital trigger (15 trigger types)                                                                                                       | advanced (includes zone trigger),<br>digital trigger (15 trigger types)                                                                                                                   | advanced (includes zone trigger), digital trigger (15 trigger types), high speed serial pattern trigger including 5 Gbps clock data recovery (CDR) <sup>2)</sup>                                                                                                                                                                              | advanced (includes zone trigger), digital trigger (14 trigger types) with real-time deembedding <sup>2)</sup> , high speed serial pattern trigger including 8/16 Gbps clock data recovery (CDR) <sup>2)</sup>                                                                                        |
| 0.0001 div, across full bandwidth, user controllable                                                                                                                          | 0.0001 div, across full bandwidth, user controllable                                                                                                                                      | 0.0001 div, across full bandwidth, user controllable                                                                                                                                                                                                                                                                                          | 0.0001 div, across full bandwidth, user controllable                                                                                                                                                                                                                                                 |
| user configurable, hardware based<br>advanced (formula editor)                                                                                                                | user configurable, hardware based<br>advanced (formula editor)                                                                                                                            | user configurable, hardware based<br>advanced (formula editor, Python interface)                                                                                                                                                                                                                                                              | user configurable, hardware based<br>advanced (formula editor, Python interface)                                                                                                                                                                                                                     |
| I <sup>2</sup> C, SPI, UART/RS-232/RS-422/RS-485, CAN, CAN FD, CAN XL, LIN, ARINC 429, MIL-STD-1553, SPMI, 10BASE-T1S, QUAD-SPI, SENT, RFFE, I <sup>3</sup> C, NRZ, SpaceWire | I <sup>2</sup> C, SPI, UART/RS-232/RS-422/RS-485, CAN, CAN FD, CAN XL, LIN, ARINC 429, MIL-STD-1553, SPMI, 10BASE-T1S, 100BASE-T1, QUAD-SPI, SENT, RFFE, I <sup>3</sup> C, NRZ, SpaceWire | I <sup>2</sup> C, SPI, UART/RS-232/RS-422/RS-485, CAN, LIN, I <sup>2</sup> S, MIL-STD-1553, ARINC 429, FlexRay, CAN FD, MIPI RFFE, USB 2.0/HSIC, MDIO, 8b10b, Ethernet, Manchester, NRZ, SENT, MIPI D-PHY, SpaceWire, MIPI M-PHY/UniPro, CXPI, USB 3.1 Gen 1, USB-SSIC, PCIe 1.1/2.0, USB Power Delivery, Automotive Ethernet 100/1000BASE-T1 | I <sup>2</sup> C, SPI, UART/RS-232/RS-422/RS-485, SENT, CAN, LIN, CAN FD, MIL-STD-1553, ARINC 429, SpaceWire, USB 2.0/HSIC/PD, USB 3.1 Gen 1/Gen 2/SSIC, PCIe 1.1/2.0/3.0, 8b10b, MIPI RFFE, MIPI D/M-PHY/UniPro, Automotive Ethernet 100/1000BASE-T1, Ethernet 10/100BASE-TX, MDIO, Manchester, NRZ |
| power, digital voltmeter (DVM), frequency response analysis, basic jitter analysis                                                                                            | power, digital voltmeter (DVM), frequency response analysis, basic jitter analysis                                                                                                        | power, advanced spectrum analysis and spectrogram, jitter and noise decomposition, clock data recovery (CDR), I/Q data and RF analysis (R&S®VSE), deembedding, embedding, equalization, PAM-N, TDR/TDT analysis, advanced eye diagram                                                                                                         | advanced spectrum analysis and spectrogram, jitter and noise decomposition, real-time deembedding, embedding, equalization, PAM-N, TDR/TDT analysis, I/Q data and RF analysis (R&S®VSE), advanced eye diagram                                                                                        |
| –                                                                                                                                                                             |                                                                                                                                                                                           | see specifications (PD 5216.1640.22)                                                                                                                                                                                                                                                                                                          | see specifications (PD 3683.5616.22)                                                                                                                                                                                                                                                                 |
| 13.3" touchscreen, 1920 × 1080 pixel (Full HD)                                                                                                                                | for MXO 5 only: 15.6" touchscreen, 1920 × 1080 pixel (Full HD)                                                                                                                            | 15.6" touchscreen, 1920 × 1080 pixel (Full HD)                                                                                                                                                                                                                                                                                                | 13.3" touchscreen, 1920 × 1080 pixel (Full HD)                                                                                                                                                                                                                                                       |
| 414 × 279 × 162                                                                                                                                                               | MXO 5: 445 × 314 × 154<br>MXO 5C: 445 × 105 × 405                                                                                                                                         | 450 × 315 × 204                                                                                                                                                                                                                                                                                                                               | 441 × 285 × 316                                                                                                                                                                                                                                                                                      |
| 6                                                                                                                                                                             | MXO 5: 9<br>MXO 5C: 8.7                                                                                                                                                                   | 10.7                                                                                                                                                                                                                                                                                                                                          | 18                                                                                                                                                                                                                                                                                                   |
| –                                                                                                                                                                             | –                                                                                                                                                                                         | –                                                                                                                                                                                                                                                                                                                                             | –                                                                                                                                                                                                                                                                                                    |

# SPECIFICATIONS OF BASE UNIT

| Vertical system: analog channels                                  |                                                      |                                                                                        |
|-------------------------------------------------------------------|------------------------------------------------------|----------------------------------------------------------------------------------------|
| Input channels                                                    |                                                      | 4 channels or 8 channels                                                               |
| Input impedance                                                   |                                                      | 50 $\Omega$ $\pm$ 1.5%,<br>1 M $\Omega$ $\pm$ 1%    12 pF (meas.)                      |
| Analog bandwidth (–3 dB)                                          | MXO 34, 4-channel instrument                         |                                                                                        |
|                                                                   | at 50 $\Omega$ input impedance                       |                                                                                        |
|                                                                   | MXO 3                                                | $\geq$ 100 MHz                                                                         |
|                                                                   | MXO 3 with -B242 option                              | $\geq$ 200 MHz                                                                         |
|                                                                   | MXO 3 with -B243 option                              | $\geq$ 350 MHz                                                                         |
|                                                                   | MXO 3 with -B245 option                              | $\geq$ 500 MHz                                                                         |
|                                                                   | MXO 3 with -B2410 option                             | $\geq$ 1 GHz                                                                           |
|                                                                   | at 1 M $\Omega$ input impedance                      |                                                                                        |
|                                                                   | MXO 3                                                | $\geq$ 100 MHz (meas.)                                                                 |
|                                                                   | MXO 3 with -B242 option                              | $\geq$ 200 MHz (meas.)                                                                 |
|                                                                   | MXO 3 with -B243 option                              | $\geq$ 350 MHz (meas.)                                                                 |
|                                                                   | MXO 3 with -B245 option                              | $\geq$ 500 MHz (meas.) <sup>1)</sup>                                                   |
|                                                                   | MXO 3 with -B2410 option                             | $\geq$ 500 MHz (meas.) <sup>1)</sup>                                                   |
|                                                                   | MXO 38, 8-channel instrument                         |                                                                                        |
|                                                                   | at 50 $\Omega$ input impedance                       |                                                                                        |
|                                                                   | MXO 3                                                | $\geq$ 100 MHz                                                                         |
|                                                                   | MXO 3 with -B282 option                              | $\geq$ 200 MHz                                                                         |
|                                                                   | MXO 3 with -B283 option                              | $\geq$ 350 MHz                                                                         |
|                                                                   | MXO 3 with -B285 option                              | $\geq$ 500 MHz                                                                         |
|                                                                   | MXO 3 with -B2810 option                             | $\geq$ 1 GHz                                                                           |
|                                                                   | at 1 M $\Omega$ input impedance                      |                                                                                        |
|                                                                   | MXO 3                                                | $\geq$ 100 MHz (meas.)                                                                 |
|                                                                   | MXO 3 with -B282 option                              | $\geq$ 200 MHz (meas.)                                                                 |
|                                                                   | MXO 3 with -B283 option                              | $\geq$ 350 MHz (meas.)                                                                 |
|                                                                   | MXO 3 with -B285 option                              | $\geq$ 500 MHz (meas.) <sup>1)</sup>                                                   |
|                                                                   | MXO 3 with -B2810 option                             | $\geq$ 500 MHz (meas.) <sup>1)</sup>                                                   |
| Additional bandwidth filters available up to instrument bandwidth |                                                      | 500/350/200/100/50/20 MHz (meas.)                                                      |
| Rise/fall time (calculated)                                       | 10% to 90% at 50 $\Omega$                            |                                                                                        |
|                                                                   | MXO 34, 4-channel instrument                         |                                                                                        |
|                                                                   | MXO 3                                                | < 3.5 ns                                                                               |
|                                                                   | MXO 3 with -B242 option                              | < 1.75 ns                                                                              |
|                                                                   | MXO 3 with -B243 option                              | < 1 ns                                                                                 |
|                                                                   | MXO 3 with -B245 option                              | < 700 ps                                                                               |
|                                                                   | MXO 3 with -B2410 option                             | < 350 ps                                                                               |
|                                                                   | MXO 38, 8-channel instrument                         |                                                                                        |
|                                                                   | MXO 3                                                | < 3.5 ns                                                                               |
|                                                                   | MXO 3 with -B282 option                              | < 1.75 ns                                                                              |
|                                                                   | MXO 3 with -B283 option                              | < 1 ns                                                                                 |
|                                                                   | MXO 3 with -B285 option                              | < 700 ps                                                                               |
|                                                                   | MXO 3 with -B2810 option                             | < 350 ps                                                                               |
| Vertical resolution                                               |                                                      | 12 bit,<br>up to 18 bit for high definition mode                                       |
| Input sensitivity                                                 | at 50 $\Omega$                                       | 1 mV/div to 1 V/div,<br>entire analog bandwidth supported for all input sensitivities  |
|                                                                   | at 1 M $\Omega$                                      | 1 mV/div to 10 V/div,<br>entire analog bandwidth supported for all input sensitivities |
| DC gain accuracy                                                  | offset and position set to 0 V, after self-alignment |                                                                                        |
|                                                                   | input sensitivity > 5 mV/div                         | $\pm$ 1% full scale                                                                    |
|                                                                   | input sensitivity $\leq$ 5 mV/div to $\geq$ 1 mV/div | $\pm$ 1.5% full scale                                                                  |
| Input coupling                                                    | at 50 $\Omega$                                       | DC                                                                                     |
|                                                                   | at 1 M $\Omega$                                      | DC, AC (> 7 Hz)                                                                        |

<sup>1)</sup> With R&S®RT-ZP05M passive probe.

## Vertical system: analog channels

|                                                                            |                                                                                                                                        |                                                                                                                                                                                   |
|----------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Maximum input voltage                                                      | at 50 $\Omega$                                                                                                                         | 5 V (RMS), 30 V ( $V_p$ )                                                                                                                                                         |
|                                                                            | at 1 M $\Omega$                                                                                                                        | 300 V (RMS), 400 V ( $V_p$ ),<br>derates at 20 dB/decade to 5 V (RMS) above<br>250 kHz                                                                                            |
|                                                                            | at 1 M $\Omega$ with R&S®RT-ZP05M passive probe                                                                                        | 400 V (RMS), 1650 V ( $V_p$ ),<br>300 V (RMS) CAT II;<br>for derating and details, see R&S®RT-Zxx<br>Standard Probes specifications<br>(PD 3607.3851.22)                          |
| Position range                                                             |                                                                                                                                        | $\pm 5$ div                                                                                                                                                                       |
| Offset range at 50 $\Omega$                                                | input sensitivity                                                                                                                      |                                                                                                                                                                                   |
|                                                                            | 70 mV/div to 1 V/div                                                                                                                   | $\pm 20$ V                                                                                                                                                                        |
|                                                                            | 1 mV/div to < 70 mV/div                                                                                                                | $\pm 3$ V                                                                                                                                                                         |
| Offset range at 1 M $\Omega$                                               | input sensitivity                                                                                                                      |                                                                                                                                                                                   |
|                                                                            | 1 V/div to 10 V/div                                                                                                                    | $\pm 250$ V                                                                                                                                                                       |
|                                                                            | 60 mV/div to < 1 V/div                                                                                                                 | $\pm 30$ V                                                                                                                                                                        |
|                                                                            | 1 mV/div to < 60 mV/div                                                                                                                | $\pm 3$ V                                                                                                                                                                         |
| Offset accuracy                                                            |                                                                                                                                        | $\pm (0.35 \% \times  \text{net offset}  + 0.5 \text{ mV} +$<br>$0.1 \text{ div} \times \text{input sensitivity})$<br>(net offset = offset – position $\times$ input sensitivity) |
| DC measurement accuracy                                                    | after adequate suppression of measurement<br>noise using high definition (HD) mode or wave-<br>form averaging or a combination of both | $\pm (\text{DC gain accuracy} \times  \text{reading} - \text{net offset}  +$<br>offset accuracy)                                                                                  |
| Channel-to-channel isolation<br>(each channel with same input sensitivity) | input frequency within instrument bandwidth                                                                                            | > 60 dB (1:1000)                                                                                                                                                                  |

### RMS noise floor<sup>2)</sup>

| At 50 $\Omega$ (meas.)  | Input sensitivity | Analog bandwidth (–3 dB) |             |             |             |             |
|-------------------------|-------------------|--------------------------|-------------|-------------|-------------|-------------|
|                         |                   | 100 MHz                  | 200 MHz     | 350 MHz     | 500 MHz     | 1 GHz       |
|                         | 1 mV/div          | 50 $\mu$ V               | 64 $\mu$ V  | 76 $\mu$ V  | 83 $\mu$ V  | 136 $\mu$ V |
|                         | 2 mV/div          | 53 $\mu$ V               | 68 $\mu$ V  | 81 $\mu$ V  | 88 $\mu$ V  | 143 $\mu$ V |
|                         | 5 mV/div          | 64 $\mu$ V               | 78 $\mu$ V  | 92 $\mu$ V  | 101 $\mu$ V | 166 $\mu$ V |
|                         | 10 mV/div         | 91 $\mu$ V               | 107 $\mu$ V | 121 $\mu$ V | 133 $\mu$ V | 224 $\mu$ V |
|                         | 20 mV/div         | 156 $\mu$ V              | 174 $\mu$ V | 195 $\mu$ V | 213 $\mu$ V | 371 $\mu$ V |
|                         | 50 mV/div         | 380 $\mu$ V              | 418 $\mu$ V | 468 $\mu$ V | 516 $\mu$ V | 901 $\mu$ V |
|                         | 100 mV/div        | 923 $\mu$ V              | 1.06 mV     | 1.20 mV     | 1.31 mV     | 2.01 mV     |
|                         | 200 mV/div        | 1.60 mV                  | 1.76 mV     | 1.96 mV     | 2.12 mV     | 3.46 mV     |
|                         | 500 mV/div        | 3.69 mV                  | 3.96 mV     | 4.32 mV     | 4.75 mV     | 8.00 mV     |
|                         | 1 V/div           | 7.28 mV                  | 7.82 mV     | 8.50 mV     | 9.30 mV     | 15.77 mV    |
| At 1 M $\Omega$ (meas.) | Input sensitivity | Analog bandwidth (–3 dB) |             |             |             |             |
|                         |                   | 20 MHz                   | 100 MHz     | 200 MHz     | 350 MHz     | 500 MHz     |
|                         | 1 mV/div          | 35 $\mu$ V               | 46 $\mu$ V  | 53 $\mu$ V  | 62 $\mu$ V  | 65 $\mu$ V  |
|                         | 2 mV/div          | 34 $\mu$ V               | 48 $\mu$ V  | 55 $\mu$ V  | 66 $\mu$ V  | 70 $\mu$ V  |
|                         | 5 mV/div          | 47 $\mu$ V               | 60 $\mu$ V  | 70 $\mu$ V  | 81 $\mu$ V  | 88 $\mu$ V  |
|                         | 10 mV/div         | 74 $\mu$ V               | 88 $\mu$ V  | 102 $\mu$ V | 118 $\mu$ V | 129 $\mu$ V |
|                         | 20 mV/div         | 138 $\mu$ V              | 157 $\mu$ V | 180 $\mu$ V | 205 $\mu$ V | 226 $\mu$ V |
|                         | 50 mV/div         | 334 $\mu$ V              | 372 $\mu$ V | 422 $\mu$ V | 477 $\mu$ V | 524 $\mu$ V |
|                         | 100 mV/div        | 715 $\mu$ V              | 849 $\mu$ V | 1.00 mV     | 1.13 mV     | 1.23 mV     |
|                         | 200 mV/div        | 1.37 mV                  | 1.56 mV     | 1.79 mV     | 2.02 mV     | 2.21 mV     |
|                         | 500 mV/div        | 3.37 mV                  | 3.76 mV     | 4.23 mV     | 4.77 mV     | 5.20 mV     |
|                         | 1 V/div           | 7.08 mV                  | 8.29 mV     | 9.70 mV     | 11.18 mV    | 12.05 mV    |
|                         | 2 V/div           | 13.78 mV                 | 15.70 mV    | 18.04 mV    | 20.40 mV    | 22.39 mV    |
|                         | 5 V/div           | 34.20 mV                 | 37.64 mV    | 42.92 mV    | 48.16 mV    | 52.09 mV    |
|                         | 10 V/div          | 68.50 mV                 | 75.54 mV    | 85.48 mV    | 96.27 mV    | 104.25 mV   |

<sup>2)</sup> HD mode active for bandwidth  $\leq 500$  MHz.

| Vertical system: digital channels |                                                                          |                                                                                                                                                      |
|-----------------------------------|--------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| Input channels                    |                                                                          | 16 logic channels (D0 to D15)                                                                                                                        |
| Arrangement of input channels     |                                                                          | arranged in two logic probes with 8 channels each, assignment of the logic probes to the channels (D0 to D7 and D8 to D15) is displayed on the probe |
| Input impedance                   |                                                                          | 100 k $\Omega$ $\pm$ 2 %    ~4 pF (meas.) at probe tips                                                                                              |
| Maximum input frequency           | signal with minimum input voltage swing and hysteresis setting: "normal" | 300 MHz (meas.)                                                                                                                                      |
| Maximum input voltage             |                                                                          | $\pm$ 40 V ( $V_p$ ); 32 V (RMS), derates to 7 V (RMS) with 20 dB/decade at frequencies above 25 MHz                                                 |
| Minimum input voltage swing       |                                                                          | 500 mV ( $V_{pp}$ ) (meas.)                                                                                                                          |
| Threshold groups                  |                                                                          | D0 to D3, D4 to D7, D8 to D11 and D12 to D15                                                                                                         |
| Threshold level                   | range                                                                    | $\pm$ 8 V in 25 mV steps                                                                                                                             |
|                                   | predefined                                                               | CMOS 5.0 V, CMOS 3.3 V, CMOS 2.5 V, TTL, ECL, PECL, LVPECL                                                                                           |
| Threshold accuracy                | threshold level between $\pm$ 4 V                                        | $\pm$ (100 mV + 3% of threshold setting)                                                                                                             |
| Comparator hysteresis             |                                                                          | normal, robust, maximum                                                                                                                              |

| Horizontal system                                |                                                                                                                                                                                                                                                                             |                                                                                                 |
|--------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|
| Timebase range                                   |                                                                                                                                                                                                                                                                             | selectable between 200 ps/div and 10 000 s/div, time per div settable to any value within range |
| Deskew range (channel deskew)                    | between analog channels                                                                                                                                                                                                                                                     | $\pm$ 20 ms                                                                                     |
|                                                  | between digital channels                                                                                                                                                                                                                                                    | $\pm$ 100 ns                                                                                    |
| Reference position                               |                                                                                                                                                                                                                                                                             | 0% to 100% of measurement display area                                                          |
| Horizontal position range (trigger offset range) | max.                                                                                                                                                                                                                                                                        | +(memory depth/current sampling rate)                                                           |
|                                                  | min.                                                                                                                                                                                                                                                                        | -5000 s                                                                                         |
| Modes                                            |                                                                                                                                                                                                                                                                             | normal, roll                                                                                    |
| Channel-to-channel skew                          | between analog channels                                                                                                                                                                                                                                                     | < 100 ps (meas.)                                                                                |
|                                                  | between digital channels                                                                                                                                                                                                                                                    | < 500 ps (meas.)                                                                                |
| Timebase accuracy                                | after delivery/calibration, at +23°C                                                                                                                                                                                                                                        | $\pm$ 2.5 ppm                                                                                   |
|                                                  | during calibration interval                                                                                                                                                                                                                                                 | $\pm$ 3.5 ppm                                                                                   |
| Delta time accuracy                              | corresponds to time error between two edges on same acquisition and channel; signal amplitude greater than 5 divisions, measurement threshold set to 50%, vertical gain 10 mV/div or greater; rise time lower than four sample periods; waveform acquired in real-time mode | $\pm$ (0.20/real-time sampling rate + timebase accuracy $\times$  reading ) (peak) (meas.)      |

| Acquisition system         |                                |                                                                                                          |
|----------------------------|--------------------------------|----------------------------------------------------------------------------------------------------------|
| Sampling rate              | analog channels (real time)    |                                                                                                          |
|                            | MXO 34                         | max. 5 Gsample/s on 2 channels, max. 2.5 Gsample/s on 4 channels                                         |
|                            | MXO 38                         | max. 5 Gsample/s on 4 channels, max. 2.5 Gsample/s on 8 channels                                         |
|                            | analog channels (interpolated) | max. 5 Tsample/s                                                                                         |
|                            | digital channels               | max. 5 Gsample/s on each channel                                                                         |
| Waveform acquisition rate  | max.                           | > 4500000 waveforms/s                                                                                    |
| Trigger rearm time         | min.                           | < 21 ns                                                                                                  |
| Memory depth <sup>3)</sup> | standard                       | 125 Mpoints                                                                                              |
|                            | R&S®MXO34-B105 option          | 500 Mpoints with 4 active channels (single capture), 500 Mpoints with 2 active channels (run continuous) |
|                            | R&S®MXO38-B105 option          | 500 Mpoints with 8 active channels (single capture), 500 Mpoints with 4 active channels (run continuous) |

<sup>3)</sup> The maximum available memory depth depends on the bit depth of the acquired data and, therefore, on the settings of the acquisition system, such as decimation mode, waveform arithmetic or high definition mode.

| Acquisition system     |                                                                                                   |                                                                                        |
|------------------------|---------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|
| Acquisition modes      | sample                                                                                            | middle sample in decimation interval                                                   |
|                        | peak detect                                                                                       | largest and smallest sample in decimation interval                                     |
|                        | average                                                                                           | average of acquired waveforms                                                          |
|                        | number of averaged waveforms                                                                      | 2 to 16777215                                                                          |
|                        | envelope                                                                                          | envelope of acquired waveforms                                                         |
| Sampling modes         | real-time mode                                                                                    | max. sampling rate set by digitizer                                                    |
|                        | interpolated time                                                                                 | enhancement of sampling resolution by interpolation; max. sampling rate is 5 Tsample/s |
| Interpolation modes    |                                                                                                   | linear, sin(x)/x, sample&hold                                                          |
| Fast segmentation mode | continuous recording of waveforms in acquisition memory without interruption due to visualization |                                                                                        |
|                        | max. real-time waveform acquisition rate                                                          | > 4600000 waveforms/s                                                                  |
|                        | min. blind time between consecutive acquisitions                                                  | < 21 ns                                                                                |

| High definition mode    |                                                                                                                                                                                                                                                                         |                                                                     |
|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------|
| General description     | The high definition mode increases the bit resolution of the waveform signal by using digital filtering, leading to reduced noise. Because of the digital trigger concept of the MXO 3, signals with increased numeric resolution are used as the input for triggering. |                                                                     |
| Numeric resolution      | bandwidth, at 5 Gsample/s                                                                                                                                                                                                                                               | bit resolution                                                      |
|                         | 1 kHz to 10 MHz                                                                                                                                                                                                                                                         | 18 bit                                                              |
|                         | 100 MHz                                                                                                                                                                                                                                                                 | 16 bit                                                              |
|                         | 200 MHz                                                                                                                                                                                                                                                                 | 15 bit                                                              |
|                         | 500 MHz                                                                                                                                                                                                                                                                 | 14 bit                                                              |
| Real-time sampling rate | MXO 34                                                                                                                                                                                                                                                                  | max. 5 Gsample/s on 2 channels,<br>max. 2.5 Gsample/s on 4 channels |
|                         | MXO 38                                                                                                                                                                                                                                                                  | max. 5 Gsample/s on 4 channels,<br>max. 2.5 Gsample/s on 8 channels |

| Trigger system      |                                                             |                                                                                                                  |
|---------------------|-------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------|
| Trigger sources     |                                                             | analog channels (C1 to C4),<br>digital channels (D0 to D15),<br>external trigger input, line trigger, serial bus |
| Trigger level range |                                                             | ±5 div from center of screen                                                                                     |
| Trigger modes       |                                                             | auto, normal, single, n single                                                                                   |
| Trigger sensitivity |                                                             | 0.0001 div, from DC to instrument bandwidth for all vertical scales                                              |
| Trigger jitter      | full-scale sine wave of frequency set to<br>−3 dB bandwidth | < 1 ps (RMS) (meas.)                                                                                             |
| Coupling mode       | standard                                                    | same as selected channel                                                                                         |
|                     | HF reject                                                   | cutoff frequency selectable from 1 kHz to 500 MHz                                                                |
|                     | LF reject                                                   | attenuates frequencies < 50 kHz                                                                                  |
| Trigger hysteresis  | modes                                                       | auto (default setting) or manual                                                                                 |
|                     | adjustment resolution                                       | 0.0001 div, from DC to instrument bandwidth for all vertical scales                                              |
| Holdoff range       | time                                                        | 100 ns to 10 s, fixed and random                                                                                 |

| Main trigger modes |                                                                                                                                                                                                                                                          |                  |
|--------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
| Edge               | triggers on specified edge (positive, negative or either) and level                                                                                                                                                                                      |                  |
| Glitch             | triggers on glitches of positive, negative or either polarity that are shorter or longer than specified width                                                                                                                                            |                  |
|                    | glitch width                                                                                                                                                                                                                                             | 200 ps to 1000 s |
| Width              | triggers on positive or negative pulse of specified width; width can be shorter, longer, inside or outside a specified range                                                                                                                             |                  |
|                    | pulse width                                                                                                                                                                                                                                              | 200 ps to 1000 s |
| Runt               | triggers on pulse of positive, negative or either polarity that crosses one threshold but fails to cross a second threshold before crossing the first one again; runt pulse width can be arbitrary, shorter, longer, inside or outside a specified range |                  |
|                    | runt pulse width                                                                                                                                                                                                                                         | 200 ps to 1000 s |
| Window             | triggers when signal enters or exits a specified voltage range; triggers also when signal stays inside or outside the voltage range for a specified period of time                                                                                       |                  |
| Timeout            | triggers when signal stays high, low or unchanged for a specified period of time                                                                                                                                                                         |                  |
|                    | timeout                                                                                                                                                                                                                                                  | 0 ps to 1000 s   |

| Trigger system                   |                                                                                                                                                                                                                                                       |                                                                                                                                                                          |
|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Interval                         | triggers when time between two consecutive edges of same slope (positive or negative) is shorter, longer, inside or outside a specified range                                                                                                         |                                                                                                                                                                          |
|                                  | interval time                                                                                                                                                                                                                                         | 200 ps to 1000 s                                                                                                                                                         |
| Slew rate                        | triggers when the time required by a signal edge to toggle between user-defined upper and lower voltage levels is shorter, longer, inside or outside a specified range; edge slope may be positive, negative or either                                |                                                                                                                                                                          |
|                                  | toggle time                                                                                                                                                                                                                                           | 0 ps to 1000 s                                                                                                                                                           |
| Setup&hold                       | triggers on setup time and hold time violations between clock and data present on any two input channels; monitored time interval may be specified by the user in the range from –100 s to 100 s around a clock edge and must be at least 200 ps wide |                                                                                                                                                                          |
| Pattern                          | triggers when a logical combination (and, nand, or, nor) of the input channels stays true for a period of time shorter, longer, inside or outside a specified range                                                                                   |                                                                                                                                                                          |
| State                            | triggers when a logical combination (and, nand, or, nor) of the input channels stays true at a slope (positive, negative or either) in one selected channel                                                                                           |                                                                                                                                                                          |
| Advanced trigger modes           |                                                                                                                                                                                                                                                       |                                                                                                                                                                          |
| Zone trigger                     | triggers on user-defined zones drawn on the display                                                                                                                                                                                                   |                                                                                                                                                                          |
|                                  | source                                                                                                                                                                                                                                                | acquired waveforms (input channels), math waveforms (including power analysis waveforms), spectrum waveforms, XY plots                                                   |
|                                  | number of zones/areas                                                                                                                                                                                                                                 | up to 4 zones with up to 8 areas each                                                                                                                                    |
|                                  | area shapes                                                                                                                                                                                                                                           | polygons with up to 16 points                                                                                                                                            |
|                                  | area types                                                                                                                                                                                                                                            | must intersect, must not intersect                                                                                                                                       |
|                                  | combination of zones                                                                                                                                                                                                                                  | logical combination of zones of multiple sources using Boolean expressions                                                                                               |
|                                  | trigger compatibility                                                                                                                                                                                                                                 | requires sequence trigger A ▷ zone trigger where primary A condition can be: edge, glitch, width, runt, window, timeout, interval, slew rate, setup&hold, state, pattern |
| Sequence trigger (A/B/R trigger) | triggers on B event after occurrence of A event; delay condition after A event specified as time interval; an optional R event resets the trigger sequence to A                                                                                       |                                                                                                                                                                          |
|                                  | A event                                                                                                                                                                                                                                               | edge, glitch, width, runt, window, timeout, interval, slew rate                                                                                                          |
|                                  | B event                                                                                                                                                                                                                                               | edge, glitch, width, runt, window, timeout, interval, slew rate                                                                                                          |
|                                  | R event                                                                                                                                                                                                                                               | edge, glitch, width, runt, window, timeout, interval, slew rate                                                                                                          |
| Serial bus trigger               | optional                                                                                                                                                                                                                                              | see dedicated triggering and decoding options                                                                                                                            |
| Trigger input                    | input impedance                                                                                                                                                                                                                                       | 50 Ω (meas.) or 1 MΩ (meas.)    11 pF (meas.)                                                                                                                            |
|                                  | max. input voltage at 50 Ω                                                                                                                                                                                                                            | 30 V ( $V_p$ )                                                                                                                                                           |
|                                  | max. input voltage at 1 MΩ                                                                                                                                                                                                                            | 300 V (RMS), 400 V ( $V_p$ ), derates at 20 dB/decade to 5 V (RMS) above 250 kHz                                                                                         |
|                                  | trigger level                                                                                                                                                                                                                                         | ±5 V                                                                                                                                                                     |
|                                  | sensitivity                                                                                                                                                                                                                                           |                                                                                                                                                                          |
|                                  | input frequency ≤ 100 MHz                                                                                                                                                                                                                             | 300 mV ( $V_{pp}$ ) (meas.)                                                                                                                                              |
|                                  | input frequency > 100 MHz and ≤ 500 MHz                                                                                                                                                                                                               | 500 mV ( $V_{pp}$ ) (meas.)                                                                                                                                              |
|                                  | input coupling                                                                                                                                                                                                                                        | AC, DC (50 Ω and 1 MΩ)                                                                                                                                                   |
|                                  | trigger filter                                                                                                                                                                                                                                        | HF reject (attenuates > 50 kHz), LF reject (attenuates < 50 kHz), noise reject                                                                                           |
|                                  | trigger modes                                                                                                                                                                                                                                         | edge (positive, negative or either)                                                                                                                                      |
| Trigger output                   | functionality                                                                                                                                                                                                                                         | A pulse is generated for each event triggering signal acquisition.                                                                                                       |
|                                  | output voltage                                                                                                                                                                                                                                        | 0 V to 5 V (nom.) at high impedance; 0 V to 2.5 V (nom.) at 50 Ω                                                                                                         |
|                                  | pulse width                                                                                                                                                                                                                                           | selectable between 16 ns and 50 ms                                                                                                                                       |
|                                  | pulse polarity                                                                                                                                                                                                                                        | low active or high active                                                                                                                                                |
|                                  | output delay                                                                                                                                                                                                                                          | depends on trigger settings                                                                                                                                              |

| Spectrum analysis   |                                                                                      |                                                                                                                                              |
|---------------------|--------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| General description | Spectrum analysis allows signal analysis in the frequency domain.                    |                                                                                                                                              |
| Spectrum            | sources                                                                              | channel 1 to channel 4, math waveforms, reference waveforms                                                                                  |
|                     | setup parameters                                                                     | center frequency, frequency span, resolution bandwidth (automatic or manual), gate position, gate width, vertical scaling, vertical position |
|                     | scaling                                                                              | dBm, dBV, dBμV, V (RMS)                                                                                                                      |
|                     | span                                                                                 | 1 Hz to 1.2 GHz <sup>4)</sup>                                                                                                                |
|                     | resolution bandwidth (RBW)                                                           | span/4 ≥ RBW ≥ span/6000                                                                                                                     |
|                     | windows                                                                              | flat top, Hanning, Hamming, Blackman, rectangular, Kaiser Bessel, Gaussian                                                                   |
|                     | trace types                                                                          | normal, max. hold, min. hold, average                                                                                                        |
|                     | max. real-time waveform acquisition rate                                             | > 40 000 waveforms/s                                                                                                                         |
| Gate                | delimits the display region used for spectrum analysis                               |                                                                                                                                              |
| Peak list           | The values in the peak list are also shown in the diagram to allow easy correlation. |                                                                                                                                              |

| RF characteristics                                |                                                                                                                                                                                                                                        |                         |
|---------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|
| Sensitivity/noise density                         | at 1 GHz<br>(measurement of the power spectral density at 1 GHz at input sensitivity 2 mV/div, corresponding to –30 dBm input range of the oscilloscope, using spectrum analysis with center frequency 1 GHz, span 500 kHz, RBW 3 kHz) | –157 dBm (1 Hz) (meas.) |
| Noise figure                                      | at 1 GHz<br>(calculated based on the noise power density above)                                                                                                                                                                        | 16 dB (meas.)           |
| Dynamic range                                     | measured for a 1 GHz input carrier with level –3 dBm at input of oscilloscope, using spectrum analysis with center frequency 1 GHz, span 2 MHz, RBW 400 Hz at +20 MHz from center frequency                                            | 106 dB (meas.)          |
| Absolute amplitude accuracy                       | 0 Hz to 800 MHz                                                                                                                                                                                                                        | ±1 dB (meas.)           |
| Spurious-free dynamic range (excluding harmonics) | measured for a 250 MHz input carrier and level –3 dBm at input sensitivity 50 mV/div, using spectrum analysis with center frequency 600 MHz, span 1.2 GHz, RBW 300 kHz                                                                 | 65 dBc (meas.)          |
| Second harmonic distortion                        | measured for a 250 MHz input carrier and level –3 dBm at input sensitivity 50 mV/div, using spectrum analysis with center frequency 600 MHz, span 1.2 GHz, RBW 300 kHz                                                                 | –59 dBc (meas.)         |
| Third harmonic distortion                         | measured for a 250 MHz input carrier and level –3 dBm at input sensitivity 50 mV/div, using spectrum analysis with center frequency 600 MHz, span 1.2 GHz, RBW 300 kHz                                                                 | –60 dBc (meas.)         |

<sup>4)</sup> The stop frequency depends on the analog bandwidth of the instrument.

## Waveform measurements

|                        |                                                                                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|------------------------|------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Automatic measurements | measurements on acquired waveforms (input channels), math waveforms, reference waveforms | amplitude, high, low, maximum, minimum, peak-to-peak, mean, RMS, sigma, positive overshoot, negative overshoot, area, rise time, fall time, positive pulse width, negative pulse width, period, frequency, positive duty cycle, negative duty cycle, delay, phase, burst width, pulse count, edge count, pulse train, positive switching, negative switching, cycle area, cycle mean, cycle RMS, cycle sigma, setup, hold, setup/hold time, setup/hold ratio, slew rate rising, slew rate falling, delay to trigger |
|                        | gate                                                                                     | delimits the display region evaluated for automatic measurements                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|                        | reference levels                                                                         | user-configurable vertical levels define support structures for automatic measurements                                                                                                                                                                                                                                                                                                                                                                                                                              |
|                        | statistics                                                                               | displays maximum, minimum, mean, standard deviation and measurement count for each automatic measurement                                                                                                                                                                                                                                                                                                                                                                                                            |
|                        | track                                                                                    | measurement results displayed as continuous trace that is time-correlated to the measurement source                                                                                                                                                                                                                                                                                                                                                                                                                 |
|                        | number of active measurements                                                            | 16                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|                        | result line annotation                                                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Cursor measurements    | available cursors                                                                        | up to two cursor sets on screen, each set with two horizontal and two vertical cursors                                                                                                                                                                                                                                                                                                                                                                                                                              |
|                        | target waveforms                                                                         | acquired waveforms (input channels), math waveforms, reference waveforms, XY diagrams                                                                                                                                                                                                                                                                                                                                                                                                                               |
|                        | operating modes                                                                          | vertical measurements, horizontal measurements, or both; vertical cursors either set manually or locked to waveform                                                                                                                                                                                                                                                                                                                                                                                                 |
|                        | source mode                                                                              | single source, use second source, multiple sources (multichannel cursor)                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|                        | multiple sources mode selection                                                          | acquired waveforms (input channels), math waveforms, reference waveforms                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Waveform histogram     | number of diagrams                                                                       | up to 8                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|                        | sources                                                                                  | acquired waveforms (input channels), math waveforms, reference waveforms                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|                        | mode                                                                                     | vertical, horizontal                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|                        | windowing                                                                                | user-defined                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

## Waveform math

|                  |                               |                                                                                                                                                                                                      |
|------------------|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| General features | number of math equations      | up to 8                                                                                                                                                                                              |
|                  | number of reference waveforms | up to 8                                                                                                                                                                                              |
|                  | sources                       | channel 1, channel 2, channel 3, channel 4, channel 5, channel 6, channel 7, channel 8, math waveforms 1 to 8, reference waveforms 1 to 8                                                            |
| Functions        | operators                     | add, subtract, multiply, divide, absolute value, square, square root, integrate, differentiate, $\log_{10}$ , $\log_e$ , $\log_2$ , reciprocal, invert, low pass, high pass, rescale ( $a * x + b$ ) |
|                  | filter                        | low pass, high pass                                                                                                                                                                                  |
|                  | filter types                  | Gaussian, rectangular                                                                                                                                                                                |
|                  | gate                          | delimits the display region used for waveform math                                                                                                                                                   |

## Digital voltmeter

|                        |  |                                                 |
|------------------------|--|-------------------------------------------------|
| Accuracy               |  | related to channel settings of voltmeter source |
| Measurements           |  | DC, DC RMS, AC RMS                              |
| Sources                |  | C1, C2, C3, C4, C5, C6, C7, C8                  |
| Number of measurements |  | up to 4                                         |
| Resolution             |  | up to 6 digits                                  |
| Bandwidth              |  | up to 20 MHz                                    |

| Display characteristics                 |                                                                                                                                                                                                                                                    |
|-----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Diagram types                           | Yt, XY, zoom, spectrum                                                                                                                                                                                                                             |
| Display configuration (waveform layout) | The display area can be split into separate diagram areas by dragging and dropping signal icons. Each diagram area can hold any number of signals. Diagrams can be stacked on top of each other and later accessed via dynamic tabs (Tab 1, etc.). |
| Signal icons                            | Each active waveform is represented by a signal icon on the signal bar; the signal icon displays the individual vertical and acquisition settings.                                                                                                 |
| Toolbar                                 | enables quick access to important tools; allows to set the most common parameters directly in a simple menu and gives access to more detailed parameters in the main menu; user-defined selection of tools in the toolbar                          |
| Upper menu bar                          | displays trigger, horizontal and acquisition system settings; allows quick access to these settings                                                                                                                                                |
| Main menu                               | provides access to all instrument settings in a compact menu structure                                                                                                                                                                             |
| Axis label                              | The x-axis and y-axis are labeled with values and physical unit.                                                                                                                                                                                   |
| Diagram label                           | Diagrams can be individually labeled with a descriptive, user-defined name.                                                                                                                                                                        |
| Diagram layout                          | The grid, crosshair, axis labeling and diagram labeling can be switched on and off separately.                                                                                                                                                     |
| Persistence                             | 50 ms to 50 s, or infinite                                                                                                                                                                                                                         |
| Zoom                                    | vertical and horizontal; touch interface simplifies resize and drag operations on zoom window                                                                                                                                                      |
| Signal colors (waveform coding)         | predefined or user-defined color tables for persistence display                                                                                                                                                                                    |

| History and segmented memory |                                                                                                                                                                        |                                                                                                                                     |                                |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|
| Acquisition memory           | automatic                                                                                                                                                              | automatic setting of segment size and sample rate                                                                                   |                                |
|                              | manual                                                                                                                                                                 | user-defined setting of segment size and sample rate                                                                                |                                |
| Memory segmentation          | function                                                                                                                                                               | memory segments for the acquisition                                                                                                 |                                |
|                              | number of segments                                                                                                                                                     | record length                                                                                                                       | segments <sup>5)</sup> (up to) |
|                              |                                                                                                                                                                        | 1 kpoint                                                                                                                            | 1 048 575                      |
|                              |                                                                                                                                                                        | 2 kpoints                                                                                                                           | 524 287                        |
|                              |                                                                                                                                                                        | 5 kpoints                                                                                                                           | 262 143                        |
|                              |                                                                                                                                                                        | 10 kpoints                                                                                                                          | 131 071                        |
|                              |                                                                                                                                                                        | 20 kpoints                                                                                                                          | 65 535                         |
|                              |                                                                                                                                                                        | 50 kpoints                                                                                                                          | 32 767                         |
|                              |                                                                                                                                                                        | 100 kpoints                                                                                                                         | 16 383                         |
|                              |                                                                                                                                                                        | 200 kpoints                                                                                                                         | 9 361                          |
|                              |                                                                                                                                                                        | 500 kpoints                                                                                                                         | 4 095                          |
|                              |                                                                                                                                                                        | 1 Mpoint                                                                                                                            | 2 113                          |
|                              |                                                                                                                                                                        | 2 Mpoints                                                                                                                           | 1 056                          |
|                              |                                                                                                                                                                        | 5 Mpoints                                                                                                                           | 427                            |
|                              |                                                                                                                                                                        | 10 Mpoints                                                                                                                          | 213                            |
|                              |                                                                                                                                                                        | 20 Mpoints                                                                                                                          | 106                            |
|                              |                                                                                                                                                                        | 50 Mpoints                                                                                                                          | 41                             |
|                              |                                                                                                                                                                        | 100 Mpoints                                                                                                                         | 20                             |
|                              |                                                                                                                                                                        | 200 Mpoints                                                                                                                         | 9                              |
|                              |                                                                                                                                                                        | 400 Mpoints                                                                                                                         | 4                              |
|                              |                                                                                                                                                                        | 500 Mpoints                                                                                                                         | 3                              |
|                              | Segmentation is available on all analog and logic channels, protocol decoding and spectrum analysis.                                                                   |                                                                                                                                     |                                |
| Fast-segmented mode          | continuous recording of waveforms in acquisition memory without interruption due to visualization; blind time between consecutive acquisitions, see Acquisition system |                                                                                                                                     |                                |
| History mode                 | function                                                                                                                                                               | provides access to past acquisitions in the segmented memory                                                                        |                                |
|                              | timestamp resolution                                                                                                                                                   | 1 ns                                                                                                                                |                                |
|                              | history player                                                                                                                                                         | replays the recorded waveforms; repetition possible; adjustable speed; manual next/previous segment; numerical segment number input |                                |
|                              | analyze options                                                                                                                                                        | overlay all segments, average all segments, envelope all segments                                                                   |                                |

<sup>5)</sup> With R&S®MXO3-B105 memory option. The maximum number of segments depends on the number of active channels and the bit resolution of the acquired data and, therefore, on the acquisition system settings such as decimation mode, use of waveform arithmetics or high definition (HD) mode. The maximum number of segments without R&S®MXO3-B105 memory option is limited to 10 000.

| Mask testing                                               |                                            |                                                                                                                                          |
|------------------------------------------------------------|--------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| Test definition                                            | number of masks                            | up to 8 simultaneously                                                                                                                   |
|                                                            | source                                     | acquired waveforms (input channels), math waveforms, reference waveforms, spectrum waveforms, XY plots                                   |
|                                                            | fail condition                             | waveform hit                                                                                                                             |
|                                                            | test rate                                  | up to 4 million waveforms/s                                                                                                              |
| Mask definition with segments                              | action on error                            | acquisition stop, beep, save waveform, pulse on trigger out                                                                              |
|                                                            | number of segments per mask test           | up to 8                                                                                                                                  |
|                                                            | segment definition                         | array of at least 3 points defines an inner region                                                                                       |
| Result statistics                                          | category                                   | total completed acquisition, failed acquisition, passed acquisition, fail rate, overall test result (pass/fail)                          |
| Visualization options                                      | waveform style                             | vectors, dots                                                                                                                            |
|                                                            | mask colors                                | predefined colors for mask without violation (translucent gray), mask with violation (translucent red)                                   |
| Miscellaneous                                              |                                            |                                                                                                                                          |
| Remote control                                             | web interface                              | full operation of the instrument's touch interface, keys and multifunction wheel via web browser                                         |
|                                                            | VNC                                        | control of the instrument through virtual network computing                                                                              |
|                                                            | SCPI                                       | standard instrument programming interface through VISA                                                                                   |
| Languages                                                  | available languages for the user interface | English, German, French, Simplified Chinese, Traditional Chinese, Japanese, Russian, Spanish, Italian, Portuguese, Korean, Czech, Polish |
|                                                            | online help on the instrument              | English                                                                                                                                  |
| Input and output                                           |                                            |                                                                                                                                          |
| Front                                                      |                                            |                                                                                                                                          |
| Channel inputs                                             |                                            | BNC; for details, see Vertical system                                                                                                    |
|                                                            | probe interface                            | auto detection of passive probes, Rohde&Schwarz active probe interface                                                                   |
| Digital channel inputs                                     | D15 to D8, D7 to D0                        | interface for R&S®RT-ZL03X logic probe                                                                                                   |
| Probe compensation output                                  | signal shape                               | rectangle, $V_{low} = 0\text{ V}$ , $V_{high} = 3.3\text{ V}$<br>amplitude $3.3\text{ V (}V_{pp}\text{)} \pm 5\%$ (meas.)                |
|                                                            | frequency                                  | $1\text{ kHz} \pm 1\%$ (meas.)                                                                                                           |
| Demo P1                                                    | analog signal output for demo apps         | $V_p \leq \pm 5\text{ V}$ (meas.)                                                                                                        |
| Demo P2                                                    | digital signal output demo apps            | $V_p \leq 3.3\text{ V}$ (meas.)                                                                                                          |
| USB interface                                              |                                            | 2 × USB 3.1 Gen 1 ports, type A plug                                                                                                     |
| Rear                                                       |                                            |                                                                                                                                          |
| Trigger input                                              |                                            | BNC; for details, see Trigger system                                                                                                     |
| Trigger out                                                |                                            | BNC; for details, see Trigger system                                                                                                     |
| Waveform generator output<br>(requires R&S®MXO3-B6 option) |                                            | BNC; for details, see R&S®MXO3-B6 option                                                                                                 |
| USB interface                                              |                                            | 1 × USB 3.1 Gen 1 port, type B plug                                                                                                      |
| LAN interface                                              |                                            | RJ-45 connector, supports 10/100/1000BASE-T, LXI compliant                                                                               |
| External monitor interface                                 |                                            | HDMI, 1920 × 1080 pixel at 60 Hz, output of oscilloscope display                                                                         |

The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing, LLC in the United States and other countries.

|                                            |                                 |                                                                                                                                                                                                                                                                    |
|--------------------------------------------|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Input and output</b>                    |                                 |                                                                                                                                                                                                                                                                    |
| Security slot                              |                                 | for standard Kensington style lock                                                                                                                                                                                                                                 |
| VESA mount                                 |                                 | VESA compatibility mounting interface, 100 mm × 100 mm pattern size                                                                                                                                                                                                |
| <b>Right side</b>                          |                                 |                                                                                                                                                                                                                                                                    |
| Ground jack                                |                                 | connected to ground                                                                                                                                                                                                                                                |
| <b>General data</b>                        |                                 |                                                                                                                                                                                                                                                                    |
| <b>Display</b>                             | type                            | 11.6" LC TFT color display with capacitive touchscreen                                                                                                                                                                                                             |
|                                            | resolution                      | 1920 × 1080 pixel (Full HD)                                                                                                                                                                                                                                        |
| <b>Temperature</b>                         |                                 |                                                                                                                                                                                                                                                                    |
| Temperature range                          | operating temperature range     | 0°C to +45°C                                                                                                                                                                                                                                                       |
|                                            | storage temperature range       | –40°C to +70°C                                                                                                                                                                                                                                                     |
|                                            |                                 | in line with MIL-PRF-28800F section 4.5.5.1.1.1 class 3 tailored to +45°C for operation                                                                                                                                                                            |
| Climatic resistance                        | damp heat                       | +25°C/+45°C at 95 % relative humidity cyclic, in line with IEC 60068-2-30                                                                                                                                                                                          |
| <b>Altitude</b>                            |                                 |                                                                                                                                                                                                                                                                    |
| Operating                                  |                                 | up to 3000 m above sea level                                                                                                                                                                                                                                       |
| Nonoperating                               |                                 | up to 4600 m above sea level                                                                                                                                                                                                                                       |
| <b>Mechanical resistance</b>               |                                 |                                                                                                                                                                                                                                                                    |
| Vibration                                  | sinusoidal                      | 5 Hz to 150 Hz, max. 1.8 g at 55 Hz; 0.5 g from 55 Hz to 150 Hz, in line with EN 60068-2-6                                                                                                                                                                         |
|                                            |                                 | 10 Hz to 55 Hz, in line with MIL-PRF-28800F, section 4.5.5.3.2 class 3                                                                                                                                                                                             |
|                                            | random                          | 8 Hz to 500 Hz, acceleration 1.2 g (RMS), in line with EN 60068-2-64                                                                                                                                                                                               |
|                                            |                                 | 5 Hz to 500 Hz, acceleration 2.058 g (RMS), in line with MIL-PRF-28800F, section 4.5.5.3.1 class 3                                                                                                                                                                 |
| Shock                                      |                                 | 40 g shock spectrum, in line with MIL-STD-810G, method no. 516.6, procedure I                                                                                                                                                                                      |
|                                            |                                 | 30 g functional shock, halfsine, duration 11 ms, in line with MIL-PRF-28800F, section 4.5.5.4.1                                                                                                                                                                    |
| <b>Electromagnetic compatibility (EMC)</b> |                                 |                                                                                                                                                                                                                                                                    |
| RF emissions                               |                                 | in line with CISPR 11/EN 55011 group 1, class A (for a shielded test setup); the instrument complies with the emission requirements stipulated by EN 55011, EN 61326-1 and EN 61326-2-1 class A, making the instrument suitable for use in industrial environments |
| Immunity                                   |                                 | in line with IEC/EN 61326-1 table 2, immunity test requirements for industrial environment <sup>6)</sup>                                                                                                                                                           |
| <b>Certifications</b>                      |                                 |                                                                                                                                                                                                                                                                    |
| Calibration interval                       |                                 | VDE, <sub>C</sub> CSA <sub>US</sub> , KC                                                                                                                                                                                                                           |
| <b>Power supply</b>                        |                                 |                                                                                                                                                                                                                                                                    |
| AC supply                                  |                                 | 100 V to 240 V ±10% at 50 Hz to 60 Hz and 400 Hz ±5%, max. 2.8 A to 1.8 A, in line with MIL-PRF 28800F, section 3.5                                                                                                                                                |
| Power consumption                          | maximum                         | 280 W                                                                                                                                                                                                                                                              |
| Safety                                     |                                 | in line with IEC 61010-1, EN 61010-1, CAN/CSA-C22.2 No. 61010-1, UL 61010-1                                                                                                                                                                                        |
| <b>Mechanical data</b>                     |                                 |                                                                                                                                                                                                                                                                    |
| Dimensions                                 | W × H × D                       | 375 mm × 233 mm × 163 mm (14.76 in × 9.17 in × 6.42 in)                                                                                                                                                                                                            |
| Weight                                     | without options, nominal        | 4.0 kg (8.82 lb)                                                                                                                                                                                                                                                   |
| Rackmount height                           | with R&S®ZZA-MXO3 rackmount kit | 5 HU                                                                                                                                                                                                                                                               |

<sup>6)</sup> Test criterion is displayed noise level within ±1 div for input sensitivity of 5 mV/div.

# ORDERING INFORMATION

| Designation                                                                                                                                                                                    | Type           | Order No.    |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|--------------|
| <b>Choose your base model</b>                                                                                                                                                                  |                |              |
| Oscilloscope, 100 MHz, 4 channels                                                                                                                                                              | MXO 34         | 1335.2050.04 |
| Oscilloscope, 100 MHz, 8 channels                                                                                                                                                              | MXO 38         | 1335.2050.08 |
| Base unit (including standard accessories: 500 MHz passive probe (10:1) per channel, accessories bag, quick start guide, power cord)                                                           |                |              |
| <b>Choose your bandwidth upgrade</b>                                                                                                                                                           |                |              |
| Upgrade of MXO 34 to 200 MHz bandwidth                                                                                                                                                         | R&S®MXO3-B242  | 1335.2221.02 |
| Upgrade of MXO 34 to 350 MHz bandwidth                                                                                                                                                         | R&S®MXO3-B243  | 1335.2244.02 |
| Upgrade of MXO 34 to 500 MHz bandwidth                                                                                                                                                         | R&S®MXO3-B245  | 1335.2267.02 |
| Upgrade of MXO 34 to 1 GHz bandwidth                                                                                                                                                           | R&S®MXO3-B2410 | 1335.2280.02 |
| Upgrade of MXO 38 to 200 MHz bandwidth                                                                                                                                                         | R&S®MXO3-B282  | 1335.2815.02 |
| Upgrade of MXO 38 to 350 MHz bandwidth                                                                                                                                                         | R&S®MXO3-B283  | 1335.2821.02 |
| Upgrade of MXO 38 to 500 MHz bandwidth                                                                                                                                                         | R&S®MXO3-B285  | 1335.2838.02 |
| Upgrade of MXO 38 to 1 GHz bandwidth                                                                                                                                                           | R&S®MXO3-B2810 | 1335.2844.02 |
| <b>Choose your options</b>                                                                                                                                                                     |                |              |
| Mixed signal option for MXO 3 series with 16 digital channels                                                                                                                                  | R&S®MXO3-B1    | 1335.2073.02 |
| Arbitrary waveform generator, 50 MHz, 1 analog channel                                                                                                                                         | R&S®MXO3-B6    | 1335.2850.02 |
| Memory upgrade to 500 Mpoints                                                                                                                                                                  | R&S®MXO3-B105  | 1335.3105.02 |
| Power analysis                                                                                                                                                                                 | R&S®MXO3-K31   | 1335.2880.02 |
| Frequency response analysis                                                                                                                                                                    | R&S®MXO3-K36   | 1335.2896.02 |
| Low speed serial buses<br>(I <sup>2</sup> C/QuadSPI/SPI/UART/RS-232/RS-422/RS-485/NRZ clocked/NRZ unclocked/Manchester)                                                                        | R&S®MXO3-K510  | 1335.2867.02 |
| Automotive protocols (CAN/CAN FD/CAN XL/LIN/SENT)                                                                                                                                              | R&S®MXO3-K520  | 1335.2873.02 |
| Aerospace protocols (ARINC 429/MIL-STD-1553/SpaceWire)                                                                                                                                         | R&S®MXO3-K530  | 1335.2996.02 |
| MIPI low speed protocols (SPMI/RFFE/I <sup>3</sup> C)                                                                                                                                          | R&S®MXO3-K550  | 1335.5214.02 |
| Automotive Ethernet protocols (10BASE-T1S)                                                                                                                                                     | R&S®MXO3-K560  | 1335.5943.02 |
| R&S®ScopeStudio Software                                                                                                                                                                       | R&S®MXO-PC     | 1801.9005.02 |
| R&S®ScopeStudio Protocol Decode Option                                                                                                                                                         | R&S®MXO-PC-K1  | 1804.8874.02 |
| Application bundle, consists of the following options:<br>R&S®MXO3-B6, R&S®MXO3-B105, R&S®MXO3-K31, R&S®MXO3-K36, R&S®MXO3-K510,<br>R&S®MXO3-K520, R&S®MXO3-K530, R&S®MXO3-K550, R&S®MXO3-K560 | R&S®MXO3-PK1   | 1335.2909.02 |
| <b>Choose your additional probes</b>                                                                                                                                                           |                |              |
| <b>Single-ended passive probes</b>                                                                                                                                                             |                |              |
| 700 MHz, 10 MΩ, 10:1, 400 V, 9.5 pF, 2.5 mm                                                                                                                                                    | R&S®RT-ZP11    | 1803.0005.02 |
| 500 MHz, 10 MΩ, 10:1, 400 V, 9.5 pF, 2.5 mm                                                                                                                                                    | R&S®RT-ZP10    | 1409.7550.00 |
| 500 MHz, 10 MΩ, 10:1, 300 V, 10 pF, 5 mm                                                                                                                                                       | R&S®RT-ZP05M   | 1335.3505.02 |
| 700 MHz, 14.9 MΩ, 25:1, 30 V, 4 pF, MM CX                                                                                                                                                      | R&S®RT-ZPMMCX  | 1803.1599.02 |
| 38 MHz, 1 MΩ, 1:1, 55 V, 39 pF, 2.5 mm                                                                                                                                                         | R&S®RT-ZP1X    | 1333.1370.02 |
| <b>Active broadband probes: single-ended</b>                                                                                                                                                   |                |              |
| 1.0 GHz, active, 1 MΩ, Rohde & Schwarz probe interface                                                                                                                                         | R&S®RT-ZS10E   | 1418.7007.02 |
| 1.0 GHz, active, 1 MΩ, R&S®ProbeMeter, micro button, Rohde & Schwarz probe interface                                                                                                           | R&S®RT-ZS10    | 1410.4080.02 |
| 1.5 GHz, active, 1 MΩ, R&S®ProbeMeter, micro button, Rohde & Schwarz probe interface                                                                                                           | R&S®RT-ZS20    | 1410.3502.02 |
| <b>Active broadband probes: differential</b>                                                                                                                                                   |                |              |
| 1.0 GHz, active, differential, 1 MΩ, R&S®ProbeMeter, micro button, incl. 10:1 external attenuator,<br>1 MΩ, 60 V DC, 42.4 V AC (peak), Rohde & Schwarz probe interface                         | R&S®RT-ZD10    | 1410.4715.02 |
| 1.5 GHz, active, differential, 1 MΩ, R&S®ProbeMeter, micro button, Rohde & Schwarz probe interface                                                                                             | R&S®RT-ZD20    | 1410.4409.02 |
| <b>Power rail probe</b>                                                                                                                                                                        |                |              |
| 2.0 GHz, 1:1, 50 kΩ, ±0.85 V, ±60 V offset, Rohde & Schwarz probe interface                                                                                                                    | R&S®RT-ZPR20   | 1800.5006.02 |
| <b>High voltage probes: passive</b>                                                                                                                                                            |                |              |
| 250 MHz, 100:1, 100 MΩ, 850 V, 6.5 pF                                                                                                                                                          | R&S®RT-ZH03    | 1333.0873.02 |
| 400 MHz, 100:1, 50 MΩ, 1000 V, 7.5 pF                                                                                                                                                          | R&S®RT-ZH10    | 1409.7720.02 |
| 400 MHz, 1000:1, 50 MΩ, 1000 V, 7.5 pF                                                                                                                                                         | R&S®RT-ZH11    | 1409.7737.02 |
| <b>High voltage probes: differential</b>                                                                                                                                                       |                |              |
| 200 MHz, 250:1/25:1, 5 MΩ, 750 V (peak), 300 V CAT III, Rohde & Schwarz probe interface                                                                                                        | R&S®RT-ZHD07   | 1800.2307.02 |
| 100 MHz, 500:1/50:1, 10 MΩ, 1500 V (peak), 1000 V CAT III, Rohde & Schwarz probe interface                                                                                                     | R&S®RT-ZHD15   | 1800.2107.02 |
| 200 MHz, 500:1/50:1, 10 MΩ, 1500 V (peak), 1000 V CAT III, Rohde & Schwarz probe interface                                                                                                     | R&S®RT-ZHD16   | 1800.2207.02 |
| 100 MHz, 1000:1/100:1, 40 MΩ, 6000 V (peak), 1000 V CAT III, Rohde & Schwarz probe interface                                                                                                   | R&S®RT-ZHD60   | 1800.2007.02 |

| Designation                                                                                                                        | Type                            | Order No.    |
|------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|--------------|
| <b>Current probes</b>                                                                                                              |                                 |              |
| 20 kHz, AC/DC, 0.01 V/A and 0.001 V/A, $\pm 200$ A and $\pm 2000$ A, BNC interface                                                 | R&S®RT-ZC02                     | 1333.0850.02 |
| 100 kHz, AC/DC, 0.1 V/A, 30 A, BNC interface                                                                                       | R&S®RT-ZC03                     | 1333.0844.02 |
| 2 MHz, AC/DC, 0.01 V/A, 500 A (RMS), Rohde&Schwarz probe interface                                                                 | R&S®RT-ZC05B                    | 1409.8204.02 |
| 10 MHz, AC/DC, 0.01 V/A, 150 A (RMS), BNC interface                                                                                | R&S®RT-ZC10                     | 1409.7750.02 |
| 10 MHz, AC/DC, 0.01 V/A, 150 A (RMS), Rohde&Schwarz probe interface                                                                | R&S®RT-ZC10B                    | 1409.8210.02 |
| 50 MHz, AC/DC, 0.1 V/A, 30 A (RMS), Rohde&Schwarz probe interface                                                                  | R&S®RT-ZC15B                    | 1409.8227.02 |
| 100 MHz, AC/DC, 0.1 V/A, 30 A (RMS), BNC interface                                                                                 | R&S®RT-ZC20                     | 1409.7766.02 |
| 100 MHz, AC/DC, 0.1 V/A, 30 A (RMS), Rohde&Schwarz probe interface                                                                 | R&S®RT-ZC20B                    | 1409.8233.02 |
| 120 MHz, AC/DC, 1 V/A, 5 A (RMS), BNC interface                                                                                    | R&S®RT-ZC30                     | 1409.7772.02 |
| <b>EMC near-field probe</b>                                                                                                        |                                 |              |
| Probe set for E and H near-field measurements, 30 MHz to 3 GHz                                                                     | R&S®HZ-15                       | 1147.2736.02 |
| <b>Logic probe<sup>1)</sup></b>                                                                                                    |                                 |              |
| 300 MHz logic probe, 8 channels                                                                                                    | R&S®RT-ZL03X                    | 1335.3005.02 |
| <b>Probe accessories</b>                                                                                                           |                                 |              |
| Accessory set for R&S®RT-ZP10/-ZP11 passive probe (2.5 mm probe tip)                                                               | R&S®RT-ZA1                      | 1409.7566.02 |
| Probe power supply for R&S®RT-ZC10/-ZC20/-ZC30                                                                                     | R&S®RT-ZA13                     | 1409.7789.02 |
| External attenuator 10:1, 2.0 GHz, 1.3 pF, 60 V DC, 42.4 V AC (peak), for R&S®RT-ZD20/-ZD30 probes                                 | R&S®RT-ZA15                     | 1410.4744.02 |
| Probe pouch for the logic probes                                                                                                   | R&S®RT-ZA19                     | 1335.7875.02 |
| Power deskew and calibration test fixture                                                                                          | R&S®RT-ZF20                     | 1800.0004.02 |
| 3D positioner with central tensioning knob for easy clamping and positioning of probes (span width: 200 mm, clamping range: 15 mm) | R&S®RT-ZA1P                     | 1326.3641.02 |
| <b>Choose your accessories</b>                                                                                                     |                                 |              |
| Front cover                                                                                                                        | R&S®MXO3-Z1                     | 1335.1902.02 |
| Soft case                                                                                                                          | R&S®MXO3-Z3                     | 1335.1919.02 |
| Transit case                                                                                                                       | R&S®MXO3-Z4                     | 1335.1925.02 |
| Rackmount kit, for MXO 3 oscilloscopes with 5 HU                                                                                   | R&S®ZZA-MXO3                    | 1335.2715.02 |
| VESA mount (compatible with standard 100 mm × 100 mm pattern)                                                                      | Choose industry standard mounts |              |

<sup>1)</sup> The R&S®MXO3-B1 mixed signal option contains two R&S®RT-ZL03X logic probes.

Service at Rohde & Schwarz

# YOU'RE IN GREAT HANDS

|                     | SERVICE PLANS                  | ON DEMAND             |
|---------------------|--------------------------------|-----------------------|
| Calibration         | Up to five years <sup>1)</sup> | Pay per calibration   |
| Warranty and repair | Up to five years <sup>1)</sup> | Standard price repair |

<sup>1)</sup> For extended periods, contact your Rohde & Schwarz sales office.

Instrument management made easy

The R&S®InstrumentManager makes it easy to register and manage your instruments. It lets you schedule calibration dates and book services.

Find out more  
about our service  
portfolio under:



### Service at Rohde & Schwarz You're in great hands

- ▶ Worldwide
- ▶ Local and personalized
- ▶ Customized and flexible
- ▶ Uncompromising quality
- ▶ Long-term dependability



### Rohde & Schwarz

The Rohde & Schwarz technology group is among the trailblazers when it comes to paving the way for a safer and connected world with its leading solutions in test & measurement, technology systems and networks & cybersecurity. Founded more than 90 years ago, the group is a reliable partner for industry and government customers around the globe. The independent company is headquartered in Munich, Germany and has an extensive sales and service network with locations in more than 70 countries.

[www.rohde-schwarz.com](http://www.rohde-schwarz.com)

### Sustainable product design

- ▶ Environmental compatibility and eco-footprint
- ▶ Energy efficiency and low emissions
- ▶ Longevity and optimized total cost of ownership

Certified Quality Management

**ISO 9001**

Certified Environmental Management

**ISO 14001**

### More certificates of Rohde & Schwarz



### Rohde & Schwarz training

[www.training.rohde-schwarz.com](http://www.training.rohde-schwarz.com)

### Rohde & Schwarz customer support

[www.rohde-schwarz.com/support](http://www.rohde-schwarz.com/support)

