

# Agilent 8491A/B, 8493A/B/C, 11581A, 11582A and 11583C Coaxial Attenuators dc to 26.5 GHz

Product Overview



8491A/B



8493C



8493A/B

- **High accuracy**
- **Low SWR**
- **Broadband frequency coverage**
- **Small size**



Agilent Technologies

## Description

Agilent's coaxial fixed attenuators provide precision attenuation, flat frequency response, and low SWR over broad frequency ranges (dc to 26.5 GHz) at low prices. Attenuators are available in eight attenuation values: 3, 6, 10, 20, 30, 40, 50, and 60 dB; with performances specified from dc to 26.5 GHz; and with choice of four connector types: Type-N, APC-7, SMA<sup>1</sup>, and APC 3.5<sup>2</sup>.

These attenuators are all tested on a state-of-the-art precision analyzer to assure specifications over the full frequency ranges. Although the 8493C is not specified above 26.5 GHz, it performs resonance free to 34 GHz with only a small loss in performance.

## Precision construction

The attenuators employ a film on an attenuator card as the resistive element. The uniformity and repeatability of the film deposition process result in high accuracy and low SWR over very wide frequency ranges.

The 8493C features thin-film-tantalum nitride on a sapphire substrate for exceptional precision performance to 26.5 GHz. In fact, it performs resonance-free to 34 GHz, the top frequency limit of the APC-3.5 connector.

The choice of connector type and material also ensure accurate and repeatable attenuation. The 8491A/B attenuators are furnished with Type-N connectors whose dimensions are compatible with either MIL-C-71 or MIL-C-39012 connector specifications.

These connectors are stainless steel for long wear and high repeatability. The 8493A/B attenuators are furnished with SMA type connectors. The connectors are heat treated beryllium copper for greater strength and wear.

The 8493C is furnished with the APC 3.5 connector which is compatible with standard SMA connectors but is more rugged and offers improved repeatability over hundreds of connections.

---

1. As per USASI Committee C83.2 compatible with DSM, ARM, WPM, BRM, NPM, etc.  
2. Mate with MIL-C-71 or MIL-C-39012 connectors.

## Quality assurance in testing

The flat frequency response and low SWR of the attenuators are assured over the entire frequency range by full frequency band testing on a state-of-the-art precision analyzer. Full frequency band testing ensures that narrow resonances in the frequency band are not overlooked. Actual attenuation values taken at dc, 4, 8, 12, 18, and 26.5 GHz are stamped on the attenuator body for permanent and easy reference.

Testing each attenuator with a state-of-the-art precision analyzer brings standards lab accuracy to production testing because the system can determine its own measurement uncertainties and compensate for them in the testing process. System calibration is derived from precise physical standards which are directly traceable to the National Bureau of Standards. In addition, automatic testing eliminates the possibility of human error in setting instrument controls, taking data, or making calculations.

## Applications

Ruggedness, reliability and small size make these attenuators useful both on the bench and in systems applications. With their high accuracy and low SWR they are ideally suited for extending the range of sensitive power meters for higher power measurements and for “padding” poorly matched devices to improve system SWR.

These same characteristics lend themselves to applications as calibration standards in attenuation and RF substitution measurements. With their broad dc to 26.5 GHz frequency range and reasonable cost, general applications, such as the reduction of power level to sensitive components and instrumentation systems, are attractive and appropriate uses for these attenuators.

## Accuracy


The accuracy of an attenuator directly affects the accuracy of the measurement where the attenuator is used. In fact, attenuators are used extensively as the standard against which other instruments or devices are calibrated.

Agilent’s fixed attenuators achieve flat frequency response (typically a few hundredths of a dB) and overall accuracy (typically  $\pm 2\%$  of value in dB at 26.5 GHz) through the use of thin-film attenuator cards. These cards are composed of high stability tantalum nitride resistive film deposited on a sapphire or alumina substrate.

## Quality assurance in specifications

The following examples demonstrate the reliability and comprehensiveness of specifications. Although the absolute accuracy for a 3 dB attenuator is specified as  $\pm 0.3$  dB, test data statistics indicate an expected value of 3 dB  $\pm 0.20$  dB from dc to 18 GHz. Similarly a 30 dB attenuator is specified as  $\pm 1.0$  dB, but typically is no worse than 30 dB  $\pm 0.75$  dB from dc to 18 GHz. The other attenuation values are also specified as conservatively.

In addition, Agilent precision attenuators meet more comprehensive performance standards. Linear phase response is an example. Not only is wide bandwidth significant, but also linear phase response is an important parameter for applications where pulse distortion must be kept to a minimum. The excellent linearity of the Agilent attenuators is typified in the accompanying illustration of an actual network analyzer measurement.

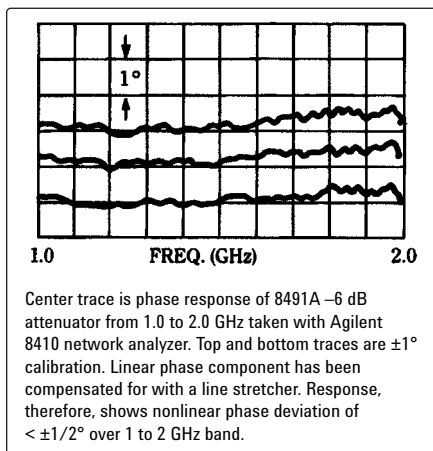

## Economy

Automated procedures have resulted in economies of scale in production and testing. The automated resistive film deposition process permits high-volume manufacture with excellent yield. Furthermore, characteristics are consistently uniform; hand “touch-up” is not required to meet specifications. Automatic testing means exceptionally thorough, high-accuracy measurements can be performed in appreciably shorter time than could be done manually.

The overall result is outstanding attenuator performance at attractive prices.

## Calibration data

### Optional calibration data

Use of calibration data has always been an effective means of reducing measurement uncertainty at RF and microwave frequencies. This data is available for Agilent’s fixed attenuators as Option 849xx-UK6. Data which is generated by an automatic network analyzer provides a tabulated list of attenuation and SWR’s at 26 to 67 frequencies (see table 2). Measurements to 60 dB are directly traceable to NBS standards and feature very low measurement uncertainties. Option 849xx-UK6 data is available when the attenuators are first purchased and recalibrations are available through Agilent Customer Service Centers around the world.

**Table 1. SWR data uncertainties**

SWR data uncertainties			
Connector type	Frequency range (GHz)	Measured SWR 1.0 to 1.35	Measured SWR 1.35 to 1.86
APC 7 & male Type-N	dc to 12.4	±0.025	±0.041
	12.4 to 18.0	±0.031	±0.050
Female Type-N	dc to 8.0	±0.025	±0.046
	8.0 to 12.4	±0.031	±0.063
	12.4 to 18.0	±0.042	±0.071
Male SMA	dc to 8.0	±0.031	±0.054
	8.0 to 12.4	±0.045	±0.084
	12.4 to 18.0	±0.077	±0.137
Female SMA	dc to 8.0	±0.054	±0.088
	8.0 to 12.4	±0.077	±0.132
	12.4 to 18.0	±0.122	±0.206
Male APC-3.5	dc to 10	±0.025	±0.041
	10 to 18	±0.031	±0.050
	18 to 26.5	±0.045	±0.067
Female APC-3.5	dc to 10	±0.020	±0.030
	10 to 18	±0.025	±0.037
	18 to 26.5	±0.035	±0.050

**Table 2. Coaxial attenuator calibration frequencies\* (MHz)**

100	4500	9000	13000	16750
500	5000	9500	13500	17000
1000	5500	10000	14000	17250
1500	6000	10500	14500	17500
2000	6500	11000	15000	17750
2500	7000	11500	15500	18000
3000	7500	12000	16000	(each 250 MHz
3500	8000	12400	16250	to 26.5 GHz)
4000	8500	12500	16500	

\*dc to 12.4 GHz models include 26 frequencies, dc to 18 GHz models include 42 frequencies, dc to 26.5 GHz models include 67 frequencies (2 to 26.5 GHz).

**Table 3. Attenuation data uncertainties**

Attenuation (dB)	8491, 8492 and 8493 Attenuation data uncertainty (dB)				
	0.1 to 2.0 GHz	2 to 6 GHz	6 to 12.4 GHz	12.4 to 18.0 GHz	18.0 to 26.5 GHz
3	±0.07	±0.06	±0.06	±0.11	±.15
6	±0.07	±0.07	±0.07	±0.11	±.15
10	±0.08	±0.07	±0.07	±0.12	±.15
20	±0.09	±0.08	±0.08	±0.13	±.15
30	±0.12	±0.11	±0.11	±0.15	±.1 8
40	±0.15	±0.14	±0.14	±0.21	±.25
50	±0.23	±0.23	±0.23	±0.34	n/a
60	±0.50*	±0.48*	±0.90*	±0.90*	n/a

\*The uncertainties noted represent 99.7% probability values.

## Ordering information

To order, basic model number and option (specifies attenuation value) must be specified. Option 849xx-UK6 calibration data can also be ordered with the basic model number and attenuation value option. Please note, Option 849xx-UK6 is not available with 11581/2A nor 11583C.

### Attenuation options

	Atten	8491A/B options	8493A/B options	8493C options
Option 003	3 dB	8491x-003	8493x-003	8493C-003
Option 006	6 dB	8491x-006	8493x-006	8493C-006
Option 010	10 dB	8491x-010	8493x-010	8493C-010
Option 020	20 dB	8491x-020	8493x-020	8493C-020
Option 030	30 dB	8491x-030	8493x-030	8493C-030
Option 040	40 dB	8491x-040		8493C-040
Option 050	50 dB	8491x-050		
Option 060	60 dB	8491x-060		

Note: x = A or B

## Specifications

Specifications describe the instruments warranted performance. Supplemental characteristics (shown in italics) are intended to provide information useful in applying the instrument by giving typical, but non-warranted, performance parameters.

### *Frequency range:*

8491A and 8493A, dc to 12.4 GHz

8491B, 8493B, dc to 18 GHz

8493C, dc to 26.5 GHz

### *Attenuation accuracy:*

	8491A/93A	8491B/93B		8493C	
	dc to 12.4 GHz	dc to 12.4	12.4 to 18 GHz	dc to 18	18 to 26.5 GHz
3 dB	±0.3 dB	±0.3 dB		±0.5 dB	±1.0 dB
6 dB	±0.3 dB	±0.3 dB	±0.4 dB	±0.6 dB	
10 dB	±0.5 dB	±0.6 dB		±0.3 dB	±0.5 dB
20 dB	±0.5 dB	±0.6 dB	±1.0 dB	±0.5 dB	±0.6 dB
30 dB	±1.0 dB	±1.0 dB		±0.7 dB	±1.0 dB
	8491A only	8491B/92A only			
40 dB	±1.5 dB	±1.5 dB		±1.0 dB	±1.3 dB
50 dB	±1.5 dB	±1.5 dB		N/A	
60 dB	±2.0 dB	±2.0 dB		N/A	

### *SWR:*

	8491B/8493B			8493C		
	8491A/8493A			dc to 8	8 to 12.4	12.4 to 26.5
	dc to 8 (GHz)	8 to 12.4 (GHz)	12.4 to 18 (GHz)			
3 dB	1.25	1.35	1.5	1.10	1.15	1.25
6 dB	1.2	1.3	1.5	1.10	1.15	1.27
10 dB	1.2	1.3	1.5	1.10	1.15	1.25
20 dB	1.2	1.3	1.5	1.10	1.15	1.25
30 dB	1.2	1.3	1.5	1.10	1.15	1.25
	8491A/B only		8491B only			
40 dB	1.2	1.3	1.5	1.10	1.15	1.25
50 dB	1.2	1.3	1.5	N/A	N/A	N/A
60 dB	1.2	1.3	1.5	N/A	N/A	N/A

## Environmental

Temperature, non-operating:  $-55^{\circ}$  to  $+85^{\circ}\text{C}$

Temperature, operating:  $0^{\circ}$  to  $+55^{\circ}\text{C}$

EMC: Radiated interference is within the requirements of MIL STD 461 method RE02, VDE 0871 EN55011 and FCC part 18

		8491A	8493A	8491B	8493B	8493C	
Connectors (50 $\Omega$ )		Type-N <sup>2</sup>	SMA <sup>1</sup>	Type-N <sup>2</sup>	SMA <sup>1</sup>	APC-3.5	
Dimensions	Millimeters	67 X 21	40 X 13	67 X 21	40 X 13	3,6,10,20 dB	30,40 dB
	Inches	2 7/16 X 13/16 D	1 9/16 X 1/2 D	2 7/16 X 13/16 D	1 9/16 X 1/2 D	33.8 X 8	36.8 X 8
Weight	Net	110 g (4 oz)	30 g (1 oz)	110 g (4 oz)	30 g (1 oz)	8.5 g (0.3 oz)	9.4 g (0.33 oz)
	Shipping	220 g (8 oz)	220 g (8 oz)	220 g (8 oz)	220 g (8 oz)	45 kg (1 lb)	

## Supplemental characteristics

Temperature stability:

0.0001 dB/dB/ $^{\circ}\text{C}$  (all except 8493C)

0.0002 dB/dB/ $^{\circ}\text{C}$  (8493C)

Maximum input power: 2 W avg., 100 W peak<sup>3</sup>

Power sensitivity: 0.001 dB/dB/W (all except 8493C)

0.001 dB/W (8493C)

1. As per USASI Committee C83.2 compatible with QSM, ARM, WPM, BRM, NPM, etc.

2. Mate with MIL-C-71 or MIL-C-39012 connectors.

3 At  $20^{\circ}\text{C}$  derated to 1.3 W avg. at  $55^{\circ}\text{C}$ .

## Attenuator sets

### 11581A/11582A/11583C

A calibrated set of four fixed coaxial attenuators (3, 6, 10, and 20 dB) is available. Each set includes a calibration report certified traceable to the National Bureau of Standards. The reports included with the 11581A, 11582A, and 11583C indicate the accuracy of measurement and list the attenuation and reflection coefficient at each port of the attenuator.

The set of four attenuators is furnished in a handsome walnut accessory case. In addition to protecting the units when not in use, the case is also a convenient storage place for the attenuators and the calibration reports.

Calibration data as described on page 4 is included with rack attenuator set.

## Ordering information

11581A (3,6,10,20 dB values 8491A)  
11582A (3, 6,10,20 dB values 8491B)  
11583C (3, 6, 10, 20 dB values 8493C)



## Agilent Email Updates

[www.agilent.com/find/emailupdates](http://www.agilent.com/find/emailupdates)  
Get the latest information on the products and applications you select.

## Agilent Technologies' Test and Measurement Support, Services, and Assistance

Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Support is available for at least five years beyond the production life of the product. Two concepts underlie Agilent's overall support policy: "Our Promise" and "Your Advantage."

### Our Promise

Our Promise means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you use Agilent equipment, we can verify that it works properly, help with product operation, and provide basic measurement assistance for the use of specified capabilities, at no extra cost upon request. Many self-help tools are available.

### Your Advantage

Your Advantage means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and on-site education and training, as well as design, system integration, project management, and other professional engineering services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.

**By internet, phone, or fax, get assistance with all your test and measurement needs.**

### Online assistance:

[www.agilent.com/find/assist](http://www.agilent.com/find/assist)

### Phone or Fax

United States:  
(tel) 800 452 4844

Korea:  
(tel) (82 2) 2004 5004  
(fax) (82 2) 2004 5115

Canada:  
(tel) 877 894 4414  
(fax) 905 282 6495

Latin America:  
(tel) (305) 269 7500  
(fax) (305) 269 7599

China:  
(tel) 800 810 0189  
(fax) 800 820 2816

Taiwan:  
(tel) 0800 047 866  
(fax) 0800 286 331

Europe:  
(tel) (31 20) 547 2323  
(fax) (31 20) 547 2390

Other Asia Pacific  
Countries:  
(tel) (65) 6375 8100  
(fax) (65) 6836 0252

Japan:  
(tel) (81) 426 56 7832  
(fax) (81) 426 56 7840

Email:  
[tm\\_asia@agilent.com](mailto:tm_asia@agilent.com)

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2002  
Printed in USA, May 30, 2002  
**5953-6475**



**Agilent Technologies**