

Agilent E1339A 72-Channel Digital Output/Relay Driver

Data Sheet

- 1-Slot, B-size, register based
- Digital output or dense relay driver
- Open Collector outputs switch up to 32 V
- Relay coil flyback protection
- Power for driver external devices
- Output cables supplied

Description


The Agilent Technologies E1339A 72-Channel Digital Output/Relay Driver is a **B-size, 1-slot, register-based VXI module**. Channels can be used (with external pull-up resistors) as digital outputs or as drivers for external relays.

All channels are referenced to chassis ground, can sink up to 200 mA each, and can switch voltages up to 32 V. Limited power is available on the module faceplate for powering external devices. An on-board jumper permits either the +5, +12, or +24 V VXI power supplies to be used for powering external devices.

Please note that +24 volt power is not available on Agilent B-size VXI mainframes. If +24 volt load power is required in such a case, an external power supply may be used. +24 volt power is available on Agilent C-size mainframes.

The downloadable SCPI and *VXIplug&play* drivers provide open/close commands for individual 72-channel operation or for 36-channel dual output operation (the latter is designed specifically for driving latching microwave relays).

Refer to the Agilent Technologies Website for instrument driver availability and downloading instructions, as well as for recent product updates, if applicable.

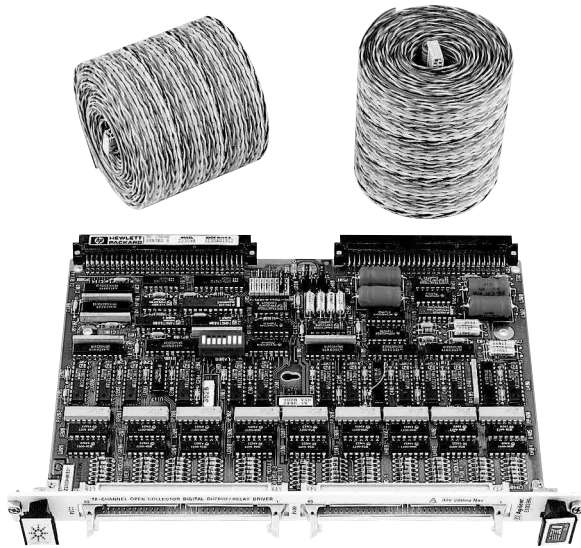

Agilent E1339A



Agilent Technologies

Connectors

User connection to the E1339A is implemented through two 60-pin faceplate ribbon cable headers with cable securing clips/extractors. Two 2-meter long-twisted pair ribbon mating cables with ribbon connectors are supplied with the module. The user-end of these cables is unterminated.

C-size Adapter

For adapting the E1339A to a C-size mainframe, the E1407A Adapter is recommended.

Product Specifications

General

Number of channels:	72
Channel type:	Output
Output or input type:	Open collector
Sink current per channel:	200 mA
Maximum open collector voltage:	32 V
Maximum available current (only one of the three internal power supplies can be selected):	
+5 V:	1 A (fused and requires P2)
+12 V:	1 A (fused)
+24 V:	1 A (fused and requires P2)

General Specifications

VXI Characteristics

VXI device type:	Register based
Data transfer bus:	n/a
Size:	B
Slots:	1
Connectors:	P1/P2
Shared memory:	None
VXI buses:	None
C-size compatibility:	Yes, requires E1407A

Instrument Drivers - See the Agilent Technologies Website (http://www.agilent.com/find/inst_drivers) for driver availability and downloading.

Command module firmware:	Downloadable
Command module firmware rev:	A.08
I-SCPI Win 3.1:	No
I-SCPI Series 700:	No
C-CSPI Lynx OS:	No
C-SCPI Series 700:	No
Panel Drivers:	No
VXIplug&play Win Framework:	No
VXIplug&play Win 95/NT Framework:	Yes
VXIplug&play HP-UX Framework:	No

Module Current

	I_{PM} (A)	I_{DM} (A)
+5 V:	0.10	0.10
+12 V:	0.10	0.01
-12 V:	-	-
+24 V:	-	-
-24 V:	-	-
-5.2 V:	-	-
-2 V:	-	-


Cooling/Slot

Watts/slot:	6
ΔP mm H ₂ O:	0.05
Air flow liter/s:	0.42

Ordering Information

Description	Product No.
72-Channel Digital Output/Relay Driver Service Manual	E1339A E1339A 0B3

E1339A Circuit Diagram

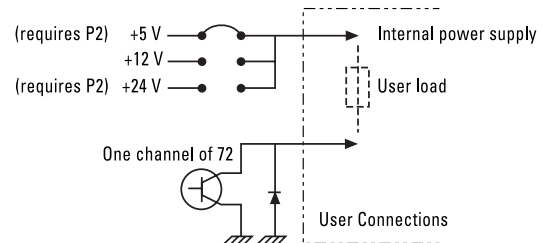

Agilent Technologies' Test and Measurement Support, Services, and Assistance

Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Support is available for at least five years beyond the production life of the product. Two concepts underlie Agilent's overall support policy: "Our Promise" and "Your Advantage."

Our Promise

Our Promise means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you use Agilent equipment, we can verify that it works properly, help with product operation, and provide basic measurement assistance for the use of specified capabilities, at no extra cost upon request. Many self-help tools are available.

Your Advantage

Your Advantage means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and on-site education and training, as well as design, system integration, project management, and other professional engineering services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.

By internet, phone, or fax, get assistance with all your test & measurement needs.

Online assistance:

www.agilent.com/find/assist

Phone or Fax

United States:

(tel) 1 800 829 4444

Canada:

(tel) 1 877 894 4414

(fax) (905) 282 6495

China:

(tel) 800 810 0189

(fax) 800 820 2816

Europe:

(tel) (31 20) 547 2323

(fax) (31 20) 547 2390

Japan:

(tel) (81) 426 56 7832

(fax) (81) 426 56 7840

Korea:

(tel) (82 2) 2004 5004

(fax) (82 2) 2004 5115

Latin America:

(tel) (305) 269 7500

(fax) (305) 269 7599

Taiwan:

(tel) 0800 047 866

(fax) 0800 286 331

Other Asia Pacific Countries:

(tel) (65) 6375 8100

(fax) (65) 6836 0252

(e-mail) tm_asia@agilent.com

Data Subject to Change

© Agilent Technologies, Inc. 2001

Printed in the U.S.A. May 1, 2004

5965-8831E



Agilent Technologies