

# **Specifications Guide**

**Agilent CSA Spectrum Analyzer**



**Agilent Technologies**

**Manufacturing Part Number: N1996-90021  
Supercedes: N1996-90004**

**Printed in USA  
September 2010**

© Copyright 2006-2010 Agilent Technologies, Inc.

The information in this document is subject to change without notice.

Agilent Technologies makes no warranty of any kind with regard to this material, including but not limited to, the implied warranties of merchantability and fitness for a particular purpose. Agilent Technologies shall not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance, or use of this material.

## **Warranty**

This Agilent Technologies instrument product is warranted against defects in material and workmanship for a period of one year from date of shipment. During the warranty period, Agilent Technologies will, at its option, either repair or replace products that prove to be defective.

For warranty service or repair, this product must be returned to a service facility designated by Agilent Technologies. Buyer shall prepay shipping charges to Agilent Technologies and Agilent Technologies shall pay shipping charges to return the product to Buyer. However, Buyer shall pay all shipping charges, duties, and taxes for products returned to Agilent Technologies from another country.

Agilent Technologies warrants that its software and firmware designated by Agilent Technologies for use with an instrument will execute its programming instructions when properly installed on that instrument. Agilent Technologies does not warrant that the operation of the instrument, or software, or firmware will be uninterrupted or error-free.

## **Limitation of Warranty**

The foregoing warranty shall not apply to defects resulting from improper or inadequate maintenance by Buyer, Buyer-supplied software or interfacing, unauthorized modification or misuse, operation outside of the environmental specifications for the product, or improper site preparation or maintenance.

**NO OTHER WARRANTY IS EXPRESSED OR IMPLIED. AGILENT TECHNOLOGIES SPECIFICALLY DISCLAIMS THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.**

## **Exclusive Remedies**

THE REMEDIES PROVIDED HEREIN ARE BUYER'S SOLE AND EXCLUSIVE REMEDIES. AGILENT TECHNOLOGIES SHALL NOT BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, WHETHER BASED ON CONTRACT, TORT, OR ANY OTHER LEGAL THEORY.

## **Where to Find the Latest Information**

Documentation is updated periodically. For the latest information about Agilent CSA spectrum analyzers, including firmware upgrades and application information, see:

<http://www.agilent.com/find/csa>



# Table of Contents

<b>1 CSA Specifications .....</b>	<b>8</b>
Definitions and Requirements .....	9
1.1 Definitions.....	9
1.2 Conditions Required to Meet Specifications.....	9
1.3 Certification .....	9
Frequency .....	10
Frequency Range .....	10
Frequency Reference (10 MHz) .....	10
Frequency Readout Accuracy.....	10
Frequency Span.....	10
Sweep and Trace Update Time .....	11
Trace Points.....	11
Trigger .....	12
Resolution Bandwidth (RBW) .....	13
Video Bandwidth (VBW) .....	14
Stability .....	14
Amplitude.....	16
Measurement Range .....	16
Maximum Safe Input Level .....	16
1-dB Gain Compression.....	16
ADC Over Range .....	16
Displayed Average Noise Level (DANL).....	17
Display Range.....	17
Marker Readout Resolution .....	17
Reference Level .....	18
Frequency Response.....	18
Scale Fidelity.....	19
Bandwidth Switching Uncertainty .....	19
Attenuator Switching Uncertainty .....	19
Absolute Amplitude Accuracy .....	19
Overall Amplitude Accuracy .....	20
95% Confidence Absolute Amplitude Uncertainty .....	20
RF Input VSWR.....	21
Second Harmonic Distortion .....	21
Third Order Intermodulation Distortion (TOI) .....	21
Residual Responses .....	21
Spurious Responses.....	22
Power Measurements.....	23

Channel Power .....	23
Occupied Bandwidth (OBW) .....	23
Adjacent Channel Power (ACP) .....	23
Hardware Options.....	25
Preamplifier ( <i>Options P03/P06</i> ).....	25
General.....	26
Calibration Cycle.....	26
Environmental Conditions .....	26
Acoustic Emissions (ISO 7779) .....	26
EMI Compatibility.....	26
Immunity Testing.....	26
Power Requirements .....	26
Data Storage.....	27
Display.....	27
Weight.....	27
Cabinet Dimensions .....	27
Front Panel Inputs & Outputs .....	28
RF Input .....	28
Probe Power Output .....	28
Tracking Generator Output .....	28
USB.....	28
Rear Panel Inputs & Outputs.....	29
USB-A.....	29
LAN.....	29
Timing LAN Opt.....	29
10 MHz Reference Out .....	29
External Reference Input.....	29
External Trigger Input.....	30
GPS Antenna Input.....	30
Kensington Security Slot .....	30
Regulatory Information .....	31
Compliance with German Noise Requirements .....	32
Acoustic Noise Emission/Geraeuschemission.....	32
Compliance with Canadian EMC Requirements .....	32
Declaration of Conformity.....	32
<b>2 Stimulus Response Measurement Suite (N8995A)</b> .....	<b>34</b>
Stimulus/Response .....	35
Frequency Range .....	35
Directivity.....	35

Source match (RF Output) .....	35
Frequency Resolution.....	35
Return Loss (RF Output) .....	36
Insertion Loss.....	37
Distance to Fault (Port 1).....	37
<b>3 AM/FM Modulation Analysis Measurement Suite (<i>N8996A</i>) .....</b>	<b>38</b>
AM Demodulation .....	39
Input Power Range.....	39
Carrier Frequency Range.....	39
Demodulation Bandwidth .....	39
Max Capture Memory .....	39
Max Capture Time .....	39
Modulation Rate Range.....	39
Modulation Rate Accuracy .....	40
Modulation Depth Range .....	40
AM Depth Accuracy .....	40
Modulation Distortion Floor .....	40
Residual AM (50 Hz to 3 kHz BW).....	40
Detectors.....	40
Burst/Sync Search .....	40
SINAD Accuracy.....	40
FM Demodulation .....	41
Input Power Range.....	41
Carrier Frequency Range.....	41
Demodulation Bandwidth .....	41
Max Capture Memory .....	41
Max Capture Time .....	41
Modulation Rate Range.....	41
Modulation Rate Accuracy .....	42
Peak Deviations.....	42
FM Deviation Accuracy .....	42
Modulation Distortion Floor .....	42
Detectors.....	42
Burst/Sync Search .....	42
SINAD Accuracy.....	42

---

## 1 CSA Specifications

## Definitions and Requirements

This book contains specifications and supplemental information for the Agilent CSA spectrum analyzers. The distinction among specifications, typical performance, and nominal values are described as follows.

### 1.1 Definitions

- Specifications describe the performance of parameters covered by the product warranty (temperature = 0 to 50°C, unless otherwise noted).
- Typical describes additional product performance information that is not covered by the product warranty. It is performance beyond specification that 80% of the units exhibit with a 95% confidence level over the temperature range 20 to 30° C. Typical performance does not include measurement uncertainty.
- Nominal values indicate expected performance, or describe product performance that is useful in the application of the product, but is not covered by the product warranty.

The following conditions must be met for the analyzer to meet its specifications.

### 1.2 Conditions Required to Meet Specifications

- The analyzer is within its calibration cycle. See the General section.
- At least 2 hours of storage or operation at the operating temperature.
- Analyzer has been turned on at least 30 minutes.

### 1.3 Certification

Agilent Technologies certifies that this product met its published specifications at the time of shipment from the factory. Agilent Technologies further certifies that its calibration measurements are traceable to the United States National Institute of Standards and Technology, to the extent allowed by the Institute's calibration facility, and to the calibration facilities of other International Standards Organization members.

## Frequency

Description	Specification	Supplemental Information
<b>Frequency Range</b>		
Option 503	100 kHz to 3 GHz	
Option 506	100 kHz to 6 GHz	
<b>Frequency Reference (10 MHz)</b>		
Accuracy	$\leq \pm 5 \text{ ppm}$	Within two years of adjustment
Aging Rate (25 °C)	$\leq \pm 2 \text{ ppm/year}$	$\leq \pm 5 \text{ ppm/10 years nominal}$
Temperature Stability (0-50 °C)	$\leq \pm 1 \text{ ppm}$	
<b>Frequency Readout Accuracy</b> (start, stop, center, marker)	$\pm (\text{freq indication} \times \text{frequency reference accuracy} + 1\% \times \text{Span} + 10\% \times \text{RBW} + 0.5 \times \text{horizontal resolution} + 1\text{Hz})^{\text{a}}$	Horizontal resolution = span/(sweep points -1)
<b>Frequency Span</b>		
Range	0 Hz (zero span), 1 kHz to maximum frequency	
Resolution	1 kHz	
Accuracy	$\pm \text{span} / (\text{sweep points} - 1)$	

a. Formula applies for RBW < 5 MHz

Description	Specification	Supplemental Information
<b>Sweep and Trace Update Time</b>		
Sweep Time Setting Range (Zero Span)		
Minimum	Maximum of 2/RBW or 1us	
Maximum	Minimum of 102,400/RBW or 10s, but never less than 27.3 ms	
Sweep Time Setting Range <sup>a</sup> (Span > 0, Manual coupled)		Settability of manually-coupled sweep time in non-zero span is dependent upon the RBW, VBW, span, detector, and sweep points.
Minimum		8.6ms or autocoupled sweeptime, whichever is greater
Maximum		4000 s <sup>b</sup>
Remote Sweep and Trace Transfer Speed (auto range off)		RBW auto-coupled, 501 pts
Span = 0 Hz		120 ms minimum
Span ≤ 100 MHz		300 ms
<b>Trace Points</b>	Settable, 2 to 1001	Defaults to 401

- a. Manually-coupled sweep times are only available in non-zero spans with firmware revision ≥ A.02.00. Firmware revisions < A.02.00 only provide auto coupled sweep times in non-zero spans.
- b. The maximum sweep time is highly dependent upon the combination of span, RBW, VBW, and sweep points. As a result, there will be situations where a sweep time of 4000 s is not possible.

Description	Specification	Supplemental Information
<b>Trigger</b>		
Trigger Resolution	Free run, External, RF burst, Video 133.33 nsec or $1/(2 \times \text{RBW})$	
Delayed Trigger (external, RF burst, Video)		
Range	-10 s to 10 s	RBW and VBW dependent
Resolution	1 us	
RF Burst		
Min Trigger Level (0 dB atten)		
1 GHz, preamp off	-29 dBm, nominal	
2.7 GHz, preamp off	-35 dBm, nominal	
1 GHz, preamp on	-51 dBm, nominal	
2.7 GHz, preamp on	-53 dBm, nominal	
Resolution	0.1 dB	

Description	Specification	Supplemental Information
<b>Resolution Bandwidth (RBW)</b> Range (-3 dB bandwidth) Non-zero Spans Firmware Revision $\leq$ A.01.99	10 Hz to 200 kHz in 1% setability (1 Hz minimum setability); 250 kHz, 300 kHz, 500 kHz, 1 MHz, 3 MHz, and 5 MHz	Step keys and knob change RBW in 1-3-10 sequence Maximum Span/RBW ratio is $5 \times 10^7$
Firmware Revision $\geq$ A.02.00	10 Hz to 200 kHz in 10% setability, 24 steps per decade, in the following sequence: 1.0, 1.1, 1.2, 1.3, 1.5, 1.6, 1.8, 2.0, 2.2, 2.4, 2.7, 3.0, 3.3, 3.6, 3.9, 4.3, 4.7, 5.1, 5.6, 6.2, 6.8, 7.5, 8.2, 9.1, 10; and 240 kHz, 300 kHz, 510 kHz, 1 MHz, 3 MHz, 5 MHz	Step keys and knob change RBW in 1-3-10 sequence Maximum Span/RBW ratio is $5 \times 10^7$
Zero Span	3 kHz to 5 MHz in 1-3-5 sequence , 240 kHz, 1.2 <sup>a</sup> MHz	
Accuracy (3 dB Bandwidth) RBW $\leq$ 200 kHz Zero Span	< 2% nominal	
Span > 0	< 7% nominal	
RBW = 240 kHz, 250 kHz <sup>a</sup> , 300 kHz, 1 MHz, 3 MHz Zero Span		
Span > 0	< 5% nominal	
RBW = 5 MHz Zero Span		
Span > 0	< 5% nominal	
RBW = 5 MHz Zero Span		
Span > 0	< 14% nominal	
Selectivity (60 dB/ 3 dB bandwidth ratio) RBW $\leq$ 10 kHz Zero Span	< 14% nominal Digital, Approximately Guasian shape	
Span > 0 10 kHz < RBW $\leq$ 200 kHz	< 6.5:1 nominal < 8.4:1 nominal	
Zero Span	< 3:1 nominal	


Specifications Guide  
CSA Specifications

Span > 0 RBW $\geq$ 240 kHz <sup>b</sup> Zero Span Span > 0		< 8.4:1 nominal  < 4.5:1 nominal  < 4.5:1 nominal
<b>Video Bandwidth (VBW)<sup>c</sup></b>  Range  Settability	1 Hz to 8 MHz and 50 MHz (wide open)  1 Hz to 10 Hz in 1 Hz increments; 10 Hz to 3 MHz in 10% steps, 24 steps per decade, in the following sequence: 1.0, 1.1, 1.2, 1.3, 1.5, 1.6, 1.8, 2.0, 2.2, 2.4, 2.7, 3.0, 3.3, 3.6, 3.9, 4.3, 4.7, 5.1, 5.6, 6.2, 6.8, 7.5, 8.2, 9.1, 10; and 4, 5, 6, 8 and 50 MHz	RBW dependent

- a. For firmware revision <A.02.00, the 240 kHz and 1.2 MHz RBWs are replaced by the 250 kHz and 1.25 MHz RBWs, respectively.
- b. For firmware revision <A.02.00, the 240 kHz RBW is replaced by the 250 kHz RBW.
- c. Video Bandwidth (VBW) is only available in firmware revisions  $\geq$ A.02.00

Description	Specification	Supplemental Information
<b>Stability</b>  Noise Sidebands  10 kHz offset 10 kHz to 2.5 GHz 2.5 GHz to 6 GHz   1 MHz offset 10 MHz to 2.2 GHz 2.7 GHz to 4.8 GHz 10 MHz to 6 GHz   Residual FM		

- a. Performance typically degrades when using an external reference

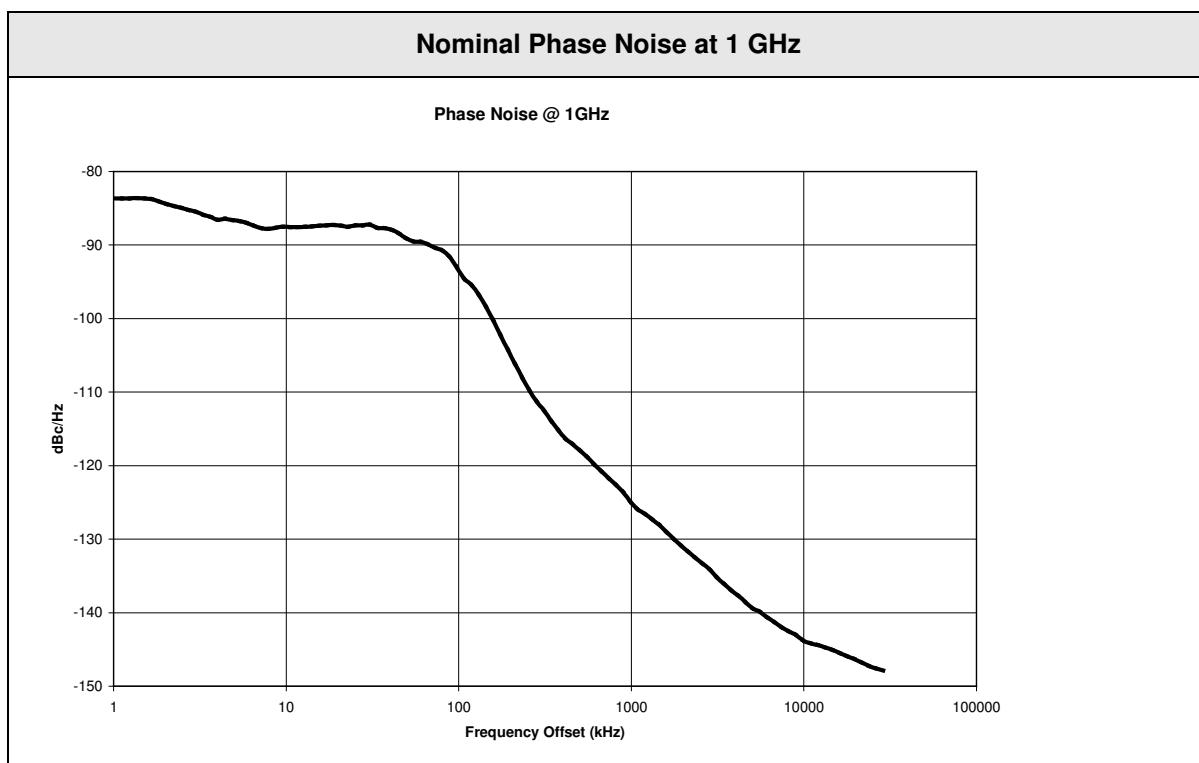

## Amplitude

Description	Specification	Supplemental Information
<b>Measurement Range</b>	Displayed Average Noise Level to Maximum Safe Input Level	
Input Attenuator Range	0 to 40 dB in 1 dB steps	
<b>Maximum Safe Input Level</b>	+33 dBm	
Average Continuous Power (Input attenuation $\geq$ 19 dB)		
Peak Pulse Power (for < 10 $\mu$ sec pulse width, <1% duty cycle, and input attenuation $\geq$ 19 dB)	+40 dBm	
DC	50 Vdc	
<b>1-dB Gain Compression</b> (Two-tone test, spacing >15 MHz)		
Input Level, 0 dB Attenuation		
Preamplifier Off	13 dBm at 1 GHz, nominal	
Preamplifier On (Options P03/P06)	-10 dBm at 1 GHz, nominal	
<b>ADC Over Range</b>		
Maximum mixer level <sup>a</sup>		-3 dBm at 1 GHz characteristic <sup>b</sup>

a. Input mixer level = RF input level – input attenuation + preamplifier gain

b. ADC over range limit will vary with frequency.

Description	Specification	Supplemental Information
<b>Displayed Average Noise Level (DANL)</b>  (10 Hz RBW, VBW auto coupled <sup>a</sup> , 50 Ω termination on input, 0 dB attenuation, sample detector, 25 averages)		
100 kHz to 500 kHz	< -95 dBm	< -80 dBm nominal
500 kHz to 1 MHz	< -110 dBm	
1 MHz to 10 MHz	< -125 dBm	
10 MHz to 50 MHz	$< -123 + 3.79 \times (\text{frequency in GHz} - 1 \text{ GHz})$	$< -128 + 3.79 \times (\text{frequency in GHz} - 1 \text{ GHz})$ typical
50 MHz to 2.7 GHz	$< -125 + 3.37 \times (\text{frequency in GHz} - 2.7 \text{ GHz})$	$< -131 + 3.37 \times (\text{frequency in GHz} - 2.7 \text{ GHz})$ typical
2.7 GHz to 6 GHz		
Preamplifier On (Options P03/P06)		
100 kHz to 500 kHz	< -115 dBm	< -90 dBm nominal
500 kHz to 1 MHz	< -130 dBm	
1 MHz to 10 MHz	< -145 dBm	
10 MHz to 50 MHz	$< -143 + 3.66 \times (\text{frequency in GHz} - 1 \text{ GHz})$	$< -146 + 3.66 \times (\text{frequency in GHz} - 1 \text{ GHz})$ typical
50 MHz to 2.7 GHz	$< -141 + 2.63 \times (\text{frequency in GHz} - 2.7 \text{ GHz})$	$< -145 + 2.63 \times (\text{frequency in GHz} - 2.7 \text{ GHz})$ typical
2.7 GHz to 6 GHz		
<b>Display Range</b>		
Log Scale	Ten divisions displayed; 1 dB/div to 20 dB/div in 1 dB steps	
Linear Scale	Ten divisions	
Scale Units	dBm, dBmV, dBμV, W, V, A	
<b>Marker Readout Resolution</b>		
Log Scale	±0.01 dB	
Linear Scale	±0.01 % of ref level	

a. Video BW (VBW) is only available with firmware revisions ≥ A.02.00.

Description	Specification	Supplemental Information
<b>Reference Level</b>		
Range	100 dBm to -150 dBm	
Resolution		
Log Scale	0.1 dB	
Linear Scale	0.2 % of reference level	
Accuracy	0 dB <sup>a</sup>	

Description	Specification	Supplemental Information
<b>Frequency Response<sup>b</sup></b>		
(relative to 50 MHz, 10 dB attenuation)		
100 kHz to 250 kHz		
20 to 30 °C	±1.50 dB	
0 to 55 °C	±1.61 dB	
250 kHz to 10 MHz		
20 to 30 °C	±0.70 dB	
0 to 55 °C	±0.75 dB	
10 MHz to 1 GHz		
20 to 30 °C	±0.44 dB	
0 to 55 °C	±0.53 dB	
1 GHz to 2.7 GHz		
20 to 30 °C	±0.60 dB	
0 to 55 °C	±0.88 dB	
2.7 GHz to 3 GHz		
20 to 30 °C	±0.69 dB	
0 to 55 °C	±1.20 dB	
3 GHz to 6 GHz		
20 to 30 °C	±1.12 dB	
0 to 55 °C	±1.60 dB	

- a. Because reference level affects only the display, not the measurement, it causes no additional error in measurement results from trace data or markers.
- b. For 240 kHz to 3 MHz RBW, add the following uncertainty:  $\pm 1.2 \times A^2$ , where  $A = \text{Span}/(100 \times \text{RBW})$ , maximum 0.5. Specification does not apply for RBW = 5 MHz.

Description	Specification	Supplemental Information
<b>Scale Fidelity</b>  (relative to the reference condition of $-10$ dBm at the input mixer)		
Input Mixer Level <sup>a</sup>  -10 dBm to -80 dBm 20 to 30 °C 0 to 55 °C	$\pm 0.20$ dB $\pm 0.25$ dB	
<b>Bandwidth Switching Uncertainty</b>  (at tuned frequency, 10 Hz to 3 MHz RBW, referenced to 1 kHz RBW)		
20 to 30 °C 0 to 55 °C	$\pm 0.32$ dB $\pm 0.45$ dB	
<b>Attenuator Switching Uncertainty</b>  (relative to the 10 dB attenuator setting)		< 0.18 dB nominal
<b>Absolute Amplitude Accuracy</b>  (peak detector, preamplifier off, input signal 0 dBm to -50 dBm, 10 dB Attenuation, 1 kHz RBW)		
At 50 MHz reference  20 to 30 °C 0 to 55 °C	$\pm 0.38$ dB $\pm 0.60$ dB	

a. Input mixer level = RF input level – input attenuation + preamplifier gain


Description	Specification	Supplemental Information
<b>Overall Amplitude Accuracy</b>  (peak detector, preamplifier off, input signal 0 dBm to -50 dBm, 10 dB Attenuation, RBW < 3 MHz)  20 to 30 °C  100 kHz to 250 kHz 250 kHz to 10 MHz 10 MHz to 1 GHz 1 GHz to 2.7 GHz 2.7 GHz to 3 GHz 3 GHz to 6 GHz  0 to 55 °C  100 kHz to 250 kHz 250 kHz to 10 MHz 10 MHz to 1 GHz 1 GHz to 2.7 GHz 2.7 GHz to 3 GHz 3 GHz to 6 GHz	± 2.40 dB ± 1.54 dB ± 1.34 dB ± 1.51 dB ± 1.60 dB ± 2.02 dB  ± 3.00 dB ± 2.03 dB ± 1.83 dB ± 2.18 dB ± 2.50 dB ± 2.90 dB	
<b>95% Confidence Absolute Amplitude Uncertainty<sup>a</sup></b>  (20 to 30 °C degrees, peak detector, preamplifier off, input signal 0 dBm to -50 dBm, RBW ≤ 3 MHz)  10 MHz to 1 GHz 1 GHz to 2.7 GHz 2.7 GHz to 3 GHz 3 GHz to 6 GHz		± 0.53 dB ± 0.59 dB ± 0.64 dB ± 0.76 dB

- a. Absolute Amplitude Accuracy for a wide range of signal and measurement settings, with 95% confidence, attenuation settings and frequency ranges shown. The value given is computed from the observations of a statistically significant number of instruments. The computation includes the root-sum-squaring of these terms: the absolute amplitude accuracy observed at 50 MHz, the frequency response relative to 50 MHz, RBW switching uncertainty, the attenuation switching uncertainty relative to 10 dB at 50 MHz, and the measurement uncertainties of these observations.

To that root-sum-squaring result is added the environmental effects of 20 to 30 °C variation. The 95th percentiles are determined with 95% confidence.

Description	Specification	Supplemental Information
<b>RF Input VSWR</b>  (at tuned frequency)  Attenuator Setting		
10 dB		$\leq 1.2:1$ nominal
100 kHz to 1 GHz		$\leq 1.4:1$ nominal
1 GHz to 4 GHz		$\leq 1.8:1$ nominal
4 GHz to 6 GHz		
$\geq 19$ dB		
100 kHz to 1.7 GHz		$\leq 1.2:1$ nominal
1.7 GHz to 4 GHz		$\leq 1.3:1$ nominal
4 GHz to 6 GHz		$\leq 1.6:1$ nominal
<b>Second Harmonic Distortion</b>  (Measurement conditions:)		
<700 MHz		<-60 dBc for -30 dBm signal at input mixer, +30 dBm SHI, nominal
>700 MHz		<-75 dBc for -30 dBm signal at input mixer, +45 dBm SHI, nominal
<b>Third Order Intermodulation Distortion (TOI)</b>		
<b>Residual Responses</b>  (0 dB input attenuation, no signal at input, input terminated in $50\Omega$ )		+18 dBm (nominal) <-90 dBm, nominal with exceptions as noted
For frequency = $10 \text{ MHz} \times N$ , where N = integer from 1 to 40		<-70 dBm, nominal

Description	Specification	Supplemental Information
<b>Spurious Responses</b>  Input Mixer level -10 dBm First IF Image Response $RFsig = RFtune + 2 \times 3435 \text{ MHz}$ for RFtune 1.7 to 2.7 GHz $RFsig = RFtune + 2 \times 765 \text{ MHz}$ for RFtune > 2.7 GHz Highband $\frac{1}{2}$ IF Spur $RFsig = RFtune + 765 \text{ MHz}/2$ for RFtune > 2.7 GHz First IF Subharmonic $RFsig = 3435 \text{ MHz}/2$		<-60 dBc, nominal with exceptions as noted below, internal batteries not being charged.  <-55 dBc, nominal  <-55 dBc, nominal  <-50 dBc, nominal  <-40 dBc, nominal

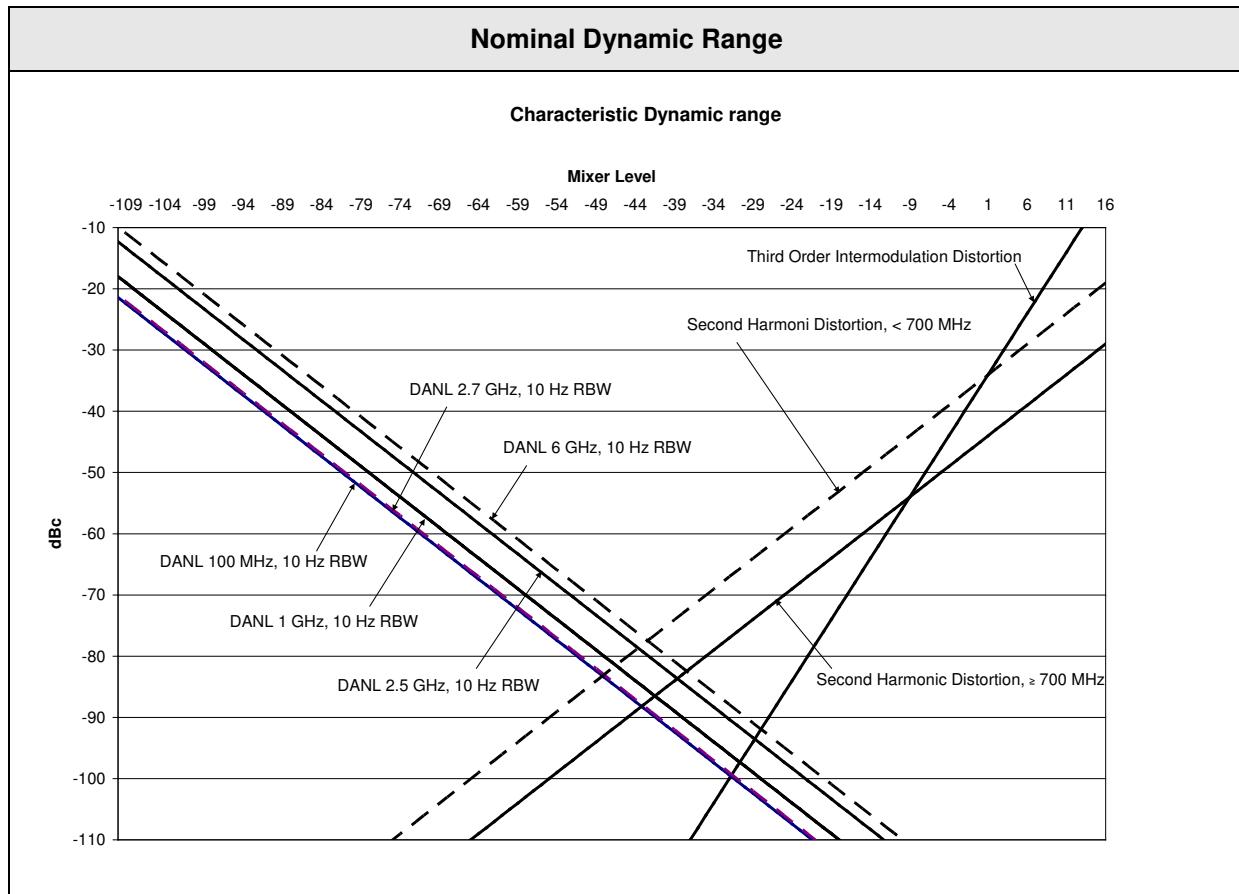

## Power Measurements

Description	Specification		Supplemental Information
<b>Channel Power</b>  Accuracy (average detector, preamplifier off, input signal 0 dBm to -50 dBm, 10 dB Attenuation)			
20 to 30 °C	<b>RBW ≤ 200 kHz</b>	<b>200 kHz &lt; RBW &lt; 3 MHz</b>	
100 to 250 kHz	±2.69 dB	±2.57 dB	
250 kHz to 10 MHz	±1.83 dB	±1.71 dB	
10 MHz to 1 GHz	±1.63 dB	±1.51 dB	
1 GHz to 2.7 GHz	±1.80 dB	±1.68 dB	
2.7 GHz to 3 GHz	±1.89 dB	±1.77 dB	
3 GHz to 6 GHz	±2.31 dB	±2.19 dB	
0 to 55 °C			
100 to 250 kHz	±3.29 dB	±3.17 dB	
250 kHz to 10 MHz	±2.32 dB	±2.20 dB	
10 MHz to 1 GHz	±2.12 dB	±2.00 dB	
1 GHz to 2.7 GHz	±2.47 dB	±2.35 dB	
2.7 GHz to 3 GHz	±2.79 dB	±2.67 dB	
3 GHz to 6 GHz	±3.19 dB	±3.07 dB	
<b>Occupied Bandwidth (OBW)</b>  Frequency Accuracy ( $0.70 \times \text{Span} < \text{OBW} < 0.90 \times \text{Span}$ ; $\text{RBW} \leq \text{Span} / 100$ )			$\pm(\text{OBW indication} \times \text{frequency reference accuracy} + 2\% \times \text{RBW} + 2.0 \times \text{horizontal resolution} + 0.5 \text{ digit}) \text{ nominal}$ ±3.19 dB nominal
Power Accuracy (using average detector)			
<b>Adjacent Channel Power (ACP)</b>			
Dynamic Range			
W-CDMA with 1 DCPH			

Specifications Guide  
CSA Specifications

---

5 MHz offset		-60 dBc nominal
10 MHz offset		-62 dBc nominal
W-CDMA with Test Model 1		
5 MHz offset		-59 dBc nominal
10 MHz offset		-60 dBc nominal
Accuracy		
ACPR $\geq$ -40 dBc		$\pm$ 0.27 dB nominal
-40 dBc > ACPR $\geq$ -45 dBc		$\pm$ 0.30 dB nominal
-45 dBc > ACPR $\geq$ -50 dBc		$\pm$ 0.49 dB nominal
-50 dBc > ACPR $\geq$ -55 dBc		$\pm$ 1.22 dB nominal

## Hardware Options

Description	Specification	Supplemental Information
<b>Preamplifier (Options P03/P06)</b>  Frequency Range  <i>Option P03</i> <i>Option P06</i>  Gain	100 kHz to 3 GHz  100 kHz to 6 GHz	22 dB (nominal) 1 MHz to 2.7 GHz  18 dB (nominal) > 2.7 GHz

## General

Description	Specification	Supplemental Information
<b>Calibration Cycle</b>	1 year	
<b>Environmental Conditions</b>		
Operating		This product is designed for use in Installation Category II and Pollution Degree 2 per IEC 61010 664 respectively.
Altitude	3000 Meters	
Temperature Range		
Operating	0 to 40°C	
AC Power	0 to 50°C	
Battery Power	-40 to 70 °C	
Storage	-20 to 60 °C, ≤ 80%RH	
Battery		The battery packs should be stored in an environment with low humidity, free from corrosive gas at a recommended temperature range <21°C. Extended exposure to temperatures above 45°C could degrade battery performance and life.
<b>Acoustic Emissions (ISO 7779)</b>	< 55 dBA	
<b>EMI Compatibility</b>		
Radiated Emissions	CISPR 11, Class A	
Conducted Emissions	CISPR 11, Class A	
<b>Immunity Testing</b>		
Radiated Immunity	IEC/EN 61000-4-3	Performance criterion A
Conducted Immunity	IEC/EN 61000-4-6	Performance criterion A
ESD Immunity	IEC/EN 61000-4-2	Performance criterion B
<b>Power Requirements</b>	Dual battery or Agilent supplied power adaptor (150W)	Approx. 2 ½ hours battery operation

Description	Specification	Supplemental Information
<b>Data Storage</b>		2 MB for user states and traces
<b>Display</b>	8.4" color XGA TFT-LCD	1024 x 768 with anti-glare coating
<b>Weight</b>		
Without batteries	7.5 kg	Not including power adapter (power adapter weight 0.9 kg)
With two batteries and impact cover installed	8.5 kg	
<b>Cabinet Dimensions</b> (H × W × D)		
Without bumpers or handle	177 × 426 × 200 mm	
With bumpers and handle in carry position	200 × 481 × 420 mm	
With bumpers and handle in storage position	223 × 481 × 248 mm	

## Front Panel Inputs & Outputs

Description	Specification	Supplemental Information
<b>RF Input</b>  Connector Impedance LO Emissions  Preamp Off, 0 dB attenuation Preamp On, 20 dB attenuation	Type N, female	50 Ω nominal  ≤ -50 dBm, nominal ≤ -75 dBm, nominal
<b>Probe Power Output</b>	+15 V at 150 mA -12 V at 150 mA	
<b>Tracking Generator Output</b>	Type N, female	50 Ω nominal
<b>USB</b>  USB-A (2 ports)	USB 1.1 (full speed)	Low-power devices only

## Rear Panel Inputs & Outputs

Description	Specification	Supplemental Information
<b>USB-A</b> USB-A (1 port) USB-B (1 port)	USB 1.1 USB 1.1	Low-power devices only Reserved for future use
<b>LAN</b>	10/100 base T RJ-45 connector	
<b>Timing LAN Opt</b>		Reserved for future use
<b>10 MHz Reference Out</b> Connector Level	BNC female	+5 dBm, 50 Ω nominal, AC coupled
<b>External Reference Input</b> Connector Input Frequency  Input Amplitude Range 1 MHz to 19.6608 MHz 0.5 Hz Impedance 1 MHz to 19.6608 MHz 0.5 Hz Lock Range Lock Time	BNC female 1 MHz, 2.048 MHz, 4.95 MHz, 10 MHz, 13 MHz, 15 MHz, 19.6608 MHz, 0.5 Hz (even second clock)	-5 dBm to +10 dBm nominal TTL levels nominal  50 Ω nominal 10 kΩ nominal ±10ppm of selected external frequency 15 seconds, 30 seconds for Even second clock

Description	Specification	Supplemental Information
<b>External Trigger Input</b>		
Connector	BNC female	
Impedance		10 kΩ nominal
Trigger Level		
Rising Edge		1.7 V nominal
Falling Edge		1.0 V nominal
Trigger Slope	Rising/falling edge selectable	
<b>GPS Antenna Input</b>		Reserved for future use
<b>Kensington Security Slot</b>		To prevent unauthorized removal of the spectrum analyzer, you can use a Kensington Slim MicroSaver security cable to attach the analyzer to an immovable object. Your spectrum analyzer has a Kensington Security Slot located on the instrument rear panel. For more information, visit <a href="http://www.microsaver.com">www.microsaver.com</a> .

## Regulatory Information

This product is designed for use in Installation Category II and Pollution Degree 2 per IEC 61010 and 664 respectively.

This product has been designed and tested in accordance with IEC Publication 61010, Safety Requirements for Electronic Measuring Apparatus, and has been supplied in a safe condition. The instruction documentation contains information and warnings which must be followed by the user to ensure safe operation and to maintain the product in a safe condition.



The CE mark is a registered trademark of the European Community (if accompanied by a year, it is the year when the design was proven).

---



The CSA mark is the Canadian Standards Association safety mark.

ISM 1-A

This is a symbol of an Industrial Scientific and Medical Group 1 Class A product. (CISPR 11, Clause 4)



This product complies with the WEEE Directive (2002/96/EC) marking requirements. The affixed label indicates that you must not discard this electrical/ electronic product in domestic household waste.

Product Category: With reference to the equipment types in the WEEE Directive Annex I, this product is classed as a "Monitoring and Control instrumentation" product.

***Do not dispose in domestic household waste.***

***To return unwanted products, contact your local Agilent office, or see [www.agilent.com/environment/product/](http://www.agilent.com/environment/product/) for more information.***

---

## Compliance with German Noise Requirements

Acoustic Noise Emission/Geraeuschemission	
LpA <70 dB	LpA <70 dB
Operator position	Am Arbeitsplatz
Normal position	Normaler Betrieb
Per ISO 7779	Nach DIN 45635 t.19

## Compliance with Canadian EMC Requirements

This ISM device complies with Canadian ICES-001.

Cet appareil ISM est conforme a la norme NMB du Canada.

## Declaration of Conformity

A copy of the Manufacturer's European Declaration of Conformity for this instrument can be obtained by contacting your local Agilent Technologies sales representative.



---

## **2 Stimulus Response Measurement Suite (*N8995A*)**

---

## Stimulus/Response <sup>a</sup>

Description	Specification	Supplemental Information
<b>Frequency Range</b> <i>N8995A-SR3 or N1996A-TG3</i> <i>N8995A-SR6 or N1996A-TG6</i>	10 MHz to 3 GHz 10 MHz to 6 GHz	
<b>Directivity</b> Uncorrected 10 MHz to 3 GHz 3 GHz to 6 GHz Corrected (using option SRK, Stimulus Response Calibration Kit) 10 MHz to 2 GHz 2 GHz to 3 GHz 3 GHz to 6 GHz		25 dB nominal 20 dB nominal > 49 dB nominal > 46 dB nominal > 40 dB nominal
<b>Source match (RF Output)</b> Uncorrected 10 MHz to 3 GHz 3 GHz to 6 GHz Corrected (using option SRK, Stimulus Response Calibration Kit) 10 MHz to 2 GHz 2 GHz to 3 GHz 3 GHz to 6 GHz		20 dB, nominal 15 dB, nominal 34 dB, nominal 31 dB, nominal 27 dB, nominal
<b>Frequency Resolution</b>		60 Hz nominal

- a. For firmware revisions  $\leq$  A.01.99, you must also have either N1996A Option TG3 or N1996A Option TG6. These options provide the tracking generator hardware and VSWR bridge necessary to make these measurements. The N8995A is the only means of controlling the tracking generator hardware. For firmware revisions  $\geq$  A.02.00, N8995A-SR3 and N8995A-SR6 provide the equivalent functionality.

Specifications Guide  
 Stimulus Response  
 Measurement Suite (N8995A)

---

Description	Specification	Supplemental Information		
<b>Return Loss (RF Output)</b>  ( $\geq 4$ averages)				
Range		Return Loss	VSWR	
10 MHz to 2 GHz		> 49 dB nominal,	< 1.01:1	
2 GHz to 3 GHz		> 46 dB nominal	< 1.01:1	
3 GHz to 6 GHz		> 40 dB nominal	< 1.02:1	
Resolution	0.1 dB			
Display Range	–5 dB to +150 dB			
SWR Range	1 to 500			
Accuracy  (using Stimulus/Response Calibration Kit, Option SRK, and calibration and measurement performed over the same frequency range and at the same reference plane)		(nominal)		
Range		< 2 GHz	< 3 GHz	< 6 GHz
Return loss from 5 dB to 10 dB		$\pm 0.2$ dB	$\pm 0.2$ dB	$\pm 0.4$ dB
Return loss from 10 dB to 20 dB		$\pm 0.3$ dB	$\pm 0.5$ dB	$\pm 0.9$ dB
Return loss from 20 dB to 30 dB		$\pm 0.9$ dB	$\pm 1.3$ dB	$\pm 2.4$ dB

Description	Specification	Supplemental Information		
<b>Insertion Loss</b>				
Dynamic Range (source level set to -15 dBm)		> 70 dB nominal		
10 MHz to 3 GHz		> 50 dB nominal		
3 GHz to 5 GHz		> 25 dB nominal		
5 GHz to 6 GHz				
Source Level Range	-15 dBm to -30 dBm			
Accuracy due to limited isolation				
Frequency Range		< 3 GHz	< 5 GHz	< 6 GHz
DUT <sup>a</sup> Insertion Loss 10 dB		± 0.0 dB	± 0.1 dB	± 1.4 dB
DUT <sup>a</sup> Insertion Loss 20 dB		± 0.0 dB	± 0.3 dB	± 3.9 dB
DUT <sup>a</sup> Insertion Loss 30 dB		± 0.1 dB	± 0.8 dB	
DUT <sup>a</sup> Insertion Loss 40 dB		± 0.3 dB	± 2.4 dB	
DUT <sup>a</sup> Insertion Loss 50 dB		± 0.8 dB		
Accuracy due to imperfect match				
Frequency Range		< 3 GHz	< 6 GHz	
DUT <sup>a</sup> Return Loss 5 dB		± 1.0 dB	± 1.6 dB	
DUT <sup>a</sup> Return Loss 10 dB		± 0.5 dB	± 0.9 dB	
DUT <sup>a</sup> Return Loss 20 dB		± 0.2 dB	± 0.3 dB	
DUT <sup>a</sup> Return Loss 30 dB		± 0.1 dB	± 0.1 dB	
<b>Distance to Fault (Port 1)</b>				
Range	1 m to 300 m			
Resolution		$(1.5 \times 10^8) \times (VF) \times (f_2 - f_1) \text{ Hz}^b$ , typically 1% of measurement distance		
VSWR	1 to 500			

a. Device Under Test

b. VF is the relative propagation velocity of the cable;  $f_1$  and  $f_2$  are the start and stop frequencies, respectively.

---

## **3 AM/FM Modulation Analysis Measurement Suite (*N8996A*)**

This chapter contains specifications for the N8996A AM/FM Modulation Analysis using the Agilent CSA including options:

- Option 1FP AM/FM analysis

## AM Demodulation

Description	Specification	Supplemental Information
<b>Input Power Range</b>	-50 to +30 dBm with Auto-range On	
<b>Carrier Frequency Range</b>		
<i>Option 503</i>	100 kHz to 3 GHz	
<i>Option 506</i>	100 kHz to 6 GHz	
<b>Demodulation Bandwidth</b>	$\leq 5\text{MHz}$	$(2 \times \text{Max. Mod. Rate}) \leq \text{Max Demod BW}$ 160k samples
<b>Max Capture Memory</b>		
<b>Max Capture Time</b>		Sampling rate / Max. measurement time
Demodulation bandwidth (Max. capture time = Capture memory/Sample Rate)		
5 MHz	7.5 MHz / 21.845 ms	
3 MHz	7.5 MHz / 21.845 ms	
1.25 MHz	2.5 MHz / 65.536 ms	
1.0 MHz	2 MHz / 81.92 ms	
500 kHz	1 MHz / 163.84 ms	
300 kHz	600 kHz / 273.067 ms	
250 kHz	500 kHz / 327.68 ms	
100 kHz	200 kHz / 819.2 ms	
50 kHz	100 kHz / 1638.4 ms	
30 kHz	60 kHz / 2730.7 ms	
10 kHz	20 kHz / 8192.0 ms	
5 kHz	10 kHz / 16.384 s	
3 kHz	6 kHz / 27.3067 s	
<b>Modulation Rate Range<sup>a</sup></b>		
$100\text{ kHz} \leq f_c < 10\text{ MHz}$	20 Hz to 10 kHz	
$10\text{ MHz} \leq f_c < 3/6\text{ GHz}$	50 Hz to 200 kHz	

- a. When the carrier frequency  $f_c$  is equal or less than 2.6 MHz, to avoid the image that appears in the IF corresponding to the negative of signal frequency, the  $f_c$  and IFBW must be chosen to satisfy  $\text{IFBW} < 2 \times (f_c - 100\text{ kHz})$

Specifications Guide  
AM/FM Modulation Analysis  
Measurement Suite (N8996A)

Description		Specification	Supplemental Information
<b>Modulation Rate Accuracy</b>			
Modulation Rate < 1 kHz			1 Hz nominal
Modulation rate >= 1 kHz			< 0.1% nominal
<b>Modulation Depth Range<sup>a</sup></b>		0 to 100%	
<b>AM Depth Accuracy<sup>b,c</sup></b>			± 3% of reading nominal
<b>Modulation Distortion Floor<sup>d</sup></b>			
Carrier Frequency	Modulation Rates	AM Depth	
250 kHz to 10 MHz	400 Hz	1% to 3%	< 1.5% nominal
10 MHz to 3/6 GHz	400 Hz	1% to 3%	< 2% nominal
250 kHz to 10 MHz, 10 MHz to 3/6 GHz	400 Hz	> 3%	< 0.6% nominal
250 kHz to 10 MHz, 10 MHz to 3/6 GHz	1 kHz	1% to 3%	< 2.5% nominal
250 kHz to 10 MHz, 10 MHz to 3/6 GHz	1 kHz	> 3%	< 0.7% nominal
<b>Residual AM (50 Hz to 3 kHz BW)</b>			< 0.1% (rms) nominal
<b>Detectors</b>			Available: +peak, -peak, ±peak/2, rms
<b>Burst/Sync Search</b>		None, RF Amplitude	
<b>SINAD Accuracy</b>			± 1 dB

- a. This is range over which AM depth measurements may be made. The accuracy characteristic applies only over the 0.5% to 99% range.
- b. For peak measurements only: AM accuracy may be affected by distortion generated by the spectrum analyzer. In the worst case this distortion can decrease accuracy by 0.1% of reading for each 0.1 % of distortion.
- c. If the measured AM depth is <2%, set IFBW to Manual rather than Auto for better results.
- d. The minimum IFBW (3 kHz) is used for distortion measurement.

## FM Demodulation

Description	Specification	Supplemental Information
<b>Input Power Range</b>	-50 to +30 dBm with Auto-range ON	
<b>Carrier Frequency Range</b>		
Option 503	100 kHz to 3 GHz	
Option 506	100 kHz to 6 GHz	
<b>Demodulation Bandwidth<sup>a</sup></b>	$\leq 5\text{MHz}$	
<b>Max Capture Memory</b>		160k samples
<b>Max Capture Time</b>		
Demodulation bandwidth		Sampling rate / Max. measurement time
5 MHz		7.5 MHz / 21.845 ms
3 MHz		7.5 MHz / 21.845 ms
1.25 MHz		2.5 MHz / 65.536 ms
1.0 MHz		2 MHz / 81.92 ms
500 kHz		1 MHz / 163.84 ms
300 kHz		600 kHz / 273.067 ms
250 kHz		500 kHz / 327.68 ms
100 kHz		200 kHz / 819.2 ms
50 kHz		100 kHz / 1638.4 ms
30 kHz		60 kHz / 2730.7 ms
10 kHz		20 kHz / 8192.0 ms
5 kHz		10 kHz / 16.384 s
3 kHz		6 kHz / 27.3067 s
<b>Modulation Rate Range</b>		
100 kHz $\leq f_c < 10$ MHz	20 Hz to 10 kHz	
10 MHz $\leq f_c < 3/6$ GHz	50 Hz to 200 kHz	

- a. When the carrier frequency  $f_c$  is equal or less than 2.6 MHz, to avoid the image that appears in the IF corresponding to the negative of signal frequency, the  $f_c$  and IFBW must be chosen to satisfy  $\text{IFBW} < 2 \times (f_c - 100 \text{ kHz})$

Specifications Guide  
AM/FM Modulation Analysis  
Measurement Suite (N8996A)

Description				Specification	Supplemental Information		
<b>Modulation Rate Accuracy</b>							
0.2 ≤ β ≤ 100, deviation ≤ 400 kHz	Modulation rate < 1 kHz			1 Hz nominal			
	Modulation rate >= 1 kHz			< 0.1% nominal			
<b>Peak Deviations</b>							
100 kHz ≤ f <sub>c</sub> ≤ 10 MHz				Max 40 kHz			
10 MHz ≤ f <sub>c</sub> ≤ 3/6 GHz				Max 400 kHz			
<b>FM Deviation Accuracy<sup>a</sup></b>							
Frequency range	Modulation Rate	Peak Deviation	β <sup>b</sup>		± 3% of reading, nominal		
200 kHz to 10 MHz	20 Hz to 10 kHz	≤ 40 kHz	> 0.2				
10 MHz to 3/6 GHz	50 Hz to 200 kHz	≤ 400 kHz	> 0.5				
<b>Modulation Distortion Floor<sup>c</sup></b>					< 1% nominal		
Carrier Frequency	Modulation Rates	Deviation					
250 kHz to 10 MHz	400 Hz or 1 kHz	1 kHz or 3 kHz					
10 MHz to 3/6 GHz	400 Hz or 1 kHz	1 kHz or 3 kHz			< 0.9% nominal		
<b>Detectors</b>							
<b>Burst/Sync Search</b>				None, RF Amplitude			
<b>SINAD Accuracy<sup>d</sup></b> (Meas Filter On and β > 1) <sup>e</sup>					± 1 dB nominal		

- a. The peak deviations that the system is capable of measuring are governed by the instrument's IFBW (Information Bandwidth) setting. The relationship is described by the equation Peak deviation (in Hz) = IFBW/2 – modulation rate. If the measured frequency deviation β<1, set IFBW to manual rather than auto to help satisfy this equation and yield better results.
- b. β is the ratio of frequency deviation to modulation rate (deviation/rate).
- c. If IFBW is greater than 3 kHz, Meas Filter must be On and the Demod Spectrum Span must be set to 3 kHz.
- d. Measured distortion must be greater than 3% for the FM SINAD accuracy to apply. For distortions less than 3%, the noise floor of the analyzer will begin to affect the accuracy of the measurement.
- e. SINAD accuracy will degrade when measuring signals with β ≤ 1. When measuring signals with β ≤ 1, some improvement may be possible by adjusting the Demod Spectrum Span (the span setting in the Demod Spectrum measurement controls the low-pass cutoff frequency of the measurement filter).