

MT8820C

Radio Communication Analyzer

MT8820C

Radio Communication Analyzer

Product Introduction

*~ All-in-one tester for developing and manufacturing
LTE mobile terminals ~*

Version 9.00
December 2014

ANRITSU CORPORATION

Contents

What is MT8820C?

What is MT8820C?

All-In-One LTE/3G/2G UE Development and Manufacturing

Supports All Manufacturing Processes

Cost and Space Saving Parallelphone Measurement

LTE FDD/TDD Features

LTE FDD/TDD Options

Benefits of MT8820C

MT8820A/B Compatibility

LTE Extensibility

LTE-Advanced DL CA 3CCs Extensibility

Upgrade to MT8820C

TD-SCDMA Extensibility

What is MT8820C?

What is MT8820C?

New All-in-One Test Platform Supporting LTE-Advanced CA and Compatibility with Existing 3G/2G

The **MT8820C** is Anritsu's new all-in-one test platform for R&D and manufacturing of LTE/2G/3G UE (User Equipment); it is based on the popular MT8820B for the 2G/3G market.

The MT8820C supports manufacturing of LTE-Advanced DL CA mobiles, including RF calibration, RF parametric testing, and functional tests. It is backwards compatible with the MT8820B/15B.

It supports LTE-Advanced DL CA/3G/2G UE RF development as well as manufacturing of multi-systems. Backwards compatibility with the MT28820A/B helps reduce setup times and the MT8820B to MT8820C upgrade option cuts installation costs.



Key Features

Supports 2G/3G to LTE with Signalling

LTE-Advanced CA^{*3}/LTE

W-CDMA/HSPA/HSPA Evolution/DC-HSPA/4G-HSDPA
GSM/GPRS/EGPRS
CDMA2000^{*1} 1X/1xEV-DO Rev. A
TD-SCDMA/HSPA/HSDPA Evolution
PHS/ADVANCED PHS

- **Excellent TD-SCDMA functions**
- **Backwards compatibility with MT8820A/B**
- **Supports all manufacturing processes**
- **ParallelphoneTM Measurement^{*2}**
- **MT8820B to MT8820C Upgrade**

*1: CDMA2000® is a registered trademark of the Telecommunications Industry Association (TIA-USA).

*2: Parallelphone™ is a registered trademark of Anritsu Corporation.

*3: Please contact our sales representative about LTE-Advanced CA and LTE(FDD/TDD).

All-In-One LTE/3G/2G UE Development and Manufacturing

The all-in-one MT8820C supporting all test functions, including signalling, is the ideal solution for LTE/3G/2G UE R&D and manufacturing. It saves both costs and space over other solutions and, in addition to fully supporting LTE-Advanced CA from the first product roll-out, also supports 3G/2G, because it is based on the popular MT8820B.



- GSM/GPRS/EGPRS
- W-CDMA/HSPA/HSPA Evolution
- CDMA2000/1x EVDO Rev. A
- TD-SCDMA/HSPA
- PHS/ADVANCED PHS

- **LTE-Advanced DL CA/LTE**
- GSM/GPRS/EGPRS
- W-CDMA/HSPA/HSPA Evolution/DC-HDPA/4G-HSDPA
- CDMA2000/1x EVDO Rev. A
- TD-SCDMA/HSPA/HSDPA Evolution
- PHS/ADVANCED PHS

Supports All Manufacturing Processes

The MT8820C solution supports all tests ranging from RF parametric to UE function and performance tests.

Function and Performance Tests

- Voice Call, Video Call
- External Packet Data
- Current Consumption

RF Parametric Tests


- UE Transmitter Test
- UE Receiver Test
- Signalling/Non-Signalling Mode
- UE Calibration



MT8820C

Cost and Space Saving Parallelphone Measurements

Using Parallelphone Measurement (PPM), one MT8820C can test two mobiles simultaneously and independently, cutting costs and saving space.

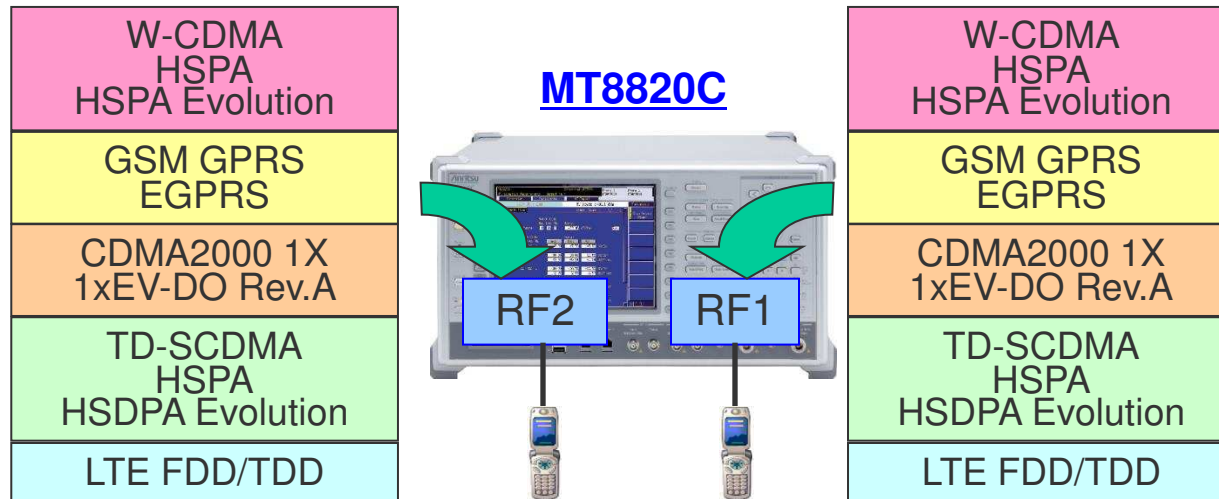

For example, two GSM mobiles can be tested simultaneously at RF1 and RF2, respectively.



*Since both phone terminals are occupied for LTE-Advanced FDD/TDD, 2x2 LTE MIMO and 4C-HSDPA/DC-HSPA, PPM measurements are not supported.

LTE FDD/TDD Features


LTE FDD/TDD Options – 1/21

LTE Opt: with and without Signalling (DL Real Time)


The MT8820C can control the UE call processing to measure UE TX/RX characteristics in compliance with 3GPP test standards.

The MT8820C also supports non-call processing for RF Parametric Tests with the DL signal generated by real-time encoding. An external PC handles the UE test loop mode without signalling. This reduces test times.

With signalling

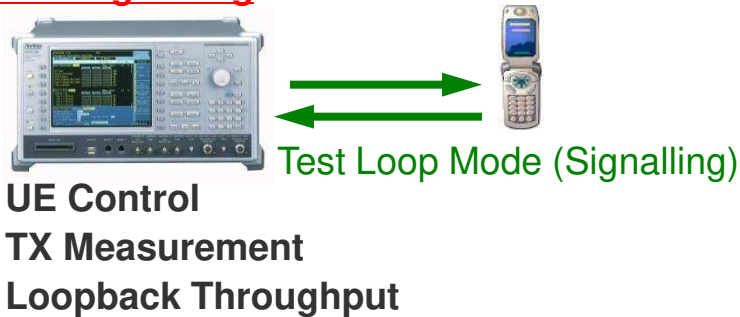

Without signalling

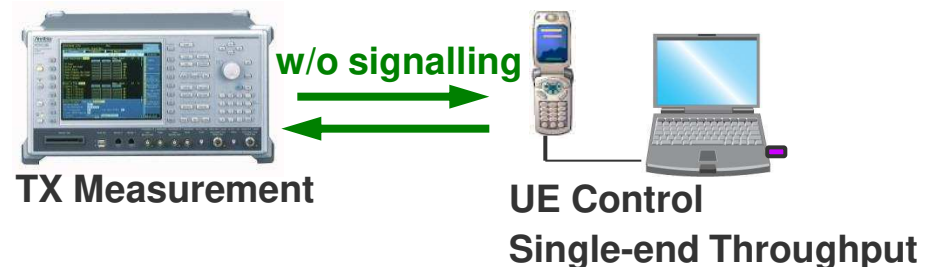

MT8820C Radio Communication Analyzer

MT8820C-008 LTE Measurement Hardware

MX882012C LTE FDD Measurement Software

*The above option configuration shows LTE FDD.

LTE FDD/TDD Options – 2/21

LTE: Example of parameters

As an example of parameter settings:

1. Selectable Channel Bandwidth from 1.4/3/5/10/15/20 MHz
2. Supports FRC of UE Category 1 to 5 for TRX measurements at SISO connection
3. Supports QPSK and 16QAM modulation for uplink, and QPSK, 16QAM and 64QAM for downlink
4. Settable Resource Block (RB) and start position
5. Selection of PUSCH or PUCCH as measurement channel

1

Frequency	FDD
Channel Bandwidth	5MHz
UL Channel & Frequency	1.4MHz CH = 1950.000000 MHz
DL Channel & Frequency	3MHz CH = 2140.000000 MHz
Operation Band	5MHz
Frequency Separation	10MHz
Level	15MHz

2

Signal

Channel Coding RMC

Antenna Configuration Single Antenna

DCI Format for Single Antenna 1A

Propagation Matrix None

5 2 RMC Configuration PUSCH

2 UE Category 8

DTCH Data Pattern MAC Padding Bits

4 UL RMC

4 Number of RB 100

Starting RB 0 3

Modulation TBS Index TBS C-RNTI

MCS Index 5 QPSK (5) (8760) 8

64QAM Disabled

4 DL RMC

4 Number of RB 100

Starting RB 0 3

Subframe Modulation TBS Index TBS SI-RNTI C-RNTI

MCS Index (1-4, 6-9) 5 (QPSK) (5) (8760) - 8

MCS Index (5) 5 (QPSK) (5) (8504) 8 -

MCS Index (0) 5 (QPSK) (5) (8760) - 8

MCS Index (-) (N/A) (-----) (--) (-----) - -

CFI 2

TDD subframe 0 1 2 3 4 5 6 7 8 9

Uplink Downlink Configuration 1 : (5ms) D S U U D D S U U D

Special Subframe Configuration 4

*The above example shows LTE FDD (MX882012C).

LTE FDD/TDD Options – 3/21

TX Measurements

Power Measurement				(Meas. Count : 1/ 1)
	Avg.	Max.	Min.	Limit
TX Power	20.02	20.02	20.02	dBm
Channel Power	20.02	20.02	20.02	dBm
Occupied Bandwidth				(Meas. Count : 1/ 1)
				Limit
OBW	17.775	Hz		
Upper Frequency	8.876	Hz		
Lower Frequency	-8.888	Hz		
Center (Upper+Lower)/2	1949.988	Hz		
Spectrum Emission Mask				(Meas. Count : 1/ 1)
Worst Value of Each Frequency Range	Level	Mask Margin	Frequency	
Lower				
0.0 to 1.0 MHz	-40.78	-21.28	-0.045	dB
1.0 to 5.0 MHz	-27.35	-18.85	-1.500	dB
5.0 to 20.0 MHz	-30.50	-19.00	-5.500	dB
20.0 to 25.0 MHz	-40.70	-17.20	-20.500	dB
Upper				
0.0 to 1.0 MHz	-39.76	-20.26	0.885	dB
1.0 to 5.0 MHz	-26.75	-18.25	1.500	dB
5.0 to 20.0 MHz	-29.96	-18.46	5.500	dB
20.0 to 25.0 MHz	-41.52	-18.02	20.500	dB
Template Judgement	Pass			
Adjacent Channel Power				(Meas. Count : 1/ 1)
Offset Frequency	Power			Limit
	Avg.	Max.	Min.	
E-UTRA				
-20MHz	-39.23	-39.23	-39.23	dB
20MHz	-38.94	-38.94	-38.94	dB
UTRA				
-17.5MHz	-45.40	-45.40	-45.40	dB
-12.5MHz	-42.36	-42.36	-42.36	dB
12.5MHz	-41.81	-41.81	-41.81	dB
17.5MHz	-45.00	-45.00	-45.00	dB
Modulation Analysis				(Meas. Count : 1/ 1)
	Avg.			
Carrier Frequency	1850.000005	Hz		
	Avg.	Max.	Min.	Limit
Carrier Frequency Error	0.0055	0.0055	0.0055	kHz
EVM	0.00	0.00	0.00	ppm
Reference Signal EVM	3.28	3.28	3.28	% (rms)
Peak Vector Error	3.12	3.12	3.12	% (rms)
Phase Error	32.51	32.51	32.51	°
Magnitude Error	1.39	1.39	1.39	deg. (rms)
Rho	2.21	2.21	2.21	% (rms)
Carrier Leakage	0.99896	0.99896	0.99896	
IQ Imbalance	-40.43	-40.43	-40.43	dBc
In-Band Emissions	97.85	97.85	97.85	% (L/Q)
General	-40.86	-40.86	-40.86	dB
IQ Imbalance				dB
Carrier Leakage				dBc
Spectrum Flatness				
> 3MHz (R1 +)	0.63	0.63	0.63	dB
> 3MHz (R1 -)	-1.30	-1.30	-1.30	dB (p-p)
> 3MHz (RP1)	1.93	1.93	1.93	dB
< 3MHz (R2 +)				dB
< 3MHz (R2 -)				dB
< 3MHz (RP2)				dB (p-p)
RP12				dB
RP21				dB

Power Measurement

Occupied Bandwidth

Spectrum Emission Mask

Adjacent Channel Power Ratio


Modulation Analysis
Frequency Error
EVM
Phase Error
Magnitude Error
Carrier Leakage
In-Band Emissions
Spectrum Flatness

*MX882012C example

LTE FDD/TDD Options – 4/21

Screen Views – 1/2

The LTE FDD option supports various screens, such as Occupied Bandwidth, Spectrum Emission Mask, Adjacent Channel Power and Modulation Analysis (EVM, Phase Error, Magnitude Error Constellation, In-Band Emissions and Spectrum Flatness) for verifying detailed RF characteristics.

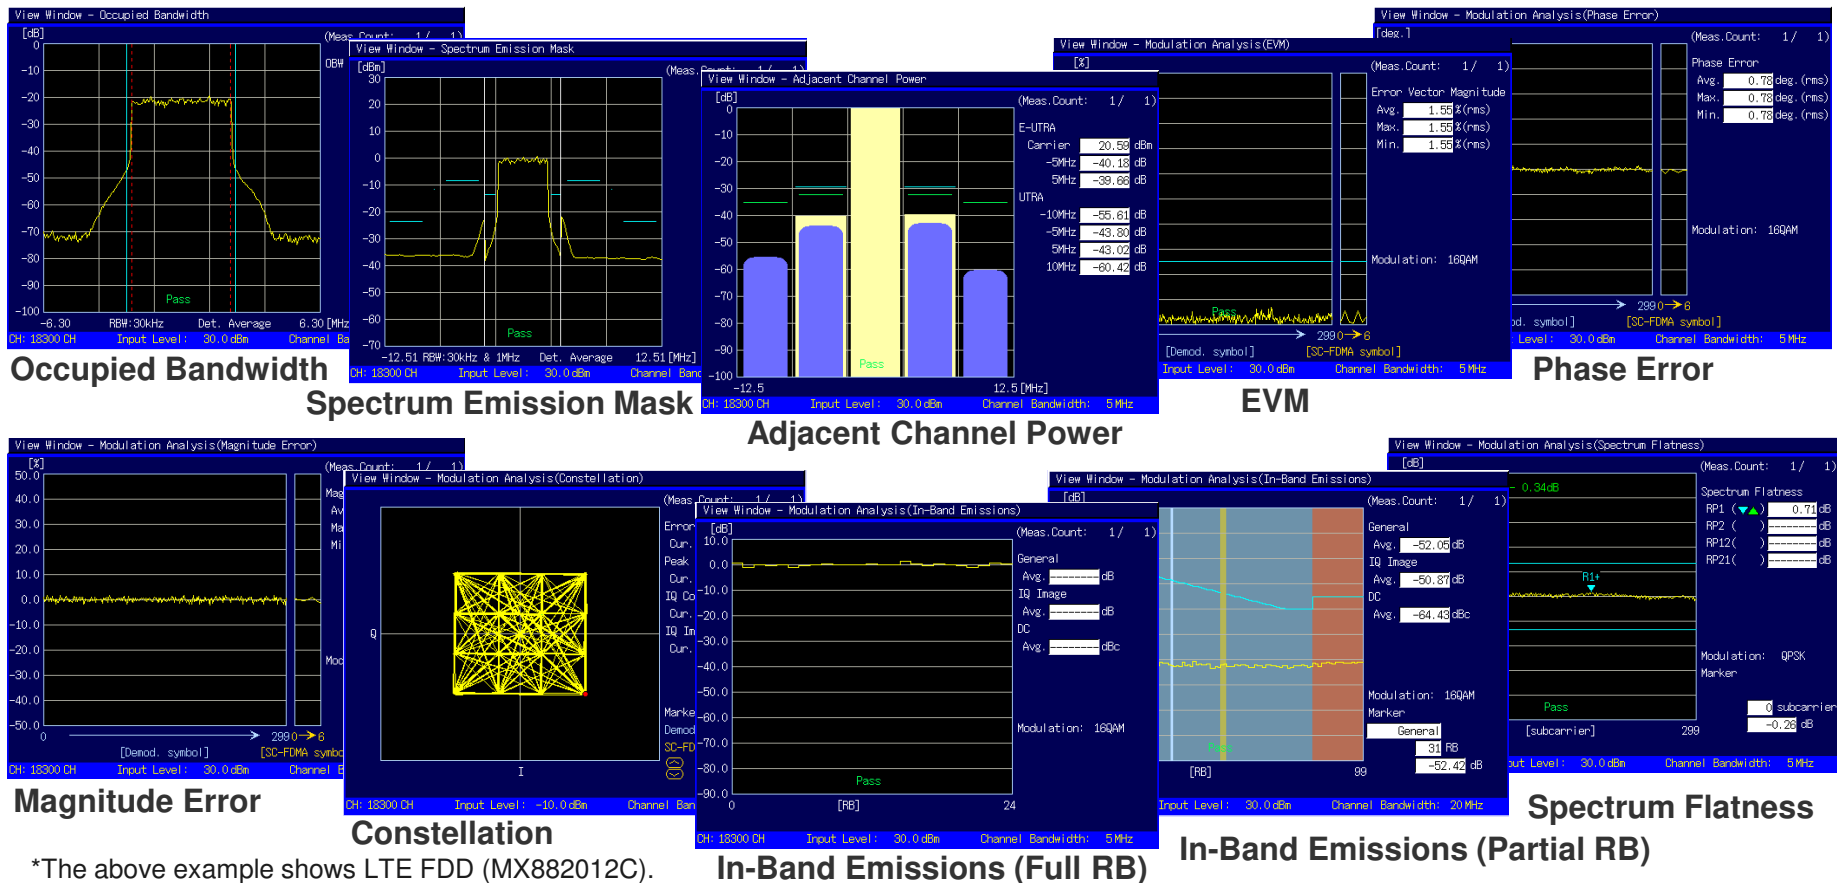

*The above example shows LTE FDD (MX882012C).

In-Band Emissions (Full RB)

In-Band Emissions (Partial RB)

Spectrum Flatness

LTE FDD/TDD Options – 5/21

Screen Views – 2/2

TX Measurement - Power Control Tolerance/Power Template

The following items are difficult to execute without call processing, because conditions during communications are controlled by signaling messages, but the MT8820C makes these tests very easy.

6.2.5 Configured UE Transmitted Output Power



6.3.4.1 General ON/OFF time mask*

6.3.5.1 Power Control Absolute power tolerance


6.3.5.2 Power Control Relative power tolerance

6.3.5.3 Aggregate power control tolerance



*2010-06 version already supported.

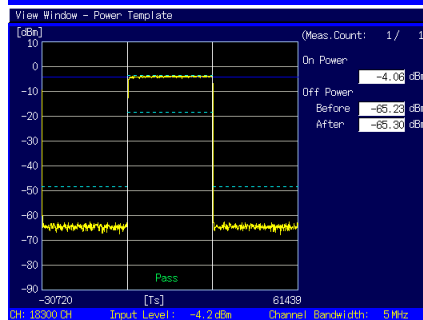



Power Template

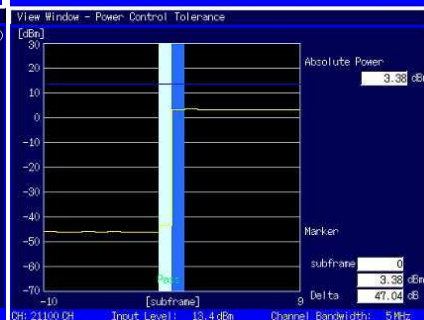

Absolute Power

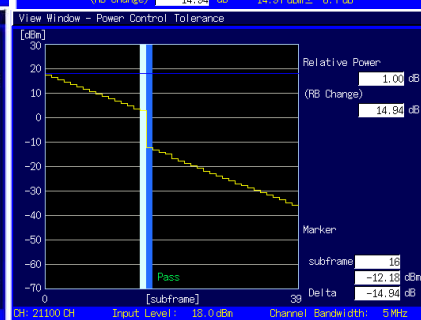

Relative Power

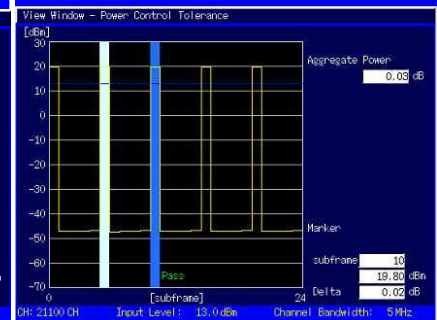

Aggregate Power

LTE FDD/TDD Options – 6/21

RX Measurements

RX Measurements – RF Throughput

Example: Single antenna, 10 MHz BW

Throughput	End			Limit
DL				
Throughput	3953	kbps (=	100.00 %)	≥ 95.0 %
(Code Word 0		kbps (=		
(Code Word 1		kbps (=		
Block Error Rate	0.0000			
	0.00E+00			
Error Count	0			
	(NACK 0	DTX 0)		
Transmitted/Sample	2007 /	2000	Block	
UL				
Throughput	5160	kbps (=	100.00 %)	
Error Count/Received	0 /	2000		

RX Measurements – CQI

CQI	End			
	Avg.	Median	Max.	Min.
CQI	15.0	15	15	14
Sum in Median CQI ± 3	2000			
Rate	100.00 %			
PMI	0 753	1 247	2 0	3 4022
RI	1 0	2 1000		
Received/Sample	2000 /	2000	Block	

*The above example shows LTE FDD (MX882012C).

LTE FDD/TDD Options – 7/21

Other Functions

Measurement Report – RSRP/RSRQ

Group Hopping ☐ On
Sequence Hopping (Off)
Measurement Report ☐ On Trigger Type Periodical
Call Drop Select Parameter hold 5 sec
radioResourceConfigCommon Update ☒ On ☐ Off

UE Report

IMSI(DEC) 001010123456789
IMEI 350000000000000
UE Category 3
PDN Type IPv4v6
RSRP 56 (-85 to -84 dBm)
RSRQ 20 (-10.0 to -9.5 dB)

Signalling Trace

Signalling Trace Push Encoder to change the scroll mode.


U-S	Message	Description
-->	L2 message	Random Access Preamble
<--	L2 message	Random Access Response
-->	RRCConnectionRequest	
<--	RRCConnectionSetup	
-->	RRCConnectionSetupComplete	ATTACH REQUEST
<--	DLInformationTransfer	IDENTITY REQUEST
-->	ULInformationTransfer	IDENTITY RESPONSE
<--	DLInformationTransfer	IDENTITY REQUEST
-->	ULInformationTransfer	IDENTITY RESPONSE
<--	DLInformationTransfer	AUTHENTICATION REQUEST
-->	ULInformationTransfer	AUTHENTICATION RESPONSE
<--	DLInformationTransfer	SECURITY MODE COMMAND
-->	ULInformationTransfer	SECURITY MODE COMPLETE
<--	SecurityModeCommand	
-->	SecurityModeComplete	
<--	UECapabilityEnquiry	
-->	UECapabilityInformation	
<--	RRCConnReconfiguration	ATTACH ACCEPT
-->	RRCConnReconfigurationComplete	

*The above example shows LTE FDD (MX882012C).

LTE FDD/TDD Options – 8/21


One-touch 3GPP TS36.521-1 Settings – 1/3

One-touch setting supports the main 3GPP 36.521-1 TX test conditions, eliminating complex parameter settings and providing easy standard tests. In addition, GPIB commands offer simple and fast control.

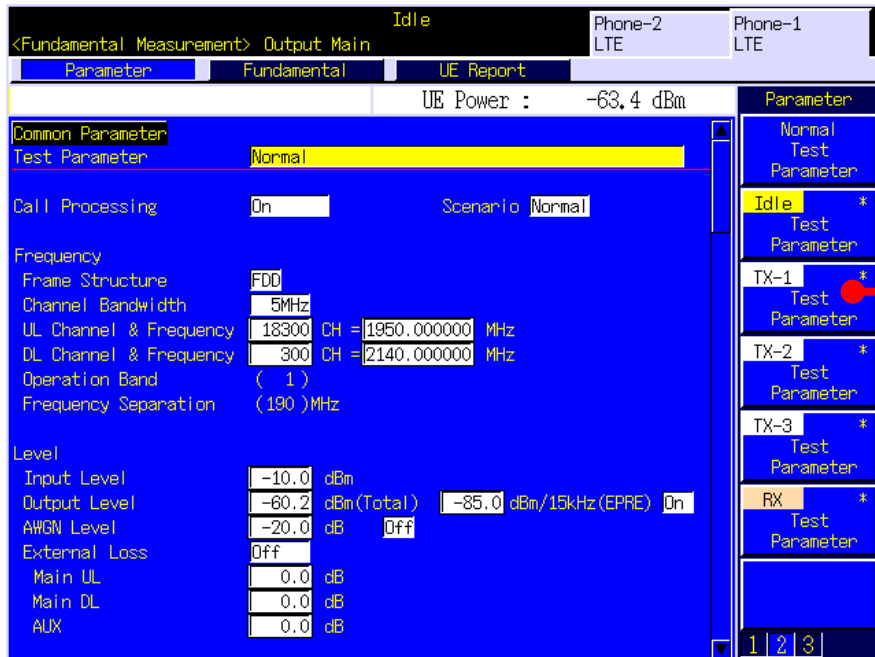

*MX882012C example

TX Test Parameters

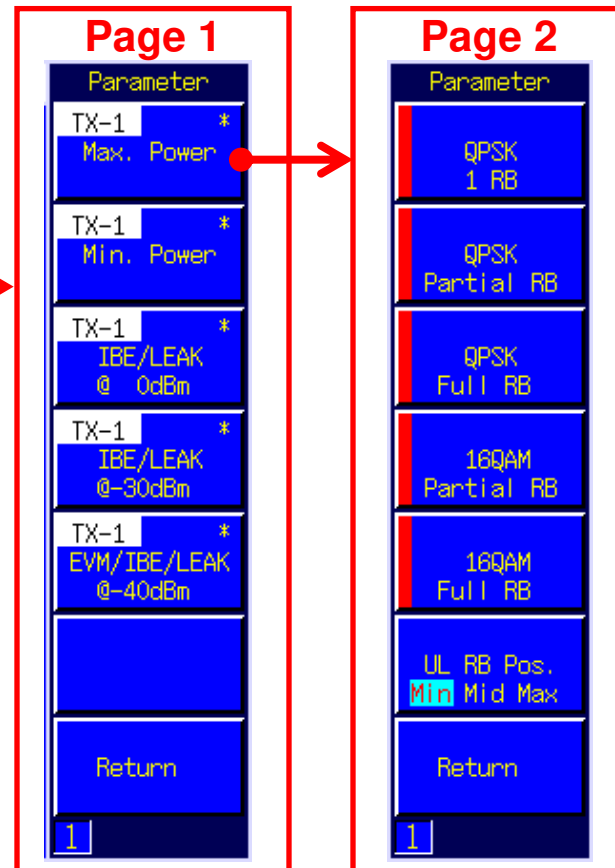

LTE FDD/TDD Options – 9/21

One-touch 3GPP TS36.521-1 Settings – 2/3

For example, pressing **TX-1** **Max. Power**, **QPSK Full RB** sets the parameters to measure the UE maximum output (QPSL Full RB) automatically and simultaneously. The overall evaluation, and pass/fail items (displayed in red) can be seen at a glance at measurement completion.

Setting

Measuring

+

Single

Result

Failed Items (Red)

Overall Evaluation

Sets Related Parameters and Measurement Items

TX-1 **Max. Power** **QPSK Full RB**

End - Fail

Overall Evaluation

Failed Items (Red)


Sets Related Parameters and Measurement Items

*MX882012C example

LTE FDD/TDD Options – 10/21

One-touch 3GPP TS36.521-1 Settings – 3/3

All One-touch keys

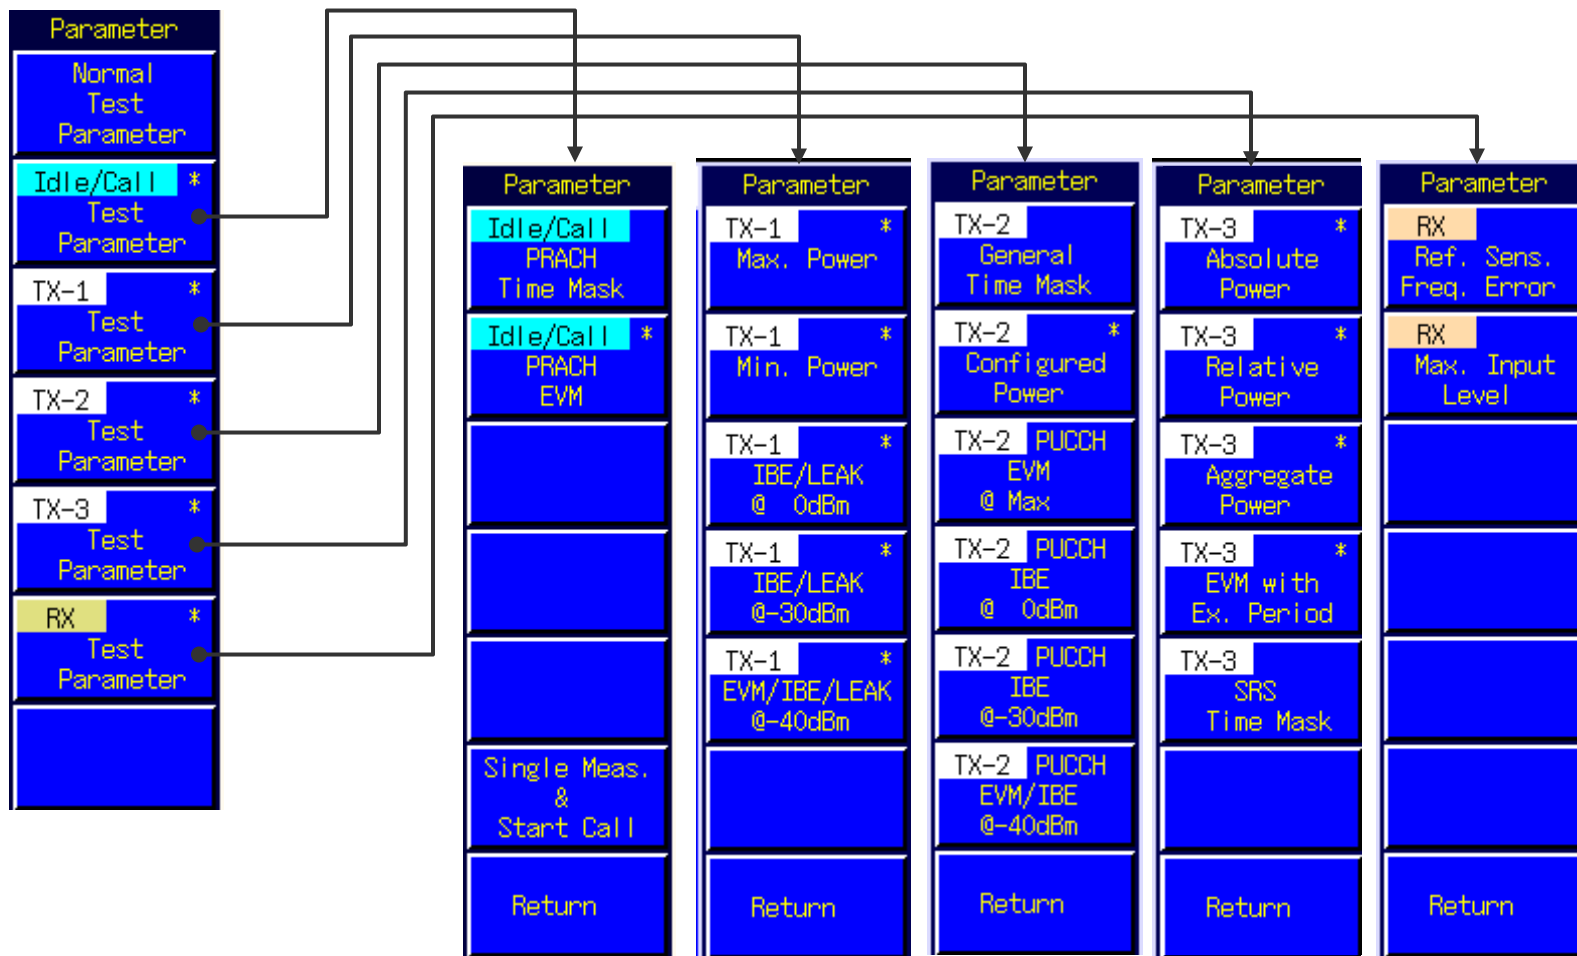

*The above example shows LTE FDD (MX882012C).

LTE FDD/TDD Options – 11/21

MT8820C Specifications

Parameter	Specification
Frequency Range	30 MHz to 2.7 GHz(3.4 GHz to 3.8 GHz Option)
Interface	MAIN: RF In/Out (Standard 1 port, max. 2 ports) AUX: RF Out (Standard 1 port, max. 2 ports)
System	- LTE-Advanced DL CA, LTE(FDD/TDD) - WCDMA (HSDPA/HSUPA/HSPA Evolution /DC-HSPA/4G-HSDPA) - GSM (GSM/GPRS/EGPRS) - CDMA2000 (EV-DO) - TD-SCDMA (HSDPA/HSUPA/HSDPA Evolution) - PHS (Advanced PHS)
Remote Control	GPIB, Ethernet

LTE FDD/TDD Options – 12/21

MX882012C LTE FDD/MX882013C LTE TDD Measurement Software

Parameter	Specification
TX Measurements	Power Frequency Error Error Vector Magnitude (EVM) Phase Error In-band Emissions for Non-allocated RB Carrier Leakage Spectrum Flatness Occupied Bandwidth Spectrum Emission Mask Adjacent Channel Leakage Power Ratio
RX Measurements	Reference Sensitivity level Maximum Input Level

LTE FDD/TDD Options – 13/21

3GPP LTE FDD/TDD Compliance – 1/2

3GPP TS 36.521-1 V12.3.0 (2014-09) Compliance Table

Section	Measurement Item	MX882012C(13C) LTE FDD(TDD) Call Processing	MT8820C Measuremet Item
6	Transmitter characteristics		
6.2	Transmit Power		
6.2.2	UE Maximum Output Power	Yes	Power Measurement
6.2.2_1	UE Maximum Output Power for HPUE	Yes	Power Measurement
6.2.3	Maximum Power Reduction (MPR)	Yes	Power Measurement
6.2.3_1	Maximum Power Reduction (MPR) for HPUE	Yes	Power Measurement
6.2.4	Additional Maximum Power Reduction (A-MPR)	Yes	Power Measurement
6.2.4_1	Additional Maximum Power Reduction (A-MPR)for HPUE	Yes	Power Measurement
6.2.5	Configured UE transmitted Output Power	Yes	Power Measurement
6.2.5_1	Configured UE transmitted Output Power for HPUE	Yes	Power Measurement
6.3	Output Power Dynamics		
6.3.1	Void		
6.3.2	Minimum Output Power	Yes	Power Measurement
6.3.3	Transmit Off power	Yes	Power Measurement
6.3.4	ON/OFF time mask		
6.3.4.1	General ON/OFF time mask	Yes	---
6.3.4.2	PRACH and SRS time mask		
6.3.4.2.1	PRACH time mask	Yes	---
6.3.4.2.2	SRS time mask	Yes	---
6.3.5	Power Control		
6.3.5.1	Power Control Absolute power tolerance	Yes	Power Control Measurement
6.3.5.2	Power Control Relative power tolerance	Yes	Power Control Measurement
6.3.5.3	Aggregate power control tolerance	Yes	Power Control Measurement
6.3.5_1	Power Control for HPUE		
6.3.5_1.1	Power Control Absolute power tolerance for HPUE	Yes	Power Control Measurement
6.3.5_1.2	Power Control Absolute power tolerance for HPUE	Yes	Power Control Measurement
6.3.5_1.3	Aggregate power control tolerance for HPUE	Yes	Power Control Measurement
6.4	Void		
6.5	Transmit signal quality		
6.5.1	Frequency Error	Yes	Modulation Analysis
6.5.2	Transmit modulation		
6.5.2.1	Error Vector Magnitude (EVM)	Yes	Modulation Analysis
6.5.2.1A	PUSCH-EVM with exclusion period	Yes	
6.5.2.2	Carrier leakage	Yes	Modulation Analysis
6.5.2.3	In-band emissions for non allocated RB	Yes	Modulation Analysis
6.5.2.4	Spectrum flatness	Yes	Modulation Analysis

LTE FDD/TDD Options – 14/21

3GPP LTE FDD/TDD Compliance – 2/2

3GPP TS 36.521-1 V12.3.0 (2014-09) Compliance Table

Section	Measurement Item	MX882012C(13C) LTE FDD(TDD) Call Processing	MT8820C Measuremet Item
6	Transmitter characteristics		
6.6	Output RF spectrum emissions		
6.6.1	Occupied bandwidth	Yes	OBW
6.6.2	Out of band emission		
6.6.2.1	Spectrum Emission Mask	Yes	SEM
6.6.2.2	Additional Spectrum Emission Mask	Yes	SEM
6.6.2.3	Adjacent Channel Leakage power Ratio	Yes	ACLR
6.6.2.3_1	Adjacent Channel Leakage power Ratio for HPUE	Yes	ACLR
6.6.2.4	Additional ACLR requirements		
6.6.3	Spurious emissions		
6.6.3.1	Transmitter Spurious emissions (*1)	Yes	---
6.6.3.2	Spurious emission band UE co-existence (*1)	Yes	---
6.6.3.3	Additional spurious emissions (*1)	Yes	---
6.7	Tranmit Intermodulation (*1)	Yes	---
7	Receiver characteristics		
7.3	Reference sensitivity level	Yes	Throughput
7.4	Maximum input level	Yes	Throughput
7.5	Adjacent Channel Selectivity (ACS) (*1)	Yes	Throughput
7.6	Blocking Characteristics		
7.6.1	In-band blocking (*1)	Yes	Throughput
7.6.2	Out-of-band blocking (*1)	Yes	Throughput
7.6.3	Narrow band blocking (*1)	Yes	Throughput
7.7	Spurious response (*1)	Yes	Throughput
7.8	Intermodulation characteristics		
7.8.1	Wide band Intermodulation (*1)	Yes	Throughput
7.8.2	Void		
7.9	Spurious emissions (*1)	Yes	---

(*1): Requires external equipment (eg. signal generator) for interference signal, etc.

LTE FDD/TDD Options – 15/21

LTE FDD/TDD Bands

3GPP TS 36.101-1 V11.7.0 (2013-12) Table 5.5-1E-UTRA operating bands

E-UTRA Operating Band	Uplink (UL) operating band BS receive UE transmit	Downlink (DL) operating band BS transmit	Duplex Mode	MX882012C LTE FDD Meas. SW v23.10
	F _{UL_low} – F _{UL_high}	F _{DL_low} – F _{DL_high}		
1	1920 MHz – 1980 MHz	2110 MHz – 2170 MHz	FDD	X
2	1850 MHz – 1910 MHz	1930 MHz – 1990 MHz	FDD	X
3	1710 MHz – 1785 MHz	1805 MHz – 1880 MHz	FDD	X
4	1710 MHz – 1755 MHz	2110 MHz – 2155 MHz	FDD	X
5	824 MHz – 849 MHz	869 MHz – 894 MHz	FDD	X
6 ^{NOTE 1}	830 MHz – 840 MHz	875 MHz – 885 MHz	FDD	X
7	2500 MHz – 2570 MHz	2620 MHz – 2690 MHz	FDD	X
8	880 MHz – 915 MHz	925 MHz – 960 MHz	FDD	X
9	1749.9 MHz – 1784.9 MHz	1844.9 MHz – 1879.9 MHz	FDD	X
10	1710 MHz – 1770 MHz	2110 MHz – 2170 MHz	FDD	X
11	1427.9 MHz – 1447.9 MHz	1475.9 MHz – 1495.9 MHz	FDD	X
12	698 MHz – 716 MHz	728 MHz – 746 MHz	FDD	X
13	777 MHz – 787 MHz	746 MHz – 756 MHz	FDD	X
14	788 MHz – 798 MHz	758 MHz – 768 MHz	FDD	X
15	Reserved	Reserved	FDD	-
16	Reserved	Reserved	FDD	-
17	704 MHz – 716 MHz	734 MHz – 746 MHz	FDD	X
18	815 MHz – 830 MHz	860 MHz – 875 MHz	FDD	X
19	830 MHz – 845 MHz	875 MHz – 890 MHz	FDD	X
20	832 MHz – 862 MHz	791 MHz – 821 MHz	FDD	X
21	1447.9 MHz – 1462.9 MHz	1495.9 MHz – 1510.9 MHz	FDD	X
22	3410 MHz – 3490 MHz	3510 MHz – 3590 MHz	FDD	X ¹
23	2000 MHz – 2020 MHz	2180 MHz – 2200 MHz	FDD	X
24	1626.5 MHz – 1660.5 MHz	1525 MHz – 1559 MHz	FDD	X
25	1850 MHz – 1915 MHz	1930 MHz – 1995 MHz	FDD	X
26	814 MHz – 849 MHz	859 MHz – 894 MHz	FDD	X
27	807 MHz – 824 MHz	852 MHz – 869 MHz	FDD	X
28	703 MHz – 748 MHz	758 MHz – 803 MHz	FDD	X
29	NA	717 MHz – 728 MHz	FDD	X
30	2305 MHz – 2315 MHz	2350 MHz – 2360 MHz	FDD	X
31	452.5 MHz – 457.5 MHz	462.5 MHz – 467.5 MHz	FDD	X
...				

Note 1: Band 6 is not applicable

E-UTRA Operating Band	Uplink (UL) operating band BS receive UE transmit	Downlink (DL) operating band BS transmit	Duplex Mode	MX882013C LTE TDD Meas. SW v23.10
	F _{UL_low} – F _{UL_high}	F _{DL_low} – F _{DL_high}		
33	1900 MHz – 1920 MHz	1900 MHz – 1920 MHz	TDD	X
34	2010 MHz – 2025 MHz	2010 MHz – 2025 MHz	TDD	X
35	1850 MHz – 1910 MHz	1850 MHz – 1910 MHz	TDD	X
36	1930 MHz – 1990 MHz	1930 MHz – 1990 MHz	TDD	X
37	1910 MHz – 1930 MHz	1910 MHz – 1930 MHz	TDD	X
38	2570 MHz – 2620 MHz	2570 MHz – 2620 MHz	TDD	X
39	1880 MHz – 1920 MHz	1880 MHz – 1920 MHz	TDD	X
40	2300 MHz – 2400 MHz	2300 MHz – 2400 MHz	TDD	X
41	2496 MHz – 2690 MHz	2496 MHz – 2690 MHz	TDD	X
42	3400 MHz – 3600 MHz	3400 MHz – 3600 MHz	TDD	X ¹
43	3600 MHz – 3800 MHz	3600 MHz – 3800 MHz	TDD	X ¹
44	703 MHz – 803 MHz	703 MHz – 803 MHz	TDD	X

X: Support

*1: Requires MT8820C-018

LTE FDD/TDD Options – 16/21

LTE FDD/TDD 2x2 MIMO RF Throughput – 1/2

One MT8820C with two ports supports RF throughput tests with 2x2 MIMO RX for LTE FDD UE Category 3 (DL 100 Mbps)

RF Throughput Measurement (@physical layer)

Condition: 2x2 MIMO RX

DL Signal: Fixed reference channel two antenna ports*

Changeable data rate up to UE Category 3 DL Max.(100 Mbps)

***: Defined in TS36.521-1 A.3.3.2.1 Two antenna ports**

RF Throughput Measurement
Up to UE Category 3 DL Max.
(LTE FDD, 100 Mbps)



MT8820C

2x2 MIMO



Connection example



**Port 1 to
antenna 1**

**Port 2 to
antenna 2**



2x2 MIMO RF Throughput Configuration

MX882012C-011 LTE FDD 2x2 MIMO DL

MX882012C LTE FDD Measurement Software

MT8820C-008 LTE Measurement Hardware

MT8820C-012 Parallelphone Measurement Hardware

MT8820C Radio Communication Analyzer

● **Hardware configuration**

● **Uses two RF ports**

● **Requires one instrument supporting LTE**

*Supported by PPM configuration (with two MT8820C-008) as well.
Note, 2x2 MIMO uses both phone terminals.

*The above example shows LTE FDD (MX882012C).

*The maximum LTE TDD 2x2MIMO download rate for UE Category 3 is 91.8 Mbps (ideal value).

LTE FDD/TDD Options – 17/21

LTE FDD/TDD 2x2 MIMO RF Throughput – 2/2

Example: 2x2 MIMO, 20 MHz BW, UE Category 3, Maximum DL Rate 100 Mbps (LTE FDD)

Connected Phone-2 LTE Phone-1 LTE

<Fundamental Measurement> Output Main

Parameter Fundamental UE Report

End UE Power : -2.6 dBm Fundamental

Throughput End Limit

Throughput	102048	kbps (= 100.00 %)
(Code Word 0	51024	kbps (= 100.00 %)
(Code Word 1	51024	kbps (= 100.00 %)
Block Error Rate	0.0000	
	0.00E+00	
Error Count	0	(NACK + DTX)
	(NACK 0 DTX 0)	
Transmitted/Sample	2000 /	2000 Block

Number of RB	100
Starting RB	0
	Aggregation Level
	Modulation TBS Index TBS SI-RNTI C-RNTI
MCS Index (1-4,6-9)	23 (64QAM) (21) (102048) - 2
MCS Index (5)	24 (64QAM) (22) (102048) 4 2
MCS Index (0)	23 (64QAM) (21) (102048) - 2

1 2 3

The 100% throughput value can be changed by setting MCS Index parameters.

*The above example shows LTE FDD (MX882012C/-006/-011).


LTE FDD/TDD Options – 18/21

LTE FDD/TDD 2x2 MIMO IP Data Throughput – 1/2

Using the LTE FDD/TDD IP data transfer software option, the MT8820C can verify IP data communications between an external application server and LTE FDD/TDD UE. Moreover, in the 2x2 MIMO configuration, IP data throughput*¹ is measured at the max. data rate*² (LTE FDD, DL 100 Mbps, UL 50 Mbps) by an external client PC.


****1: IP data throughput measured by external equipment such as PC.***

****2: Theoretical maximum data rate***

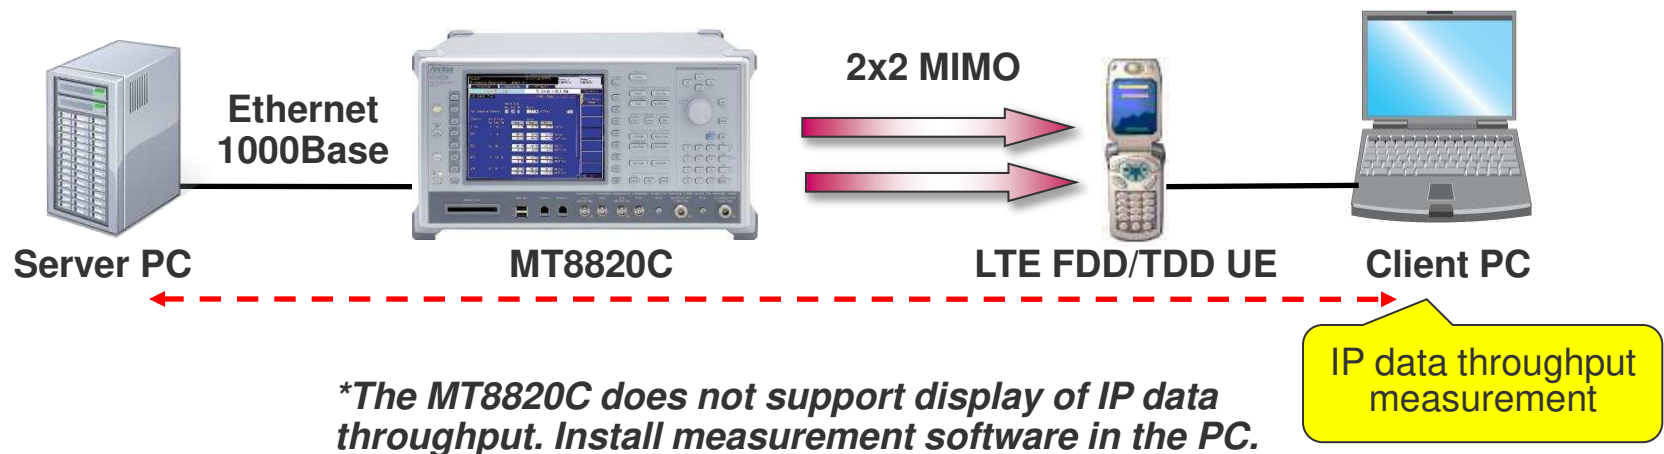

LTE TDD/FDD Options – 19/21

LTE FDD/TDD 2x2 MIMO IP Data Throughput – 2/2

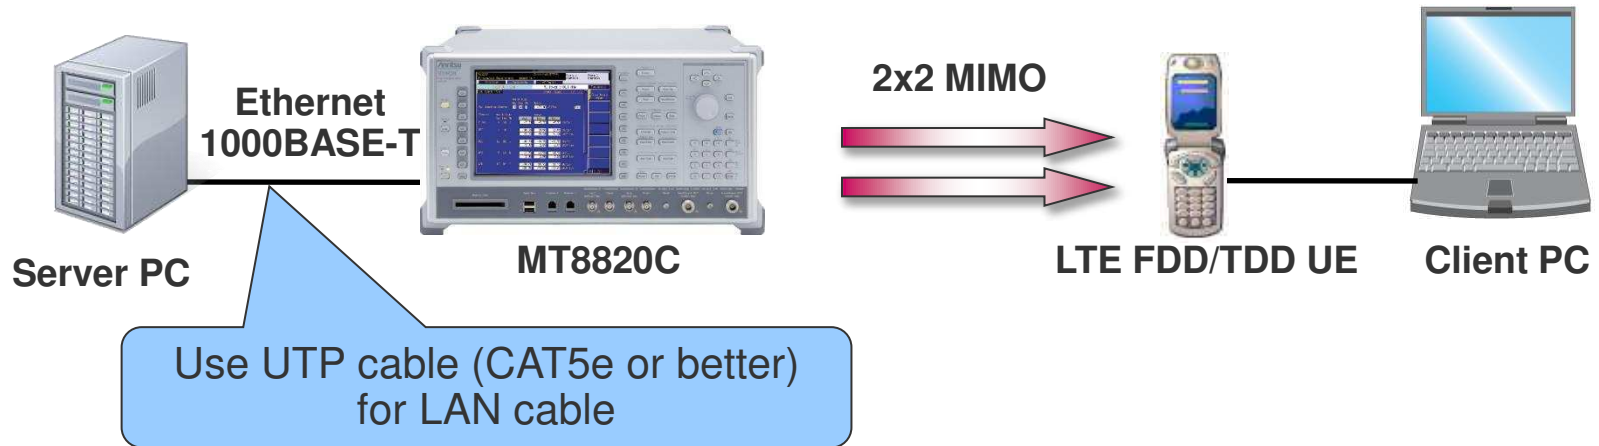

2x2 MIMO IP Data Throughput Configuration

MX882012C-011 LTE FDD 2x2 MIMO DL

MX882012C-006 LTE FDD IP Data Transfer

MX882012C LTE FDD Measurement Software

MT8820C-008 LTE Measurement Hardware

MT8820C-012 Parallelphone Measurement Hardware

MT8820C Radio Communication Analyzer

*The above example shows LTE FDD (MX882012C).


UTP: Unshielded Twisted Pair Cable
CAT5e: Enhanced Category 5 twisted pair cable

LTE TDD/FDD Options – 20/21

LTE FDD CS Fallback to W-CDMA/GSM/CDMA2000 Function – 1/2

The LTE FDD CS Fallback to W-CDMA/GSM/CDMA2000 option supports simple CS Fallback function tests (redirection base)*¹ with LTE FDD/3G/2G UEs.

➡ **Efficient for R&D, service and maintenance departments**

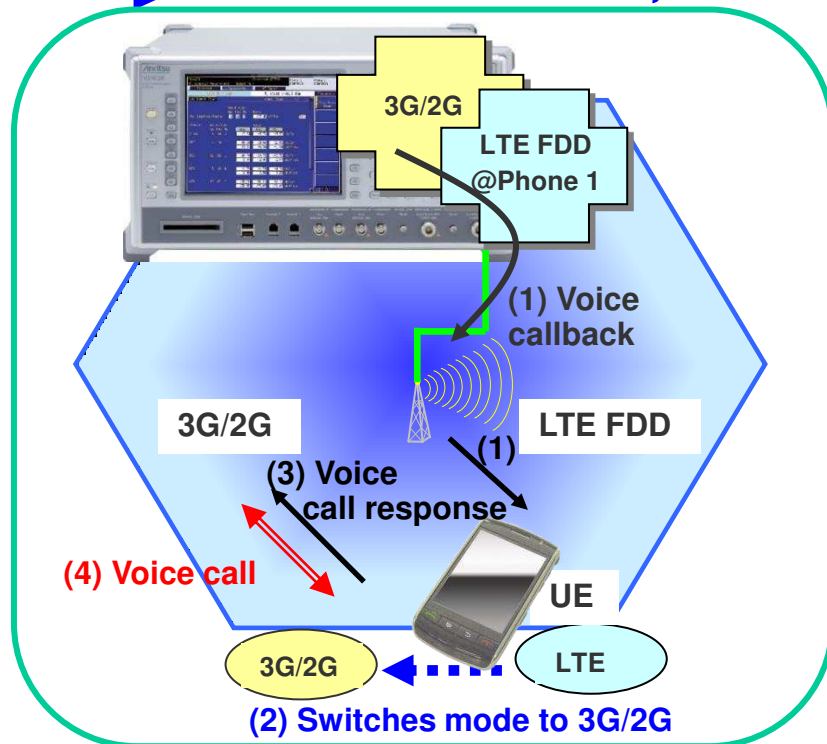

*LTE FDD CS Fallback example

- (1) Voice **callback** made by LTE FDD
- (2) LTE FDD/3G/2G UEs **switch mode** from LTE FDD to 3G/2G
- (3) UE answers voice call from base station
- (4) UE and base station start **voice call**.

[LTE system]

Inter RAT Mobility	CS Fallback to W-CDMA
LTE	
DL Channel	0
W-CDMA/TD-SCDMA	
DL Channel	10700
GSM	
Band Indicator	DCS1800
Channel	1
Standard Change	On (for single RF port testing)
Select Parameter	
☒ On ☐ Off	

Parameter
CS Fallback To W-CDMA
Test execution key

*Above shows parameter setting example for MX882012C-016 LTE FDD CS Fallback to W-CDMA/GSM.
The "1 Port CS Fallback function" is effective at the time of Standard Change [On].

[W-CDMA system]


Registration Mode	Auto
Connection Mode	CS Fallback
	Normal
	CS Fallback

*Above shows parameter setting example for MX882000C W-CDMA Measurement Software.

*1: LTE/3G/2G UEs must support CS Fallback function.

LTE TDD/FDD Options – 21/21

LTE FDD CS Fallback to W-CDMA/GSM/CDMA2000 Function – 2/2

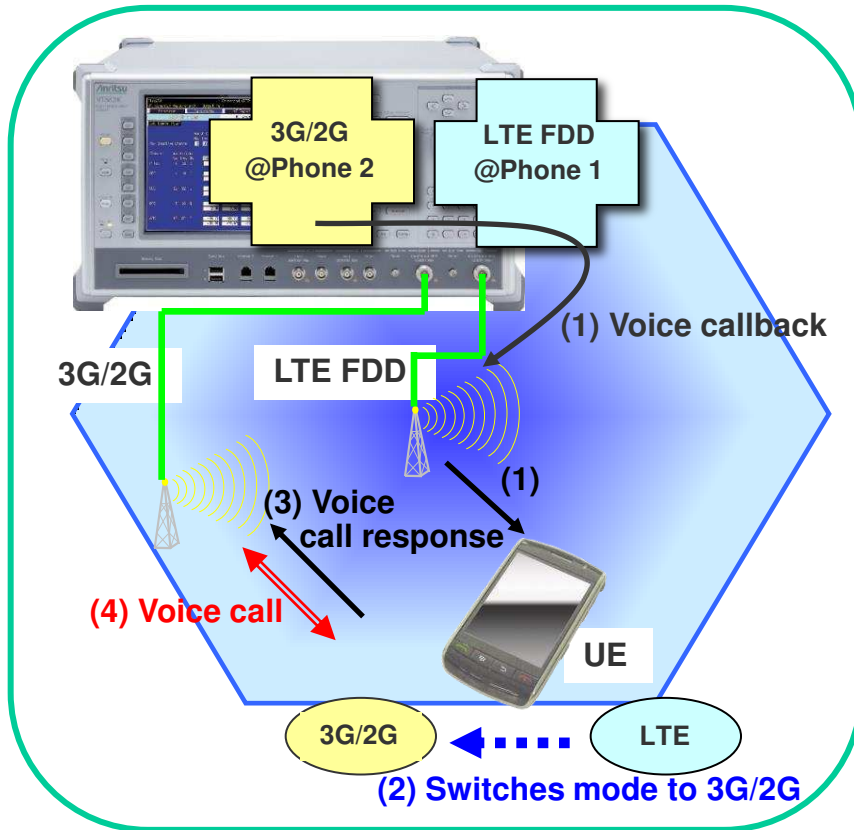


*LTE FDD CS Fallback example

Benefits of MT8820C

MT8820A/B Compatibility

All functions, performance, and remote commands are backwards compatible with the MT8820A/B, so customers can easily reuse control software developed for the MT8820A/B.

- ◆ Cuts setup time and costs
- ◆ No reconfiguration of 3G/2G test environment

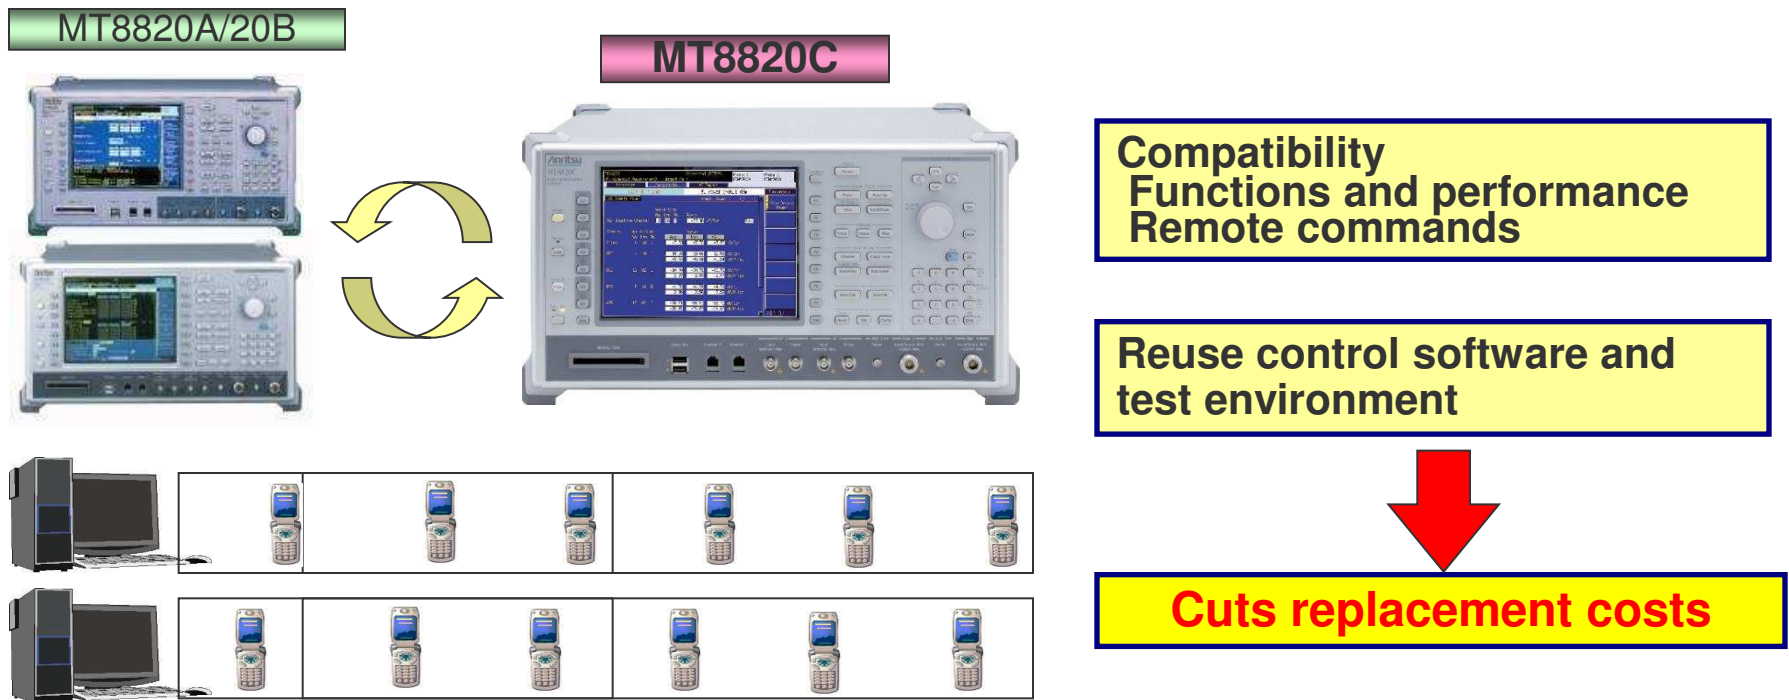

LTE Extensibility

The MT8820C platform is designed as an ideal manufacturing solution for LTE and 2G/3G mobiles. Just add the LTE option to start manufacturing LTE mobile terminals.

2G/3G Production Line



LTE Options

LTE Production Line



LTE-Advanced DL CA 3CCs Extensibility

MT8820C with LTE-Advanced DL CA options


The MT8820C has supported LTE-Advanced FDD DL CA 2CCS since Jan. 2013, and its contribution to LTE-Advanced CA development is well-known.

*1: MT8820C supports LTE-Advanced FDD/TDD DL CA 2CCs and FDD/TDD DL CA 3CCs.

Key Features

- Reliable LTE-Advanced DL CA 2CCs/3CCs with signalling
- 3GPP TS36.521-1 TRX test items*2
- Supports LTE-Advanced FDD(TDD) DL CA plus MIMO Physical throughput

*2: 3GPP TS36.521-1 test description are not yet defined.

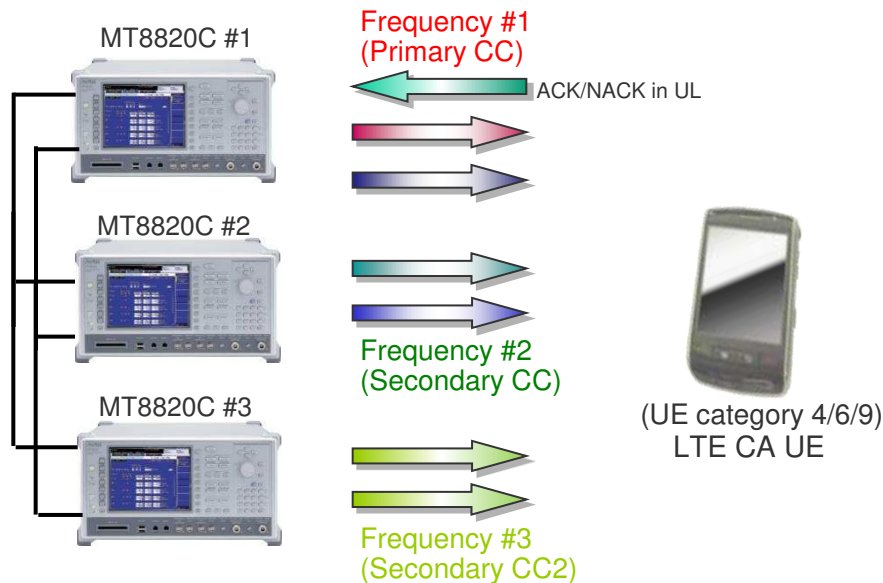


Example of DL CA 3CCs (2x2 MIMO) Connection

*CA: Carrier Aggregation

*CC: Component Carrier

Upgrade to MT8820C

The MT8820B/15B hardware and software can be upgraded to the MT8820C, helping maximize investment efficiency.

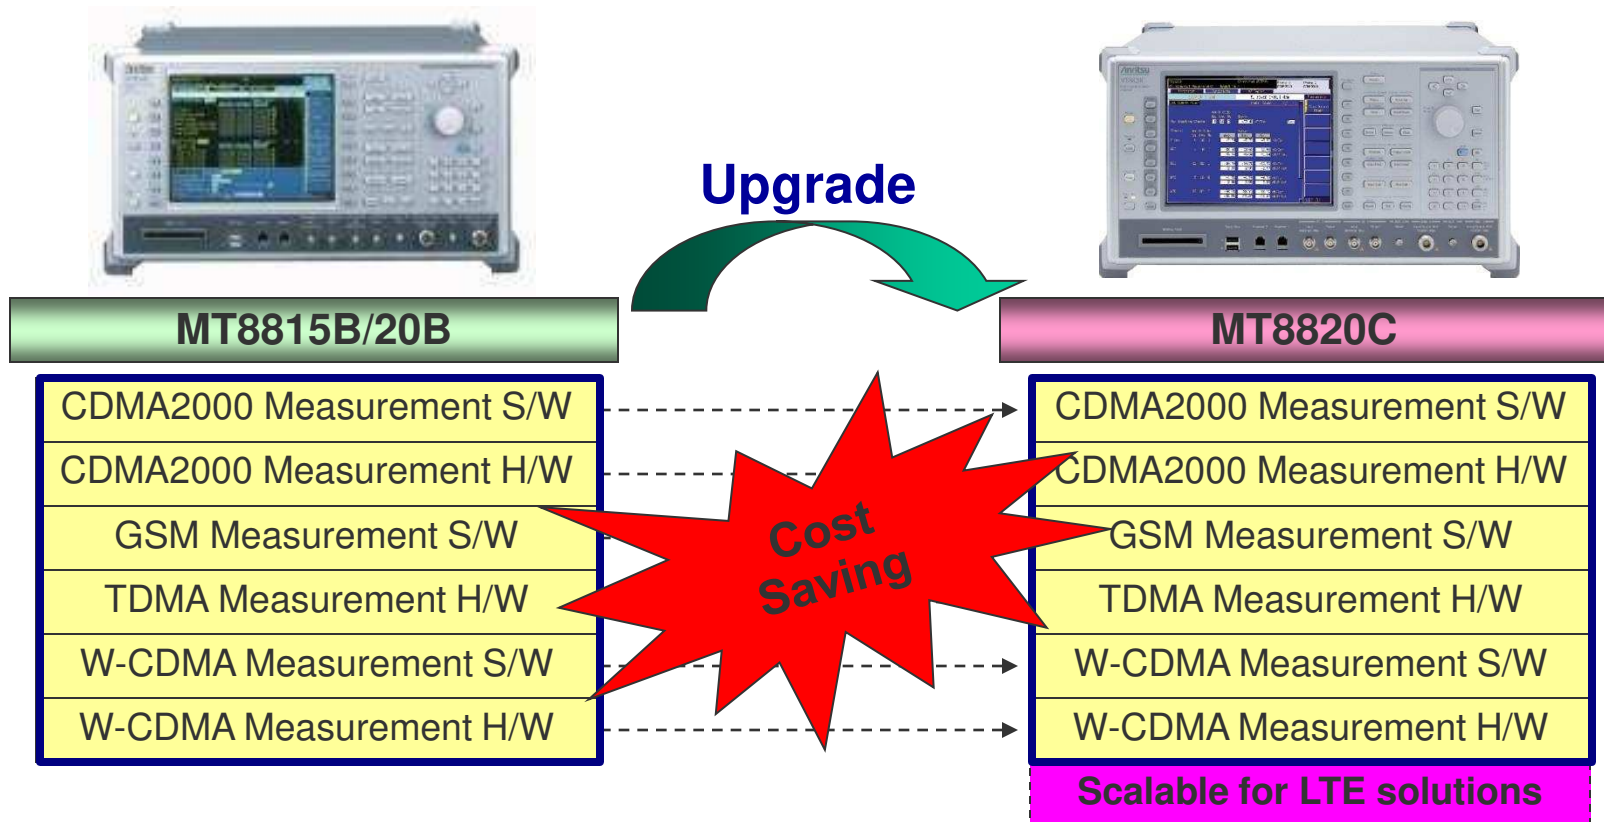

*Contact your Anritsu sales representative for upgrade details.

TD-SCDMA Extensibility


MT8820x with TD-CDMA options

The MT8820B has supported TD-SCDMA since 2007, and its contribution to TD-SCDMA development is well-known.

The new MT8820C is also the ideal platform for R&D, manufacturing and service of TD-SCDMA/GSM mobiles.

Key Features

- Reliable TD-SCDMA with signalling
- TD-SCDMA HSDPA/HSUPA tests
- 3GPP TRX test items and one-touch 3GPP TS34.122 settings
- Voice codec and videophone tests

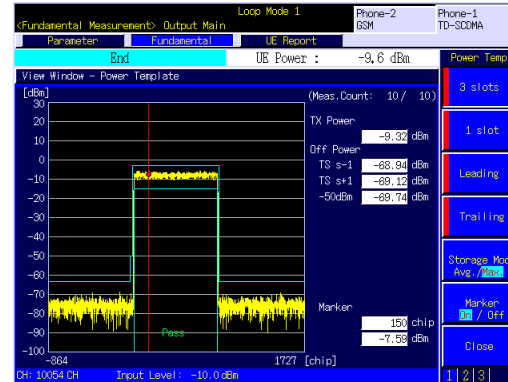

Note

● United States

Anritsu Company

1155 East Collins Blvd., Suite 100, Richardson,
TX 75081, U.S.A.
Toll Free: 1-800-267-4878
Phone: +1-972-644-1777
Fax: +1-972-671-1877

● Canada

Anritsu Electronics Ltd.

700 Silver Seven Road, Suite 120, Kanata,
Ontario K2V 1C3, Canada
Phone: +1-613-591-2003
Fax: +1-613-591-1006

● Brazil

Anritsu Eletrônica Ltda.

Praça Amadeu Amaral, 27 - 1 Andar
01327-010 - Bela Vista - São Paulo - SP - Brazil
Phone: +55-11-3283-2511
Fax: +55-11-3288-6940

● Mexico

Anritsu Company, S.A. de C.V.

Av. Ejército Nacional No. 579 Piso 9, Col. Granada
11520 México, D.F., México
Phone: +52-55-1101-2370
Fax: +52-55-5254-3147

● United Kingdom

Anritsu EMEA Ltd.

200 Capability Green, Luton, Bedfordshire, LU1 3LU, U.K.
Phone: +44-1582-433200
Fax: +44-1582-731303

● France

Anritsu S.A.

12 avenue du Québec, Bâtiment Iris 1- Silic 612,
91140 VILLEBON SUR YVETTE, France
Phone: +33-1-60-92-15-50
Fax: +33-1-64-46-10-65

● Germany

Anritsu GmbH

Nemetschek Haus, Konrad-Zuse-Platz 1
81829 München, Germany
Phone: +49-89-442308-0
Fax: +49-89-442308-55

● Italy

Anritsu S.r.l.

Via Elio Vittorini 129, 00144 Roma, Italy
Phone: +39-6-509-9711
Fax: +39-6-502-2425

● Sweden

Anritsu AB

Kistagången 20B, 164 40 KISTA, Sweden
Phone: +46-8-534-707-00
Fax: +46-8-534-707-30

● Finland

Anritsu AB

Teknobulevardi 3-5, FI-01530 VANTAA, Finland
Phone: +358-20-741-8100
Fax: +358-20-741-8111

● Denmark

Anritsu A/S

Kay Fiskers Plads 9, 2300 Copenhagen S, Denmark
Phone: +45-7211-2200
Fax: +45-7211-2210

● Russia

Anritsu EMEA Ltd.

Representation Office in Russia

Tverskaya str. 16/2, bld. 1, 7th floor.
Russia, 125009, Moscow
Phone: +7-495-363-1694
Fax: +7-495-935-8962

● United Arab Emirates

Anritsu EMEA Ltd.

Dubai Liaison Office

P O Box 500413 - Dubai Internet City
Al Thuraya Building, Tower 1, Suit 701, 7th Floor
Dubai, United Arab Emirates
Phone: +971-4-3670352
Fax: +971-4-3688460

● India

Anritsu India Private Limited

2nd & 3rd Floor, #837/1, Binnamangla 1st Stage,
Indiranagar, 100ft Road, Bangalore - 560038, India
Phone: +91-80-4058-1300
Fax: +91-80-4058-1301

● Singapore

Anritsu Pte. Ltd.

11 Chang Charn Road, #04-01, Shriro House
Singapore 159640
Phone: +65-6282-2400
Fax: +65-6282-2533

● P.R. China (Shanghai)

Anritsu (China) Co., Ltd.

Room 2701-2705, Tower A,
New Caohejing International Business Center
No. 391 Gui Ping Road Shanghai, 200233, P.R. China
Phone: +86-21-6237-0898
Fax: +86-21-6237-0899

● P.R. China (Hong Kong)

Anritsu Company Ltd.

Unit 1006-7, 10/F., Greenfield Tower, Concordia Plaza,
No. 1 Science Museum Road, Tsim Sha Tsui East,
Kowloon, Hong Kong, P.R. China
Phone: +852-2301-4980
Fax: +852-2301-3545

● Japan

Anritsu Corporation

8-5, Tamura-cho, Atsugi-shi, Kanagawa, 243-0016 Japan
Phone: +81-46-296-1221
Fax: +81-46-296-1238

● Korea

Anritsu Corporation, Ltd.

5FL, 235 Pangyoyeok-ro, Bundang-gu, Seongnam-si,
Gyeonggi-do, 463-400 Korea
Phone: +82-31-696-7750
Fax: +82-31-696-7751

● Australia

Anritsu Pty. Ltd.

Unit 21/270 Ferntree Gully Road, Notting Hill,
Victoria 3168, Australia
Phone: +61-3-9558-8177
Fax: +61-3-9558-8255

● Taiwan

Anritsu Company Inc.

7F, No. 316, Sec. 1, NeiHu Rd., Taipei 114, Taiwan
Phone: +886-2-8751-1816
Fax: +886-2-8751-1817

Please Contact: