



One Port USB Vector Network Analyzers

MS46121A Series ShockLine™ 1-Port Vector Network Analyzers

Introduction

The MS46121A is part of the ShockLine™ family of Vector Network Analyzers from Anritsu. It is available in two frequency ranges of 40 MHz to 4 GHz and 150 kHz to 6 GHz, and is capable of 1-port s-parameter and band pass time domain (distance to fault) measurements standard.

The MS46121A series is controlled through USB from an external PC. The MS46121A runs the same software as the rest of the ShockLine family, providing a powerful graphical user interface for testing of passive devices. Up to 16 MS46121A VNAs can be controlled from one computer, making it ideal for testing multiple 1-port devices in parallel for improved test productivity and throughput.

This document provides detailed specifications for the MS46121A series Vector Network Analyzers (VNAs) and related options.

Instrument Models and Operating Frequencies

- MS46121A-004, 40 MHz to 4 GHz, 1-port
- MS46121A-006, 150 kHz to 6 GHz, 1-port

Principal Option

- MS46121A-002, Low Pass Time Domain



MS46121A USB 1-Port ShockLine™ VNA

Description	Page
Definitions	2
High Level Noise	3
Output Power	3
Measurement Stability	3
Frequency Resolution, Accuracy, and Stability	3
Uncorrected (Raw) Port Characteristics	3
VNA System Performance	3
Measurement Throughput	4
Standard Capabilities	4
Calibration and Correction Capabilities	5
Remote Operability	6
Recommended External PC Configuration and Operating System	6
Device Connections	6
Mechanical	6
Environmental	7
Electromagnetic Compatibility	7
Safety	7
Warranty	7
Ordering Information	8

Definitions

	All specifications and characteristics apply under the following conditions, unless otherwise stated:
Warm-Up Time	After 30 minutes of warm-up time, where the instrument is left in the ON state.
Temperature Range	Specifications apply over the 25 °C ± 5 °C temperature range.
Error-Corrected Specifications	Specifications are valid over 23 °C ± 3 °C, with < 1 °C variation from calibration temperature.
Frequency Bands in Tables	When a frequency is listed in two rows of the same table, the specification for the common frequency is taken from the lower frequency band.
User Cables	Specifications do not include effects of any user cables attached to the instrument.
Discrete Spurious Responses	Specifications may exclude discrete spurious responses.
Internal Reference Signal	All specifications apply with internal 10 MHz Crystal Oscillator Reference Signal.
Interpolation Mode	All specifications are with Interpolation Mode Off.
Standard	Refers to instruments without Options.
Typical Performance	Typical performance indicates the measured performance of an average unit. It does not include guard-bands and is not covered by the product warranty.
Characteristic Performance	Characteristic performance indicates a performance designed-in and verified during the design phase. It does include guard-bands and is not covered by the product warranty.
Uncertainty	A coverage factor of x1 is applied to the measurement uncertainties to facilitate comparison to other industry analyzers.
Recommended Calibration Cycle	12 months (Residual specifications also require calibration kit calibration cycle adherence.)
Specifications Subject to Change	All specifications are typical unless otherwise noted and are subject to change without notice.

High Level Noise

Measured at 100 Hz IF bandwidth and at default power level, RMS.

Frequency	Magnitude (dB)	Phase Noise (deg)
150 kHz to 6 GHz	0.01	0.05

Output Power

Frequency	Power Setting	Standard (dBm)
150 kHz to 23.2 MHz	Default	0 dBm
>23.2 MHz to 4 GHz	Default	+3 dBm
>4 GHz to 6 GHz	Default	0 dBm

Measurement Stability

Ratio measurement, with ports shorted.

Frequency	Magnitude (dB/°C)
1 MHz to 6 GHz	0.02

Frequency Resolution, Accuracy, and Stability

Resolution	Accuracy	Stability	Aging
1 Hz ^a	±0.5 ppm (at time of calibration)	±1.0 ppm from -10 °C to +55 °C	±1.0 ppm/year

a. Frequency resolution is 10 kHz when using an external reference.

Uncorrected (Raw) Port Characteristics

User and System Correction Off.

Frequency Range	Directivity (dB)	Port Match (dB)
150 kHz to 6 GHz	10 dB ^a	10 dB ^b

a. Raw directivity specification degrades by 2 dB above 4 GHz.

b. Raw port match specification degrades by 5 dB above 4 GHz.



VNA System Performance**Error-Corrected Specifications**

With calibration using TOSLN50A-8 or TOSLNF50A-8 N-type connector manual calibration kits or the MN25208A SmartCal™ automatic calibration kit with N(f) type connectors (option -001).

Frequency Range	Directivity (dB)	Source Match (dB)	Reflection Tracking (dB)
150 kHz to 4 GHz	42	35	±0.1
> 4 GHz to 6 GHz	42	27	±0.2

Measurement Uncertainties

The graphs give measurement uncertainties after the above error-corrected calibration. The errors are a worst-case contribution of residual directivity, load and source match, frequency response and isolation, network analyzer dynamic accuracy, and connector repeatability. 10 Hz IF Bandwidth is used. All calibrations and measurements were performed at default port power. For other conditions, please use our free Exact Uncertainty Calculator software, available for download from the Anritsu web site at www.anritsu.com.

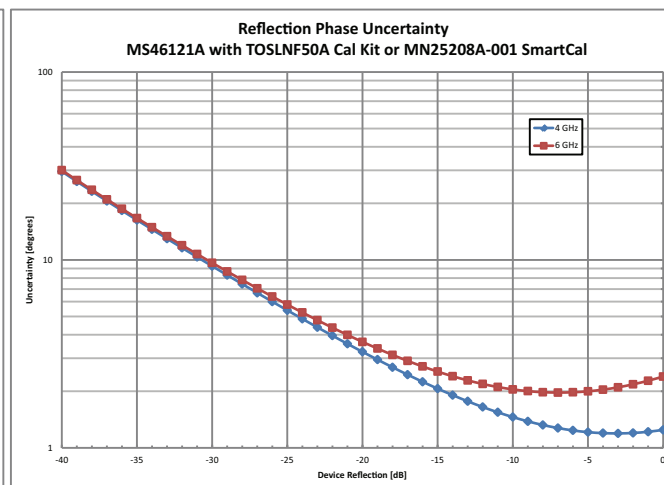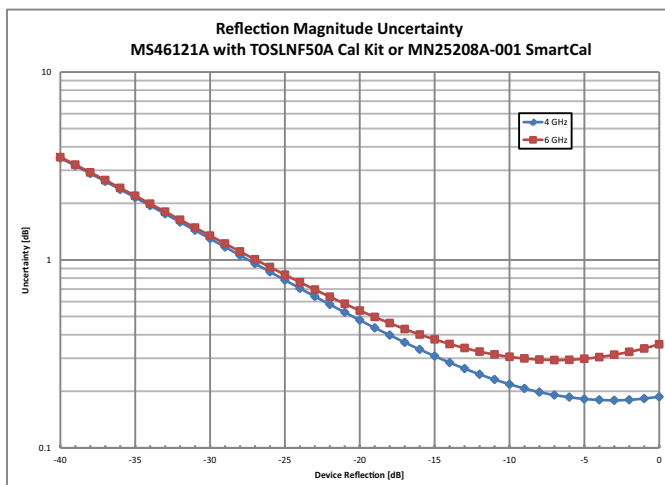

Measurement Throughput

Measurement Speed	100 μ s/point, typical. Per point single sweep time, including placing measurement data into memory. Measured with recommended external PC configuration.
--------------------------	---

Standard Capabilities

Operating Frequencies

MS46121A-004	40 MHz to 4 GHz
MS46121A-006	150 kHz to 6 GHz

Measurement Parameters

1-Port Measurements	S_{11} or any user-defined combination of a_1 , b_1 , 1
Domains	Frequency Domain and Band Pass Time Domain (Distance to Fault)

Sweeps

Frequency Sweep Types	Linear, Log, or Segmented
-----------------------	---------------------------

Display Graphs

Single Rectilinear Graph Types	Log Magnitude, Phase, Linear Magnitude, Real, Imaginary, SWR, and Impedance
Dual Rectilinear Graph Types	Log Mag and Phase, Linear Mag and Phase, Real and Imaginary
Circular Graph Types	Smith Chart, Polar

Measurements Data Points

Maximum Data Points	2 to 20,001 points
---------------------	--------------------

Limit Lines

Limit Lines	Single or segmented. 2 limit lines per trace. 50 segments per trace.
Single Limit Readouts	Uses interpolation to determine the intersection frequency.
Test Limits	Both single and segmented limits can be used for PASS/FAIL testing.

Averaging

Point-by-Point	Point-by-point (default), maximum number of averages = 4096
Sweep-by-Sweep	Sweep-by-sweep, maximum number of averages = 4096

IF Bandwidth

10, 20, 30, 50, 70, 100, 200, 300, 500, 700 Hz
1, 2, 3, 5, 7, 10, 20, 30, 50, 100 kHz

Reference Plane

Line Length or Time Delay	The reference planes of a calibration or other normalization can be changed by entering a line length or time delay.
Dielectric Constants	Dielectric constants may be entered for different media so the length entry can be physically meaningful.
Dispersion Modeling	Dispersion modeling is used in the cases of microstrip and waveguide to take into account frequency dependent phase velocities.
Attenuations	Attenuations and constant phase offsets can be entered to better describe any reference plane distortions.
De-embedding	For more complete reference plane manipulation, the full de-embedding system can also be used.

Measurement Frequency Range

Frequency Range Change	Frequency range of the measurement can be narrowed within the calibration range without recalibration.
CW Mode	CW mode permits single frequency measurements also without recalibration.
Interpolation Not Activated	If interpolation is not activated, the subset frequency range is forced to use calibration frequency points.
Interpolation Activated	If interpolation is activated, any frequency range that is a subset of the calibration frequency range can be used, but there may be some added interpolation error.

Channels, Display, and Traces

Channels	Up to 16 MS46121A VNAs can operate in parallel while controlled from a single host computer. ShockLine software dedicates one channel per MS46121A VNA with 16 channels maximum
Traces	Each channel supports up to 16 data traces.
Display Colors	Unlimited colors for data traces, memory, text, markers, graticules, and limit lines
Trace Memory and Math	A separate memory for each trace can be used to store measurement data for later display or subtraction, addition, multiplication or division with current measurement data. The trace data can be saved and recalled.
Intra-trace Math	Any two traces within a channel can be combined (via addition, subtraction, multiplication, or division) and displayed on another trace.

Scale Resolution

	Minimum per division, varies with graph type.
Log Magnitude	0.001 dB
Linear Magnitude	10 U
Phase	0.01°
Time	0.0001 ps
Distance	0.1 m
SWR	10 U
Power	0.01 dB

Markers

Markers	12 markers + 1 reference marker
Marker Coupling	Coupled or decoupled
Marker Data	Data displayed in graph area or in table form
Reference Marker	Additional marker per trace for reference
Marker Statistics	Mean, maximum, minimum, standard deviation Per trace or over a marker region
Marker Search and Tracking	Search and/or track for minimum, maximum, peak, or target value

Calibration and Correction Capabilities**Calibration Methods**

Open Short Load (OSL)
Offset Short (SSL)
Triple Offset Short (SSS)

Correction Models

1-Port (S_{11})
Reflection Frequency Response (S_{11})

Coefficients for Calibration Standards

Use the Anritsu calibration kit USB memory device to load kit coefficients and characterization files.
Enter coefficients into user-defined locations.
Use complex load models.

Interpolation

Allows interpolation between calibration frequency points.

Adapter Removal Calibration

Characterizes and "removes" an adapter that is used during calibration that will not be used for subsequent device measurements; for accurate measurement of non-insertable devices.

Dispersion Compensation

Selectable as Coaxial, other non-dispersive (e.g., for coplanar waveguide), Waveguide, or Microstrip

Embedding/De-embedding

	The MS46121A is equipped with an Embedding/De-embedding system.
De-embedding	De-embedding is generally used for removal of test fixture contributions, modeled networks, and other networks described by S-parameters (s2p files) from measurements.
Embedding	Similarly, the Embedding function can be used to simulate matching circuits for optimizing amplifier designs or simply adding effects of a known structure to a measurement.
Multiple Networks	Multiple networks can be embedded/de-embedded and changing the port and network orientations is handled easily.

Remote Operability

ShockLine supports several remote operability options.

Communication Type	Data Format	Performance	Description
Drivers	IVI-C drivers are available for download from the Anritsu website. The IVI-C package supports National Instruments LabVIEW and LabWindows, C#, .NET, MATLAB, and Python34 programming environments.		
Triggering	Start Trigger	Software	

Recommended External PC Configuration and Operating System

Operating System	Windows® 7 or 8, 64 bit
CPU	3 GHz
RAM	4 GB
Disk	120 GB
DirectX	Version 9 with Windows Display Driver Model (WDDM) installed
USB	One USB 2.0 (or higher) type A port per MS46121A used To increase the number of USB ports available an externally powered USB hub may also be used.

Device Connections



MS46121A

Test Port 1

MS46121A	N(m)
Damage Input Levels	+23 dBm maximum, ±50 VDC maximum

External Reference In

Frequency Input	10 MHz (better than 10 ppm frequency accuracy is recommended)
Connector Type	MCX(f)
Signal	+0 dBm, typical; 50 Ω, nominal

USB Ports

One Micro USB 2.0 port for connecting to an external PC controller.

Mechanical

Dimensions	W x H x D	52 mm x 148 mm 36 mm
-------------------	-----------	----------------------

Weight	< 0.4 kg (< 0.9 lb), typical weight
---------------	-------------------------------------

Environmental

Operating	Specification Conforms to MIL-PRF-28800F (class 2)
Temperature Range	-10 °C to +55 °C
Relative Humidity	5 % to 95 % at +40 °C, Non-condensing

Non-Operating

Temperature Range	-51 °C to +71 °C
Relative Humidity	0 % to 90 % at +65 °C, Non-condensing

Shock

30 g half-sine, 11 ms duration

Vibration

Sinusoidal	5 Hz to 55 Hz, 3 g max
Random	10 Hz to 500 Hz
Power Spectral Density	0.03 g ² /Hz

Electromagnetic Compatibility

EMI Conforms to and meets the requirements of:

EMC Directive	2004/108/EC
Low Voltage Directive	2006/95/EC
Emissions	EN55011:2009+A1:2010 Group 1 Class A
Immunity	EN 61000-4-2:2009, 4 kV CD, 8 kV AD EN 61000-4-3:2006+A2:2010, 3 V/m EN 61000-4-4:2004, 0.5 kV S-L, 1 kV P-L EN 61000-4-5:2006, 0.5 kV S-L, 1 kV L-E EN 61000-4-6:2009, 3 V EN 61000-4-11:2004, 100 % @ 20 ms

Safety

European Union	CE Mark
Standard:	EN 61010-1:2010

Warranty

Instrument and Built-In Options	3 years from the date of shipment (standard warranty)
Calibration Kits	Typically 1 year from the date of shipment
Test Port Cables	Typically 1 year from the date of shipment
Warranty Options	Additional warranty available

Ordering Information

Instrument Models

Base Model	MS46121A, ShockLine™ 1-Port USB VNA
Required Option	MS46121A-004, 40 MHz to 4 GHz, type N(m) port
(Select one frequency option only)	MS46121A-006, 150 kHz to 6 GHz, type N(m) port

Included Accessories

Each VNA comes with a set of included accessories.	
User Documentation	The user documentation USB device includes the ShockLine software for controlling the VNA and Adobe Acrobat PDF files for the ShockLine User Guide and Technical Data Sheet.
USB Cable	2000-1606-R, USB-A to Micro-B with latch cable, 1.8 m (6 ft)

Main VNA Option

MS46121A-002	Low Pass Time Domain
--------------	----------------------

Precision Automatic Calibrator Module

MN25208A	2-port USB SmartCal Module, 300 kHz to 8.5 GHz, (available with various connector options)
----------	--

Mechanical Calibration Kits

3653A	N Calibration Kit, Without Sliding Loads
OSLN50A-8	Precision N Male Open/Short/Load Mechanical Calibration Tee
OSLNF50A-8	Precision N Female Open/Short/Load Mechanical Calibration Tee
TOSLN50A-8	Precision N Male Through/Open/Short/Load Mechanical Calibration Tee
TOSLNF50A-8	Precision N Female Through/Open/Short/Load Mechanical Calibration Tee

RF Cables and Adapters

1091-26-R	SMA(m) to N(m), DC to 18 GHz, 50 Ω
1091-27-R	SMA(f) to N(m), DC to 18 GHz, 50 Ω
1091-80-R	SMA(m) to N(f), DC to 18 GHz, 50 Ω
1091-81-R	SMA(f) to N(f), DC to 18 GHz, 50 Ω
71693-R	Ruggedized adapter, K(f) to N(f), DC to 18 GHz, 50 Ω
34NK50	Precision Adapter, N(m) to K(m), DC to 18 GHz, 50 Ω
34NKF50	Precision Adapter, N(m) to K(f), DC to 18 GHz, 50 Ω
34NFK50	Precision Adapter, N(f) to K(m), DC to 18 GHz, 50 Ω
34NFKF50	Precision Adapter, N(f) to K(f), DC to 18 GHz, 50 Ω
K220B	Precision Adapter, DC to 40 GHz, K(m) to K(m), 50 Ω
K222B	Precision Adapter, DC to 40 GHz, K(f) to K(f), 50 Ω
K224B	Precision Adapter, DC to 40 GHz, K(m) to K(f), 50 Ω

Test Port Cables, Flexible, Ruggedized, Phase Stable

15NNF50-1.0B	N(f) to N(m), 1.0 m, 50 Ω
15NNF50-1.5B	N(f) to N(m), 1.5 m, 50 Ω
15NN50-1.0B	N(m) to N(m), 1.0 m, 50 Ω
15LL50-1.0A	3.5 mm(m) to 3.5 mm(m), 1.0 m, 50 Ω
15LLF50-1.0A	3.5 mm(m) to 3.5 mm(f), 1.0 m, 50 Ω
15KK50-1.0A	K(m) to K(m), 1.0 m, 50 Ω
15KKF50-1.0A	K(m) to K(f), 1.0 m, 50 Ω
14KFKF50-0.6	0.6 m (24"), DC to 40 GHz, K(f) to K(f), 50 Ω
14KFKF50-1.0	1.0 m (39"), DC to 40 GHz, K(f) to K(f), 50 Ω
14KFK50-0.6	0.6 m (24"), DC to 40 GHz, K(f) to K(m), 50 Ω
14KFK50-1.0	1.0 m (39"), DC to 40 GHz, K(f) to K(m), 50 Ω

Phase-Stable 18 GHz and 40 GHz Semi-Rigid Cables (Armored)

3670K50-1	0.3 m (12"), DC to 40 GHz, K(f) to K(m), 50 Ω
3670K50-2	0.6 m (24"), DC to 40 GHz, K(f) to K(m), 50 Ω

Tools

01-200	Torque End Wrench, 3/4 in, 0.9 N·m (8 lbf·in) For tightening male devices, for GPC-7 and type N connectors
01-201	Torque End Wrench, 5/16 in, 0.9 N·m (8 lbf·in) For tightening male devices, for SMA, 3.5 mm, 2.4 mm, K, and V connectors
01-203	Torque End Wrench, 13/16 in, 0.9 N·m (8 lbf·in) For tightening ruggedized SMA, 2.4 mm, K, and V connectors
01-204	End Wrench, 5/16 in, Universal, Circular, Open-ended, For SMA, 3.5 mm, 2.4 mm, K and V connectors

Documentation

User Documentation Soft copies of the manuals as Adobe Acrobat PDF files are included on the User Documentation USB memory device provided with the instrument. The Maintenance Manual is available from Anritsu Customer Service. For more information, please contact ShockLineVNA.support@Anritsu.com.

10410-00344 MS46121A Series VNA User Guide (UG)

Notes

Notes



Anritsu

• United States

Anritsu Company

1155 East Collins Blvd, Suite 100
Richardson, TX 75081, U.S.A.
Toll Free: 1-800-267-4878
Phone: +1-972-644-1777
Fax: +1-972-671-1877

• Canada

Anritsu Electronics Ltd.

700 Silver Seven Road, Suite 120
Kanata, Ontario K2V 1C3, Canada
Phone: +1-613-591-2003
Fax: +1-613-591-1006

• Brazil

Anritsu Eletrônica Ltda.

Praça Amadeu Amaral, 27 - 1 Andar
01327-010 Bela Vista, São Paulo, Brazil
Phone: +55-11-3283-2511
Fax: +55-11-3288-6940

• Mexico

Anritsu Company, S.A. de C.V.

Av. Ejército Nacional No. 579 Piso 9, Col. Granada
11520 México, D.F., México
Phone: +52-55-1101-2370
Fax: +52-55-5254-3147

• United Kingdom

Anritsu EMEA Ltd.

200 Capability Green
Luton, Bedfordshire LU1 3LU
United Kingdom
Phone: +44-1582-433280
Fax: +44-1582-731303

• France

Anritsu S.A.

12 Avenue du Québec
Bâtiment Iris 1-Silic 612
91140 Villebon-sur-Yvette, France
Phone: +33-1-60-92-15-50
Fax: +33-1-64-46-10-65

• Germany

Anritsu GmbH

Nemetschek Haus, Konrad-Zuse-Platz 1
81829 München, Germany
Phone: +49-89-442308-0
Fax: +49-89-442308-55

• Italy

Anritsu S.r.l.

Via Elio Vittorini 129
00144 Roma, Italy
Phone: +39-06-509-9711
Fax: +39-06-502-2425

• Sweden

Anritsu AB

Kistagången 20B
164 40 KISTA, Sweden
Phone: +46-8-534-707-00
Fax: +46-8-534-707-30

• Finland

Anritsu AB

Teknobulevardi 3-5
FI-01530 Vantaa, Finland
Phone: +358-20-741-8100
Fax: +358-20-741-8111

• Denmark

Anritsu A/S

Kay Fiskers Plads 9
2300 Copenhagen S, Denmark
Phone: +45-7211-2200
Fax: +45-7211-2210

• Russia

Anritsu EMEA Ltd.

Representation Office in Russia
Tverskaya str. 16/2, bld. 1, 7th floor
Russia, 125009, Moscow
Phone: +7-495-363-1694
Fax: +7-495-935-8962

• United Arab Emirates

Anritsu EMEA Ltd.

Dubai Liaison Office
P O Box 500413 - Dubai Internet City
Al Thuraya Building, Tower 1, Suite 701, 7th Floor
Dubai, United Arab Emirates
Phone: +971-4-3670352
Fax: +971-4-3688460

• Singapore

Anritsu Pte. Ltd.

11 Chang Charn Road, #04-01, Shriro House
Singapore 159640
Phone: +65-6282-2400
Fax: +65-6282-2533

• India

Anritsu India Private Limited

2nd & 3rd Floor, #837/1, Binnamangla 1st Stage
Indiranagar, 100ft Road, Bangalore - 560038, India
Phone: +91-80-4058-1300
Fax: +91-80-4058-1301

• P.R. China (Shanghai)

Anritsu (China) Co., Ltd.

27th Floor, Tower A
New Caohejing International Business Center
No. 391 Gui Ping Road Shanghai, Xu Hui Di District
Shanghai 200233, P.R. China
Phone: +86-21-6237-0898
Fax: +86-21-6237-0899

• P.R. China (Hong Kong)

Anritsu Company Ltd.

Unit 1006-7, 10/F., Greenfield Tower
Concordia Plaza
No. 1 Science Museum Road, Tsim Sha Tsui East
Kowloon, Hong Kong, P. R. China
Phone: +852-2301-4980
Fax: +852-2301-3545

• Japan

Anritsu Corporation

8-5, Tamura-cho, Atsugi-shi
Kanagawa, 243-0016 Japan
Phone: +81-46-296-1221
Fax: +81-46-296-1238

• Korea

Anritsu Corporation, Ltd.

5FL, 235 Pangyoyeok-ro, Bundang-gu
Seongnam-si
Gyeonggi-do, 463-400 Korea
Phone: +82-31-696-7750
Fax: +82-31-696-7751

• Australia

Anritsu Pty Ltd.

Unit 21/270 Ferntree Gully Road
Notting Hill, Victoria, 3168, Australia
Phone: +61-3-9558-8177
Fax: +61-3-9558-8255

• Taiwan

Anritsu Company Inc.

7F, No. 316, Sec. 1, Neihu Rd, Taipei 114, Taiwan
Phone: +886-2-8751-1816
Fax: +886-2-8751-1817

List Revision Date: 20141016



© Anritsu All trademarks are registered trademarks of their respective companies. Data subject to change without notice. For the most recent specifications visit: www.anritsu.com
Anritsu utilizes recycled paper and environmentally conscious inks and toner.

MS46121A ShockLine™ TDS
Copyright March 2015 Anritsu Company, USA
All Rights Reserved



11410-00839



B