


**NEW
ITEM**

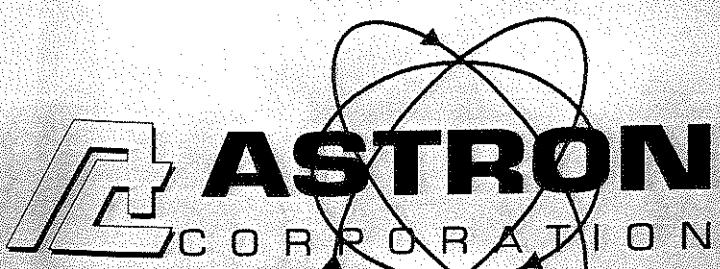

IC-F1721D


MODEL SS-10F1721
SS-12F1721
SS-18F1721

- DC-DC CONVERTERS
- DC-AC INVERTERS
- POWER SUPPLIES
- BATTERY CHARGERS

MODEL SS-10TK7180
SS-12TK7180
SS-18TK7180


**NEW
ITEM**

28VDC OUTPUT

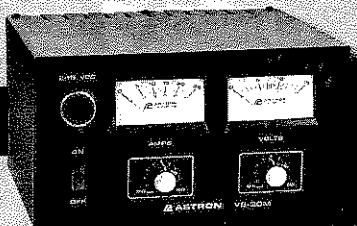

MODEL VS-20ML


ISOLATED DC-DC CONVERTERS

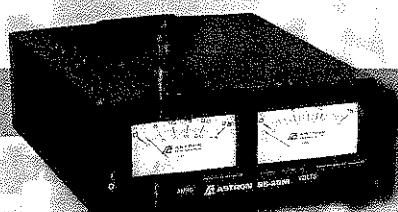

MODEL SS-25M



MODEL SLS-15

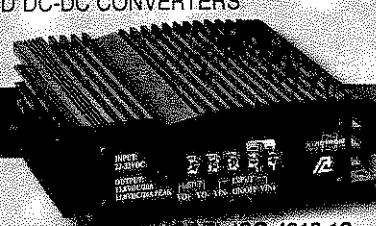


MODEL ISO 4812-12



MODEL SRM-30



MODEL SRM-30M-2

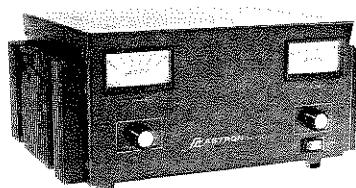

MODEL VS-50M

ASTRON POWER SUPPLIES

• HEAVY DUTY • HIGH QUALITY • RUGGED • RELIABLE •
SPECIAL FEATURES

- SOLID STATE ELECTRONICALLY REGULATED
- FOLD-BACK CURRENT LIMITING Protects Power Supply from excessive current & continuous shorted output
- CROWBAR OVER VOLTAGE PROTECTION on all Models except RS-3A, RS-4A, RS-5A, RS-4L, RS-5L
- MAINTAIN REGULATION & LOW RIPPLE at low line input Voltage
- HEAVY DUTY HEAT SINK • CHASSIS MOUNT FUSE

- THREE CONDUCTOR POWER CORD except for RS-3A
- ONE YEAR WARRANTY • MADE IN U.S.A.
- PERFORMANCE SPECIFICATIONS**
- INPUT VOLTAGE: 105-125 VAC
- OUTPUT VOLTAGE: 13.8 VDC ± 0.05 volts (Internally Adjustable: 11-15 VDC)
- RIPPLE Less than 5mv peak to peak (full load & low line)

SL SERIES


- LOW PROFILE POWER SUPPLY

| MODEL | Continuous Duty (Amps) | ICS (Amps) | Size (IN) H x W x D | Shipping Wt. (lbs.) |
|-------------------|------------------------|------------|--------------------------|---------------------|
| SL-10 | 7 | 10 | 2 1/2" x 7 1/2" x 9 1/2" | 11 |
| SL-11A | 7 | 11 | 2 1/2" x 7 1/2" x 9 1/2" | 12 |
| SL-11R | 7 | 11 | 2 1/2" x 7" x 9 1/2" | 12 |
| SL-11R-MC | 7 | 11 | 5 1/2" x 7 1/2" x 9 1/2" | 13 |
| SL-11R-GE | 7 | 11 | 5 1/2" x 7" x 9 1/2" | 13 |
| SL-11R-RA | 7 | 11 | 4 1/2" x 7" x 9 1/2" | 13 |
| SL-11R-EFJ | 7 | 11 | 5 1/2" x 7 1/2" x 9 1/2" | 13 |
| SL-11MG | 7 | 11 | 5 1/2" x 7 1/2" x 9 1/2" | 13 |
| SL-11SM/GTX/M1225 | 7 | 11 | 5 1/2" x 7" x 9 1/2" | 13 |
| SL-15R | 12 | 15 | 2 1/2" x 7" x 9 1/2" | 13 |
| SL-15R-GE | 12 | 15 | 5 1/2" x 7 1/2" x 9 1/2" | 14 |
| SL-15SM/GTX/M1225 | 12 | 15 | 5 1/2" x 7" x 9 1/2" | 15 |
| SL-15R-RA | 12 | 15 | 4 1/2" x 7 1/2" x 9 1/2" | 14 |
| SL-15R-EFJ | 12 | 15 | 5 1/2" x 7 1/2" x 9 1/2" | 14 |
| SL-15CDM | 12 | 15 | 5 1/2" x 7 1/2" x 9 1/2" | 14 |

RS-L SERIES


- POWER SUPPLIES WITH BUILT IN CIGARETTE LIGHTER RECEPTACLE


| MODEL | Continuous Duty (Amps) | ICS* (Amps) | Size (IN) H x W x D | Shipping Wt. (lbs.) |
|-------|------------------------|-------------|------------------------|---------------------|
| RS-3L | 2.5 | 3 | 3 X 4 1/2" x 5 1/2" | 4 |
| RS-4L | 3 | 4 | 3 1/2" X 6" x 7 1/2" | 6 |
| RS-5L | 4 | 5 | 3 1/2" X 6" x 7 1/2" | 7 |

RM SERIES


MODEL RM-35M

- 19" RACK MOUNT POWER SUPPLIES

| MODEL | Continuous Duty (Amps) | ICS* (Amps) | Size (IN) H x W x D | Shipping Wt. (lbs.) |
|--------------------------------|------------------------|-------------|------------------------|---------------------|
| RM-12A | 9 | 12 | 5 1/2" x 19" x 8 1/2" | 16 |
| RM-20A | 16 | 20 | 5 1/2" x 19" x 8 1/2" | 16 |
| RM-35A | 25 | 35 | 5 1/2" x 19" x 12 1/2" | 38 |
| RM-50A | 37 | 50 | 5 1/2" x 19" x 12 1/2" | 50 |
| RM-60A | 50 | 55 | 7" x 19" x 12 1/2" | 55 |
| • Separate Volt and Amp Meters | | | | |
| RM-12M | 9 | 12 | 5 1/2" x 19" x 8 1/2" | 16 |
| RM-20M | 16 | 20 | 5 1/2" x 19" x 8 1/2" | 16 |
| RM-35M | 25 | 35 | 5 1/2" x 19" x 12 1/2" | 38 |
| RM-50M | 37 | 50 | 5 1/2" x 19" x 12 1/2" | 50 |
| RM-60M | 50 | 55 | 7" x 19" x 12 1/2" | 55 |

RS-A SERIES


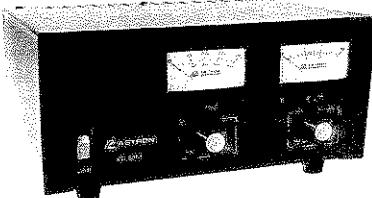
MODEL RS-7A

| MODEL | Continuous Duty (Amps) | ICS (Amps) | Size (IN) H x W x D | Shipping Wt. (lbs.) |
|--------|------------------------|------------|------------------------|---------------------|
| RS-3A | 2.5 | 3 | 3 X 4 1/2" x 5 1/2" | 4 |
| RS-4A | 3 | 4 | 3 1/2" X 6" x 7 1/2" | 5 |
| RS-5A | 4 | 5 | 3 1/2" X 6" x 7 1/2" | 7 |
| RS-7A | 5 | 7 | 3 1/2" X 6" x 9" | 9 |
| RS-10A | 7.5 | 10 | 4 X 7 1/2" x 10 1/2" | 11 |
| RS-12A | 9 | 12 | 4 1/2" X 8" x 9" | 13 |
| RS-20A | 16 | 20 | 5 X 9" x 10 1/2" | 18 |
| RS-35A | 25 | 35 | 5 X 11" x 11" | 27 |
| RS-50A | 37 | 50 | 6 X 13" x 11" | 46 |
| RS-70A | 57 | 70 | 6 X 13" x 12 1/2" | 48 |



MODEL RS-12M

| MODEL | Continuous Duty (Amps) | ICS (Amps) | Size (IN) H x W x D | Shipping Wt. (lbs.) |
|---------------------------------|------------------------|------------|------------------------|---------------------|
| • Switchable volt and Amp meter | | | | |
| RS-12M | 9 | 12 | 4 1/2" X 8" x 9" | 13 |
| • Separate volt and Amp meters | | | | |
| RS-20M | 16 | 20 | 5 X 9" x 10 1/2" | 18 |
| RS-35M | 25 | 35 | 5 X 11" x 11" | 27 |
| RS-50M | 37 | 50 | 6 X 13" x 11" | 46 |
| RS-70M | 57 | 70 | 6 X 13" x 12 1/2" | 48 |

VS-M AND VRM-M SERIES


MODEL VS-12M

- Separate Volt and Amp Meters • Output Voltage adjustable from 2-15 volts • Current limit adjustable from 1.5 amps to Full Load.

| MODEL | Continuous Duty (Amps) | ICS* (Amps) | Size (IN) H x W x D | Shipping Wt. (lbs.) |
|--------------------------------------|------------------------|-------------|------------------------|---------------------|
| VS-12M | 9 | 5 | 4 1/2" X 8" x 9" | 13 |
| VS-20ML | 16 | 9 | 5 X 9" x 10 1/2" | 20 |
| VS-35M | 25 | 15 | 5 X 11" x 11" | 29 |
| VS-50M | 37 | 22 | 6 X 13" x 11" | 46 |
| VS-70M | 57 | 34 | 6 X 13" x 12 1/2" | 48 |
| • Variable rack mount power supplies | | | | |
| VRM-35M | 25 | 15 | 5 1/2" X 19" X 12 1/2" | 38 |
| VRM-50M | 37 | 22 | 5 1/2" X 19" X 12 1/2" | 50 |

¹ICS - Intermittent Communication Service (50% Duty Cycle 5 min. on 5 min. off)

RS-S SERIES

MODEL RS-12S

- Built in speaker


| MODEL | Continuous Duty (Amps) | ICS (Amps) | Size (IN) H x W x D | Shipping Wt. (lbs.) |
|--------|------------------------|------------|---------------------|---------------------|
| RS-7S | 5 | 7 | 4 x 7½ x 10½ | 10 |
| RS-10S | 7.5 | 10 | 4 x 7½ x 10½ | 12 |
| RS-12S | 9 | 12 | 4½ x 8 x 9 | 13 |
| RS-20S | 16 | 20 | 5 x 9 x 10½ | 18 |
| SL-11S | 7 | 11 | 2½ x 7¾ x 9¾ | 12 |



MODEL RM-35M-BB

BATTERY BACKUP POWER SUPPLIES


The RS-10A, RS-12A, RS-12MBB, RS-20A, RS-20MBB, RM-35A/M, RM-50A/M, RM-10A, RM-12A/M, RM-20A/M & RM-60A/M are available with battery revert and trickle charge circuit with zero switch over time. (Battery not included.) To specify the backup circuit add BB after the model number.

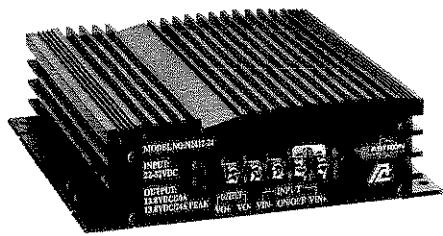NEW DC-DC CONVERTERS

MODEL N2412-12, N2412-24, A4812-12 & A4812-24


- Standard Features:**
- Overvoltage Protection
 - Short Circuit Protection
 - Extra Terminal provided to allow converters to be turned ON and OFF with the ignition switch.
 - Overcurrent Protection
 - Terminal Block Connectors

| MODEL | N2412-12 | A4812-12 | N2412-24 | A4812-24 |
|------------------------|----------------|----------------|----------------|----------------|
| Input Voltage | 22-32 VDC | 30-56 VDC | 22-32 VDC | 30-56 VDC |
| Output Voltage | 13.8 VDC | 13.8 VDC | 13.8 VDC | 13.8 VDC |
| Line/Load Regulation | .03 VDC | .03 VDC | .04 VDC | .04 VDC |
| Ripple | 20 mVrms | 20 mVrms | 20 mVrms | 20 mVrms |
| Continuous Current | 10 Amps | 9 Amps | 20 Amps | 18 Amps |
| Peak Current | 12 Amps | 12 Amps | 24 Amps | 24 Amps |
| Overvoltage Protection | 17 VDC | 17 VDC | 17 VDC | 17 VDC |
| Efficiency | 88% | 88% | 88% | 88% |
| Dimensions | 2" x 6.2" x 6" | 2" x 6.2" x 6" | 2" x 6.2" x 7" | 2" x 6.2" x 7" |
| Weight | 1.8 Lbs | 1.8 Lbs | 2 Lbs | 2 Lbs |

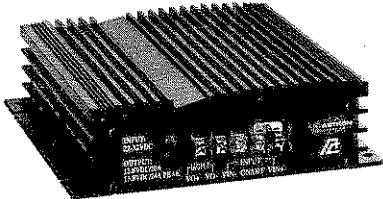
ISOLATED DC-DC CONVERTERS

The ISO converters were designed for use on electric forklifts (where high line transients and voltage spikes are common) and will operate on positive or negative electrical systems. They incorporate over voltage protection, over load protection, terminal block connections and an extra terminal to allow the converters to be turned on/off with the ignition switch.

| MODEL | ISO2412-12 | ISO4812-12 | ISO2412-24 | ISO4812-24 |
|-------------------------------|------------|------------|------------|------------|
| Input Voltage | 22-32 VDC | 36-72 VDC | 22-32 VDC | 36-72 VDC |
| Output Voltage | 13.8 VDC | 13.8 VDC | 13.8 VDC | 13.8 VDC |
| Continuous Current | 10 Amps | 10 Amps | 20 Amps | 20 Amps |
| Peak Current | 12 Amps | 12 Amps | 24 Amps | 24 Amps |
| Combined load/line regulation | +/- 1% | +/- 1% | +/- 1% | +/- 1% |
| Output Ripple | 20 mVrms | 20 mVrms | 20 mVrms | 20 mVrms |



MODEL 1212

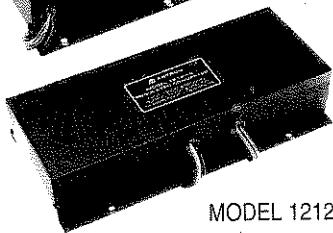

MODEL 1212-18

MODEL 1212 & 1212-18 Switching Regulated Converter.


Designed for FM transceivers and other applications requiring 12 volt power source converted from 12 volt positive ground battery. Regulation with pulse width modulation at 20 KHz.

Input – 12 V DC (Positive ground only). Functional from – 11 V DC to – 16 V DC. Output + 13.8 V DC (Negative ground only).

| 1212 | 1212-18 |
|----------------------|---------------------------|
| Output Voltage | 13.8 V DC (+.2 V DC) |
| Line/Load Regulation | 200 mV |
| Ripple/Noise | 50 mV RMS |
| Current Continuous | 6 Amp |
| Current (ICS) | 7 Amp |
| Current Limit | 8 Amp |
| Case | 2¾" (H) x 6" (W) x 6" (D) |
| Shipping Weight | 2 lbs. |
| | 2¾" x 6" x 12" |
| | 4 lbs. |



MODEL 2412

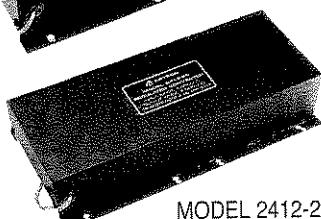


MODEL 2412-20

MODEL 2412, 2412-20 & 2412-40, 4812, 4812-20 & 4812-40**Switching Regulated Converter.**

Designed for FM transceivers and other applications requiring 12 volt power source converted from 24 volt battery. Regulation with pulse width modulation at 20 KHz.


| MODEL | 2412 | 2412-20 | 2412-40 | 4812 | 4812-20 | 4812-40 |
|---------------------------------|------------------------------|-------------------------------|-------------------------------|------------------------------|-------------------------------|-------------------------------|
| Input (negative ground only) | 22-32V DC | 22-32V DC | 22-32V DC | 30-56V DC | 30-56V DC | 30-56V DC |
| Output Voltage ($\pm .2$ V DC) | 13.8V DC | 13.8V DC | 13.8V DC | 13.8V DC | 13.8V DC | 13.8V DC |
| Line/Load Regulation | 200mV | 200 mV | 200 mV | 200 mV | 200 mV | 200 mV |
| Ripple/Noise | 50 mV RMS | 50 mV RMS | 50 mV RMS | 50 mV RMS | 50 mV RMS | 50 mV RMS |
| Current Continuous | 9 Amp | 16 Amp | 32 Amp | 9 Amp | 16 Amp | 32 Amp |
| Current Limit | 12 Amp | 20 Amp | 40 Amp | 12 Amp | 20 Amp | 40 Amp |
| Case | 2¾" x 6" x 6" (H) (W) (D) | 2¾" x 6" x 12" (H) (W) (D) | 4½" x 6" x 12" (H) (W) (D) | 2¾" x 6" x 6" (H) (W) (D) | 2¾" x 6" x 12" (H) (W) (D) | 4½" x 6" x 12" (H) (W) (D) |
| Shipping Weight | 2 lbs. | 3 lbs. | 5.5 lbs. | 2 lbs. | 3 lbs. | 5.5 lbs. |




MODEL SS-10TK



MODEL SS-12IF

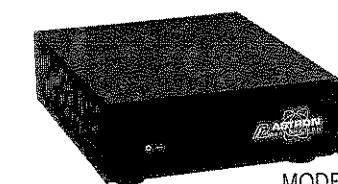


MODEL SS-18




MODEL SS-25M



MODEL SRM-30

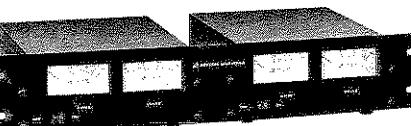

MODEL SRM-30M-2

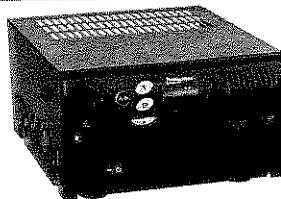

MODEL SS-12SM/GTX/M1225

...POWER ON WITH ASTRON

SWITCHING POWER SUPPLIES...

SPECIAL FEATURES:

- HIGH EFFICIENCY SWITCHING TECHNOLOGY SPECIFICALLY FILTERED FOR USE WITH COMMUNICATIONS EQUIPMENT, FOR ALL FREQUENCIES INCLUDING HF
- HEAVY DUTY DESIGN
- LOW PROFILE, LIGHT WEIGHT PACKAGE
- EMI FILTER
- MEETS FCC CLASS B

PROTECTION FEATURES:

- CURRENT LIMITING
- OVERVOLTAGE PROTECTION
- FUSE PROTECTION
- OVER TEMPERATURE SHUTDOWN

SPECIFICATIONS:

INPUT VOLTAGE: 115 VAC 50/60HZ
OR 220 VAC 50/60HZ
SWITCH SELECTABLE
OUTPUT VOLTAGE: 13.8VDC

AVAILABLE WITH THE FOLLOWING APPROVALS: UL, CUL, CE, TUV.

DESKTOP SWITCHING POWER SUPPLIES

| MODEL | CONT. (Amps) | ICS | SIZE (inches) | Wt.(lbs.) |
|-------|--------------|-----|---------------|-----------|
| SS-10 | 7 | 10 | 2½ x 6 x 9 | 3.2 |
| SS-12 | 10 | 12 | 2½ x 6 x 9 | 3.4 |
| SS-18 | 15 | 18 | 2½ x 6 x 9 | 3.6 |
| SS-25 | 20 | 25 | 2½ x 7 x 9½ | 4.2 |
| SS-30 | 25 | 30 | 3¾ x 7 x 9½ | 5.0 |

DESKTOP SWITCHING POWER SUPPLIES WITH VOLT AND AMP METERS

| MODEL | CONT. (Amps) | ICS | SIZE (inches) | Wt.(lbs.) |
|---------|--------------|-----|---------------|-----------|
| SS-25M* | 20 | 25 | 2½ x 7 x 9½ | 4.2 |
| SS-30M* | 25 | 30 | 3¾ x 7 x 9½ | 5.0 |

RACKMOUNT SWITCHING POWER SUPPLIES

| MODEL | CONT. (Amps) | ICS | SIZE (inches) | Wt.(lbs.) |
|--------|--------------|-----|---------------|-----------|
| SRM-10 | 7 | 10 | 3½ x 19 x 9½ | 4.3 |
| SRM-12 | 10 | 12 | 3½ x 19 x 9½ | 4.7 |
| SRM-18 | 15 | 18 | 3½ x 19 x 9½ | 5.0 |
| SRM-25 | 20 | 25 | 3½ x 19 x 9½ | 6.5 |
| SRM-30 | 25 | 30 | 3½ x 19 x 9½ | 7.0 |

WITH SEPARATE VOLT & AMP METERS

| MODEL | CONT. (Amps) | ICS | SIZE (inches) | Wt.(lbs.) |
|---------|--------------|-----|---------------|-----------|
| SRM-25M | 20 | 25 | 3½ x 19 x 9½ | 6.5 |
| SRM-30M | 25 | 30 | 3½ x 19 x 9½ | 7.0 |

2 ea SWITCHING POWER SUPPLIES ON ONE RACK PANEL



| MODEL | CONT. (Amps) | ICS | SIZE (inches) | Wt.(lbs.) |
|----------|--------------|-----|---------------|-----------|
| SRM-25-2 | 20 | 25 | 3½ x 19 x 9½ | 10.5 |
| SRM-30-2 | 25 | 30 | 3½ x 19 x 9½ | 11.0 |

WITH SEPARATE VOLT & AMP METERS

| MODEL | CONT. (Amps) | ICS | SIZE (inches) | Wt.(lbs.) |
|-----------|--------------|-----|---------------|-----------|
| SRM-25M-2 | 20 | 25 | 3½ x 19 x 9½ | 10.5 |
| SRM-30M-2 | 25 | 30 | 3½ x 19 x 9½ | 11.0 |

MODEL SS-15CDM


SS-25CDM

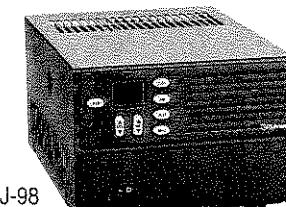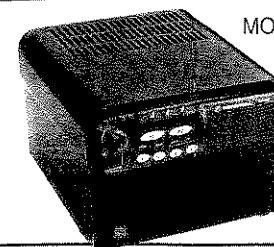

MODEL SS-10EFJ-98



MODEL SS-10RA

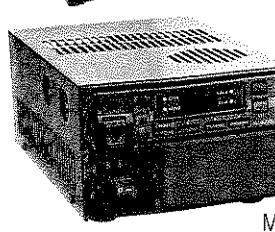

MODEL SS-10TK71/8150


SS-12TK71/8150

SS-18TK71/8150



MODEL SS10TK

MODEL: PPS-4A

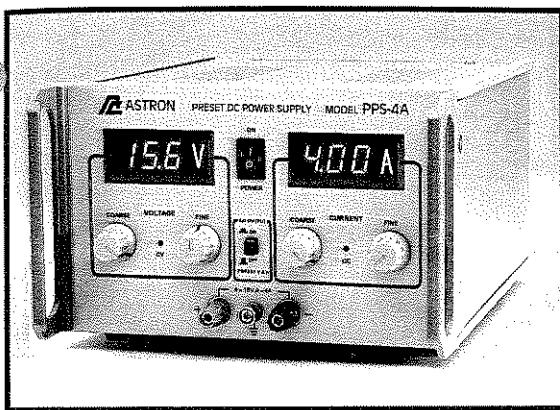

The preset regulated DC power supply has a unique feature to preset the voltage and current without actually loading the unit. The 16V output power supply is completely solid state and suitable for bench operation or 19" rack operation. It is a well regulated constant voltage/constant current supply which delivers 0-16V at 0-4 amps and can be adjusted continuously throughout the output range. The front panel CURRENT control can be used to establish the output current limit (overload or short circuit). When the supply is used as a constant voltage source the VOLTAGE controls can be used to limit the output voltage. When the unit is used as a constant current source, CURRENT controls can be used to limit the output current. The unit will automatically cross over from constant voltage to current mode and vice-versa if the output current or voltage exceeds these preset limits.

SPECIFICATIONS


| | |
|--|--|
| OUTPUT VOLTAGE | : 0-16V DC continuously variable the coarse and fine controls. |
| LOAD CURRENT | : 0-4 Amp max., continuously variable the coarse and fine controls. |
| CONSTANT VOLTAGE MODE | |
| REGULATION | : Less than $\pm 0.02\%$ +2mV for $\pm 10\%$ change in line voltage. |
| LOAD | : Less than $\pm 0.02\%$ +2mV for load change from zero to full load. |
| RIPPLE & NOISE | : Less than 1mV rms max (20HZ - 20 MHz) |
| CONSTANT CURRENT | |
| REGULATION LINE | : Less than $\pm 0.5\%$ +250 μ A for $\pm 10\%$ change in line voltage. |
| LOAD | : Less than $\pm 0.5\%$ +250 μ A for change in output voltage from 0 volts to maximum output voltage. |
| RIPPLE & NOISE | : Less than 4mA rms. |
| OUTPUT POLARITY | : Floating w.r.t. ground. |
| OVERLOAD PROTECTION | : Automatic overload and short circuit protection. |
| TRANSIENT RESPONSE | : 100 μ secs to within 10mV of set output voltage for load change from 10% to 90%. |
| STABILITY – Total drift within 8 hours, line after warm up under constant load & temp. | |
| | : $\pm 0.1\%$ +2mV in constant voltage mode. |
| | : $\pm 0.5\%$ +2mV in constant current mode with constant line, load and ambient temperature conditions. |
| PANEL METERS | : Digital panel meter (marked V for voltmeter and A for ampmeter) are provided with an accuracy of ± 3 counts. |
| MODE INDICATION | : Respective LED lights up when the unit is working in CV or CC mode. |
| OUTPUT CONTROLS | : Single turn coarse and fine controls and current controls are provided on the front panel. |
| OPERATING TEMPERATURE | : 0-50°C |
| INPUT VOLTAGE | : 115V AC, $\pm 10\%$ 46-63 single phase. |
| DIMENSIONS | : 8.2" x 9.8" x 5.2" (WxDxH) |
| WEIGHT | : 21 Lbs. (approx.) |

CUSTOM POWER SUPPLIES FOR RADIOS BELOW

EF JOHNSON GT-ML81
EF JOHNSON GT-ML83
EF JOHNSON 9800 SERIES
GE MARC SERIES
GE MONOGRAM SERIES & MAXON SM-4000 SERIES
ICOM IC-F1020 & IC-F2020
ICOM IC-F320/IC-F420
ICOM IC-F111S, IC-F121S, IC-F211S & IC-F221S
ICOM IC-F1721D
KENWOOD TK760, 762, 840, 860, 940, 941
KENWOOD TK760H, 762H
KENWOOD TK-7150/8150
KENWOOD TK7180, TK8180
MOTOROLA LOW POWER SM50, SM120, GTX/M1225
MOTOROLA HIGH POWER SM50, SM120, GTX/M1225
MOTOROLA RADIUS & GM 300
MOTOROLA RADIUS & GM 300
MOTOROLA RADIUS & GM 300
MOTOROLA CDM 750, CDM1250 and CDM1550
MOTOROLA ASTRO XTL5000
UNIDEN SMH1525, SMU4525
VERTEX – FTL-1011, FT-1011, FT-2011, FT-7011

NEW SWITCHING MODELS PICTURED ON OPPOSITE PAGE AND COVER

SS-12EFJ
SS-18EFJ
SS-10EFJ-98, SS-12EFJ-98, SS-18EFJ-98
SS-12MC
SS-10MG, SS-12MG
SS-10IF, SS-12IF
SS-10IC, SS-12IC, SS-18IC
SS-12ICF-S, SS-18ICF-S
SS-10F1721, SS-12F1721, SS-18F1721
SS-10TK
SS-12TK OR SS-18TK
SS-10TK71/8150, SS-12TK71/8150, SS-18TK71/8150
SS-10TK718, SS-12TK7180, SS-18TK7180
SS-10SM/GTX/M1225
SS-12SM/GTX/M1225, SS-18SM/GTX/M1225
SS-10RA
SS-12RA
SS-18RA
SS-25CDM
SS-10XTL, SS-12XTL, SS-18XTL
SS-10SMU, SS-12SMU, SS-18SMU
SS-10V, SS-12V, SS-18V

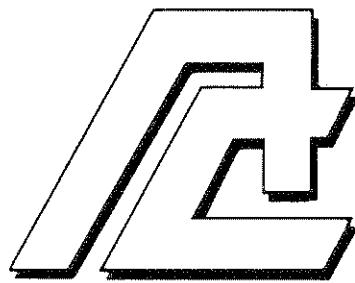

ASTRON POWER SUPPLIES

• HEAVY DUTY • HIGH QUALITY • RUGGED • RELIABLE •

SPECIAL FEATURES


- SOLID STATE ELECTRONICALLY REGULATED
- FOLD-BACK CURRENT LIMITING Protects Power Supply from excessive current & continuous shorted output
- CROWBAR OVER VOLTAGE PROTECTION on all Models
- MAINTAIN REGULATION & LOW RIPPLE at low line input Voltage
- HEAVY DUTY HEAT SINK • CHASSIS MOUNT FUSE
- THREE CONDUCTOR POWER CORD
- ONE YEAR WARRANTY • MADE IN U.S.A.

PERFORMANCE SPECIFICATIONS

- INPUT VOLTAGE: 105-125 VAC
- OUTPUT VOLTAGE: 28 VDC ± 0.05 volts (Internally Adjustable: 22-32 VDC)
- RIPPLE Less than 5mv peak to peak (full load & low line)

POWER SUPPLIES WITH 28 VDC OUTPUT VOLTAGE

LS SERIES



MODEL LS-3A

| MODEL | Continuous Duty (Amps) | ICS* (Amps) | Size (IN) H x W x D | Shipping Wt. (lbs.) |
|----------------------|------------------------|-------------|---------------------|---------------------|
| LS-3A | 3 | 4 | 3½ X 6½ x 9 | 9 |
| LS-10A | 8 | 10 | 5 X 9 x 10½ | 18 |
| LS-18A | 12 | 18 | 5 X 11 x 11 | 27 |
| LS-25A | 18 | 25 | 6 X 13½ x 11 | 46 |
| LS-35A | 27 | 35 | 6 X 13½ x 12½ | 49 |
| LS-35M (with meters) | 27 | 35 | 6 X 13½ x 12½ | 49 |

LSRM-A SERIES



MODEL LSRM-25A

19" x 5 1/4" RACK MOUNT POWER SUPPLIES

| MODEL | Continuous Duty (Amps) | ICS* (Amps) | Size (IN) H x W x D | Shipping Wt. (lbs.) |
|------------------------------|------------------------|-------------|---------------------|---------------------|
| LSRM-18A | 12 | 18 | 5½ X 19 x 12½ | 38 |
| LSRM-25A | 18 | 25 | 5½ X 19 x 12½ | 50 |
| LSRM-35A | 27 | 35 | 7 X 19 x 12½ | 55 |
| Separate volt and amp meters | | | | |
| LSRM-18M | 12 | 18 | 5½ X 19 x 12½ | 38 |
| LSRM-25M | 18 | 25 | 5½ X 19 x 12½ | 50 |
| LSRM-35M | 27 | 35 | 7 X 19 x 12½ | 55 |

VLS SERIES




MODEL VLS-10M

- Separate Volt and Amp Meters • Output Voltage adjustable from 5-32 volts • Current limit adjustable from 1.5 amps to Full Load

| MODEL | Continuous Duty (Amps) | | | Size (IN) H x W x D | Shipping Wt. (lbs.) |
|---------|------------------------|--------|-------|---------------------|---------------------|
| | @28VDC | @12VDC | @5VDC | | |
| VLS-10M | 8 | 4 | 2 | 5 x 9 x 10½ | 20 |
| VLS-25M | 18 | 10 | 5 | 6 x 13½ x 11 | 46 |
| VLS-35M | 27 | 15 | 8 | 6 x 13½ x 12½ | 49 |

28 VDC SWITCHING POWER SUPPLIES

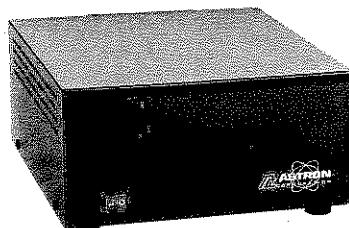

MODEL SLS-15

SPECIAL FEATURES:

- HIGH EFFICIENCY SWITCHING TECHNOLOGY SPECIFICALLY FILTERED FOR USE WITH COMMUNICATIONS EQUIPMENT, FOR ALL FREQUENCIES INCLUDING HF
- HEAVY DUTY DESIGN
- LOW PROFILE, LIGHT WEIGHT PACKAGE
- EMI FILTER
- MEETS FCC CLASS B

PROTECTION FEATURES:

- CURRENT LIMITING
- OVERVOLTAGE PROTECTION
- FUSE PROTECTION
- OVER TEMPERATURE SHUTDOWN

SPECIFICATIONS:


- INPUT VOLTAGE: 115 VAC 50/60HZ
OR 230 VAC 50/60HZ
SWITCH SELECTABLE
OUTPUT VOLTAGE: 28VDC



MODEL SLSRM-15

| MODEL | CONT. (Amps) | ICS | SIZE | Wt. (lbs.) |
|------------------|-------------------------------|-----|--------------|------------|
| DESKTOP MODELS | | | | |
| SLS-15 | 12.5 | 15 | 3½ X 7 x 9½ | 5 |
| RACKMOUNT MODELS | | | | |
| SLSRM-15 | 12.5 | 15 | 3½ X 19 x 9½ | 6 |
| SLSRM-15-2 | 2 ea SLS-15 IN ONE RACK PANEL | | | 11 |

...POWER ON WITH ASTRON DC TO AC POWER INVERTERS...

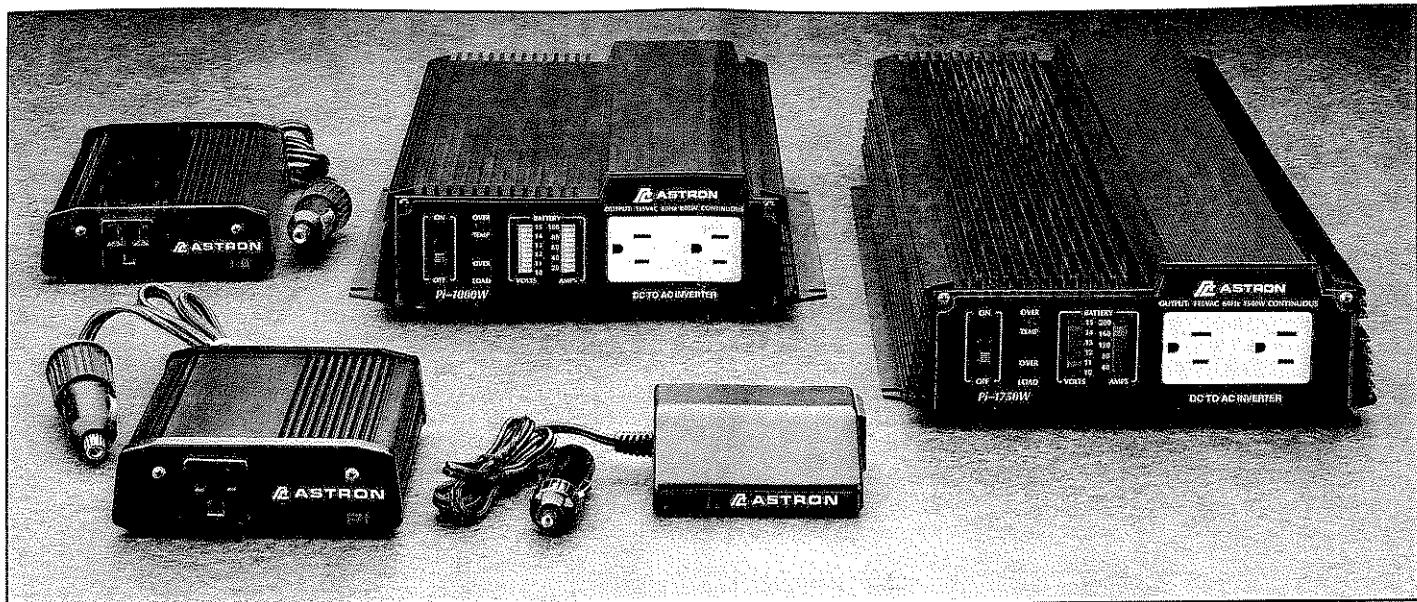

**Operate the following equipment from any 12vdc source including
Cars, Trucks, Boats and RV's etc.**

Laptop and notebook computers - Facsimiles - Battery chargers for laptop & notebook computers.
Cellular phones and camcorders - Computer peripherals, scanners and printers - Stereos, VCR and TV.
Test equipment, power drills and other electronic equipment.


SPECIFICATIONS

| | PI-50W | PI-150W | PI-250W | PI-1000W | PI-1750W | PI-3000W |
|-----------------------------|---------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|
| Output power | | | | | | |
| 30 minutes | 50 watts | 150 watts | 250 watts | | | 2600 watts |
| Surge: | 75 watts | 400 watts | 500 watts | 2000 watts | 3000 watts | 3000 watts (5 min) |
| Continuous: | 50 watts | 150 watts | 200 watts | 950 watts | 1750 watts | 2500 watts |
| Input voltage: | 10 to 15 VDC |
| Output voltage: | 115 VAC RMS ± 5% |
| Output frequency: | 60 Hz ± 0.01% |
| Output waveform: | modified sinewave, phase corrected |
| Efficiency: | Approx 90% |
| No load current draw: | <70mA | <70mA | <150mA | <300mA | <600mA | <600mA |
| Low battery alarm: | 10.7V | 10.7V | 10.7V | 10.7V | 10.7V | 10.7V |
| Low battery shutdown: | 10V | 10V | 10V | 10V | 10V | 10V |
| Dimensions (HxWxL): | 2.5"x35"x1.25" | 1.5"x4.5"x4.5" | 1.5"x4.5"x6" | 3"x9"x10" | 3"x9"x16" | 6.25"x8"x18.5" |
| Weight: | 6.5 oz | 1.13 lbs | 1.25 lbs | 5.25 lbs | 8.25 lbs | 20 lbs |
| Protection features: | | | | | | |
| Over temperature: | Electronic Shutdown |
| Overload: | Electronic Shutdown |
| Short circuit: | ----- | Electronic Shutdown |
| Reverse polarity: | ----- | Fuse | Fuse | Fuse | Fuse | Fuse |
| GFCI Protection: | ----- | ----- | ----- | Pi-1000W | Pi-1750W | ----- |



ASTRON SMARTCHARGE BATTERY CHARGERS

MICROPROCESSOR CONTROLLED

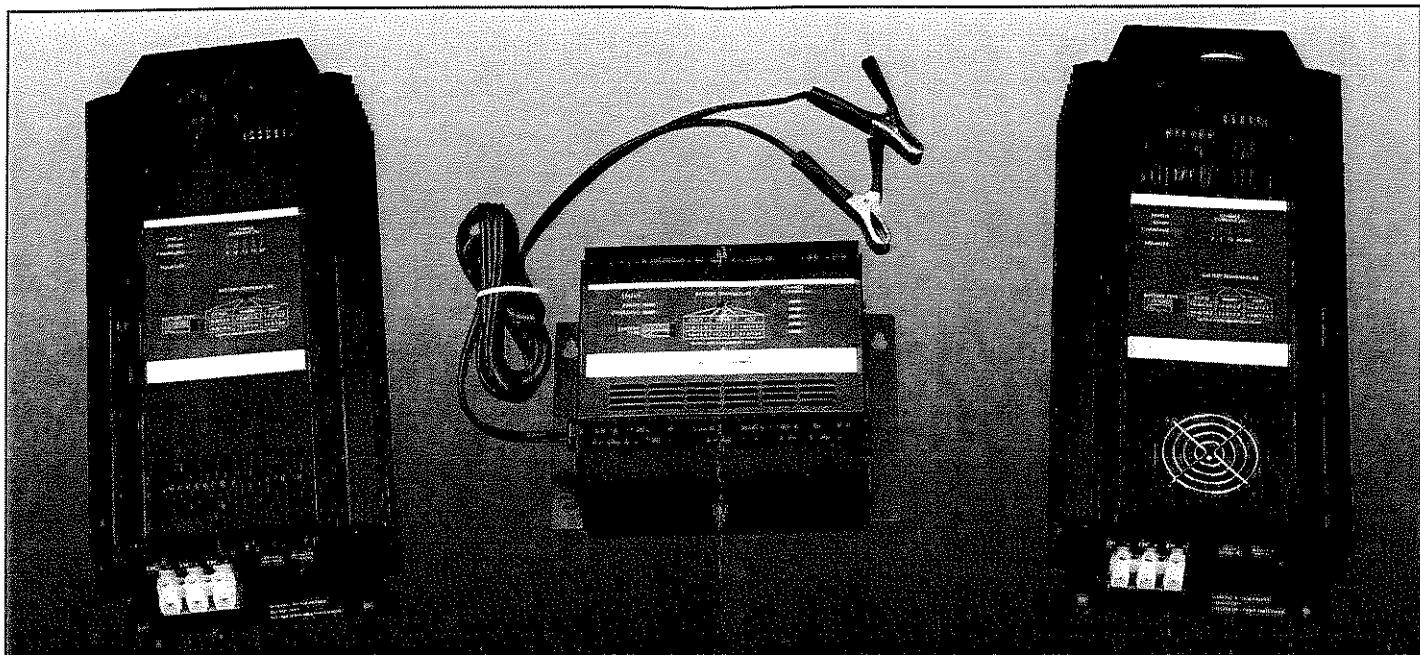

MULTI-STAGE AUTOMATIC BATTERY CHARGERS

Ideal for deep cycle marine, RV, and industrial batteries

Microprocessor controlled, multi-step, fully automatic battery charging - charge faster than ferroresonant battery charges rated at twice each SMARTCHARGE model rating. Unique 21 day automatic battery top-up maintains battery charge.

SPECIAL FEATURES

* **Battery Temperature Switch:**

Adjusts charging voltage to compensate for battery temperature, providing an accurate charge in any climate

* **Battery READY and Battery Charging LED Indicators:**

No more guessing if the battery is fully charged

* **Battery Type Selector Switch:**

Adjusts charger output for the different charging requirements of sealed (gel) and conventional flooded (wet) batteries

* **Bar graph Amp Meter:**

Displays battery charging current

* **Equalization Mode:**

Manually triggered charge mode reconditions battery to maximum capacity on SMARTCHARGE 20 & 40

* **Over-temperature, overload shutdown**

* **Non-sparking feature for safe battery connection**

* **Reverse polarity and short-circuit protection**

SPECIFICATIONS

| MODEL | SBC10 | SBC20 | SBC40 |
|------------------------|--|----------------------------------|-------------------------|
| Output Current | 10 amps continuous duty | 20 amps continuous duty | 40 amps continuous duty |
| Output Voltage | | | |
| Charge | All units: 13.8 - 14.8V DC (depending on settings) | | |
| Float | All units: 13.1 - 14.2V DC (depending on settings) | | |
| Equalize | Not available | 15.5V DC @ 4A max. | 15.5V DC @ 4A max. |
| Input Voltage range | | All units: 90 - 135V AC, 48-62Hz | |
| Weight | 3.5 lbs. / 1.6 kg | 5.5 lbs. / 2.5kg | 7.0 lbs. / 3.2kg |
| Dimensions (L x W x H) | 7.5" x 6.5" x 2.75" | 15.5" x 6.5" x 2.75" | 15.5" x 6.5" x 2.75" |
| Recommended for | 12V lead-acid batteries | 12V lead-acid batteries | 12V lead-acid batteries |
| | 25 Ah to 200 Ah | 100 Ah to 400 Ah | 400 Ah and up |



9 Autry, Irvine, CA 92618 • (949) 458-7277 • Fax: (949) 458-0826

www.valuetronics.com