

## Portable 10-Channel Data Recorder Model DAS220-BAT



The DAS220-BAT measures and records parameters commonly found in process applications including voltage, temperature, current, resistance, frequency, and pulse. It includes 10 universal integrated analog channels with convenient screw input terminals. This recorder was developed by B&K Precision's subsidiary Sefram in France, which specializes in the design and manufacture of data acquisition instruments, field strength meters, and other test and measurement instruments.

Measurement results are viewed graphically and numerically on a 10-inch color touchscreen and saved to internal memory or external USB memory. Icon-driven menus make the instrument easy to navigate. The free DasLab Windows PC software allows users to remotely control and configure the recorder, transfer logging results and configuration files, and view live data in graphical or numerical format on the PC.

The data recorder features 32 GB of solid-state memory for data logging over extended periods. The internal battery provides back-up in the event of power loss.

### Applications

- Temperature logging with thermocouples and platinum resistance temperature sensors
- Voltage measurements down to  $\pm 0.5$  mV range
- 4-20 mA current loop measurements
- Frequency, pulse totalization and pulse rotation measurements, which can be expressed in RPM (rotations per minute)



10 universal analog channels are integrated for portability


### Features and benefits:

- Wide 10-inch touchscreen TFT display
- 10 built-in universal analog inputs
- Extended battery life of up to 15 hours
- Versatile temperature measurements supporting thermocouples and Pt100 / Pt1000 temperature sensors
- Measure voltage to  $\pm 100$  V, resistance to 10 k $\Omega$  and current (with optional shunt input-terminal block)
- 16-bit vertical resolution
- Recording interval (sampling rate) up to 1 ms
- 12 logic input/output channels
- 4 timing logic input channels for pulse count, frequency and PWM measurements
- 4 alarm outputs
- 32 GB internal solid state memory
- 2 USB Host ports and 1 LAN interface
- Free DasLab operating software
- Virtual Networking Computing (VNC) capability for replicating the instrument's front panel interface on a PC

## Front panel

### 10" Touchscreen


TFT display with 10 inch touchscreen to facilitate signal viewing and analysis

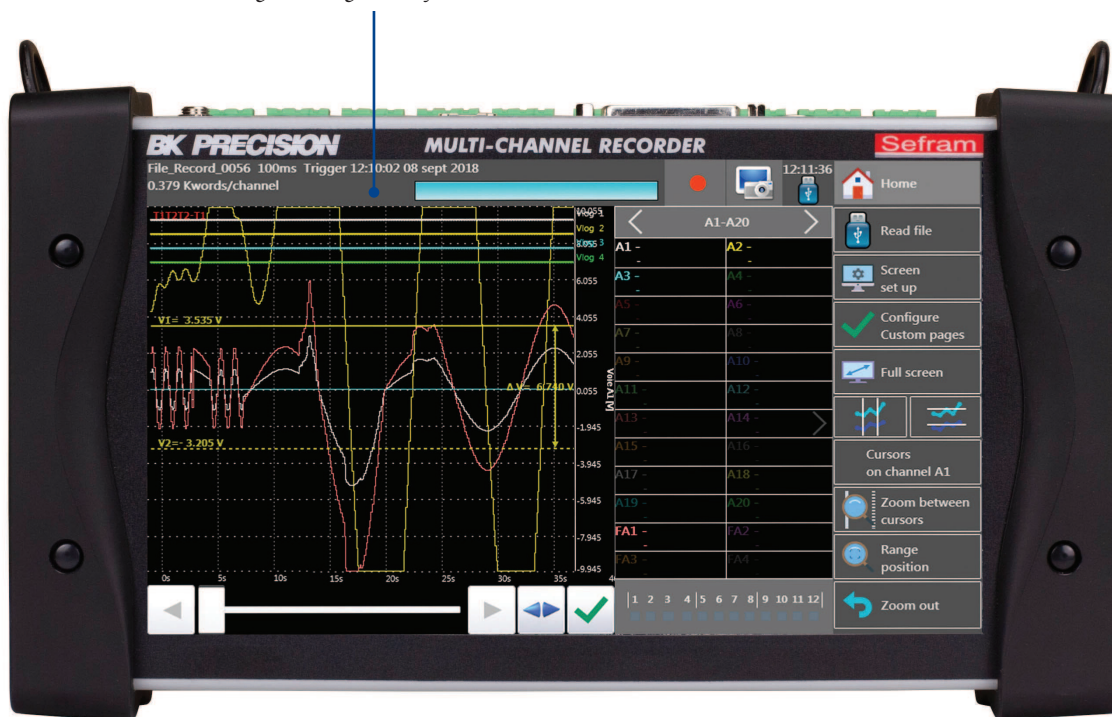

## Top input and connection panel

### Analog channels

Multiplexed analog channels for logging voltage, temperature, and current.

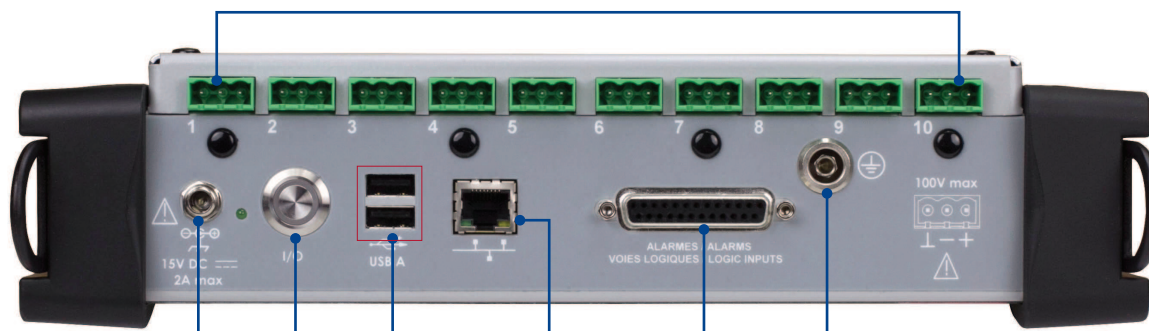

**DC power**

**Power button**


**USB host**  
Save or load configuration and data acquisition files

**LAN**  
Remote control and monitoring


**Alarm output/ Logic input**  
Pulse counter and frequency measurements

**Ground**

## Flexible operation

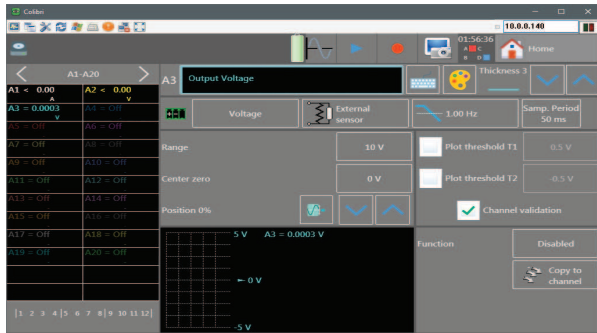


Large display with icon-driven menus for easy setup and operation.

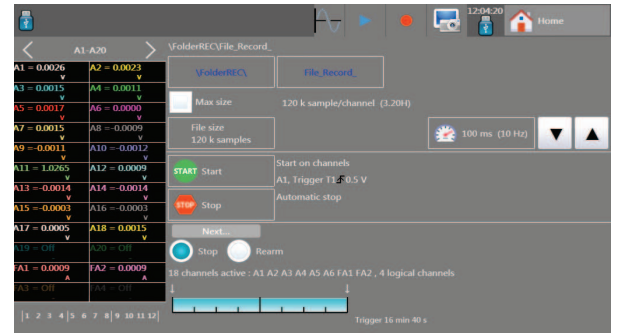


Comprehensive triggering capabilities: Configure triggers on analog and logic channels. Select from multiple combinations of thresholds, channels and conditions.




Numerical display of measured values

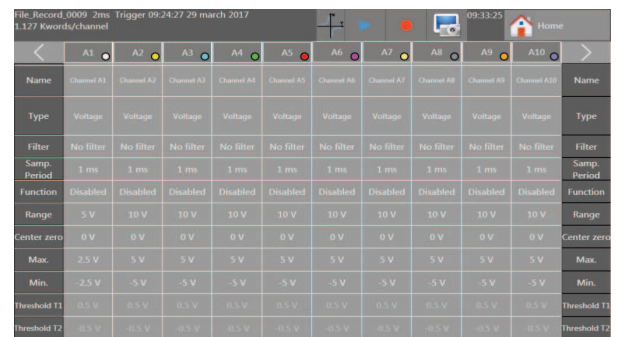


Channel setup displays all parameters on a single screen

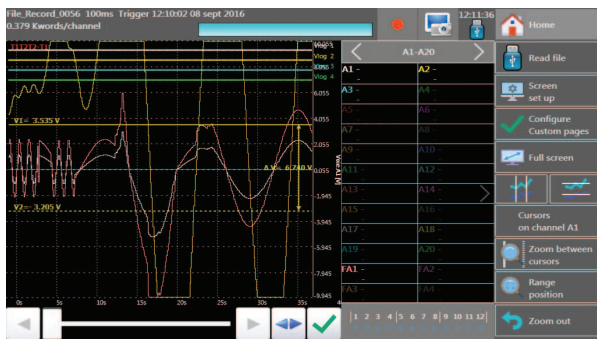


Measurement display with zoom and cursors

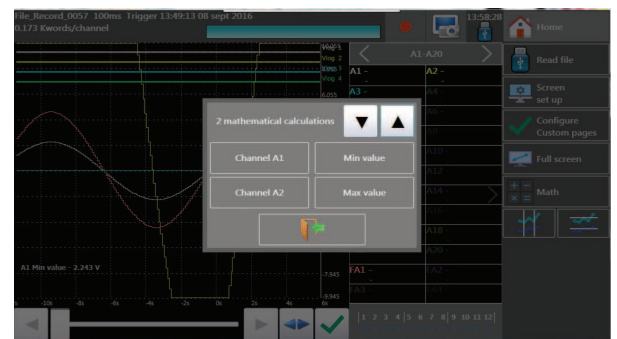

Math calculations between channels

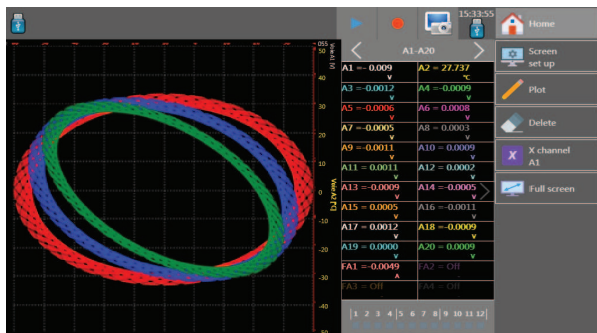


XY mode for plotting one varying voltage versus another

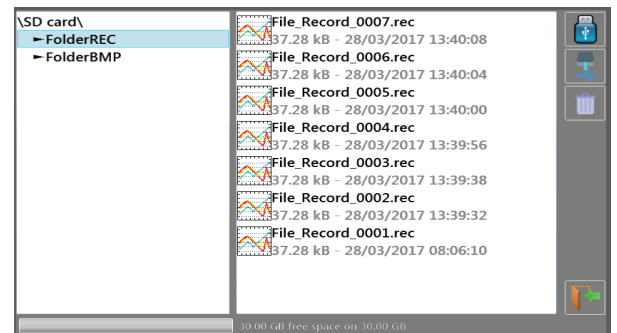


Internal file management

## The tools you need

### DasLab software

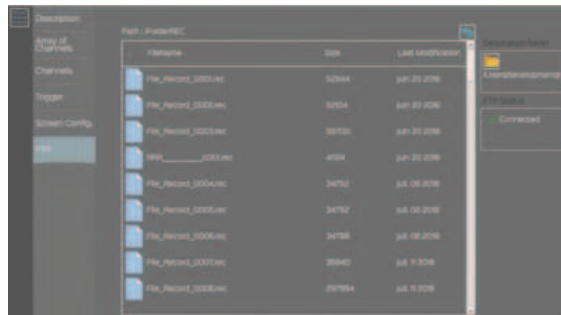

DasLab file management

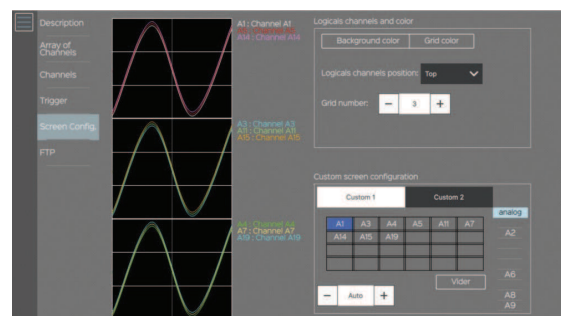

DasLab remote setup

DasLab is a license-free Windows compatible software that can be downloaded from [www.bkprecision.com](http://www.bkprecision.com). The software controls the recorder through the LAN interface and provides the following features:

- Channel and trigger configuration
- Display live measurement results in graphical or numerical format
- File management, file upload and download of data recordings, screen captures and configuration files

### Virtual Network Computing (VNC) capability

The recorder's built-in VNC capability, based on the Remote Frame Buffer protocol (RFB), provides a graphical desktop sharing system to remotely control the instrument from another computer. VNC is platform independent and provides a means to control all functions of the instrument through a graphical interface replicating the instrument's front panel using a mouse and keyboard.

### Optional accessories



The 50  $\Omega$  shunt can be used on any channel of the DAS220-BAT to accurately measure, display, and record the output from 4 to 20 mA current loop sensors.



Rugged carrying case



Analog input connectors 10 pack



Logic channels patch cord

## Specifications

Note: All specifications apply to the unit after a temperature stabilization time of 30 minutes over an ambient temperature range of 23 °C ± 5 °C.

| Analog Channels   |   |                    |
|---|---|--------------------|
| Analog Input Channels                                       | 10 integrated channels  |                    |
| <b>DC Voltage</b>   |   |                    |
| Ranges  | ± (0.5, 1, 2.5, 5, 10, 25, 50, 100) mV<br>± (0.5, 1, 2.5, 5, 10, 25, 50, 100) V |                    |
| Maximum input Voltage                                       | 100 V DC  |                    |
| Accuracy  | 0.1% of the full scale ±10 µV   |                    |
| <b>Temperature with Thermocouples</b>                       |   |                    |
| Sensors Range by Type (Cold junction compensation: ±0.5 °C) | J   | -210 °C to 1200 °C |
|   | K   | -250 °C to 1370 °C |
|   | T   | -200 °C to 400 °C  |
|   | S   | -50 °C to 1760 °C  |
|   | B   | 200 °C to 1820 °C  |
|   | E   | -250 °C to 1000 °C |
|   | N   | -250 °C to 1300 °C |
|   | C   | 0 °C to 2320 °C    |
| L   | -200 °C to 900 °C   |                    |
| <b>Temperature with Pt100 and Pt1000</b>                    |   |                    |
| Current   | 1 mA (Pt100), 100 µA (Pt1000)   |                    |
| Range   | -200 °C to 850 °C   |                    |
| Measurements  | 2 and 3 wires   |                    |
| Accuracy (at 20 °C)   | 0.3 °C ±0.1% of reading   |                    |
| Compensated Resistance                                      | 2 wires   | 30 Ω max.          |
|   | 3 wires   | 50 Ω max.          |
| <b>Resistance</b>   |   |                    |
| Ranges  | 1 kΩ and 10 kΩ  |                    |
| Accuracy  | 1 Ω (range 1 kΩ) and 10 Ω (range 10 kΩ)   |                    |
| Logic Channels  |   |                    |
| <b>Logic Input/Output</b>                                   |   |                    |
| Number of Channels  | 12  |                    |
| Maximum Permitted Voltage                                   | 24 V Cat I  |                    |
| Input Impedance   | 4.7 kΩ  |                    |
| Sampling Rate   | 1 ms max.   |                    |
| <b>Timing Input</b>   |   |                    |
| Number of Channels  | 4 (K1 to K4)  |                    |
| Maximum Permitted Voltage                                   | 24 V Cat I  |                    |
| Input impedance   | 4.7 kΩ  |                    |
| Sampling Rate   | 1 ms max.   |                    |
| Pulse Counter   | 0 to 10 Million, accuracy 1 ppm   |                    |
| Frequency Measurement                                       | 1 Hz to 10 kHz, accuracy 0.1%   |                    |
| PWM Measurement   | 100 Hz to 2 kHz, accuracy 0.1%  |                    |
| <b>Alarm Output</b>   |   |                    |
| Number of Channels  | 4 Alarms (A, B, C, D)   |                    |
| Output Level  | 0 to 5 V  |                    |

| Acquisition System                         |  |                |
|--|--|----------------|
| Resolution                                 | 16 bit   |                |
| Acquisition System                         | Scan, one sample per channel   |                |
| Sampling Interval                          | V >50 mV   | 1 ms to 20 min |
|  | V ≤50 mV, thermocouples and Pt100 / Pt1000   | 2 ms to 20 min |
| Trigger                                    | Date, delay, threshold, combination of thresholds (and/or), word on logic channels (and, or, slope, level)   |                |
| Pre-trigger                                | Variable from 0 to 100k samples  |                |
| General                                    |  |                |
| Internal Flash Drive Size                  | 32 GB  |                |
| Maximum File Size                          | 2 GB   |                |
| Operating Temperature                      | 0 °C to 40 °C, 80% RH (no condensation)  |                |
| Storage Temperature                        | -20 °C to 60 °C  |                |
| Display                                    | 10" TFT touchscreen LCD, backlit, 1024 x 600 dots  |                |
| Power Supply                               | 15 V / 4 A max with main adapter (100 / 240 VAC)   |                |
| Interfaces                                 | 2 x USB host, LAN (10/100 base-T with RJ45 socket)   |                |
| Battery                                    | Non removable, Lithium-ion   |                |
| Typical Battery Life                       | 15 hours with standby mode, 10 hours without stand-by mode   |                |
| Safety                                     | Cat I 100 V, according to IEC61010-1   |                |
| Weight                                     | 3.3 lbs (1.5 kg)   |                |
| Dimensions (W x H x D)                     | 2.6" x 11.7" x 6.9" (66 x 298 x 176 mm)  |                |
| Warranty                                   | Two Years  |                |
| Supplied Accessories                       | Main adapter 100 / 240 V, manual (CD-ROM), 25 pin male connector <sup>(1)</sup> and backshell, 10 input connectors, shoulder strap, stylus, soft wipe, and screwdriver |                |
| Order Information for Optional Accessories |  |                |
| 902401050                                  | Analog input terminal blocks 20 pack   |                |
| 902408000                                  | Rugged carrying case   |                |
| 902407000                                  | Logic channels patch cord  |                |
| 902406500                                  | 4 to 20 mA / 50 Ω shunt  |                |
| 902409000                                  | 19" rack-mount kit   |                |

(1) User configurable with solder cups.