



## LCR METER MODEL 11022/11025

The Chroma 11022 and 11025 LCR Meters are passive component testers that can give you the most cost effective alternative equivalent to the high priced meters. They are designed for the demanding applications in production test, incoming inspection, component design and evaluation. Programmable test signal level settings are from 10mV to 1V in a step of 10mV, and the VM/IM signal level monitor functions allow you to evaluate your devices at the level you specify. Ten test frequencies of 50Hz, 60Hz, 100Hz, 120Hz, 1kHz, 10kHz, 20kHz, 40kHz, 50kHz, and 100kHz, can be used to evaluate passive components and transformers/ LF coils.

The low cost LCR meters on the market have shortcomings when used for low impedance components evaluation such as large capacitance of electrolytic capacitors and low inductance of coils. As the 11022/11025 equipped with high resolution (0.01mΩ) in low impedance and high accuracy (0.3%) till 100mΩ range, it can be used to evaluate low impedance components to meet the measurement requirements.

The 11025 LCR Meter can also measure DC resistance, turn ratio and mutual inductance of transformer. It is suitable for pulse transformer

or LF coil evaluation. Chroma's Transformer Test Fixture used with the 11025, can measure both the primary and the secondary parameters automatically by changing the internal relays of 11025. So there is no need to change the connections required for measuring transformer parameters. Adjustable internal DC bias current source can up to 200mA which is a standard function, is the right tool for inductance inspection of telecom transformers and small power chokes under DC bias current.

The 11022/11025 LCR Meter provides a powerful combination of features designed to maximize the productivity in all testing environments. The measurement speed in the SHORT integration time mode is 15mS(≥100Hz) Handler interface and Pin-out are compatible with 4263B. GPIB Interface and IEEE 488 commands are compatible with 4263B.

In addition, the 11022/11025 have built in a comparator, 8 bin sorting, trigger delay functions and handler interface trigger function, which make them easy for system integration, and improve the measurement throughput as well as reliability.

## MODEL 11022/11025

### Key Features

- 0.1% basic accuracy
- Transformer test parameters (11025), Turns Ratio, DCR, Mutual Inductance
- 50Hz, 60Hz, 100Hz, 120Hz, 1kHz, 10kHz, 20kHz, 40kHz, 50kHz, 100kHz test frequencies
- 21ms measurement time (≥ 100Hz)
- Agilent 4263B LCR Meter commands compatible
- 4 different output resistance modes selectable for non-linear inductor and capacitor measuring
- High resolution in low impedance(0.01mΩ) and high accuracy 0.3% till 100mΩ range
- Adjustable DC bias current up to 200mA (constant 25Ω) (11025)
- 1320 Bias Current Source directly control capability
- 0.01mΩ ~ 99.99mΩ wide measurement range (4 1/2 digits)
- Dual frequency function for automatic production
- BIAS comparator function
- Comparator function and 8/99 bin-sorting function
- Pass/fail judge result for automatic production
- Handler interface trigger edge (rising/falling) programmable
- Test signal level monitor function
- Standard GPIB, RS-232, and handler interface
- Open/short zeroing, load correction
- LabView® Driver



**Chroma**




## SPECIFICATIONS

Model	11022	11025
Test Parameter	L, C, R,  Z , Q, D, ESR, X, $\theta$	L, C, R,  Z , Q, D, ESR, X, $\theta$ DCR4, M, Turns Ratio, L2, DCR2
<b>Test Signals</b>		
Level	10 mV~1V, step 10 mV; $\pm(10\% + 3 \text{ mV})$	
Frequency	50Hz, 60Hz, 100Hz, 120Hz, 1kHz, 10kHz, 20kHz, 40kHz, 50kHz, 100kHz; $\pm 0.01\%$	
Output Impedance (Nominal Value)	Constant 107X : 25 $\Omega$ ; Constant 320X : 100 $\Omega$ ; Constant 106X : 2 $\Omega$ , for $Z \geq 10 \Omega$ , 100mA (1V setting) for reactive load $\leq 10 \Omega$ ; Constant 102X : 25 $\Omega$ , for $Z < 1 \Omega$ , 100 $\Omega$ for else	
DC Bias Current (Freq. $\geq 1\text{kHz}$ )	--	50mA max. for Constant 100 $\Omega$ , 200mA max for Constant 25 $\Omega$ (AC level $\leq 100\text{mV}$ )
<b>Measurement Display Range</b>		
C (Capacitance)	0.001pF ~ 1.9999F	
L, M, L2 (Inductance)	0.001 $\mu\text{H}$ ~ 99.99k	
Z (Impedance), ESR	0.01m $\Omega$ ~99.99M $\Omega$	
Q (Quality Factor) ; D (Distortion Factor)	0.0001 ~ 9999	
$\theta$ (Phase Angle)	-180.00° ~ +180.00°	
Turns Ratio (Np:Ns)	--	0.9~999.99
DCR	--	0.01m $\Omega$ ~99.99M $\Omega$
<b>Basic Measurement Accuracy *1</b>	$\pm 0.1\%$	
<b>Measurement Time (Fast) *2</b>	21ms	
<b>Interface &amp; I/O</b>		
Interface	handler (50pin), GPIB, RS-232	
Output Signal	Bin-sorting & HI/GO/LOW judge	
Comparator	Upper/Lower limits in value	
Bin Sorting	8/99 bin limits in %, ABS	
Trigger Delay	0~9999ms	
<b>Display</b>	240 x 64 dot-matrix LCD display	
<b>Function</b>		
Correction	Open/ Short zeroing, load correction	
Averaging	1~256 programmable	
Cable Length	0m, 1m, 2m, 4m	
Test Sig. Level Monitor	Voltage, Current	
Equivalent Circuit mode	Series, Parallel	
<b>Memory (Store/ Recall)</b>	50 instrument setups	
<b>Trigger</b>	Internal, Manual, External, BUS	
<b>General</b>		
Operation Environment	Temperature : 10°C~40°C Humidity : < 90 % R.H.	
Power Consumption	65VA max	
Power Requirements	90 ~ 132Vac or 180 ~ 264Vac, 47 ~ 63Hz	
Dimension (H x W x D)	100 x 320 x 347.25 mm / 3.94 x 12.6 x 13.67 inch	
Weight	5.5 kg / 12.11 lbs	

**Note\*1** : 23  $\pm$  5°C after OPEN and SHORT correction. Slow measurement speed. Refer to Operation Manual for detail measurement accuracy descriptions.  
**Note\*2** : Measurement time includes sampling, calculation and judge of primary and secondary test parameter measurement.

## PANEL DESCRIPTION

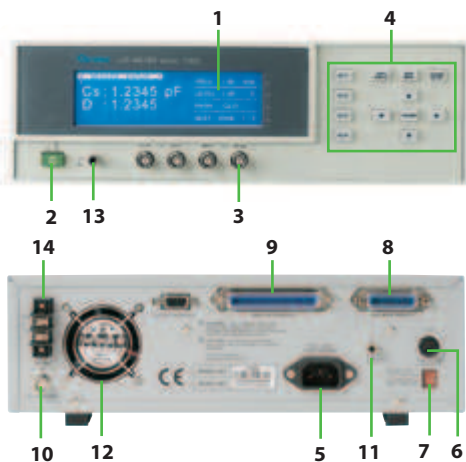

1. LCD Display
2. LINE Switch
3. Measurement Terminals
4. Function Keys
5. Power Code Receptacle
6. LINE Fuse Holder
7. LINE Voltage Selector
8. GPIB Interface
9. Handler Interface
10. External DC Bias Terminal
11. Ground Terminal
12. Fan
13. Ground Terminal
14. DC Bias Trimmer Terminal

## ORDERING INFORMATION

- 11022** : LCR Meter  
**11025** : LCR Meter  
**A110104** : SMD Test Cable #17  
**A110211** : Component Test Fixture  
**A110212** : Component Remote Test Fixture  
**A110232** : 4 BNC Test Cable with Clip#18  
**A110234** : High Frequency Test Cable  
**A110236** : 19" Rack Mounting Kit  
**A110239** : 4 Terminals SMD Electrical Capacitor Test Box (Patent)  
**A110242** : Battery ESR Test Kit  
**A110244** : High Capacitance Capacitor Test Fixture  
**A110245** : Ring Core Test Fixture  
**A113012** : Vacuum Generator for A132574  
**A113014** : Vacuum Pump for A132574  
**A132574** : Test Fixture for SMD power choke  
**A133004** : SMD Test Box  
**A133019** : BNC Test Lead, 2M (single side open)  
**A165009** : 4 BNC Test Cable with Probe

Developed and Manufactured by :

### CHROMA ATE INC.

**HEADQUARTERS**  
 66 Hwaya 1st Rd., Kueishan  
 Hwaya Technology Park,  
 Taoyuan County 33383,  
 Taiwan  
 Tel: +886-3-327-9999  
 Fax: +886-3-327-8898  
<http://www.chromaate.com>  
 E-mail: info@chromaate.com

**CHINA**  
**CHROMA ELECTRONICS**  
**(SHENZHEN) CO., LTD.**  
 8F, No.4, Nanyou Tian An  
 Industrial Estate, Shenzhen,  
 China PC: 518052  
 Tel: +86-755-2664-4598  
 Fax: +86-755-2641-9620

**JAPAN**  
**CHROMA JAPAN CORP.**  
 472 Nippa-cho, Kouhoku-ku,  
 Yokohama-shi, Kanagawa,  
 223-0057 Japan  
 Tel: +81-45-542-1118  
 Fax: +81-45-542-1080  
<http://www.chroma.co.jp>  
 E-mail: info@chromaate.com

**U.S.A.**  
**CHROMA SYSTEMS**  
**SOLUTIONS, INC.**  
 19772 Pauling, Foothill Ranch,  
 CA 92610  
 Tel: +1-949-600-6400  
 Fax: +1-949-600-6401  
<http://www.chromausa.com>  
 E-mail: sales@chromausa.com

**EUROPE**  
**CHROMA ATE EUROPE B.V.**  
 Morsestraat 32, 6716 AH Ede,  
 The Netherlands  
 Tel: +31-318-648282  
 Fax: +31-318-648288  
<http://www.chroma.eu.com>  
 E-mail: sales@chromaeu.com

Worldwide Distribution and  
 Service Network