



COM-POWER
CORPORATION

SPA 800 SERIES

RIGOL
Beyond Measure



SPA-800 Series Spectrum Analyzer

- All-Digital IF Technology
- Frequency Range from 9 kHz up to 7.5 GHz
- Min. -161dBm Displayed Average Noise Level (Typ.)
- Min. < -98dBc/Hz @ 10kHz Offset Phase Noise
- Level Measurement Uncertainty < 0.8dB
- 10Hz Minimum Resolution Bandwidth
- Up to 7.5GHz Tracking Generator (Inc lded)
- Optional Preamplifier
- EMI Filter & Quasi-Peak Detector Kit
- Optional RF TX/RX Training Kit (Inc lded)
- Optional RF Accessories(Cable, Adaptor,Attenuator,Bridge ...)
- Complete Connectivity: LAN(LXI),USB Host & Device, GPIB
- 8 Inch WVGA (800x480) Display
- Compact Size, Light Weight Design
- Advanced Measurement Functions (Opt.)
- VSWR Measurement Kit(Opt.)
- PC Software(Opt.)

Com-Power Corporation is an Authorized Distributor of RIGOL TECHNOLOGIES, INC.

SPA-800 Series Spectrum Analyzer




Product Dimensions: Width X Height X Depth = 361.6 mm x 178.8 mm x 128 mm

► Benefits of Rigol's all digital IF design


- The ability to measure smaller signals: on the basis of this technology, the IF filter enables smaller bandwidth settings, which greatly reduce the displayed average noise level.
- The ability to distinguish between small signals by frequency: using the IF filter with the smallest bandwidth setting it is possible to make out signals with a frequency difference of only 10 Hz.
- High precision amplitude readings: this technology almost eliminates the errors generated by filter switching, reference level uncertainty, scale distortion, as well as errors produced in the process of switching between logarithmic and linear display of amplitude when using a traditional analog IF design.
- Higher reliability: compared with traditional analog designs, the digital IF greatly reduces the complexity of the hardware, the system instability caused by channel aging, and the temperature sensitivity that can contribute to parts failure.
- High measurement speed: the use of digital IF technology improves the bandwidth precision and selectivity of the filter, minimizing the scanning time and improving the speed of the measurement.

► Features and Benefits


Distinguish the two nearby signals clearly with the 10Hz RBW (SPA-832/875)

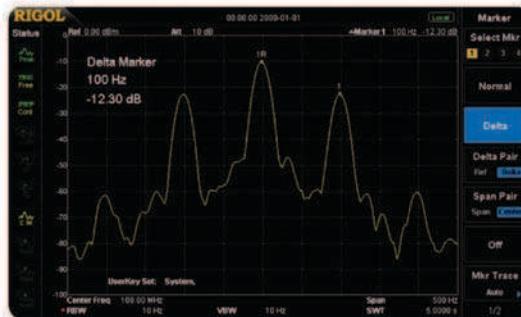

Compare the spectrums with different color trace

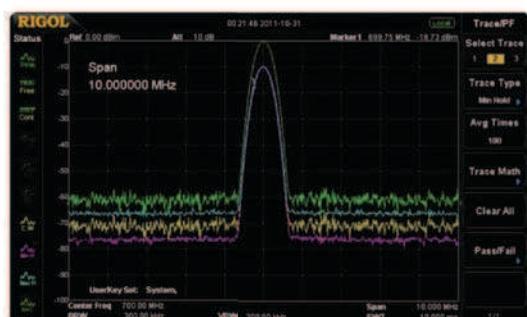


Readout the spectrum peak values with the peak table function

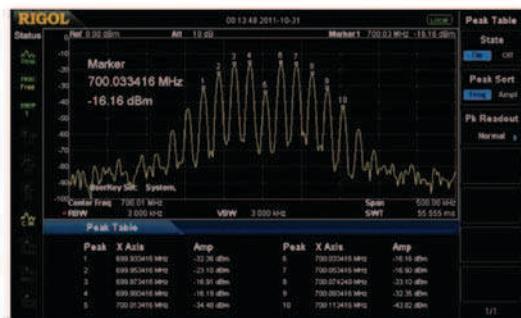

Measure lower level signal with the preamplifier turn on




Phase noise <-98dBc/Hz @10 kHz offset
(SPA-832/875)

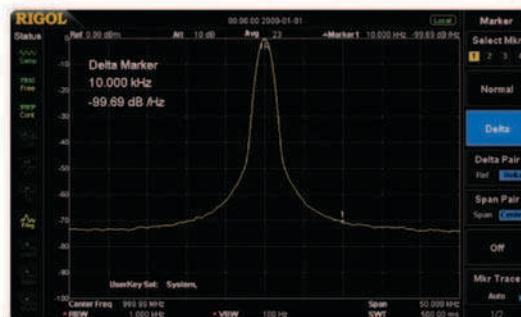


EMI kit(EMI filter & Quasi-peak & Pass/Fail)




The GUI to control the RF demo kit (Transmitter) directly

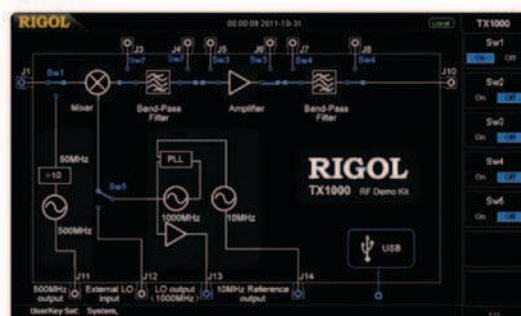


VSWR measurement

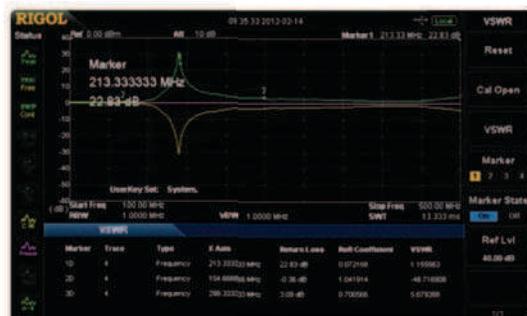

► RIGOL Spectrum Analyzer Option and Accessory

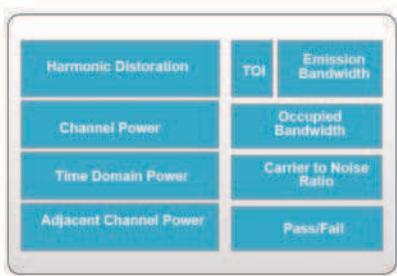

Advanced Measurement Kit
(AMK-DSA800)

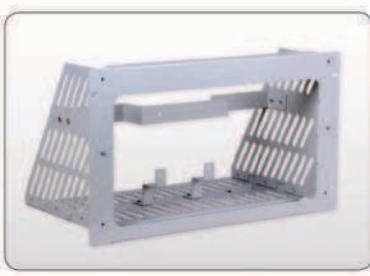


Rack Mount Kit
(RM-DSA800)



VSWR Bridge
(VB1020/VB1040/VB1080)



RF Demo Kit
(TX1000)

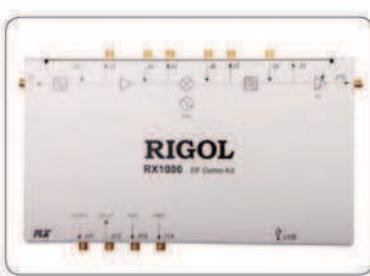

RF Demo Kit
(RX1000)



RF CATV Kit



DSA Utility Kit



RF Adaptor Kit



RF Attenuator Kit



RF Cable Kit



High Power Attenuator



DSA PC Software
(Ultra Spectrum)



Soft Carrying Bag
(BAG-G1)



USB to GPIB Converter
(USB-GPIB)

► Specifications

Specifications are valid under the following conditions: the instrument is within the calibration period, is stored for at least two hours at 0 °C to 50 °C temperature, and is warmed up for 40 minutes. Unless otherwise noted, the specifications in this manual include the measurement uncertainty.

Typical (typ.): characteristic performance, which 80 percent of the measurement results will meet at room temperature (approximately 25°C). This data is not warranted and does not include the measurement uncertainty.

Nominal (nom.): the expected mean or average performance or a designed attribute (such as the 50 Ω connector). This data is not warranted and is measured at room temperature (approximately 25°C).

Measured (meas.): an attribute measured during the design phase which can be compared to the expected performance, such as the amplitude drift variation with time. This data is not warranted and is measured at room temperature (approximately 25°C).

NOTE: All charts in this manual are the measurement results of multiple instruments at room temperature unless otherwise noted. The specifications (except the TG specifications) listed in this manual are those when the tracking generator is off.

Frequency

Frequency	SPA-815	SPA-832	SPA-875
Frequency range	9 kHz to 1.5 GHz	9 kHz to 3.2 GHz	9 kHz to 7.5 GHz
Frequency resolution	1 Hz		



Internal Reference Frequency	SPA-815	SPA-832	SPA-875
Reference frequency	10MHz		
Accuracy	±[(time since last adjustment × aging rate)+temperature stability + calibration accuracy]		
Initial calibration accuracy	<1ppm		
Temperature stability	0°C to 50°C , reference to 25°C		
< 2ppm	< 0.5ppm		
Aging rate	< 2ppm/year	< 1ppm/year	

Frequency Readout Accuracy	
Marker resolution	span/ (number of sweep points - 1)
Marker uncertainty	±(frequency indication × frequency reference uncertainty + 1% × span + 10% × resolution bandwidth + marker resolution)

Frequency Counter	
Resolution	1 Hz, 10 Hz, 100 Hz, 1 kHz, 10kHz, 100kHz
Uncertainty	±(frequency indication × reference frequency accuracy + counter resolution)

Frequency Span	
Range	0Hz, 100Hz to maximum frequency of instrument
Uncertainty	±span/ (number of sweep points - 1)

SSB Phase Noise			
	20°C to 30°C , f _c =1 GHz		
Carrier offset	SPA-815	SPA-832	SPA-875
10 kHz	<-80 dBc/Hz	<-98 dBc/Hz	
100 kHz	<-100 dBc/Hz (typ.)	<-100 dBc/Hz (typ.)	

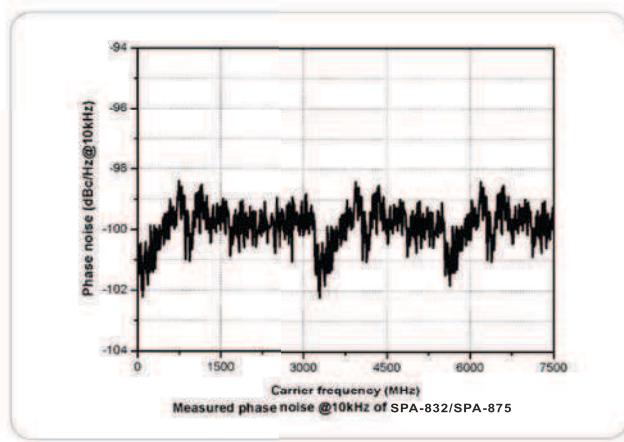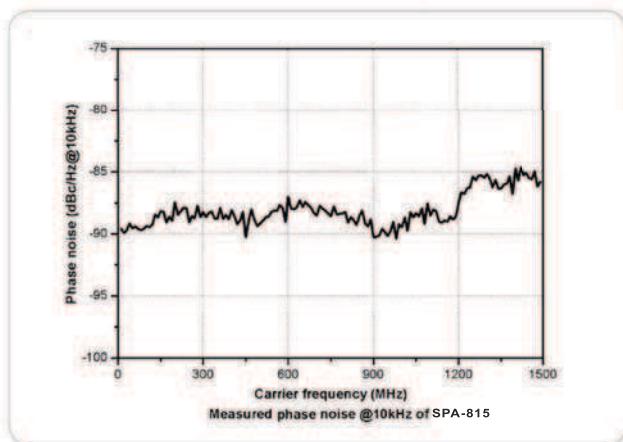

Residual FM

	20°C to 30°C , RBW = VBW = 1 kHz	SPA-815	SPA-832	SPA-875
Residual FM	< 50 Hz (nom.)	< 20Hz (nom.)		

Bandwidths

	SPA-815	SPA-832	SPA-875
Resolution bandwidth (-3dB)	100 Hz to 1 MHz, in 1-3-10 sequence	10 Hz to 1 MHz, in 1-3-10 sequence	
RBW uncertainty	<5% (nom.)		
Resolution filter shape factor (60dB: 3dB)	<5 (nom.)		
Video bandwidth (-3dB)	1 Hz to 3 MHz, in 1-3-10 sequence		
Resolution bandwidth (-6dB) (EMI)	200 Hz, 9 kHz, 120 kHz		

Amplitude



Measurement Range

Range	$f_c \geq 10\text{MHz}$ DANL to +20 dBm
-------	--

Maximum Input Level

DC voltage	50 V
CW RF power	attenuation = 30 dB +20 dBm (100 mW)
Max. damage level ^[1]	+30 dBm (1 W)

NOTE: [1] When $f_c \geq 10\text{ MHz}$, input level > +25 dBm and PA is Off, the protection switch will be on.

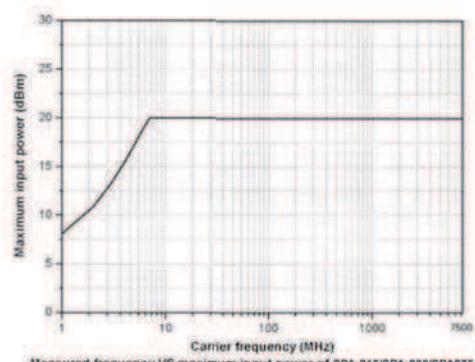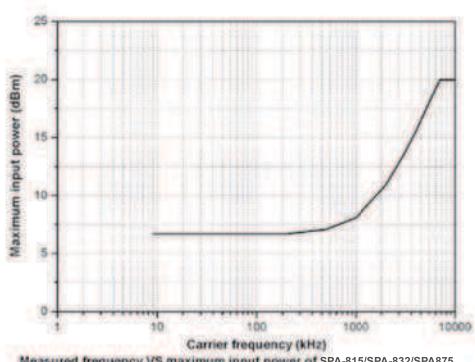

Displayed Average Noise Level (DANL)



Frequency	SPA-815
PA off	attenuation = 0 dB, RBW = VBW = 100 Hz, sample detector, trace average ≥ 50 , tracking generator off, 20°C to 30°C , input impedance = 50 Ω
100 kHz to 1 MHz	<-90 dBm, <-110 dBm (typ.)
	<-110 dBm+6×(f/1GHz)dB, <-115 dBm (typ.)
1MHz to 1.5 GHz	<-110 dBm, <-130 dBm (typ.)
	<-130 dBm+6×(f/1GHz)dB, <-135 dBm (typ.)

Displayed Average Noise Level (DANL)

		SPA-832	SPA-875
Frequency		attenuation = 0 dB, RBW = VBW = 10 Hz, sample detector, trace average ≥ 50 , tracking generator off, 20°C to 30°C, input impedance = 50 Ω	
PA off	9 kHz to 100 kHz	<-110 dBm (typ.)	<-110 dBm (typ.)
	100 kHz to 5 MHz	<-125 dBm, <-128 dBm (typ.)	<-125 dBm, <-128 dBm (typ.)
	5 MHz to 3.2 GHz	<-130 dBm, <-134 dBm (typ.)	<-130 dBm, <-134 dBm (typ.)
	3.2 GHz to 6 GHz		<-126 dBm, <-130 dBm (typ.)
	6 GHz to 7.5 GHz		<-121 dBm, <-125 dBm (typ.)
PA on	100 kHz to 5 MHz	<-142 dBm, <-145 dBm (typ.)	<-142 dBm, <-145 dBm (typ.)
	5 MHz to 3.2 GHz	<-147 dBm, <-151 dBm (typ.)	<-147 dBm, <-151 dBm (typ.)
	3.2 GHz to 6 GHz		<-143 dBm, <-147 dBm (typ.)
	6 GHz to 7.5 GHz		<-138 dBm, <-142 dBm (typ.)


Displayed Average Noise Level (DANL) (Normalized to 1Hz)

		SPA-815	SPA-832	SPA-875
Frequency		attenuation = 0 dB, RBW = VBW = 100 Hz, sample detector, trace average ≥ 50 , tracking generator off, normalized to 1Hz, 20°C to 30°C, input impedance = 50 Ω		
PA off	9 kHz to 100 kHz		<-120 dBm (typ.)	<-120 dBm (typ.)
	100 kHz to 1 MHz	<-110 dBm, <-130 dBm (typ.)	<-135 dBm, <-138 dBm (typ.)	<-135 dBm, <-138 dBm (typ.)
	1MHz to 5MHz	<-130 dBm+6×(f/1GHz) dB, <-135 dBm (typ.)		
	5 MHz to 1.5 GHz		<-140 dBm, <-144 dBm (typ.)	<-140 dBm, <-144 dBm (typ.)
	1.5 GHz to 3.2 GHz			
	3.2 GHz to 6 GHz			<-136 dBm, <-140 dBm (typ.)
PA on	6 GHz to 7.5 GHz			<-131 dBm, <-135 dBm (typ.)
	100 kHz to 1 MHz	<-130 dBm, <-150 dBm (typ.)	<-152 dBm, <-155 dBm (typ.)	<-152 dBm, <-155 dBm (typ.)
	1MHz to 5MHz	<-150dBm + 6× (f/1GHz)dB, <-155 dBm (typ.)		
	5 MHz to 1.5 GHz		<-157 dBm, <-161 dBm (typ.)	<-157 dBm, <-161 dBm (typ.)
	1.5 GHz to 3.2 GHz			<-153 dBm, <-157 dBm (typ.)
	3.2 GHz to 6 GHz			<-148 dBm, <-152 dBm (typ.)

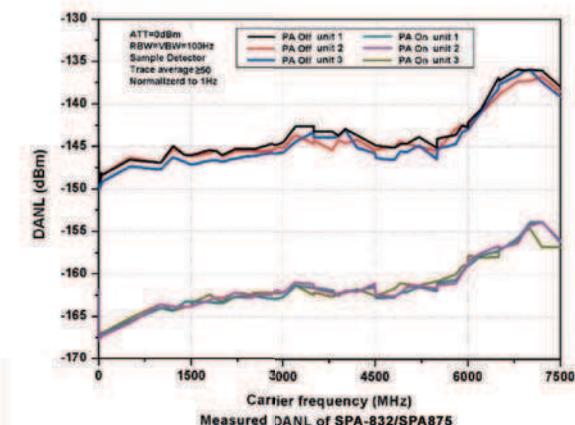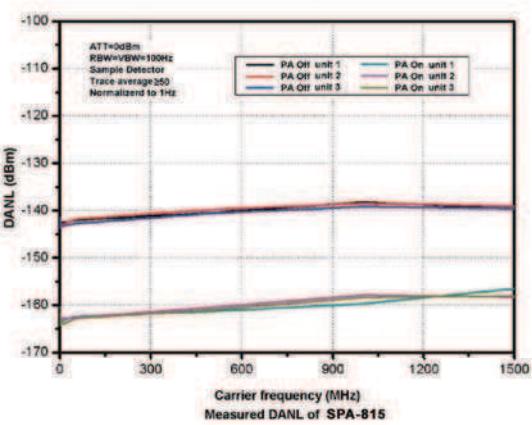


Level Display	
Logarithmic level axis	1 dB to 200 dB
Linear level axis	0 to Reference Level
Number of display points	601
Number of traces	3 + Math Trace
Trace detectors	normal, positive-peak, negative-peak, sample, RMS, voltage average quasi-peak (with EMI-DSA800 option)
Trace functions	clear write, max hold, min hold, average, view, blank
Units of level axis	dBm, dBmV, dB μ V, nV, μ V, mV, V, nW, μ W, mW, W

Frequency Response		SPA-815	SPA-832	SPA-875
PA off	Frequency response	$f_c \geq 100\text{kHz}$, attenuation = 10 dB, relative to 50 MHz, 20°C to 30 °C		
	100kHz to 1.5GHz	<0.7 dB		
	1.5GHz to 3.2GHz		<0.5 dB, <0.3 dB(typ.)	
PA on	3.2GHz to 7.5GHz		<0.7 dB, <0.3 dB(typ.)	
	100kHz to 1.5GHz	$f_c \geq 1\text{MHz}$, attenuation = 10 dB, relative to 50 MHz, 20°C to 30 °C	<1.0 dB	
	1.5GHz to 3.2GHz		<0.7 dB, <0.3 dB(typ.)	
	3.2GHz to 7.5GHz		<0.9 dB, <0.3 dB(typ.)	

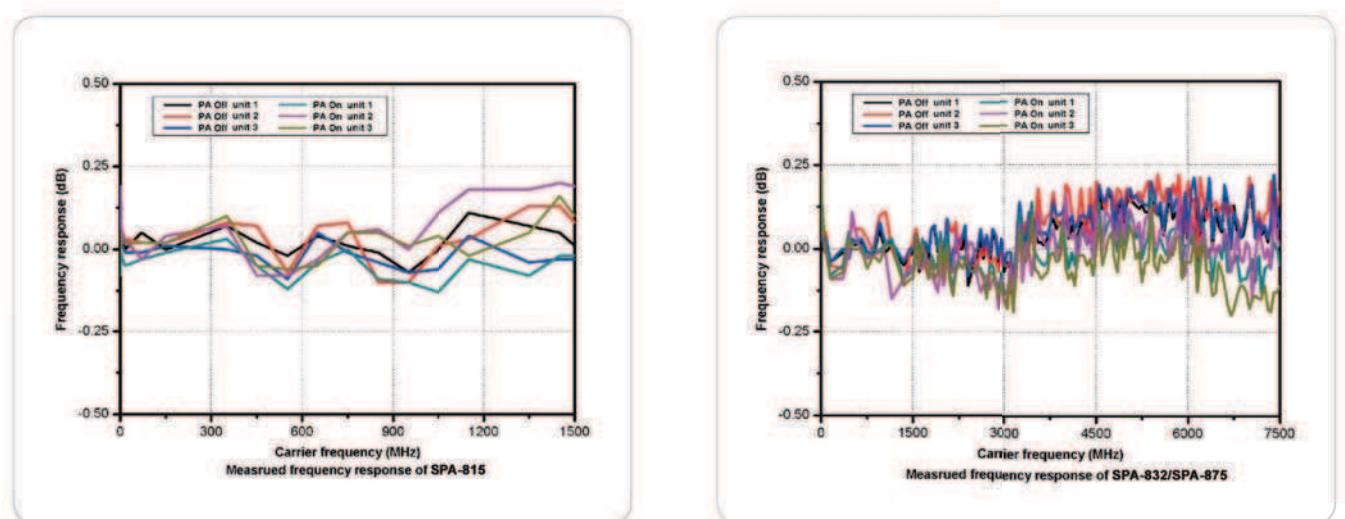

Input Attenuation Switching Uncertainty	
Setting range	SPA-815
Switching uncertainty	SPA-832
	SPA-875
Setting range	0 to 30 dB, in 1 dB step
Switching uncertainty	$f_c=50\text{ MHz}$, relative to 10 dB, 20 °C to 30 °C
	< 0.5 dB
	< 0.3 dB

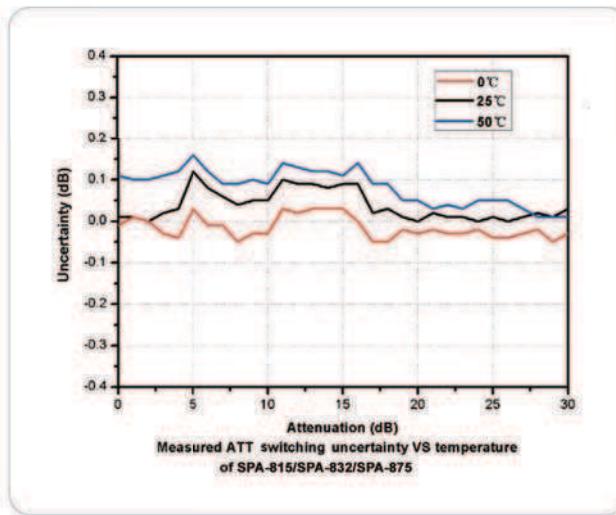



Absolute Amplitude Uncertainty	SPA-815	SPA-832	SPA-875
Uncertainty	$f_c = 50 \text{ MHz}$, peak detector, preamplifier off, attenuation = 10 dB, input signal level = -10 dBm, 20 °C to 30 °C <0.4 dB	<0.3 dB	

RBW Switching Uncertainty	relative to 1 kHz RBW
Uncertainty	<0.1 dB

Reference Level		
Range	-100 dBm to +20 dBm, in 1 dB step	
Resolution	log Scale	0.01 dB
	linear Scale	4 digits



Preamplifier	SPA-815 (standard)	PA-SPA-832 (option)	PA-SPA-875 (option)
Gain	100kHz to 1.5 GHz 20 dB(nom.)	17 dB(nom.)	
	1.5GHz to 3.2 GHz		17 dB(nom.)
	3.2GHz to 7.5 GHz		

Level Measurement Uncertainty	SPA-815	SPA-832	SPA-875
	95% confidence level, S/N > 20 dB, RBW = VBW = 1 kHz, preamplifier off, attenuation = 10 dB, -50 dBm < input level ≤ 0 dBm, $f_c > 10 \text{ MHz}$, 20 °C to 30 °C		
Level measurement uncertainty	<1.5 dB(nom.)	<0.8 dB (nom.)	

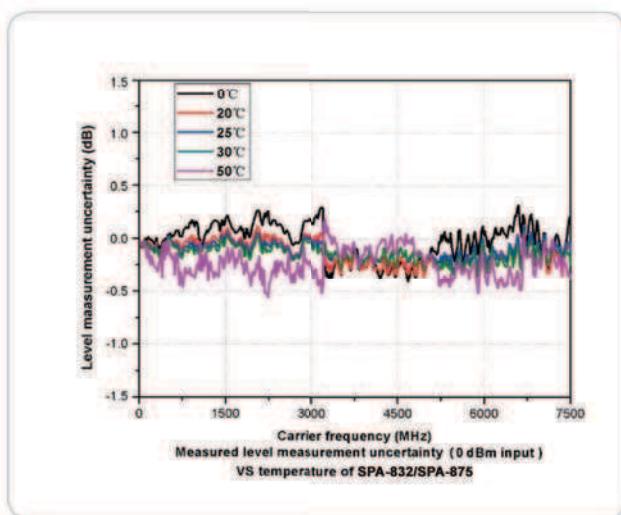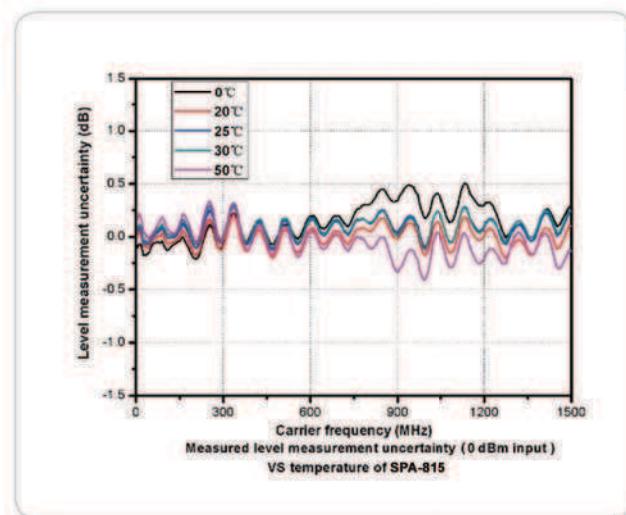

RF Input VSWR

	SPA-815	SPA-832	SPA-875	
VSWR	300kHz to 1.5GHz	attenuation ≥ 10 dB <1.5(nom.)	<1.5(nom.)	<1.5(nom.)
	1.5GHz to 3.2GHz			
	3.2GHz to 7.5GHz			<1.8(nom.)

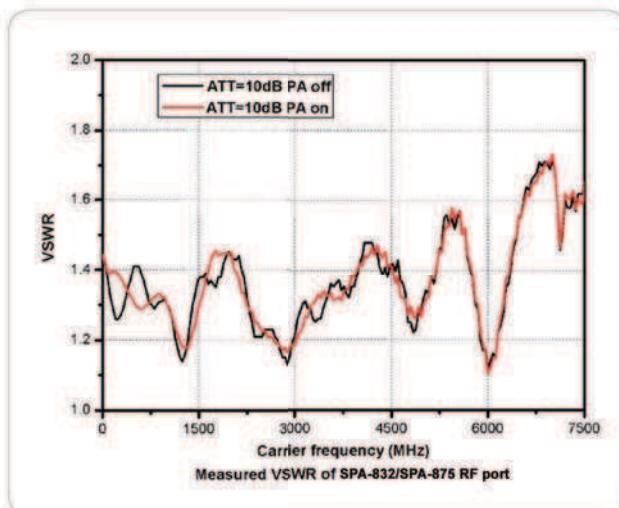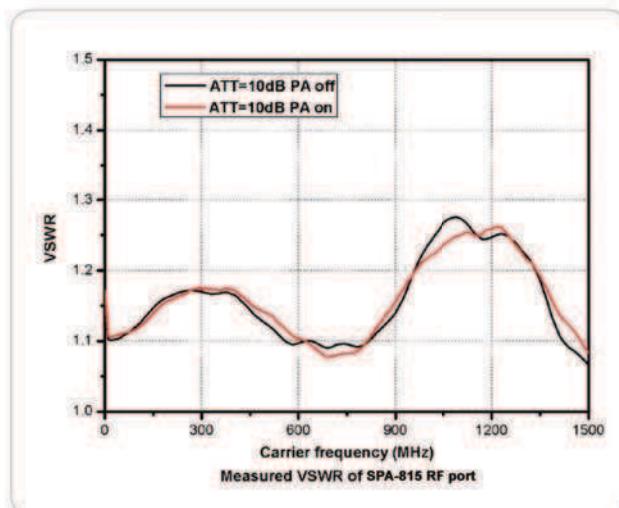

Distortion

Second Harmonic Intercept



	SPA-815	SPA-832	SPA-875
Second harmonic Intercept (SHI)	$f_c \geq 50$ MHz, input signal level = -20 dBm, attenuation = 10 dB +40dBm	+45dBm	

Third-order Intercept

	SPA-815	SPA-832	SPA-875
Third-order intercept (TOI)	$f_c \geq 50$ MHz, two -20dB tones at input mixer spaced by 200kHz, attenuation = 10 dB +10dBm	+11 dBm, +15 dBm (typ.)	

1dB Gain Compression

1dB compression of input mixer (P_{1dB})	$f_c \geq 50$ MHz, attenuation = 0 dB >0dBm
---	--

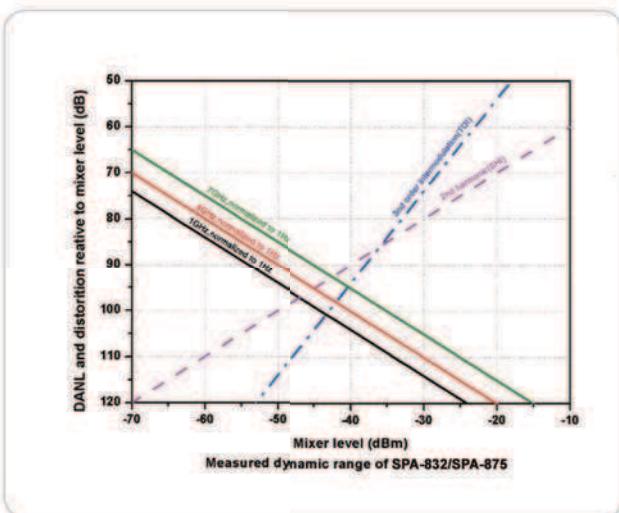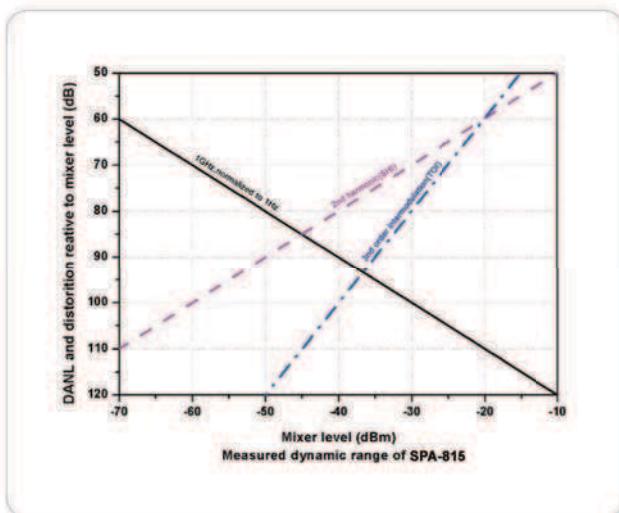

Spurious Responses

	SPA-815	SPA-832	SPA-875
Spurious response	input terminated $50\ \Omega$, attenuation = 0 dB, 20°C to 30°C ≤ -88 dBm (typ.)	≤ -90 dBm, ≤ -100 dBm (typ.)	
Intermediate frequency	≤ -60 dBc		
System related sidebands	referenced to local oscillators, referenced to A/D conversion, referenced to subharmonic of first LO, referenced to harmonic of first LO ≤ -60 dBc		
Input Related Spurious	mixer level = -30 dBm ≤ -60 dBc		

Sweep



Sweep

	SPA-815	SPA-832	SPA-875
Sweep time	Span ≥ 100 Hz zero span Span ≥ 100 Hz	10ms to 1500s 20 μs to 1500 s 5% (nom.)	1ms to 1500s 20 μs to 3200 s 20 μs to 7500 s
Sweep time uncertainty	zero span (sweep time setting value > 1 ms)	5% (nom.)	
Sweep mode	continuous, single		

Tracking Generator (Option)

TG Output

	SPA-815	SPA-832	SPA-875
Frequency range	100 kHz to 1.5 GHz	100 kHz to 3.2 GHz	100 kHz to 7.5 GHz
Output level range	-20 dBm to 0 dBm		-40 dBm to 0 dBm
Output level resolution	1 dB		
Output flatness	relative to 50 MHz ±3 dB (nom.)		

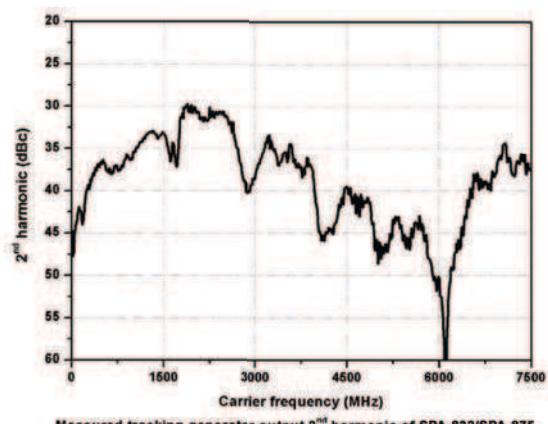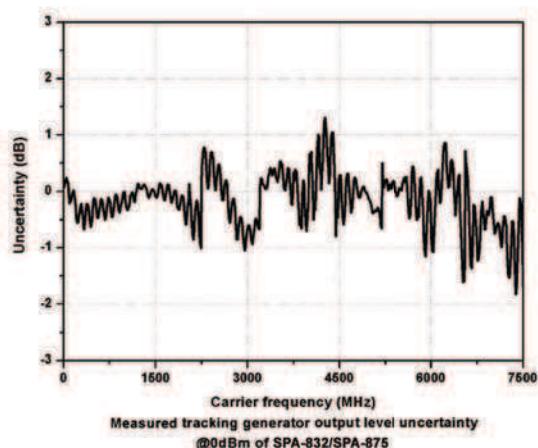

Trigger Functions

Trigger	
Trigger source	Free run, video, external
External trigger level	5 V TTL level

Input /Output

Front Panel Connectors		
RF input	impedance connector	50 Ω (nom.) N female
Tracking generator output	impedance connector	50 Ω (nom.) N female

Internal/ External Reference		
Internal reference	frequency	10 MHz
	output level	+3 dBm to +10 dBm, +8 dBm (typ.)
	impedance	50Ω (nom.)
	connector	BNC female
External reference	frequency	10 MHz±5 ppm
	input level	0 dBm to +10 dBm
	impedance	50 Ω (nom.)
	connector	BNC female

External Trigger Input		
External trigger input	impedance connector	1 kΩ (nom.) BNC female

Communication Interface		
USB host	connector	A plug
	protocol	Version2.0
USB device	connector	B plug
	protocol	Version2.0
LAN	LXI core 2011 device	10/100Base, RJ-45
IEC/IEEE(GPIB) bus(USB-GPIB option)		IEEE488.2

General Specifications

Display	TFT LCD
Type	
Resolution	800 x 480 pixels
Size	8 inch
Colors	64 k
Printer Supported	
Protocol	PictBridge
Mass Memory	
Mass Memory	Flash Disk (internal), USB Disk (not supplied)
Power Supply	
Input Voltage Range, AC	100 V to 240 V (nom.)
AC Supply Frequency	45 Hz to 440 Hz
Power Consumption	35 W (typ.), max. 50 W with all options
Environmental	
Temperature	Operating temperature range 0°C to 50°C Storage temperature range -20°C to 70°C
Humidity	0°C to 30°C ≤95% rel. humidity 30°C to 40°C ≤75% rel. humidity
Altitude	operating height up to 3,000m
Electromagnetic Compatibility and Safety	
EMC	In line with EN61326-1:2006 IEC 61000-4-2:2001 ±4.0kV (contact discharge), ±4.0kV (air discharge) IEC 61000-4-3:2002 3V/m (80MHz to 1GHz) 3V/m (1.4GHz to 2GHz) 1V/m (2.0GHz to 2.7GHz) IEC 61000-4-4:2004 1kV power lines IEC 61000-4-5:2001 0.5kV (Phase to Neutral) 0.5kV (Phase to PE) 1kV (Neutral to PE) IEC 61000-4-6:2003 3V,0.15-80MHz Voltage dip: 0% UT during half cycle 0% UT during 1 cycle 70% UT during 25 cycles Short interruption:0% UT during 250 cycles
Electrical Safety	In line with UL 61010-1:2012, CAN/CSA-C22.2 No. 61010-1-12, EN 61010-1:2010
Dimensions	
(W x H x D)	361.6 mm × 178.8 mm × 128 mm (14.2 in × 7.0 in × 5.0 in)
Weight	
Standard	SPA-815
With tracking generator	4.25 kg (9.4 lb)
	SPA-832
	4.55 kg (10.0 lb)
	SPA-875
	5.15 kg (11.4 lb)

► Ordering Information

	Description	Order Number
Model	Spectrum Analyzer, 9 kHz to 1.5 GHz (with preamplifier, with tracking generator and EMI filter & quasi-peak detector, face dry ins allied)	SPA-815TGE
	Spectrum Analyzer, 9 kHz to 3.2 GHz (with tracking generator and EMI filter & quasi-peak detector, face dry ins allied)	SPA-832TGE
	Spectrum Analyzer, 9 kHz to 7.5 GHz (with tracking generator and EMI filter & quasi-peak detector, face dry ins allied)	SPA-875TGE
Standard accessories	quick guide (hard copy)	QGD07X00
	CDROM (user's guide, programming guide)	-
	power cable	-
Options	preamplifier, 100 kHz to 3.2 GHz (only for SPA-832)	PA-DSA832
	preamplifier, 100 kHz to 7.5 GHz (only for SPA-875)	PA-DSA875
	advanced measurement kit	AMK-DSA800
	VSWR measurement kit	VSWR-DSA800
	DSA PC software	Ultra Spectrum
Optional accessories	include: N-SMA cable, BNC-BNC cable, N-BNC adaptor, N-SMA adaptor, 75 Ω to 50 Ω adaptor, 900 MHz/1.8 GHz antenna (2pcs), 2.4 GHz antenna (2pcs)	DSA Utility Kit
	include: N(F)-N(F) adaptor (1pcs), N(M)-N(M) adaptor (1pcs), N(M)-SMA(F) adaptor (2pcs), N(M)-BNC(F) adaptor (2pcs), SMA(F)-SMA(F) adaptor (1pcs), SMA(M)-SMA(M) adaptor (1pcs), BNC T type adaptor (1pcs), 50 Ω SMA load (1pcs), 50 Ω BNC impedance adaptor (1pcs)	RF Adaptor Kit
	include: 50 Ω to 75 Ω adaptor (2pcs)	RF CATV Kit
	include: 6dB attenuator (1pcs), 10dB attenuator (2pcs)	RF Attenuator Kit
	30dB high power attenuator, max. power 100W	ATT03301H
	N(M)-N(M) RF cable	CB-NM-NM-75-L-12G
	N(M)-SMA(M) RF cable	CB-NM-SMAM-75-L-12G
	RF demo kit (transmitter)	TX1000
	RF demo kit (receiver)	RX1000
	VSWR bridge with VSWR-DSA800, 1 MHz to 2 GHz	VB1020
	VSWR bridge with VSWR-DSA800, 800 MHz to 4 GHz	VB1040
	VSWR bridge with VSWR-DSA800, 2 GHz to 8 GHz	VB1080
	rack mount kit	RM-DSA800
	soft carrying bag	BAG-G1
	USB to GPIB interface converter for instrument	USB-GPIB

Warranty

Three year warranty, excluding probes and accessories.



Corporate Office

Com-Power Corporation
114 Olinda Dr.
Brea, CA 92823
United States of America
Tel: (714) 528-8800
Fax: (714) 528-1992

Sales and Support

Com-Power Corporation
19121 El Toro Rd.
Silicon Valley, CA 92676
United States of America
Toll Free: (855) EMI-2-EMC
Tel: (949) 459-9600
Fax: (949) 635-0329
Email: sales@com-power.com

Com-Power Corporation is an authorized distributor of RIGOL Technologies Inc. Product information in this document is subject to update without notice. For the latest information about Com-Power's products and services, please visit our website:

www.com-power.com