




Elektro-Automatik

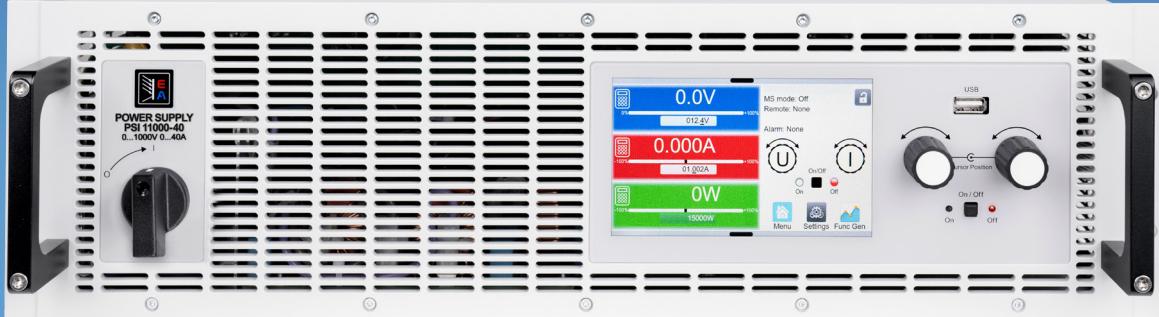

## DATASHEET

# EA-PSI 10000 3U

Programmable DC power supplies

# EA-PSI 10000 3U

## 5 KW - 10 KW - 15 KW

### Programmable DC power supplies



## Features

- Wide range input: 208 V - 480 V, +10%, 3ph AC
- Active Power Factor Correction, typical 0.99
- Very high efficiency of up to 96 %
- High performance of up to 15 kW per unit
- Voltages from 0 - 60 V up to 0 - 2000 V
- Currents from 0 - 20 A up to 0 - 510 A
- Flexible power regulated DC output stage (autoranging)
- Regulation modes CV, CC, CP, CR with fast crossover
- Digital regulation, high resolution with 16bit ADCs and DACs, selection of control speed

- Color 5" TFT display with touch control and intuitive user interface
- Galvanically isolated Share-Bus for parallel operation of all power classes in the 10000 series
- Master-Slave bus for parallel operation of up to 64 units of all power classes in the 10000 series
- Integrated function generator with predefined curves
- Automotive test procedures for LV123, LV124 and LV148
- Photovoltaics test mode (EN 50530)
- Command languages and drivers: SCPI and ModBus, LabVIEW, IVI

## Built-in interfaces

- USB
- Ethernet
- Analog
- USB Host
- Master-Slave bus
- Share-Bus

## Optional interfaces

- CAN
- CANopen
- RS232
- Profibus
- EtherCAT
- Profinet, with one or two ports
- Modbus, with one or two ports
- Ethernet, with one or two ports

## Software

- EA Power Control

## Options

- Models for 208 V<sub>AC</sub> supply

## Technical data

General specifications	
<b>AC input</b>	
Voltage, Phases	Standard model: Range 1: 208 V, $\pm 10\%$ , 3ph AC Range 2: 380 - 480 V, $\pm 10\%$ , 3ph AC US208V model: 208 V, $\pm 10\%$ , 3ph AC
Frequency	45 - 65 Hz
Power factor	ca. 0.99
Leakage current	<5 mA
Inrush current *1	Standard model @400 V: ca. 54 A per phase US208V model @208 V: ca. 28 A per phase
Oversupply category	II
<b>DC input/output static</b>	
Load regulation CV	$\leq 0.05\%$ FS (0 - 100% load, at constant AC input voltage and temperature)
Line regulation CV	$\leq 0.01\%$ FS (208 V - 480 V AC $\pm 10\%$ , at constant load and constant temperature)
Stability CV	$\leq 0.02\%$ FS (during 8 h of operation, after 30 minutes of warm-up, at constant AC input voltage, load and temperature)
Temperature coefficient CV	$\leq 30\text{ppm}/^{\circ}\text{C}$ (after 30 minutes of warm-up)
Compensation (remote sense)	$\leq 5\%$ $U_{\text{Nominal}}$
Load regulation CC	$\leq 0.1\%$ FS (0 - 100% load, at constant AC input voltage and temperature)
Line regulation CC	$\leq 0.01\%$ FS (208 V - 480 V AC $\pm 10\%$ , at constant load and constant temperature)
Stability CC	$\leq 0.02\%$ FS (during 8 h of operation, after 30 minutes of warm-up, at constant AC input voltage, load and temperature)
Temperature coefficient CC	$\leq 50\text{ppm}/^{\circ}\text{C}$ (after 30 minutes of warm-up)
Load regulation CP	$\leq 0.3\%$ FS (0 - 100% load, at constant AC input voltage and temperature)
Load regulation CR	$\leq 0.3\%$ FS + 0.1% FS of current (0 - 100% load, at constant AC input voltage and temperature)
<b>Protective functions</b>	
OVP	Oversupply protection, adjustable 0 - 110% $U_{\text{Nominal}}$
OCP	Overcurrent protection, adjustable 0 - 110% $I_{\text{Nominal}}$
OPP	Overpower protection, adjustable 0 - 110% $P_{\text{Nominal}}$
OT	Overtemperature protection (DC terminal shuts down in case of insufficient cooling)
<b>DC input/output dynamic</b>	
Rise time 10 - 90% / Fall time 90 - 10%	CV *2: $\leq 10$ ms CC *3: $\leq 2$ ms
<b>Display &amp; measurement accuracy</b>	
Voltage	$\leq 0.05\%$ FS
Current	$\leq 0.1\%$ FS
<b>Insulation</b>	
AC input to DC terminal	3750 Vrms (1 minute, creepage distance >8 mm) *4
AC input to case (PE)	2500 Vrms
DC terminal to case (PE)	Depending on the model, see model tables
DC terminal to interfaces	1000 V DC (models up to 360 V rating), 1500 V DC (models from 500 V rating)
<b>Interfaces digital</b>	
Built-in, galvanically isolated	USB, Ethernet (100 MBit) for communication, 1x USB host for data acquisition
Optional, galvanically isolated	CAN, CANopen, RS232, ModBus TCP, Profinet, Profibus, EtherCAT, Ethernet
<b>Interface analog</b>	
Built-in, galvanically isolated	15 pole D-Sub
Signal range	0 - 10 V or 0 - 5 V (switchable)
Inputs	U, I, P, R, remote control on/off, DC input/output on/off, resistance mode on/off
Outputs	Monitor U and I, alarms, reference voltage, DC input/output status, CV/CC regulation mode
Accuracy U / I / P / R	0 - 10 V: $\leq 0.2\%$ , 0 - 5 V: $\leq 0.4\%$

\*1 Calculated for the peak value of the stated voltage including 10% tolerance, at 23°C ambient and first switch-on (cold start)

\*2 Valid for power supplies, unidirectional or bidirectional, in source mode operation

\*3 Valid for electronic loads or bidirectional power supplies in sink mode operation

\*4 Models with up to 80 V DC rating have reinforced insulation while all other models from 200 V DC rating have basic insulation

General specifications	
<b>Device configuration</b>	
Parallel operation	Up to 64 units of any power class in series 10000, with master-slave bus and Share-Bus
<b>Safety and EMC</b>	
Safety	EN 61010-1 IEC 61010-1 UL 61010-1 CSA C22.2 No 61010-1 BS EN 61010-1
EMC	EN 55011, class B (standard models), group 1 or class A, group 1 (US208V models) CISPR 11, class B (standard models), group 1 or class A, group 1 (US208V models) FCC 47 CFR Part 15B, unintentional radiator, class B (standard models) or class A (US208V models) EN 61326-1 include tests according to: - EN 61000-4-2 - EN 61000-4-3 - EN 61000-4-4 - EN 61000-4-5 - EN 61000-4-6
Appliance class	I
Ingress Protection	IP20
<b>Environmental conditions</b>	
Operating temperature *5	0 - 50 °C (32 - 122 °F)
Storage temperature	-20 - 70 °C (-4 - 158 °F)
Humidity	≤80% relative humidity, non-condensing
Altitude	≤2000 m (≤6,600 ft)
Pollution degree	2
<b>Mechanical construction</b>	
Cooling	Forced air flow from front to rear (temperature controlled fans)
Dimensions (W x H x D)	Enclosure: 483 mm (19 in) x 132 mm (3U) x 668 mm (26.3 in) Overall depth: min. 785 mm (min. 31 in)
Weight	5 kW unit: 18 kg (40 lb)      10 kW unit: 25.4 kg (56 lb)      15 kW unit: 32.8 kg (72 lb)

\*5 The rated power of the device is available up to approximately +40 °C (104 °F)

Technical specifications	PSI 10060-170	PSI 10080-170	PSI 10200-70	PSI 10360-40	PSI 10500-30
<b>DC output</b>					
Voltage range	0 - 60 V	0 - 80 V	0 - 200 V	0 - 360 V	0 - 500 V
Ripple in CV (rms)	≤10 mV (BW 300 kHz *1)	≤10 mV (BW 300 kHz *1)	≤40 mV (BW 300 kHz *1)	≤55 mV (BW 300 kHz *1)	≤70 mV (BW 300 kHz *1)
Ripple in CV (pp)	≤100 mV (BW 20 MHz *1)	≤100 mV (BW 20 MHz *1)	≤300 mV (BW 20 MHz *1)	≤320 mV (BW 20 MHz *1)	≤350 mV (BW 20 MHz *1)
Current range	0 - 170 A	0 - 170 A	0 - 70 A	0 - 40 A	0 - 30 A
Power range *2	0 - 5000 W (0 - 3000 W)				
Resistance range	0.016 Ω - 26 Ω	0.016 Ω - 26 Ω	0.1 Ω - 160 Ω	0.3 Ω - 520 Ω	0.6 Ω - 1000 Ω
Output capacitance	7990 µF	7990 µF	2520 µF	393 µF	180 µF
Efficiency (up to)	94.5% *3	94.5% *3	94.5% *3	95.5% *3	95.5% *3
<b>AC input</b>					
P <sub>Max</sub> (Standard)	Range 1: 3.5 kW Range 2: 5.5 kW				
P <sub>Max</sub> (US208V)	6 kW				
Phase current (Standard) *4	Range 1: ≤29 A Range 2: ≤27 A				
Phase current (US208V) *4	≤49 A				
<b>Insulation</b>					
Negative DC pole <-> PE	±600 V DC	±600 V DC	±1000 V DC	±1000 V DC	±1500 V DC
Positive DC pole <-> PE	+600 V DC	+600 V DC	+1000 V DC	+1000 V DC	+2000 V DC
<b>Product codes</b>					
Standard	06230829	06230830	06230831	06230832	06230833
US208V	06238829	06238830	06238831	06238832	06238833

\*1 BWL = Bandwidth limit on the measuring oscilloscope

\*2 The value in brackets applies to the state of derating (power reduction) with 208 V ±10% utility

\*3 At 100% power and 100% output voltage

\*4 Calculated for the default AC supply voltage in the stated range, minus 10% tolerance, at maximum output power and 10% power loss from AC to DC

Technical specifications	PSI 10750-20	PSI 10920-20 *5			
<b>DC output</b>					
Voltage range	0 - 750 V	0 - 920 V			
Ripple in CV (rms)	$\leq 200 \text{ mV}$ (BW 300 kHz *1)	$\leq 200 \text{ mV}$ (BW 300 kHz *1)			
Ripple in CV (pp)	$\leq 800 \text{ mV}$ (BW 20 MHz *1)	$\leq 800 \text{ mV}$ (BW 20 MHz *1)			
Current range	0 - 20 A	0 - 20 A			
Power range *2	0 - 5000 W (0 - 3000 W)	0 - 5000 W (0 - 3000 W)			
Resistance range	1.2 $\Omega$ - 2200 $\Omega$	1.6 $\Omega$ - 3300 $\Omega$			
Output capacitance	180 $\mu\text{F}$	120 $\mu\text{F}$			
Efficiency (up to)	95.5% *3	95.5% *3			
<b>AC input</b>					
$P_{\text{Max}}$ (Standard)	Range 1: 3.5 kW Range 2: 5.5 kW	Range 1: 3.5 kW Range 2: 5.5 kW			
$P_{\text{Max}}$ (US208V)	6 kW	6 kW			
Phase current (Standard) *4	Range 1: $\leq 29 \text{ A}$ Range 2: $\leq 27 \text{ A}$	Range 1: $\leq 29 \text{ A}$ Range 2: $\leq 27 \text{ A}$			
Phase current (US208V) *4	$\leq 49 \text{ A}$	$\leq 49 \text{ A}$			
<b>Insulation</b>					
Negative DC pole $\leftrightarrow$ PE	$\pm 1500 \text{ V DC}$	$\pm 1500 \text{ V DC}$			
Positive DC pole $\leftrightarrow$ PE	$+2000 \text{ V DC}$	$+2000 \text{ V DC}$			
<b>Product codes</b>					
Standard	06230834	06230857			
US208V	06238834	06238857			

\*1 BWL = Bandwidth limit on the measuring oscilloscope

\*2 The value in brackets applies to the state of derating (power reduction) with 208 V  $\pm 10\%$  utility

\*3 At 100% power and 100% output voltage

\*4 Calculated for the default AC supply voltage in the stated range, minus 10% tolerance, at maximum output power and 10% power loss from AC to DC

\*5 The data listed below this model name are preliminary

Technical specifications	PSI 10060-340	PSI 10080-340	PSI 10200-140	PSI 10360-80	PSI 10500-60
<b>DC output</b>					
Voltage range	0 - 60 V	0 - 80 V	0 - 200 V	0 - 360 V	0 - 500 V
Ripple in CV (rms)	≤10 mV (BW 300 kHz *1)	≤10 mV (BW 300 kHz *1)	≤40 mV (BW 300 kHz *1)	≤55 mV (BW 300 kHz *1)	≤70 mV (BW 300 kHz *1)
Ripple in CV (pp)	≤100 mV (BW 20 MHz *1)	≤100 mV (BW 20 MHz *1)	≤300 mV (BW 20 MHz *1)	≤320 mV (BW 20 MHz *1)	≤350 mV (BW 20 MHz *1)
Current range	0 - 340 A	0 - 340 A	0 - 140 A	0 - 80 A	0 - 60 A
Power range *2	0 - 10000 W (0 - 6000 W)				
Resistance range	0.008 Ω - 13 Ω	0.008 Ω - 13 Ω	0.05 Ω - 80 Ω	0.15 Ω - 260 Ω	0.3 Ω - 500 Ω
Output capacitance	15980 µF	15980 µF	5040 µF	787 µF	360 µF
Efficiency (up to)	94.5% *3	94.5% *3	94.5% *3	95.5% *3	95.5% *3
<b>AC input</b>					
P <sub>Max</sub> (Standard)	Range 1: 7 kW Range 2: 11 kW				
P <sub>Max</sub> (US208V)	11 kW				
Phase current (Standard) *4	Range 1: ≤29 A Range 2: ≤27 A				
Phase current (US208V) *4	≤49 A				
<b>Insulation</b>					
Negative DC pole <-> PE	±600 V DC	±600 V DC	±1000 V DC	±1000 V DC	±1500 V DC
Positive DC pole <-> PE	+600 V DC	+600 V DC	+1000 V DC	+1000 V DC	+2000 V DC
<b>Product codes</b>					
Standard	06230835	06230836	06230837	06230838	06230839
US208V	06238835	06238836	06238837	06238838	06238839

\*1 BWL = Bandwidth limit on the measuring oscilloscope

\*2 The value in brackets applies to the state of derating (power reduction) with 208 V ±10% utility

\*3 At 100% power and 100% output voltage

\*4 Calculated for the default AC supply voltage in the stated range, minus 10% tolerance, at maximum output power and 10% power loss from AC to DC

Technical specifications	PSI 10750-40	PSI 10920-40 *5	PSI 11000-30	PSI 11500-20	
<b>DC output</b>					
Voltage range	0 - 750 V	0 - 920 V	0 - 1000 V	0 - 1500 V	
Ripple in CV (rms)	≤200 mV (BW 300 kHz *1)	≤200 mV (BW 300 kHz *1)	≤200 mV (BW 300 kHz *1)	≤400 mV (BW 300 kHz *1)	
Ripple in CV (pp)	≤800 mV (BW 20 MHz *1)	≤800 mV (BW 20 MHz *1)	≤1000 mV (BW 20 MHz *1)	≤2000 mV (BW 20 MHz *1)	
Current range	0 - 40 A	0 - 40 A	0 - 30 A	0 - 20 A	
Power range *2	0 - 10000 W (0 - 6000 W)				
Resistance range	0.6 Ω - 1100 Ω	0.75 Ω - 1600 Ω	1.2 Ω - 2000 Ω	2.6 Ω - 4500 Ω	
Output capacitance	360 µF	240 µF	197 µF	90 µF	
Efficiency (up to)	95.5% *3	95.5% *3	95.5% *3	95.5% *3	
<b>AC input</b>					
P <sub>Max</sub> (Standard)	Range 1: 7 kW Range 2: 11 kW				
P <sub>Max</sub> (US208V)	11 kW	11 kW	11 kW	11 kW	
Phase current (Standard) *4	Range 1: ≤29 A Range 2: ≤27 A				
Phase current (US208V) *4	≤49 A	≤49 A	≤49 A	≤49 A	
<b>Insulation</b>					
Negative DC pole <-> PE	±1500 V DC	±1500 V DC	±1500 V DC	±1500 V DC	
Positive DC pole <-> PE	+2000 V DC	+2000 V DC	+2000 V DC	+2000 V DC	
<b>Product codes</b>					
Standard	06230854	06230858	06230855	06230856	
US208V	06238854	06238858	06238855	06238856	

\*1 BWL = Bandwidth limit on the measuring oscilloscope

\*2 The value in brackets applies to the state of derating (power reduction) with 208 V ±10% utility

\*3 At 100% power and 100% output voltage

\*4 Calculated for the default AC supply voltage in the stated range, minus 10% tolerance, at maximum output power and 10% power loss from AC to DC

\*5 The data listed below this model name are preliminary

Technical specifications	PSI 10060-510	PSI 10080-510	PSI 10200-210	PSI 10360-120	PSI 10500-90
<b>DC output</b>					
Voltage range	0 - 60 V	0 - 80 V	0 - 200 V	0 - 360 V	0 - 500 V
Ripple in CV (rms)	≤10 mV (BW 300 kHz *1)	≤10 mV (BW 300 kHz *1)	≤40 mV (BW 300 kHz *1)	≤55 mV (BW 300 kHz *1)	≤70 mV (BW 300 kHz *1)
Ripple in CV (pp)	≤100 mV (BW 20 MHz *1)	≤100 mV (BW 20 MHz *1)	≤300 mV (BW 20 MHz *1)	≤320 mV (BW 20 MHz *1)	≤350 mV (BW 20 MHz *1)
Current range	0 - 510 A	0 - 510 A	0 - 210 A	0 - 120 A	0 - 90 A
Power range *2	0 - 15000 W (0 - 9000 W)				
Resistance range	0.006 Ω - 9 Ω	0.006 Ω - 9 Ω	0.03 Ω - 50 Ω	0.1 Ω - 180 Ω	0.2 Ω - 330 Ω
Output capacitance	23970 μF	23970 μF	7560 μF	1180 μF	540 μF
Efficiency (up to)	94.5% *3	94.5% *3	94.5% *3	95.5% *3	95.5% *3
<b>AC input</b>					
P <sub>Max</sub> (Standard)	Range 1: 10 kW Range 2: 16 kW				
P <sub>Max</sub> (US208V)	16 kW				
Phase current (Standard) *4	Range 1: ≤29 A Range 2: ≤27 A				
Phase current (US208V) *4	≤49 A				
<b>Insulation</b>					
Negative DC pole <-> PE	±600 V DC	±600 V DC	±1000 V DC	±1000 V DC	±1500 V DC
Positive DC pole <-> PE	+600 V DC	+600 V DC	+1000 V DC	+1000 V DC	+2000 V DC
<b>Product codes</b>					
Standard	06230820	06230821	06230822	06230823	06230824
US208V	06238820	06238821	06238822	06238823	06238824

\*1 BWL = Bandwidth limit on the measuring oscilloscope

\*2 The value in brackets applies to the state of derating (power reduction) with 208 V ±10% utility

\*3 At 100% power and 100% output voltage

\*4 Calculated for the default AC supply voltage in the stated range, minus 10% tolerance, at maximum output power and 10% power loss from AC to DC

Technical specifications	PSI 10750-60	PSI 10920-60 *5	PSI 11000-40	PSI 11500-30	PSI 12000-20
<b>DC output</b>					
Voltage range	0 - 750 V	0 - 920 V	0 - 1000 V	0 - 1500 V	0 - 2000 V
Ripple in CV (rms)	≤200 mV (BW 300 kHz *1)	≤200 mV (BW 300 kHz *1)	≤300 mV (BW 300 kHz *1)	≤400 mV (BW 300 kHz *1)	≤400 mV (BW 300 kHz *1)
Ripple in CV (pp)	≤800 mV (BW 20 MHz *1)	≤800 mV (BW 20 MHz *1)	≤1600 mV (BW 20 MHz *1)	≤2400 mV (BW 20 MHz *1)	≤2400 mV (BW 20 MHz *1)
Current range	0 - 60 A	0 - 60 A	0 - 40 A	0 - 30 A	0 - 20 A
Power range *2	0 - 15000 W (0 - 9000 W)				
Resistance range	0.4 Ω - 750 Ω	0.5 Ω - 1100 Ω	0.8 Ω - 1300 Ω	1.7 Ω - 3000 Ω	3.5 Ω - 5300 Ω
Output capacitance	540 µF	360 µF	131 µF	60 µF	60 µF
Efficiency (up to)	95.5% *3	95.5% *3	95.5% *3	95.5% *3	95.5% *3
<b>AC input</b>					
P <sub>Max</sub> (Standard)	Range 1: 10 kW Range 2: 16 kW				
P <sub>Max</sub> (US208V)	16 kW				
Phase current (Standard) *4	Range 1: ≤29 A Range 2: ≤27 A				
Phase current (US208V) *4	≤49 A				
<b>Insulation</b>					
Negative DC pole <-> PE	±1500 V DC				
Positive DC pole <-> PE	+2000 V DC				
<b>Product codes</b>					
Standard	06230825	06230859	06230826	06230827	06230828
US208V	06238825	06238859	06238826	06238827	06238828

\*1 BWL = Bandwidth limit on the measuring oscilloscope

\*2 The value in brackets applies to the state of derating (power reduction) with 208 V ±10% utility

\*3 At 100% power and 100% output voltage

\*4 Calculated for the default AC supply voltage in the stated range, minus 10% tolerance, at maximum output power and 10% power loss from AC to DC

\*5 The data listed below this model name are preliminary

## General

The DC laboratory power supplies in the PSI 10000 series from EA Elektro-Automatik convert the energy from the grid into a regulated DC voltage with an efficiency of over 96%. The PSI 10000 series includes single and three phase units, which, together with the wide input range, allows use with practically all global mains voltages. The DC voltage and current ratings are determined by typical applications and the spectrum ranges from 0 - 60 V to 0 - 2000 V and from 0 - 6 A up to 0 - 1000 A in a single device. The DC supply operates as a flexible output stage with a constant power characteristic (autoranging) and a wide voltage and current range.

To achieve higher power and current all units are equipped with a master-slave bus. This enables up to 64 parallel connected devices to be combined into one system which can provide up to 1920 kW and 64000 A. Such a system works as a single unit and can use different power classes, only the voltage class must remain constant. In this way a user can construct a 75 kW system from two 30 kW 4U and one 15 kW 3U device from the PSI 10000 range.

Furthermore, typical laboratory functionality is provided. This includes an extensive function generator, alarm and warning management, various optional industrial interfaces, software solutions and many more functions.

## AC connection


The DC power supplies in the PSI 10000 series are equipped with an active PFC which provides a high efficiency at a low energy consumption. Furthermore, the devices in this series provide a wide input voltage range. It reaches from 110/120 V up to 240 V with 1-phase models and from 208 V to 380/400/480 V with 3-phase models. Hence the devices can be operated in the majority of global grids. They adjust automatically, without additional configuration, to the available grid voltage by applying a derating of the DC input power. The separately available US208V models, however, provide the full rated power at a supply with 208 V.

## DC output

The DC output of the power supply series PSI 10000 3U is rated for DC voltages of 0 - 60 V up to 0 - 2000 V and currents of 0 - 20 A up to 0 - 510 A. The flexible output stages (autoranging) provide the user with a wide voltage, current and power range and hence a wider field of working than traditional power supplies.

## DC connection

Connection of the DC output is done via copper blades on the back side of the device. If a system with higher performance is required, the devices are simply connected in parallel. With minimal effort devices can be linked with the vertical copper rails. A cover for contact protection is provided.

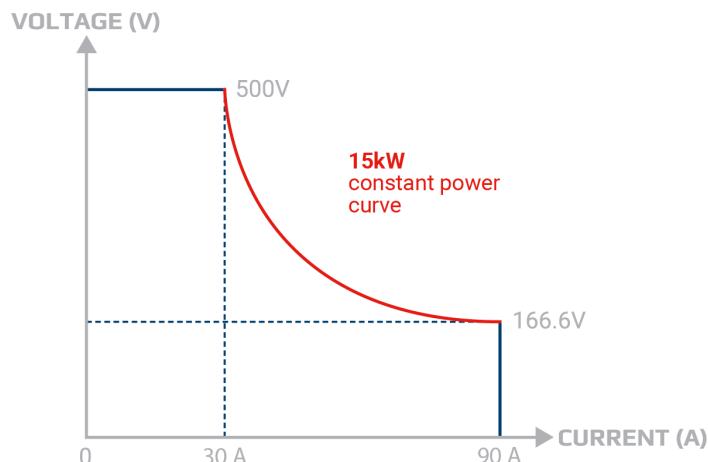

## The principle of autoranging

„Autoranging“ is a term used when a programmable DC power supply automatically offers a wider output and input range of both, voltage and current, to maintain full power across a wide operation range. This type of solution allows the use of a single unit to address multiple voltage and current combinations.

## Function generator

All models in the PSI 10000 series are equipped with a function generator. This allows waveforms such as sine, triangle, square or trapezoid to be simply called up and applied to either the voltage or the current. A ramp function and a arbitrary generator allow voltage and current progression to be freely programmable. Test sequences for repeated tests can be saved and reloaded when needed, which saves time. For simulation of a photovoltaics system or fuel cells, adaptable tables are provided. With the integrated and adjustable PV characteristics curve DIN EN 50530 various solar modules can be defined and entire day trend progression can be simulated.

Conclusion: the user is supported by a multitude of useful functions.

## Interfaces

As standard, 10000s series devices are fitted with the most important interfaces and ports which are all galvanically isolated from the DC input. There is an analog interface which can be parameterized for input and output, control and monitoring of 0 - 5 V or 0 - 10 V for voltage, current, power and resistance, assorted inputs and outputs as well as USB and Ethernet ports. Further optional industrial interface for plug & play slot complete the portfolio:

- CAN
- CANopen
- RS232
- Profibus
- EtherCAT
- Profinet, with one or two ports
- Modbus, with one or two ports
- Ethernet, with one or two ports

## High performance systems

High power applications can be covered with high power systems of up to 960 kW. These are achieved by using the outputs of many PSI 10000 3U devices and connecting them in parallel using copper rails. A 19" cabinet with a height of 42U can hold up to 12 units of 3U and thus form a system of up to 180 kW occupying only 0.6 m<sup>2</sup> (6.5 sqft) of floor space. The master/slave bus allows for up to 6 cabinets with a maximum of 64 units and up to 15 kW each to behave as one unit.

## Master-slave bus and Share-Bus

When the integrated master-slave bus and Share-Bus are used, a multi device system behaves as a single device. The buses are simply connected between each device. With the master-slave bus the system data, such as total power and total current, are collected and displayed on the master unit. Warnings and alarms of the slave devices are also clearly displayed. The Share-Bus cares for a balanced load distribution between the individual units.



## Example representation

In this illustration you can see a fully assembled and wired 240 kW system, realized with 30 kW 4U units.

## Applications

### Relay test in the production

Relay manufacturers must carry out assorted tests on their products during production. For these the coils and contacts are provided with exactly defined voltage and current. For the coil tests, important parameters such as operating, holding and decay current, together with the associated voltages must be checked and documented. For the contacts, not only are the current carrying capability and contact resistance important parameters, but also voltage consistency and disconnect threshold indicate much about the product quality. Testing all these is best supported by an automatic test system. A part of such a system can be the devices of the PSI 10000 series with their exact, dynamic, controls of voltage, current, power, and resistance, providing optimal values for the best test results. With their diverse interface connections, they can be integrated into any test system and deliver the necessary data without the need for additional measuring equipment.

### Fuel cell simulation

One of further applications where programmable DC power supplies are used for is the simulation of fuel cells. It allows for optimal definition of these energy storages, as well of components powered by these fuel cells. In every application where reproducible data is required, the use of a simulator is typically first choice. This is mainly due to the various built-in mechanisms for the protection of connected consumers. The overcurrent protection (OCP) can, like a safety fuse, switch off the output and generate an alarm. The voltage can be monitored and can, if over or under limits, trigger various functions, and also generate warnings and alarms. Thus, many integrated functions can be safely performed.



### On-board charger test

In an on-board charger test (OBC) the electrical features of the charger must be tested under various conditions. This requires a flexible test system which also provides test data. With the sequencing and logging functions of the software EA-Power Control it allows data to be exported and saved. In this way applications can instantly generate reproducible test results based on dynamic and highly accurate set point and measurement data. To avoid competition between two separate control loops of the device under test (DUT) and the testing device, the voltage regulation speed of the power supply is adjustable. The modes Normal, Fast and Slow allow the PSI 10000 devices to be adapted the control characteristics of the on-board charger. Due to the fact that a power supply can only operate as a source, the combination with a sink, here an electronic DC load of ELR 10000 series, might be required.


### Solar array simulation

The programmable power supplies of the PSI 10000 range are highly suited to use as test systems for PV inverters as they can provide the necessary simulation for solar panels. Users can quickly access simulation models according to EN 50530 or Sandia while it supports diverse solar panel types. Parameters such as irradiation (varying with shadows), panel technology and temperature can be included. Thus the devices can test all the relevant electrical features of a PV inverter including the important efficiency value. The high resolution of 16-bit technology and a high sampling rate enable the programmable power supply to deliver accurate results which can be documented and saved to an Excel file.

## Technical drawings PSI 10000 3U ≤200 V

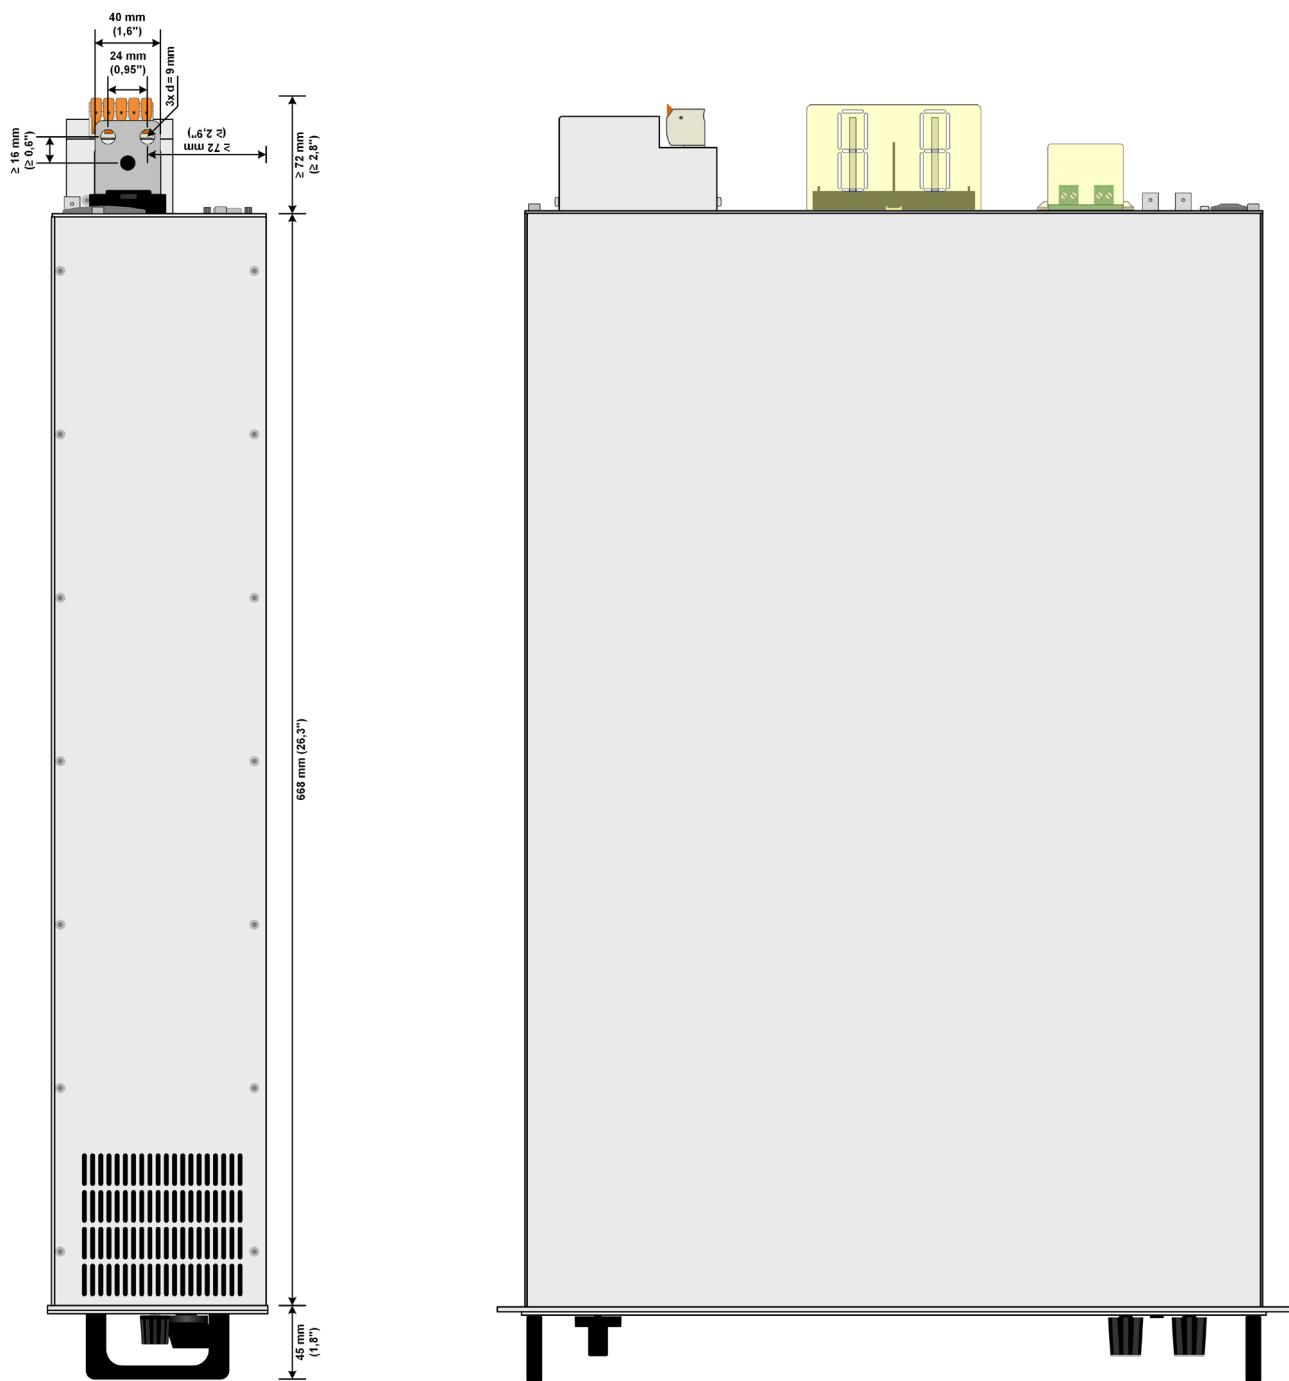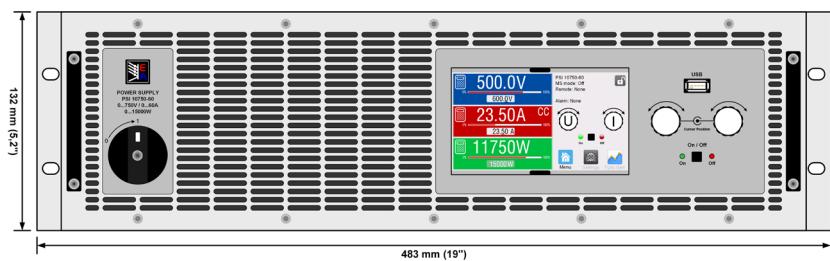


## Front panel description PSI 10000 3U

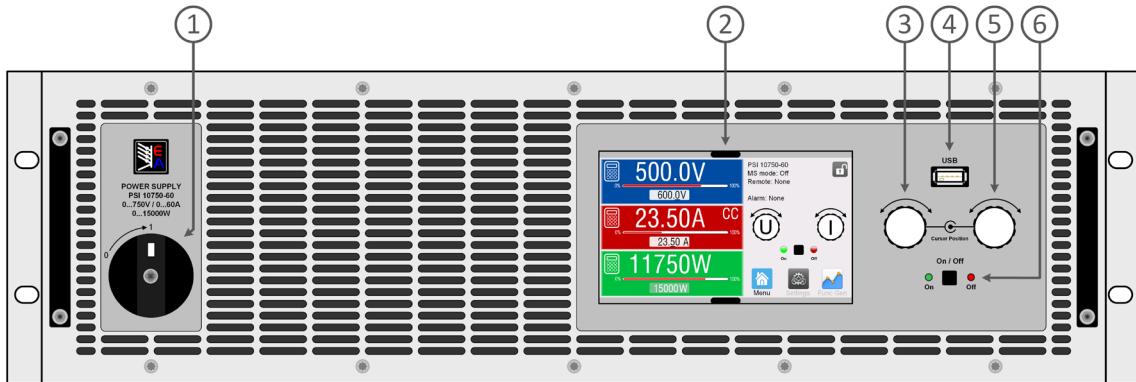



1. Power switch
2. TFT control interface, interactive operation and display
3. Rotary knob with push-button action, for settings and control
4. USB host, uses USB sticks for data logging and sequencing
5. Rotary knob with push-button action, for settings and control
6. On / Off push-button with LED status display

## Rear panel description PSI 10000 3U <200 V

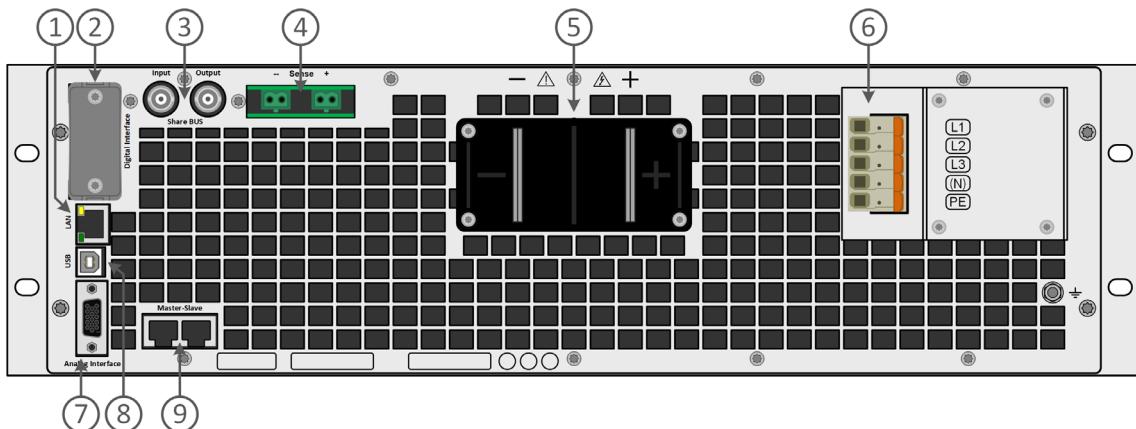


1. Ethernet interface
2. Slot for interfaces
3. Share-Bus connectors to set up a system for parallel connection
4. Remote sense connectors
5. DC output terminal (copper blades)
6. AC input connector
7. Connector (DB15 female) for isolated analog programming, monitor and other functions
8. USB interface
9. Master-slave bus connectors to set up a system for parallel connection

## Technical drawings PSI 10000 3U $\geq 360$ V

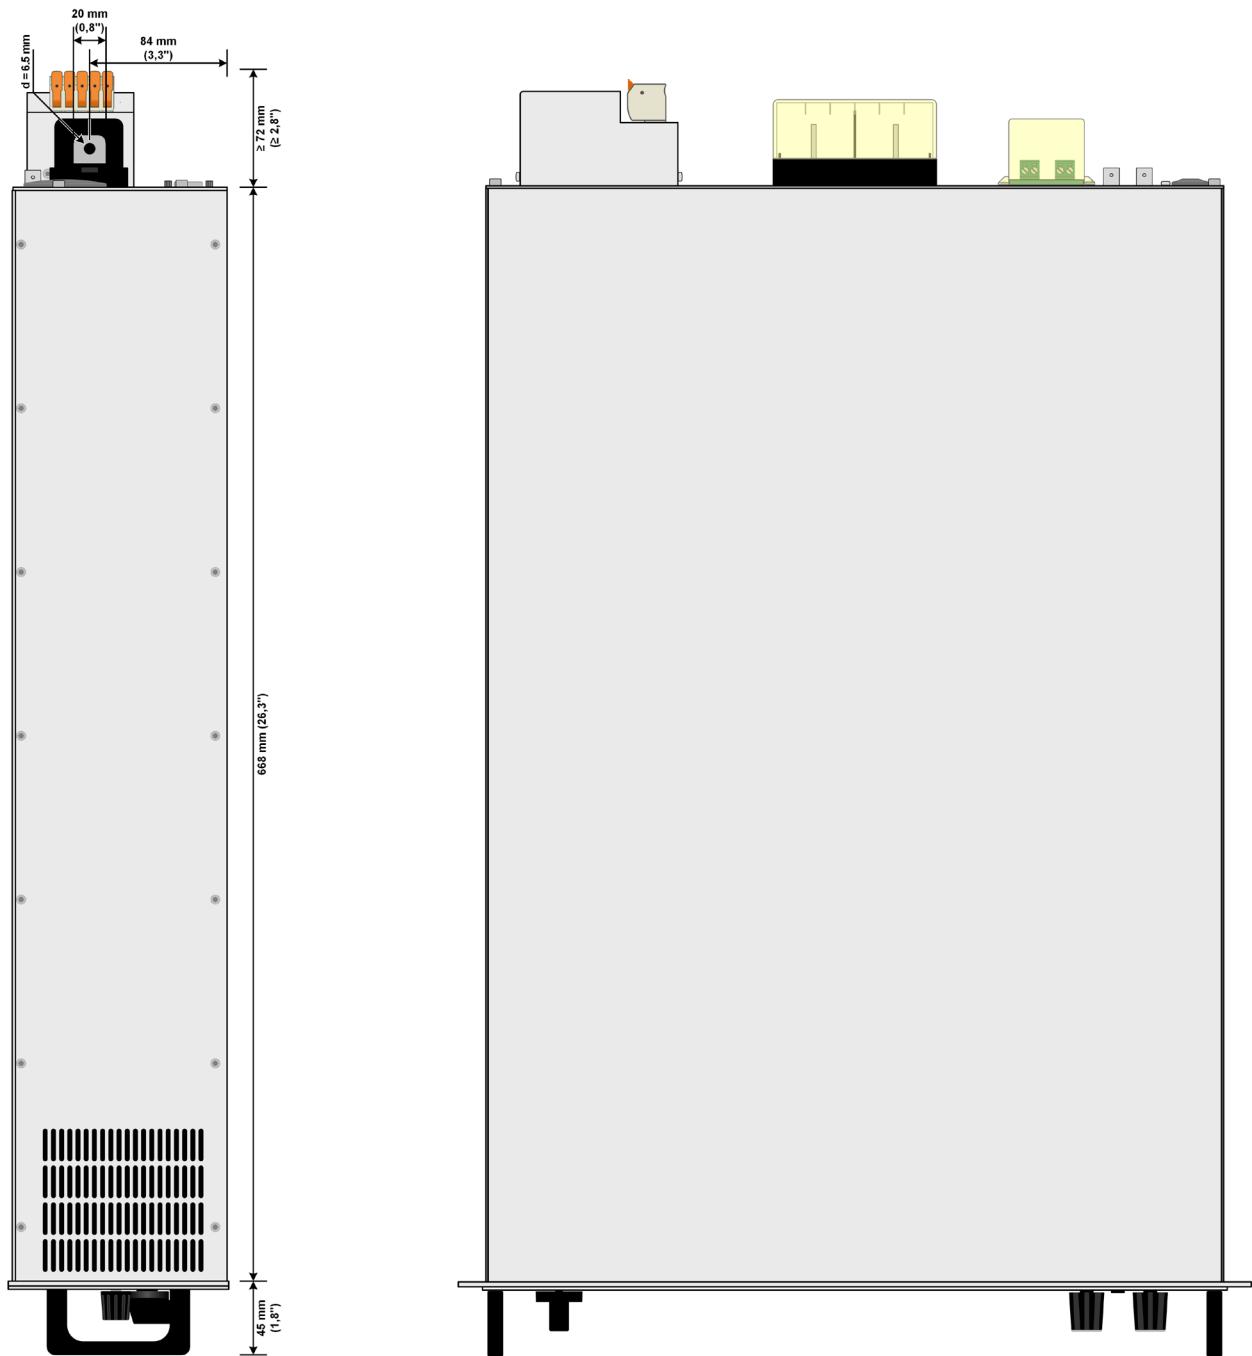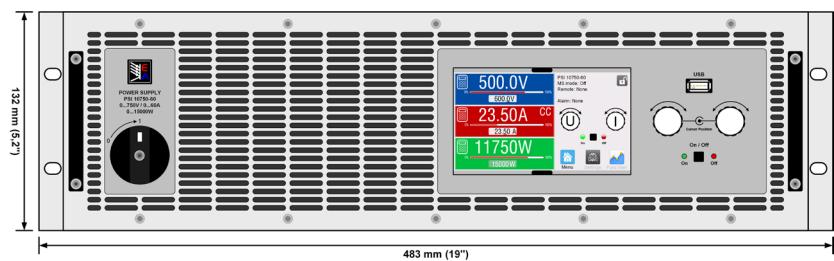


## Front panel description PSI 10000 3U

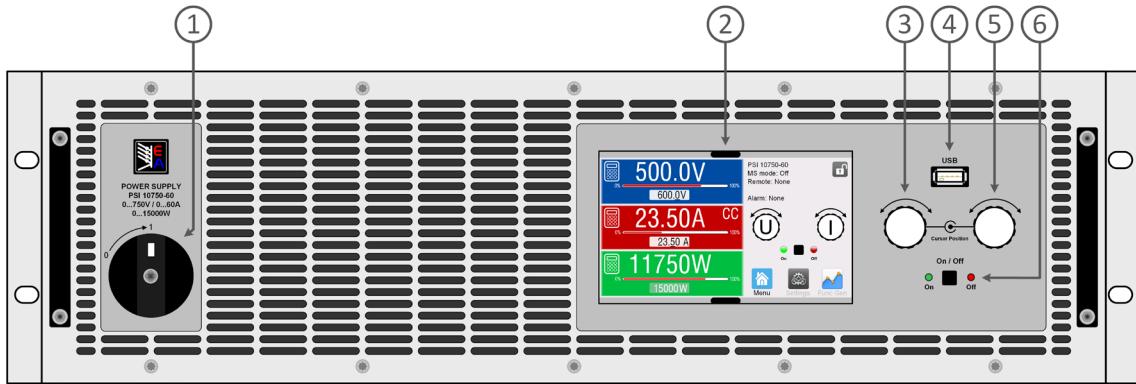

1. Power switch
2. TFT control interface, interactive operation and display
3. Rotary knob with push-button action, for settings and control
4. USB host, uses USB sticks for data logging and sequencing
5. Rotary knob with push-button action, for settings and control
6. On / Off push-button with LED status display

## Rear panel description PSI 10000 3U >360 V

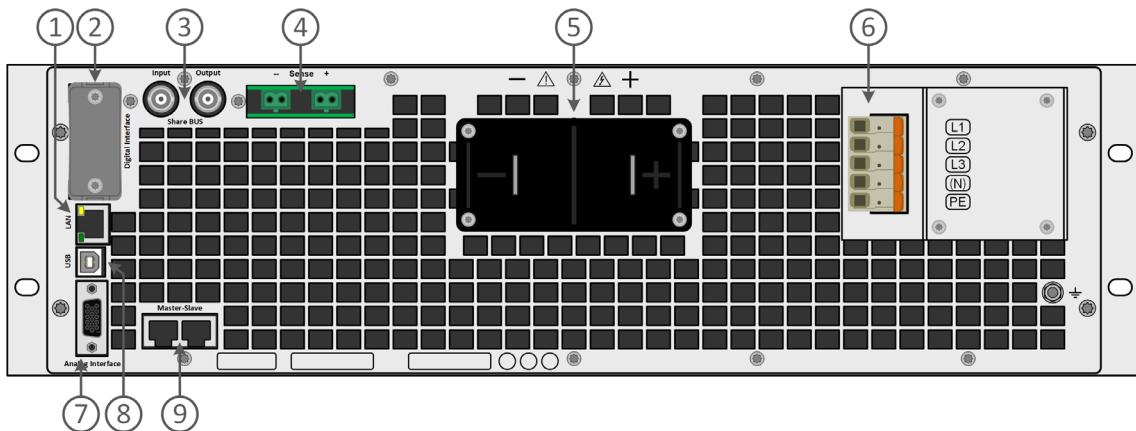

1. Ethernet interface
2. Slot for interfaces
3. Share-Bus connectors to set up a system for parallel connection
4. Remote sense connectors
5. DC output terminal (copper blades)
6. AC input connector
7. Connector (DB15 female) for isolated analog programming, monitor and other functions
8. USB interface
9. Master-slave bus connectors to set up a system for parallel connection

**EA Elektro-Automatik GmbH**  
Helmholtzstr. 31-37  
41747 Viersen  
Germany

Phone: +49 2162 3785 - 0  
[ea1974@elektroautomatik.com](mailto:ea1974@elektroautomatik.com)

**[www.elektroautomatik.com](http://www.elektroautomatik.com)**  
**[www.tek.com](http://www.tek.com)**

