


6.5-Digit Multimeter, High-Accuracy, C-Size HP E1410A

Technical Specifications

- 1-Slot, C-size, message based
- Vdc/ac, 2- & 4-wire Ω
- Noise rejection with long integration times/guarding
- Quality measurements with high common mode rejection
- True RMS from 20 Hz to 1 MHz
- Software calibration

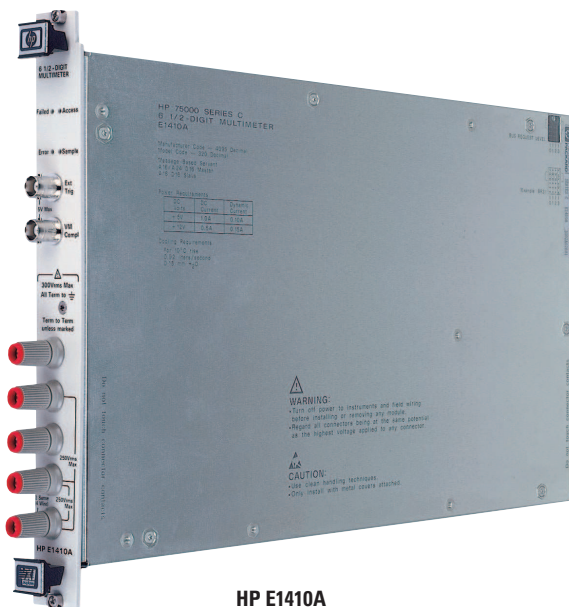

Description

The HP E1410A 6.5-Digit Multimeter is a **C-size, 1-slot, message-based VXI module**. It offers DC voltage and resistance measurements at rates over 1,450 readings/s in the 3.5-digit mode or normal mode rejection of up to 90 dB in the 6.5-digit mode. You can measure true RMS AC signals from 20 Hz to 1 MHz with programmable settling times. Offset compensated ohms allows for quality resistance measurements by eliminating the effect of small series voltage offsets. Temperature measurements using thermistors and RTDs are supported. Resolution, accuracy, and noise rejection may be set to optimize measurements speed. Extensive triggering is available.

Refer to the HP Website for instrument driver availability and downloading instructions, as well as for recent product updates, if applicable.

Accuracy

Choose the resolution, accuracy, and noise rejection you need. Fast function-range changes allow you to optimize measurement speeds. For low-level signals, long integration times and the system guard yield the most accurate measurements possible. Integration times from 100 power line cycles to 0.0005 power line cycles are selectable for all functions. Resolution from 6.5 to 3.5 digits is selectable as a function of integration time.

Flexible Triggering

The DMM has extensive triggering capabilities, including synchronization with external devices. You can access the external trigger and voltmeter complete signals from the front panel or VXIbus (TTL trigger lines).

Product Specifications

Reading Rate/Resolution

Max. reading rate: 1.45 k

Auto zero off, fixed range, delay 0, AC slow filter on, and offset compensation off.

Typical Reading Rates (rdgs/s)

	Aperture									
	2.0 s	1.67 s	200 ms	167 ms	20 ms	16.7 ms	2.0 ms	1.67 ms	100 μ s	10 μ s
DC voltage	0.4	0.49	4.0	4.9	47	56	312	360	1250	1450
Four-wire resistance	0.4	0.49	4.0	4.9	47	56	312	360	1250	1450
AC voltage	0.17	0.2	0.65	0.7	1.0	1.0	1.0	1.0	1.0	1.0

Resolution (bits/digits)

	Aperture									
	2.0 s	1.67 s	200 ms	167 ms	20 ms	16.7 ms	2.0 ms	1.67 ms	100 μ s	10 μ s
Binary bits:	± 21.5	± 21.5	± 21.5	± 21.5	± 21.5	± 21.5	± 18.2	± 18.2	± 14.9	± 11.5
Decimal digits:	6.5	6.5	6.5	6.5	6.5	6.5	5.5	5.5	4.5	3.5

Noise Rejection (dB)

Noise Rejection Conditions: 1 k Ω imbalance in low lead. NMR is for specified frequencies $\pm 0.08\%$.

DC Voltage & Resistance:

		2.0 s	1.67 s	200 ms	167 ms	20 ms	16.7 ms	2.0 ms	1.67 ms	100 μ s	10 μ s
DC Common mode rejection		140 dB	140 dB	140 dB	140 dB	140 dB	140 dB	140 dB	140 dB	140 dB	140 dB
50 Hz	Power line cycles	100	—	10	—	1	—	—	—	—	—
Normal mode (50 Hz) rejection		90 dB	0 dB	80 dB	0 dB	60 dB	0 dB	0 dB	0 dB	0 dB	0 dB
60 Hz	Power line cycles	—	100	—	10	—	1	—	—	—	—
Normal mode (60 Hz) rejection		0 dB	90 dB	0 dB	80 dB	0 dB	60 dB	0 dB	0 dB	0 dB	0 dB
400 Hz	Power line cycles	800	—	80	—	8	—	—	—	—	—
Normal mode (400 Hz) rejection		90 dB	0 dB	80 dB	0 dB	60 dB	0 dB	0 dB	0 dB	0 dB	0 dB
AC voltage											
		2.0 s	1.67 s	200 ms	167 ms	20 ms	16.7 ms	2.0 ms	1.67 ms	100 μ s	10 μ s
DC to 60 Hz Common mode rejection		>86 dB	>86 dB	>86 dB	>86 dB	>86 dB	>86 dB	>86 dB	>86 dB	>86 dB	>86 dB

DC Voltage Resolution/Accuracy

Accuracy Conditions: Auto-zero on. One hour warmup. Temperature within $\pm 5^\circ\text{C}$ of temperature at calibration (module calibrated at 18-28 $^\circ\text{C}$).

Range	Input Resistance	Resolution vs Aperture (Volts)		90-Day Accuracy vs Aperture \pm (% of Reading + Volts)	
		20/16.7 ms	10 μs	20/16.7 ms	10 μs
30 mV	>10 G Ω	10 nV	10 μV	0.0040% + 3.9 μV	0.0040% + 60 μV
300 mV	>10 G Ω	100 nV	100 μV	0.0025% + 4.0 μV	0.0025% + 400 μV
3 V	>10 G Ω	1 μV	1 mV	0.0017% + 9.0 μV	0.0017% + 4.0 mV
30 V	10 M Ω \pm 1%	10 μV	10 mV	0.0035% + 200 μV	0.0035% + 40 mV
300 V	10 M Ω \pm 1%	100 μV	100 mV	0.0063% + 700 μV	0.0050% + 400 mV
DC voltage:	300 V				
Voltage accuracy (DC):	0.002%				

Four-Wire Resistance

Range	Source Current	Maximum Open Circuit Voltage	Resolution vs. Aperture (Volts)		90-Day Accuracy vs. Aperture \pm (% of reading = Ω)	
			20/16.7 ms	10 μs	20/16.7 ms	10 μs
30 Ω	1 mA	12 V	10 $\mu\Omega$	10 m Ω	0.0065% + 4.5 m Ω	0.0065% + 60 m Ω
300 Ω	1 mA	12 V	100 $\mu\Omega$	100 m Ω	0.0045% + 4.5 m Ω	0.0045% + 400 m Ω
3 k Ω	1 mA	12 V	1 m Ω	1 Ω	0.0035% + 7 m Ω	0.0035% + 4 Ω
30 k Ω	100 μA	12 V	10 m Ω	10 Ω	0.0035% + 70 m Ω	0.0035% + 40 Ω
300 k Ω	10 μA	12 V	100 m Ω	100 Ω	0.0040% + 900 m Ω	0.0040% + 400 Ω
3 M Ω	1 μA	12 V	1 Ω	1 k Ω	0.0055% + 16 Ω	0.0055% + 5 k Ω
30 M Ω	100 nA	8.5 V	10 Ω	10 k Ω	0.0250% + 930 Ω	0.0250% + 50 k Ω
300 M Ω	100 nA	8.5 V	100 Ω	100 k Ω	1.6% + 100 k Ω	not specified
3 G Ω	100 nA	8.5 V	1 k Ω	1 M Ω	16% + 1 M Ω	not specified

Accuracy conditions: Auto-zero on, one hour warmup. On 300 M Ω and 3 G Ω ranges, specification applies to two-wire Ω only, with inputs >10% of full scale and within 24 hrs of internal calibration. Temperature within $\pm 5^\circ\text{C}$ of temperature at calibration (module calibrated at 18-28 $^\circ\text{C}$).

2/4-wire Ω : 3 G Ω

True RMS AC Voltage (AC coupled)

Crest Factor: 3.5 at full scale. Accuracy Conditions: Sine wave inputs >10% of full scale. DC component <10% of AC component. AC slow filter on. Auto-zero on. One hour warmup. Temperature within $\pm 5^\circ\text{C}$ of temperature at calibration (module calibrated at 18-28 $^\circ\text{C}$).

Range (RMS)	Input Impedance	Resolution Aperture = 20/16.7 ms	Frequency	90-Day Accuracy \pm (% of reading + Volts) Aperture = 20/16.7 ms
30 mV	1 M Ω \pm 1%, < 90 pF	10 nV	20 Hz-45 Hz	0.58% + 37.3 μV
			45-100 Hz	0.23% + 37.3 μV
			100 Hz-20 kHz	0.15% + 37.3 μV
			20-100 kHz	0.68% + 47.1 μV
			100-300 kHz	3.35% + 123 μV
			300 kHz-1 MHz	10.35% + 691 μV
300 mV	1 M Ω \pm 1%, < 90 pF	100 nV	20-45 Hz	0.58% + 133 μV
			45-100 Hz	0.23% + 133 μV
			100 Hz-20 kHz	0.15% + 133 μV
			20-100 kHz	0.68% + 231 μV
			100-300 kHz	3.35% + 991 μV
			300 kHz-1 MHz	10.35% + 6.67 mV
3 V	1 M Ω \pm 1%, < 90 pF	1 μV	20-45 Hz	0.58% + 1.33 mV
			45-100 Hz	0.23% + 1.33 mV
			100 Hz-20 kHz	0.15% + 1.33 mV
			20-100 kHz	0.68% + 2.31 mV
			100-300 kHz	3.35% + 9.91 mV
			300 kHz-1 MHz	10.35% + 66.7 mV
30 V	1 M Ω \pm 1%, < 90 pF	10 μV	20-45 Hz	0.58% + 13.3 mV
			45-100 Hz	0.23% + 13.3 mV
			100 Hz-20 kHz	0.15% + 13.3 mV
			20-100 kHz	0.68% + 23.1 mV
			100-300 kHz	3.35% + 99.1 mV
			300 kHz-1 MHz	10.35% + 667 mV
300 V	1 M Ω \pm 1%, < 90 pF	100 μV	20-45 Hz	0.64% + 133 mV
			45-100 Hz	0.29% + 133 mV
			100 Hz-20 kHz	0.21% + 133 mV
			20-100 kHz	1.08% + 390 mV
			100 kHz-1 MHz	not specified

AC voltage: 300 V
Voltage accuracy (AC): 0.194%

Frequency and Period

Sensitivity (sinewave): 10 mV rms
Trigger level: Triggers and counts on zero crossings
Conditions: 0-55 °C

Frequency Range	Period Range	1 Year Accuracy ± (% of Reading)
10-400 Hz	0.1-0.025 s	0.05%
400 Hz-1.5 MHz	0.025 s-667 ns	0.01%

Timing/Synchronization

Timer/pacer:
Timer range: 600 μs to 2100 s
Resolution: 1.0 μs

Programmable delay:
Delay range: 0 to 2100 s
Resolution: 1.0 μs

External trigger:
Trigger condition (programmable): Negative or positive edge
Minimum pulse width: 10 ns

Memory

Reading storage: 4,096 readings
Multimeter state memory: 10 states

Functions

Idc: —
Iac: —
Frequency: 1.5 MHz
Period: 1 μs
Temp.: Tm, RTD

General Specifications

VXI Characteristics

VXI device type: Message based
Size: C
Slots: 1
Connectors: PI/2
Shared memory: Yes
VXI busses: TTL Trigger Bus
C-size compatibility: n/a

Instrument Drivers

See the HP Website (http://www.hp.com/go/inst_drivers) for driver availability and downloading.

Command module firmware: n/a
Command module firmware rev: n/a
I-SCPI Win 3.1: n/a
I-SCPI Series 700: n/a
C-SCPI LynxOS: n/a
C-SCPI Series 700: n/a
HP Panel Drivers: Yes
VXIplug&play Win Framework: Yes
VXIplug&play Win 95/NT Framework: Yes
VXIplug&play HP-UX Framework: No

Module Current

	I _{PM}	I _{DM}
+5 V:	1	0.1
+12 V:	0.5	0.15
-12 V:	0	0
+24 V:	0	0
-24 V:	0	0
-5.2 V:	0	0
-2 V:	0	0

Cooling/Slot

Watts/slot: 11.00
ΔP mm H₂O: 0.15
Air Flow liter/s: 0.92

Ordering Information

Description	Product No.
6.5-Digit Multimeter, High Accuracy Service Manual	HP E1410A
Mil Std 45662A Calibration w/Test Data	HP E1410A 0B3
Japan - Japanese Localization	HP E1410A 1BP
3 Yr. Retn. to HP to 1 Yr. OnSite Warr.	HP E1410A ABJ
	HP E1410A W01

Related Literature

1998 Test System and VXI Products Data Book,
HP Pub. No. 5966-2812E

1999 Test System and VXI Products Catalog,
HP Pub. No. 5968-3698

Warranty

Standard Hewlett-Packard VXIbus hardware products are warranted against defects in materials and workmanship for a period of three years unless otherwise noted. HP software and firmware products that are designated by HP for use with a hardware product, when properly installed on that hardware product, are warranted not to fail to execute their programming instructions due to defects in materials and workmanship.

For a complete and detailed warranty statement please see the *HP Test System and VXI Products Data Book* or visit the HP Website at <http://www.hp.com/go/vxi>.

Website Directory

HP VXI Product Information
<http://www.hp.com/go/vxi>

HP VXI Channel Partners
<http://www.hp.com/go/vxichanpart>

HP VEE Application Website
<http://www.hp.com/go/hpvee>

Data Acquisition and Control Website
http://www.hp.com/go/data_acq

HP Instrument Driver Downloads
http://www.hp.com/go/inst_drivers

Electronics Manufacturing Test Solutions
<http://www.hp.com/go/manufacturing>

For more information about Hewlett-Packard test & measurement products, applications, services, and for a current sales office listing, visit our website, <http://www.hp.com/go/tmdir>. You can also contact one of the following centers and ask for a test & measurement sales representative.

United States:

Hewlett-Packard Company
Test and Measurement Call Center
P.O. Box 4026
Englewood, CO 80155-4026
1 800 452 4844

Canada:

Hewlett-Packard Canada Ltd.
5150 Spectrum Way
Mississauga, Ontario L4W 5G1
(905) 206 4725

Europe:

Hewlett-Packard
European Marketing Centre
P.O. Box 999
1180 AZ Amstelveen
The Netherlands
(31 20) 547 9900

Japan:

Hewlett-Packard Japan Ltd.
Measurement Assistance Center
9-1, Takakura-Cho, Hachioji-Shi,
Tokyo 192, Japan
Tel: (81) 426 56 7832
Fax: (81) 426 56 7840

Latin America:

Hewlett-Packard
Latin American Region Headquarters
5200 Blue Lagoon Drive, 9th Floor
Miami, Florida 33126
U.S.A.
Tel: (305) 267-4245
(305) 267-4220
Fax: (305) 267-4288

Australia/New Zealand:

Hewlett-Packard Australia Ltd.
31-41 Joseph Street
Blackburn, Victoria 3130
Australia
1 800 629 485

Asia Pacific:

Hewlett-Packard Asia Pacific Ltd.
17-21/F Shell Tower, Times Square,
1 Matheson Street, Causeway Bay,
Hong Kong
Tel: (852) 2599 7777
Fax: (852) 2506 9285

Data Subject to Change
Copyright © April 1999
Hewlett-Packard Company
HP Publication No.: 5965-5561E