
500 MHz 10x Passive Voltage Oscilloscope Probes

CT3290RA & CT3290RA-PRO

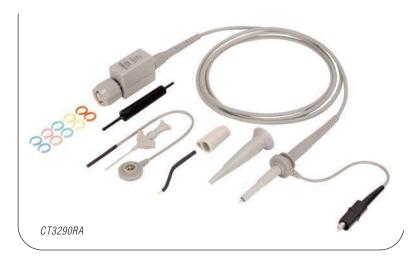

THE COMPACT 3.5[™] Oscilloscope Probe Delivers High-Frequency Performance in a Miniature Package:

Cal Test's CT3290RA family of 10x Passive Voltage Probes deliver 500 MHz performance with compatibility to high-end scopes from Agilent®, Tektronix® and others. For the users of Tektronix scopes featuring their P6139A probe (Series TDS3000B, MS0/DP04000 & DP07000), the CT3290RA offers a 3-fold replacement advantage:

- Comparable performance
- Accessory interchangeability
- Economical price

These are high quality oscilloscope probes with matching performance throughout the specified bandwidth (Fig. 1). They feature a durable one-piece construction, highly flexible cable, BNC's with readout actuator (sense pins) and accessories fully interchangeable with Tektronix's P6139A probes. Two models are available, CT3290RA, featuring a complement of standard accessories matching the name brand probe's offering and CT3290RA-PRO, with a full compliment of accessories ready to meet most any interface requirement. Both probes are economically priced and backed by a two (2) year warranty.

For additional product information, crossreference, or individual accessories, visit our web site at www.caltestelectronics.com.




Fig. 1 - Response Curves: CT3290RA vs. P6139A (3.3 GHz SA w/tracking generator)

Specifications and appearance subject to change without notice P329000 110807

1 - www.caltestelectronics.com : Oscilloscope Probes>Compact 3.5 Probes>Compact 3.5 Probe

FEATURES:

- 500 MHz bandwidth (-3 dB)
- Readout Actuator (Sense Pin)
- Compact 3.5mm body
- Industry compatible accessories
- Meets 300 V CAT II IEC 61010-031

BENEFITS:

- Quality replacement probe for high frequency oscilloscopes
- Cost effective
- Accessory compatibility to Tektronix Model P6139A probes

SPECIFICATIONS:

- Attenuation ratio 10x (10:1)
- Bandwidth DC to 500 MHz
- Rise time 0.7 nS
- Compensation range 8 to 18 pF
- Input resistance 10 $M\Omega$
- Input capacitance 8 pF
- Max. input voltage 600 V CAT I 300 V CAT II (DC + Peak AC)
 Derated with frequency
- Working temperature -10° to +55° C
- Cable length 1.3 meters (51")
- RoHS Compliant
- CE Listed



www.valuetronics.com

ORDER INFORMATION:

CT3290RA

500 MHz 10x Oscilloscope Probe Kit Accessories Included: (see table below)


CT3290RA-PRO

500 MHz 10x Oscilloscope Probe Kit with Deluxe Accessory Offering Accessories Included: (see table below)

KIT CONTENTS:

CONTACT INFO:

Toll Free: 888-256-2246 (US Only) Phone: 714-221-9330 Fax: 714-921-9849 22820 Savi Ranch Pkwy Yorba Linda, CA 92887-4610 USA www.caltestelectronics.com

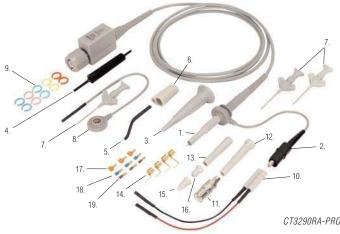

CT3290RA-PRO pictured

Itm.	Description	Model	CT3290RA	CT3290RA-PRO
1	Attenuator Tip Cover	CT3646-8	1	1
2	Slip-on GND Lead w/Alligator Clip	CT3645-12-8	1	1
3	Sprung Hook, Grey	CT3647-8	1	1
4	Deluxe Trimmer Tool	CT3648	1	1
5	Low Impedance Ground Tip	CT3649	1	1
6	Ground Collar	CT3650-8	1	1
7	SMT IC Test Clip, Grey	CT3659-8	1	3
8	Slip-on GND Lead w/0.6 mm Jack	CT3661-15-8	1	1
9	Identifier Rings (5 x 2 colors)	CT3662	1	1
10	Twin Lead Adapter, 3.5mm	CT3678 (1)	-	1
11	BNC Adapter, 3.5 mm	CT3655	-	1
12	Cover Shell (no Slip-on GND)	CT3672 ⁽²⁾	-	1
13	Cover Shell (w/ Slip-on GND)	CT3652-8	-	1
14	Probe Tip GNDs (0.1, 0.2, 0.3 & 0.4")	CT3672 ⁽³⁾	-	1
15	IC Tip Insulator	CT3654-8	-	1
16	Tip Insulator	CT3653-8	-	1
17	IC Lead Combs, 0.050" (Yellow)	CT3675 ⁽⁴⁾	-	3
18	IC Lead Combs, 0.025" (Blue)	CT3676 (4)	-	3
19	IC Lead Combs, 0.5mm (Red)	CT3677 (4)	-	3

Specifications and appearance subject to change without notice P329000 110807

2 - www.caltestelectronics.com : Oscilloscope Probes>Compact 3.5 Probes>Compact 3.5 Probe

(1) Twin Lead Adapter part number includes two (2) SMT IC Test Clips.

(2) Cover Shell part number includes two (2) each of Probe Tip Gounds (0.1, 0.2, 0.3 & 0.4").

(3) Kit consists of two (2) each of Probe Tip Grounds (0.1, 0.2, 0.3 & 0.4") plus Cover Shell (no Slip-on GND).

(4) Replacement part numbers consist of twelve (12) each.

Copyright © 2007, Cal Test Electronics, Inc. All rights reserved. Information in this publica-tion supersedes that in all previously pub-lished material. Trade names referenced are the service marks, trademarks or registered trademarks of their respective companies.



www.valuetronics.com