Advance Spectrum Analyzer Kit - Engineer

CT3741



FEATURES:

- Analyzers to 9 GHz
- High Quaity Interconnection Kit
- Precision N-type Attenuator
- High Frequency N-type Cable
- · Gold Plated Contacts
- Low SWR
- · Storage Pouch

ADVANCED INTERCONNECTION KIT FOR RF MEASUREMENTS WITH SPECTRUM ANALYZERS:

Cal Test's advanced spectrum analyzer accessory kit, model CT3741, designed for analyzers up to 9 GHz, provide users the necessary interconnection cables and adapters to begin instrument applications.

The kit consists of 1 each, 1-meter BNC and N-Type cable assemblies, 5 between- and in-series BNC, N-Type and SMA coaxial adapters, 1 BNC 50Ω terminator, and 1, 10 dB N-Type attenuator, just the right accessories for design work, performance verification or calibration processes.

Model CT3741, Advanced Spectrum Analyzer Kit is suitable for instruments from Advantest®, Agilent®, B&K Precision®, Rohde & Schwarz®, Tektronix® and many others. Find the recommended instrument for model CT3741, or Cal Test's others spectrum analyzer kits...

CT3739 - Spectrum Analyzer Kit - Technician

CT3740 - Enhanced Spectrum Analyzer Kit - Engineer

... at our web site www.caltestelectronics.com.

APPLICATIONS:

- R&D Laboratories
- Production Test Stations
- Service & Repair Facilities
- Educational Test Benches
- RF Field Testing

Specifications and appearance subject to change without notice $P374100\ 110408$

1 - www.caltestelectronics.com




ORDER **I**NFORMATION:

CT3741

Advanced Spectrum Analyzer Kit - Engineer

KIT CONTENTS:

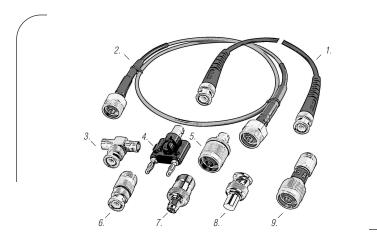

Itm	Description	Model	Qty.	Frequency Range	VSWR Max.
1.	BNC Cable Assembly, 100cm (40")	CT2942-100	1	DC - 1 GHz	1.20:1 @ 1 GHz
2.	N Type Cable Assembly, 100cm (40")	CT3331-100	1	DC - 4 GHz	1.30:1 @ 4 GHz
3.	BNC Tee, female-male-female	CT2411	1	DC - 4 GHz	N/A
4.	BNC female to Double Banana Plugs	CT2939	1	N/A	N/A
5.	BNC female to N Type male	CT2762	1	DC - 4 GHz	1.30:1 @ 4 GHz
6.	BNC male to N Type female	CT2763	1	DC - 4 GHz	1.30:1 @ 4 GHz
7.	N Type female to SMA male	CT3390	1	DC - 4 GHz	1.30:1 @ 4 GHz
8.	BNC male Terminator, 50 Ω , 1/2 W	CT3334-50	1	DC - 500 MHz	N/A
9.	N Type Attenuator, 10 dB, 2W	CT3353-10	1	DC - 4 GHz	1.25:1 @ 4 GHz

CONTACT INFO:

Toll Free: 888-256-2246 (US Only)

Phone: 714-221-9330 Fax: 714-921-9849 22820 Savi Ranch Pkwy

Yorba Linda, CA 92887-4610 USA www.caltestelectronics.com

SPECIFICATIONS:

- Impedance 50 Ω
- Frequency Range see table
- VSWR Max see table
- Working temperature -20° to +80° C
- Connectors: BNC
 Body Brass, Nickel Plated
 Dielectric PTFE & Delrin®
 Center Contact Brass, Gold Plated

Copyright © 2008, Cal Test Electronics, Inc. All rights reserved. Information in this publication supersedes that in all previously published material. Trade names referenced are the service marks, trademarks or registered trademarks of their respective companies.

Specifications and appearance subject to change without notice $P374100\ 110408$

2 - www.caltestelectronics.com

