



The PEL-2004A and PEL-2002A are multiple channel, programmable DC electronic loads with a modularized structure. The PEL-2000A Series is designed to meet the continuing shift toward high speed operation in today's semiconductor market. As the power supply units, DC-DC converters, and batteries that drive semiconductor circuits need to follow this shift, power supply design, quality inspection and characteristic certification using high-speed performance loads have become necessary. The PEL-2000A Series includes two types of mainframes and 4 types of load modules to accommodate users' requirements in a flexible manner. Any load module combination can be used with a mainframe to tailor a test system based on the number of channels, and the maximum load power, voltage and current of each channel. Multiple loads can be connected in parallel to provide a higher-power load to test higher power supply outputs. This flexibility significantly reduces the investment needed for future projects that have differed power requirements.

PEL-2004A is a 4-slot mainframe with a master control unit to hold 4 load modules, while PEL-2002A is a 2-slot mainframe with master control unit to hold 2 load modules. When PEL-2004A is configured with 4 load modules rated at 350W each, the PEL-2000A series is able to sink up to 1.4kVA of power.

For higher load capacities, mainframes can be linked together in parallel with standard MIL 20-pin connectors. A maximum of 5 mainframes, including one master and 4 slaves can be chained together to create a total load capacity of 7kW for high current and high power applications. Using 4 dual channel load modules, PEL-2004A is able to test 8 power supply outputs simultaneously.

The Sequence function allows each channel to change its load sink according to a predefined sequence at a rate of up to 100 $\mu$ s per step. Each sequence is able to run concurrently, under the control of one clock. This is one of the most powerful features of the PEL-2000A Series as it is able to realistically simulate a multi-output power supply load. Under Dynamic mode, the load current or load resistance pulses between two preset levels at a pre-defined speed up to 25 $\mu$ s per step. This is often used as the standard test procedure to verify the response of a power supply to quick load changes. Most remarkably, multiple load channels can be connected in parallel to run Dynamic tests synchronously under a single clock. This Parallel Dynamic functionality gives the flexibility to perform dynamic tests for a high-power power supply without the need of another high-power load.

The PEL-2000A Series includes a number of protection modes: Over Current Protection (OCP), Over Voltage Protection (OVP), Over Power Protection (OPP), Reverse Voltage Protection (RVP), and Under Voltage Protection (UVP). The protection modes are useful to protect both the load modules and the DUT(s). A buzzer can be set for when a protection setting has been tripped. When a protection mode has been tripped, the load unit will display an alarm and stop sinking current/voltage. When a load unit is operating in CR or CV mode, the unit may need Over Current Protection to prevent excessive current being sunk. Over Current Protection stops the load from sinking more current than its recommended limit and prevents the load from burn-out damage. Over Voltage Protection is used to limit the amount of voltage sunk. If the OVP trips, the PEL-Series load will stop sinking voltage. Over Power Protection is used when the input power exceeds the specifications of the load. When OPP is tripped, the power will cease to be sunk. Reverse Voltage Protection prevents reverse voltage damage to the PEL-2000A Series up to the specified rating. When Reverse Voltage Protection has been tripped, an alarm tone will sound until the reverse voltage is removed. Under Voltage Protection will turn off the load when the voltage drops below a set limit.

The Go/NoGo function is available to monitor test results all the time. When a test result goes beyond a preset limit range, a "No Go" indication will be shown on the display and a "No Go" signal can be sent out through the D-SUB interface for external device control. This Go/NoGo function is available for CC mode, CV mode and CR mode. Under "Program" mode, 12 programs each containing 10 panel-setup memories, can be edited to create work routines for repetitive tests. After a program has been executed, the results of all test steps, along with the Go/NoGo judgments, will be shown on the screen. For external control and system configuration, the PEL series has USB and RS232 interfaces as standard and GPIB as an option. The LabView driver and Data Logging PC software are both supported for all the available interfaces. Each channel has an analog control/monitoring connector on the rear panel to externally turn a load on/off and to externally monitor load input current and voltage.

## PEL-2000A Series

### FEATURES

- \* Sequence Function to do High Speed Load Simulations
- \* Flexible Configuration with Mainframes and Plug-in Modules
- \* Multiple Independent Load Inputs up to 8 Channels in a Mainframe
- \* Parallel Connection of Inputs for Higher Load Capacity
- \* Program Mode to Create Work Routines for Repetitive Tests
- \* OPP/OCP/OVP/OTP/RVP/UVP Protections
- \* External Channel Control/Monitoring via Analog Control Connector
- \* Multiple-Interface USB Device/Host, RS-232C, and GPIB (Optional)



Rear Panel

SPECIFICATIONS					
	PEL-2020A		PEL-2030A		
<b>CHANNEL RANGE</b>	L/R Low	L/R High	Left N/A	Right Low	Right High
<b>POWER</b>	100W	100W	30W	250W	250W
<b>CURRENT</b>	0~2A	0~20A	0~5A	0~4A	0~40A
<b>VOLTAGE</b>	0~80V	0~80V	1~80V	1~80V	1~80V
<b>MIN.OPERATING VOLTAGE(DC)(Typ.)</b>	0.4V at 2A 0.2V at 1A	0.8V at 20A 0.4V at 10A	0.8V at 5A 0.4V at 2.5A	0.4V at 4A 0.2V at 2A	0.8V at 40A 0.4V at 20A
<b>STATIC MODE</b>					
<b>CONSTANT CURRENT MODE</b>					
Operating Range	0~2A	0~20A	0~5A	0~4A	0~40A
Setting Range	0~2.04A	0~20.4A	0~5.1A	0~4.08A	0~40.8A
Resolution	0.1mA	1mA	0.125mA	0.1mA	1mA
Accuracy	±(0.1%set + 0.1%F.S.)	±(0.1%set + 0.2%F.S.)	±(0.1%set + 0.1%F.S.)	±(0.1%set + 0.1%F.S.)	±(0.1%set + 0.2%F.S.)
<b>CONSTANT RESISTANCE MODE</b>					
Operating Range	0.075Ω~300Ω(100W/16V) 3.75Ω~15K(100W/80V)	0.3Ω~1.2KΩ(30W/16V) 15Ω~60K(30W/80V)	0.3Ω~1.2KΩ(30W/16V) 15Ω~60K(30W/80V)	0.0375Ω~150Ω(250W/16V) 1.875Ω~7.5K(250W/80V)	0.0375Ω~150Ω(250W/16V) 1.875Ω~7.5K(250W/80V)
Setting Range	0.075Ω~300Ω(100W/16V) 3.75Ω~15K(100W/80V)	0.3Ω~1.2KΩ(30W/16V) 15Ω~60K(30W/80V)	0.3Ω~1.2KΩ(30W/16V) 15Ω~60K(30W/80V)	0.0375Ω~150Ω(250W/16V) 1.875Ω~7.5K(250W/80V)	0.0375Ω~150Ω(250W/16V) 1.875Ω~7.5K(250W/80V)
Resolution	0.333mS(100W/16V) 6.667μS(100W/80V)	83.333(30W/16V) 1.666μS(30W/80V)	83.333(30W/16V) 1.666μS(30W/80V)	0.666mS(250W/16V) 13.333μS(250W/80V)	0.666mS(250W/16V) 13.333μS(250W/80V)
Accuracy (with ≥ 2.5V at input)	300Ω: ±(0.2%set+0.1S) 15KΩ: ±(0.1%set+0.01S)	1.2KΩ:±(0.2%set+0.1S) 60KΩ:±(0.1%set+0.01S)	1.2KΩ:±(0.2%set+0.1S) 60KΩ:±(0.1%set+0.01S)	150Ω:±(0.2%set+0.1S) 7.5KΩ:±(0.1%set+0.01S)	150Ω:±(0.2%set+0.1S) 7.5KΩ:±(0.1%set+0.01S)
<b>CONSTANT VOLTAGE+CONSTANT CURRENT MODE</b>					
Operating Range	1~80V				
Setting Range	0~81.6V				
Resolution	2mV				
Accuracy	±(0.05%set + 0.1%F.S.)				
Current Setting Range	0~20A		0~5A	0~40A	
Resolution	1mA		0.125mA	1mA	
Accuracy	±(0.1%set + 0.2%F.S.)				
<b>CONSTANT POWER MODE</b>					
Operating Range*	1~10W	1~100W	1~30W	1~25W	1~250W
Setting Range	0~10.2W	0~102W	0~30.6W	0~25.5W	0~255W
Resolution	1mW	10mW	1mW	1mW	10mW
Accuracy	±(0.5%set + 0.5%F.S)	±(0.5%set + 0.5%F.S)	±(0.5%set + 0.5%F.S)	±(0.5%set + 0.5%F.S)	±(0.5%set + 0.5%F.S)
<b>DYNAMIC MODE</b>					
<b>T1&amp;T2</b>	0.025mS~10mS/Res:1μS		0.025mS~10mS/Res:1μS		
Accuracy	10mS~30S/Res:1mS 1μS/1mS ± 100ppm		10mS~30S/Res:1mS 1μS/1mS ± 100ppm		
<b>CONSTANT CURRENT MODE</b>					
Slew Rate (±10%set+15μS)	0.32~80mA/μS	3.2~800mA/μS	0.8~200mA/μS	0.64~160mA/μS	6.4~1600mA/μS
Slew Rate Resolution	0.32mA/μS	3.2mA/μS	0.8mA/μS	0.64mA/μS	6.4mA/μS
Slew Rate Accuracy of Setting	±(10%+15μs)	±(10%+15μs)	±(10%+15μs)	±(10%+15μs)	±(10%+15μs)
Current Setting Range	0~2A	0~20A	0~5A	0~4A	0~40A
Current Resolution	0.1mA	1mA	0.125mA	0.1mA	1mA
Current Accuracy	±0.4% F.S.	±0.4% F.S.	±0.4%F.S.	±0.4%F.S.	±0.4%F.S.
<b>CONSTANT RESISTANCE MODE</b>					
Slew Rate	0.32~80mA/μS	3.2~800mA/μS	0.8~200mA/μS	0.64~160mA/μS	6.4~1600mA/μS
Slew Rate Resolution	0.32mA/μS	3.2mA/μS	0.8mA/μS	0.64mA/μS	6.4mA/μS
Slew Rate Accuracy of setting	±(10%+15μs)	±(10%+15μs)	±(10%+15μs)	±(10%+15μs)	±(10%+15μs)
Resistance Setting Range	0.075Ω~300KΩ(100W/16V) 3.75Ω~15K(100W/80V)	0.3Ω~1.2KΩ(30W/16V) 15Ω~60K(30W/80V)	0.3Ω~1.2KΩ(30W/16V) 15Ω~60K(30W/80V)	0.0375Ω~150KΩ(250W/16V) 1.875Ω~7.5K(250W/80V)	0.0375Ω~150KΩ(250W/16V) 1.875Ω~7.5K(250W/80V)
Resistance Resolution	0.333mS(100W/16V) 6.667μS(100W/80V)	83.333mS(30W/16V) 1.666μS(30W/80V)	83.333mS(30W/16V) 1.666μS(30W/80V)	0.666mS(250W/16V) 13.333μS(250W/80V)	0.666mS(250W/16V) 13.333μS(250W/80V)
Resistance Resolution Accuracy	300Ω:±(0.5%set+0.1S) 15KΩ:±(0.5%set+0.01S)	1.2KΩ:±(0.5%set+0.1S) 60KΩ:±(0.5%set+0.01S)	1.2KΩ:±(0.5%set+0.1S) 60KΩ:±(0.5%set+0.01S)	150Ω:±(0.5%set+0.1S) 7.5KΩ:±(0.5%set+0.01S)	150Ω:±(0.5%set+0.1S) 7.5KΩ:±(0.5%set+0.01S)
<b>MEASUREMENT</b>					
<b>VOLTAGE READBACK</b>					
Range	0~16V	0~80V	0~16V,0~80V	0~16V	0~80V
Resolution	0.32mV	1.6mV	0.32mV,1.6mV	0.32mV	1.6mV
Accuracy	±(0.025%set + 0.025%F.S.)				
<b>CURRENT READBACK</b>					
Range	0~2A	0~20A	0~5A	0~4A	0~40A
Resolution	0.04mA	0.4mA	0.1mA	0.08mA	0.8mA
Accuracy	±(0.05%set + 0.05%F.S.)				
<b>POWER READBACK</b>					
Range	0~10W	0~100W	0~30W	0~25W	0~250W
Accuracy	±(0.1%set + 0.1%F.S.*1)			*1 : Power F.S.=Vrange F.S. x Irange F.S.	
<b>PROTECTION</b>					
<b>OVER POWER PROTECTION</b>					
Range	1~102W		1~30.6W	1~255W	
Resolution	0.5W		0.15W	1.25W	
Accuracy	±(2%set+0.25%F.S.)		±(2%set+0.25%F.S.)		
<b>OVER CURRENT PROTECTION</b>					
Range	0~20.4A		0~5.1A	0~40.8A	
Resolution	0.05A		0.0125A	0.1A	
Accuracy	±(2%set+0.25%F.S.)		±(2%set+0.25%F.S.)		
<b>OVER VOLTAGE PROTECTION</b>					
Range	1~81.6V		1~81.6V	1~81.6V	
Resolution	0.2V		0.2V	0.2V	
Accuracy	±(2%set+0.25%F.S.)		±(2%set+0.25%F.S.)		
Over Temperature Protection	≒ 85℃		≒ 85℃		
<b>RATED POWER PROTECTION</b>					
Value	110W		33W	275W	
Accuracy	±(2%set)		±(2%set)		
<b>GENERAL</b>					
<b>SHORT CIRCUIT</b>					
Current(CC)	≒ 2.2/2A	≒ 22/20A	≒ 5.5/5A	≒ 4.4/4A	≒ 44/40A
Voltage(CV)	0V	0V	0V	0V	0V
Resistance(CR)	≒ 3.75Ω	≒ 0.075Ω	≒ 15Ω, ≒ 0.3Ω	≒ 1.875Ω	≒ 0.0375Ω
<b>INPUT RESISTANCE(LOAD OFF)</b>	500KΩ(Typical)				
<b>POWER SOURCE</b>	AC100V ~ 230V ± 10% ; 50Hz / 60Hz ± 2Hz				
<b>WEIGHT</b>	Approx. 3.8 kg				
<b>DIMENSIONS &amp; WEIGHT(PEL-2002A)</b>	272(W) x 200(H) x 581(D) mm ; Approx. 16.1kg(full modules)				
<b>DIMENSIONS &amp; WEIGHT(PEL-2004A)</b>	435(W) x 200(H) x 581(D) mm ; Approx. 24.8kg(full modules)				

SPECIFICATIONS				
	PEL-2040A		PEL-2041A	
<b>CHANNEL RANGE</b>	One channel Low	One channel High	One channel Low	One channel High
<b>POWER</b>	350W	350W	350W	350W
<b>CURRENT</b>	0~7A	0~70A	0~1A	0~10A
<b>VOLTAGE</b>	0~80V	0~80V	0~500V	0~500V
<b>MIN.OPERATING VOLTAGE(DC) (Typ.)</b>	0.4V at 7A 0.2V at 3.5A	0.8V at 70A 0.4V at 35A	0.4V at 1A 0.2V at 0.5A	0.8V at 10A 0.4V at 5A
<b>STATIC MODE</b>				
<b>CONSTANT CURRENT MODE</b>				
Operating Range	0~7A	0~70A	0~1A	0~10A
Setting Range	0~7.14A	0~71.4A	0~1.02A	0~10.2A
Resolution	0.2mA	2mA	0.05mA	0.5mA
Accuracy	±(0.1%set+0.1%F.S.)	±(0.1%set+0.2%F.S.)	±(0.1%set+0.1%F.S.)	±(0.1%set+0.2%F.S.)
<b>CONSTANT RESISTANCE MODE</b>				
Operating Range	0.025Ω~100Ω(350W/16V) 1.25Ω~5K(350W/80V)		1.25Ω~5KΩ(350W/125V) 50Ω~200K(350W/500V)	
Setting Range	0.025Ω~100Ω(350W/16V) 1.25Ω~5K(350W/80V)		1.25Ω~5Ω(350W/125V) 50Ω~200K(350W/500V)	
Resolution	1mS(350W/16V) 20μS(350W/80V)		20μS(350W/125V) 0.5μS(350W/500V)	
Accuracy (with ≥ 2.5V at input)	100Ω: ±(0.2%set+0.1S) 5KΩ: ±(0.1%set+0.01S)		5KΩ: ±(0.2%set+0.02S) 200KΩ: ±(0.1%set+0.005S)	
<b>CONSTANT VOLTAGE+CONSTANT CURRENT MODE</b>				
Operating Range	1~80V		2.5~500V	
Setting Range	0~81.6V		0~510V	
Resolution	2mV		10mV	
Accuracy	±(0.05%set + 0.1%F.S.)		±(0.05%set + 0.1%F.S.)	
Current Setting Range	0~70A		0~10A	
Resolution	2mA		0.5mA	
Accuracy	±(0.1%set + 0.2%F.S)			
<b>CONSTANT POWER MODE</b>				
Operating Range*	1~35W	1~350W	1~35W	1~350W
Setting Range	0~35.7W	0~357W	0~35.7W	0~357W
Resolution	1mW	10mW	1mW	10mW
Accuracy	±(0.5%set+0.5%F.S)	±(0.5%set+0.5%F.S)	±(0.5%set+0.2%F.S)	±(0.5%set+0.5%F.S)
<b>DYNAMIC MODE</b>				
<b>T1&amp;T2</b>				
Accuracy	0.025mS~10mS/Res:1μS 10mS~30S/Res:1mS 1μS/1mS±100ppm		0.025mS~10mS/Res:1μS 10mS~30S/Res:1mS 1μS/1mS±100ppm	
<b>CONSTANT CURRENT MODE</b>				
Slew Rate (±10%set+15μS)	0.001~0.28A/μS	0.01~2.8A/μS	0.16~40mA/μS	1.6~400mA/μS
Slew Rate Resolution	0.001A/μS	0.01A/μS	0.16mA/μS	1.6mA/μS
Slew Rate Accuracy of Setting	±(10%+15μs)	±(10%+15μs)	±(10%+15μs)	±(10%+15μs)
Current Setting Range	0~7A	0~70A	0~1A	0~10A
Current Resolution	0.2mA	2mA	0.05mA	0.5mA
Current Accuracy	±0.4% F.S.	±0.4% F.S.	±0.4%F.S.	±0.4%F.S.
<b>CONSTANT RESISTANCE MODE</b>				
Slew Rate	0.001~0.28A/μS	0.01~2.8A/μS	0.16~40mA/μS	1.6~400mA/μS
Slew Rate Resolution	0.001A/μS	0.01A/μS	0.16mA/μS	1.6mA/μS
Slew Rate Accuracy of setting	±(10%+15μs)	±(10%+15μs)	±(10%+15μs)	±(10%+15μs)
Resistance Setting Range	0.025Ω~100Ω(350W/16V) 1.25Ω~5K(350W/80V)		1.25Ω~5KΩ(350W/125V) 50Ω~200K(350W/500V)	
Resistance Resolution	1mS(350W/16V) 20μS(350W/80V)		20μS(350W/125V) 0.5μS(350W/500V)	
Resistance Resolution	100Ω: ±(0.5%set + 0.1S) 5KΩ: ±(0.5%set + 0.01S)		5KΩ: ±(0.5%set + 0.02S) 200KΩ: ±(0.5%set + 0.005S)	
Resistance Accuracy				
<b>MEASUREMENT</b>				
<b>VOLTAGE READBACK</b>				
Range	0~16V	0~80V	0~125V	0~500V
Resolution	0.32mV	1.6mV	2.5mV	10mV
Accuracy	±(0.025%set + 0.025%F.S.)			
<b>CURRENT READBACK</b>				
Range	0~7A	0~70A	0~1A	0~10A
Resolution	0.14mA	1.4mA	0.02mA	0.2mA
Accuracy	±(0.05%set + 0.05%F.S.)			
<b>POWER READBACK</b>				
Range	0~35W	0~350W	0~35W	0~350W
Accuracy	±(0.1%set + 0.1%F.S.*1)		*1 : Power F.S.=Vrange F.S. x Irange F.S.	
<b>PROTECTION</b>				
<b>OVER POWER PROTECTION</b>				
Range	1~357W		1~357W	
Resolution	1.75W		1.75W	
Accuracy	±(2%set+0.25%F.S.)		±(2%set+0.25%F.S.)	
<b>OVER CURRENT PROTECTION</b>				
Range	0~71.4A		0~10.2A	
Resolution	0.175A		0.025A	
Accuracy	±(2%set+0.25%F.S.)		±(2%set+0.25%F.S.)	
<b>OVER VOLTAGE PROTECTION</b>				
Range	1~81.6V		1~510V	
Resolution	0.2V		1.25V	
Accuracy	±(2%set+0.25%F.S.)		±(2%set+0.25%F.S.)	
Over Temperature Protection	≒ 85°C		≒ 85°C	
<b>RATED POWER PROTECTION</b>				
Value	385W		385W	
Accuracy	±(2%set)		±(2%set)	
<b>GENERAL</b>				
<b>SHORT CIRCUIT</b>				
Current(CC)	≒ 7.7/7A	≒ 77/70A	≒ 1.1/1A	≒ 11/10A
Voltage(CV)	0V	0V	0V	0V
Resistance(CR)	≒ 1.25Ω	≒ 0.025Ω	≒ 15Ω, ≒ 50Ω	≒ 1.25Ω
<b>INPUT RESISTANCE(LOAD OFF)</b>				
	500KΩ(Typical)			
<b>POWER SOURCE</b>				
	AC100V ~ 230V ± 10% ; 50Hz / 60Hz ± 2Hz			
<b>WEIGHT</b>				
	Approx. 3.8 kg			
<b>DIMENSIONS &amp; WEIGHT(PEL-2040A)</b>				
	272(W) x 200(H) x 581(D) mm ; Approx. 16kg(full modules)			
<b>DIMENSIONS &amp; WEIGHT(PEL-2041A)</b>				
	435(W) x 200(H) x 581(D) mm ; Approx. 28.4kg(full modules)			

## ORDERING INFORMATION

PEL-2020A	Dual Channel Module, (0~80V, 0~20A, 100W) x 2
PEL-2030A	Dual Channel Module, (1~80V, 0~5A, 30W)+(1~80V, 0~40A, 250W)
PEL-2040A	Single Channel Module, (0~80V, 0~70A, 350W)
PEL-2041A	Single Channel Module, (0~500V, 0~10A, 350W)
PEL-2004A	4-Slot Programmable D.C. Electronic Load Mainframe
PEL-2002A	2-Slot Programmable D.C. Electronic Load Mainframe

## ACCESSORIES

PEL-2002A/2004A	User Manual x1, Power Cord x1
PEL-2002A/2030A/2040A/2041A	GTL-120 Test Lead x 1, GTL-121 Sense Lead x 1
PEL-003 x 3 (PEL-2004A); PEL-003 x 1 (PEL-2002A)	

## OPTIONAL ACCESSORIES

PEL-001	GPIB Card
PEL-002	PEL-2000A Series Rack Mount Kit
PEL-003	Panel Cover
GTL-251	GPIB-USB-HS(High Speed)
GTL-248	GPIB Cable (2m)
GTL-249	Frame Link Cable
GTL-246	USB Cable, USB 2.0 A-B TYPE CABLE, 4P
GTL-232	RS-232C Cable, 9-pin, F-F Type, null modem, 2000mm

Specifications subject to change without notice. EL-2000AGD1DH

## MODULARIZED STRUCTURE/PROGRAM & INTERFACE

### Modularized Structure


PEL-2004A is a 4-slot mainframe with a master control unit made to hold 4 load modules, and PEL-2002A is a 2-slot mainframe with a master control unit made to hold 2 load modules. The modularized structure of the PEL-2000A Series allows any combination of mainframe and load module (PEL-2020A, PEL-2030A, PEL-2040A, PEL-2041A) to be integrated into a custom-tailored system.

Multiple loads within the same mainframe can be connected in parallel to perform both static and dynamic tests. This flexibility makes the PEL-2000A Series a very cost-effective instrument for testing a broad range of power supply outputs.


### Program & Interface

The PEL-2000A Series supports a total of 12 different programs and 10 sequences to each program. With a total of up to 120 different configurations. For external control and system configuration, the PEL-Series has USB and RS-232 interfaces as standard and GPIB as an option. The LabView driver and Data Logging PC software are supported for all the interfaces available. Each channel has an analog control/monitoring connector to externally turn a load on/off and to externally monitor load input current and voltage.

## AUTOMATICALLY SEQUENCE FUNCTION

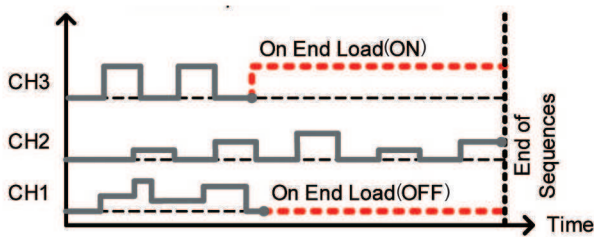

Sequence - On End Load



The figure above shows the current waveform of a simulation using the sequence function.

The Sequence function allows each channel to change its load sink according to a predefined sequence at a rate of up to 100 $\mu$ s per step. Each sequence is able to run concurrently, under the control of one clock. This is one of the most powerful features of the PEL-2000A Series as it is able to realistically simulate a multi-output power supply load. Under Dynamic mode, the load current or load resistance pulses between two preset levels at a pre-defined speed up to 25 $\mu$ s per step. This is often used as the standard test procedure to verify the response of a power supply to quick load changes.

The picture above is an example of a sequence used as a load profile for a single output switching power supply. A load profile is programmed to simulate the current drawn of a power supply load.

By using a current probe to acquire a current waveform, PEL-2000A is able to evaluate the performance of a power supply based on the load sequence that is programmed. An oscilloscope is then used to display the result.

Global Headquarters

### GOOD WILL INSTRUMENT CO., LTD.

No.7-1, Jhongsing Road, Tucheng Dist., New Taipei City 236, Taiwan  
T +886-2-2268-0389 F +886-2-2268-0639  
E-mail: marketing@goodwill.com.tw

China Subsidiary

### GOOD WILL INSTRUMENT (SUZHOU) CO., LTD.

No. 521, Zhujiang Road, Snd, Suzhou Jiangsu 215011 China  
T +86-512-6661-7177 F +86-512-6661-7277  
E-mail: marketing@instek.com.cn

Malaysia Subsidiary

### GOOD WILL INSTRUMENT (M) SDN. BHD.

27, Persiaran Mahsuri 1/1, Sunway Tunas,  
11900 Bayan Lepas, Penang, Malaysia  
T +604-6309988 F +604-6309989  
E-mail: sales@goodwill.com.my

Europe Subsidiary

### GOOD WILL INSTRUMENT EURO B.V.

De Run 5427A, 5504DG Veldhoven, THE NETHERLANDS  
T +31 (0)40-2557790 F +31 (0)40-2541194

U.S.A. Subsidiary

### INSTEK AMERICA CORP.

5198 Brooks Street Montclair, CA 91763, U.S.A.  
T +1-909-399-3535 F +1-909-399-0819  
E-mail: sales@instekamerica.com

Japan Subsidiary

### TEXIO TECHNOLOGY CORPORATION.

7F Towa Fudosan Shin Yokohama Bldg., 2-18-13 Shin  
Yokohama, Kohoku-ku, Yokohama, Kanagawa,  
222-0033 Japan  
T +81-45-620-2305 F +81-45-534-7181  
E-mail: info@texio.co.jp

Korea Subsidiary

### GOOD WILL INSTRUMENT KOREA CO., LTD.

#1406, Ace Hightech-City B/D 1Dong,  
Mullae-Dong 3Ga 55-20, Yeongduengpo-Gu, Seoul, Korea  
T +82-2-3439-2205 F +82-2-3439-2207  
E-mail : gwinstek@gwinstek.co.kr

**GW INSTEK**  
Simply Reliable



www.gwinstek.com



www.facebook.com/GWInstek