





Product no.: 512NW

Side cutter, same as 512N, with optional safety device "wire catcher"



This is the most widely used head shape.



Fits for all cutting applications where easy access is given



It is robust and offers the highest cutting capacity.








source images

## The Perfect Cut - Strong, sharp and precise, every time

The Weller Erem Series 500 Micro is a full range of medium sized, robust, precision cutters with a wide range of head shapes. The cutters are manufactured from high grade tool steel. The cutting edges are hardened to Rockwell 63-65 HRC. The precision cutters have a nonreflecting surface, are ESD safe and resharpable.

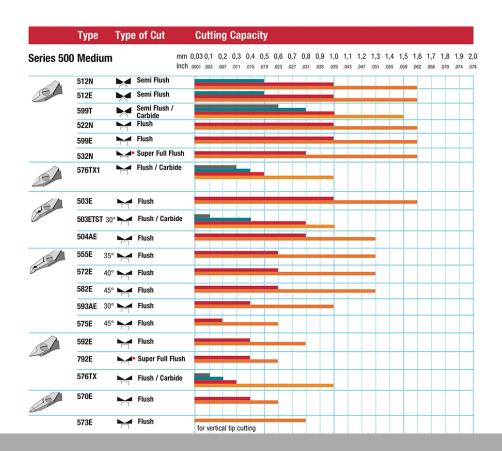











Length mm 115  Length of cutting edges mm 12  Head width mm 11  Head thickness mm 6  Head length mm 19  Max. cutting capability – hard wire mm 00,5  Weight in oz 2.363  Length of cutting edges Inches 0.472  Head width Inches 0.433  Head thickness Inches 0.236  Head length Inches 0.748  ESD-safe 0  Cut Semi-flush  Max. cutting capability – 001,0	
Head width mm  Head thickness mm  6  Head length mm  19  Max. cutting capability – hard wire mm  Weight in oz  Length of cutting edges Inches  Head width Inches  Head thickness Inches  Head length Inches  ESD-safe  Out  11  11  11  11  12  13  14  15  15  16  17  18  19  19  10  10  10  10  10  10  10  11  11	
Head thickness mm  Head length mm  19  Max. cutting capability – hard wire mm  Weight in oz  Length of cutting edges Inches  Head width Inches  0.472  Head thickness Inches  Head length Inches  ESD-safe  Out  Semi-flush	
Head length mm  Max. cutting capability – hard wire mm  Weight in oz  Length of cutting edges Inches  Head width Inches  Head thickness Inches  Head length Inches  ESD-safe  Out  19  Ø 0,5  Ø 0,5  Ø 0,5  Ø 0,5  Ø 0,472  Length of cutting edges Inches  0.472  Head width Inches  0.433  Head thickness Inches  0.748  ESD-safe  On  Semi-flush	
Max. cutting capability – hard wire mm  Weight in oz  Length of cutting edges Inches  Head width Inches  Head thickness Inches  Head length Inches  ESD-safe  Out  Out  Out  Out  Out  Out  Out  Ou	
wire mmWeight in oz2.363Length of cutting edges Inches0.472Head width Inches0.433Head thickness Inches0.236Head length Inches0.748ESD-safeonCutSemi-flush	
Length of cutting edges Inches  Head width Inches  0.433  Head thickness Inches  0.236  Head length Inches  ESD-safe  on  Cut  Semi-flush	
Head width Inches  0.433  Head thickness Inches  0.236  Head length Inches  0.748  ESD-safe  on  Cut  Semi-flush	
Head thickness Inches  D.236  Head length Inches  D.748  ESD-safe  On  Cut  Semi-flush	
Head length Inches 0.748  ESD-safe on Cut Semi-flush	
ESD-safe on Cut Semi-flush	
Cut Semi-flush	
Max cutting canability – Ø 1.0	
medium hardness mm	
Max. cutting capability – Ø 1,6 copper wire mm	
Length inches 4.528	
Weight in g 67	
Erem applications Microelectronic	