

## ARBITRARY FUNCTION GENERATOR



## AFG-2100/2000 Series

### FEATURES

- 0.1Hz ~ 5/12/25 MHz with in 1Hz Resolution
- Sine, Square, Ramp, Noise and Arbitrary Waveform
- 20MSa/s Sampling Rate, 10 bit Vertical Resolution and 4k point Memory for Arbitrary Waveform
- 1% ~ 99% Adjustable Duty Cycle for Square Waveform
- Waveform Parameter Setting Through Numeric Keypad Entry & Knob Selection
- Amplitude, DC Offset and Other Key Setting Information Shown on the 3.5" LCD Screen Simultaneously
- AM/FM/FSK Modulation, Sweep, and Frequency Counter functions (AFG-2100 only)
- USB Device Interface for Remote Control and Waveform Editing
- PC Arbitrary Waveform Editing Software



AFG-2000 Series Front

### APPLICATIONS

- Audio Products Frequency Characteristics Measurement
- Pulse Signal as Trigger or Synchronization Signal for Electronic Product Testing
- Pulse Noise Simulation
- Reference Clock Signal of Electronic Device
- Vibration Signal Simulation
- Noise Simulation for Communication System Educational Lab

**GW INSTEK**  
Simply Reliable



### Innovation and Value in Waveform Design

The AFG-2100/2000 Series Arbitrary Function Generators are DDS based signal generators covering the output of Sine, Square, Ramp, Noise and 20MSa/s Arbitrary waveform. The 0.1Hz resolution and 1% ~ 99% adjustable duty cycle of Square(Pulse) waveform greatly extend its application range in various fields.

The AFG-2100/2000 Series includes 6 models in three frequency bands of 5MHz, 12MHz and 25MHz. Besides the features of AFG-2000, AFG-2100 also carries additional features of AM/FM/FSK Modulation, Sweep and Frequency Counter. The 3.5" color LCD will clearly display the digital waveform parameters set through front panel. The entire Series is equipped with USB Device interface for remote control and importing waveform data from PC.


#### Built-In Arbitrary Waveform Function

20MSa/s sampling rate, 10 bit vertical resolution and 4k point memory equip AFG-2100/2000 the arbitrary waveform capacity. User can create waveform by mean of either point by point input from front panel or PC software.



#### 1% Adjustable Duty Cycle of Square Wave

The AFG-2100/ 2000 Series provides 1% ~ 99% variable duty cycle for its square waveform output. This feature allows generating the pulse waveform to simulate a spike signal or a transient signal.

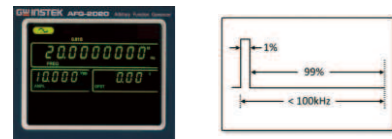

#### Fully Digital Entry Design

The fully digital entry design of AFG-2100/2000 Series improves the setting uncertainty of conventional Function Generator and therefore significantly increases the accuracy of its waveform output. The 3.5" LCD screen allows user to see the parameter value change in detail when the adjustment is in progress.



#### Amplitude and DC Offset Display

In addition to the setting parameters, the amplitude, DC offset values are also displayed on the LCD screen. Three amplitude units, Vpp, Vrms and dBm, can be selected and exchanged.




#### AM/FM/FSK, Sweep, Counter(AFG-2100 only)

AFG-2100 models are equipped with additional AM/FM/FSK Modulation, Sweep and Frequency Counter functions. The 150MHz frequency counter saves user the cost of purchasing a standalone frequency counter.



#### Arbitrary Waveform Editing Software

A free arbitrary waveform editing software is available which is used to edit the arbitrary waveform on PC. After completing the waveform editing, it can be downloaded to AFG through USB interface for waveform output.



AFG-2000/2100 Series

### SPECIFICATIONS

		AFG-2105	AFG-2112	AFG-2125	AFG-2005	AFG-2012	AFG-2025	
WAVEFORMS ARITRARY FUNCTION	Sample Rate Repetition Rate Waveform Length Amplitude Resolution	Sine, Square, Ramp 20 MSa/s 10MHz 4k point 10 bit						
FREQUENCY CHARACTERISTICS	Range Sine / Square Triangle, Ramp Resolution Stability Aging Tolerance	0.1Hz~5MHz	0.1Hz~12MHz	0.1Hz~25MHz	0.1Hz~5MHz	0.1Hz~12MHz	0.1Hz~25MHz	
OUTPUT CHARACTERISTICS	Amplitude Accuracy Resolution Flatness Units Offset Waveform Output Impedance Protection SYNC Output Level Impedance Rise or Fall Time	≤20MHz:1mVpp~10Vpp( into 50Ω);2mVpp~20Vpp(open-circuit) ≤25MHz:1mVpp~5Vpp( into 50Ω);2mVpp~10Vpp(open-circuit) ±1% of setting ±1 mVpp;(at 1 kHz,>10 mVpp) 0.1 mV or 3 digits ±1%(0.1dB)≤100kHz;± 3%(0.3dB)≤5MHz;± 5%(0.4dB)≤12MHz ±20%(2dB)≤20MHz;± 5% (0.4dB)≤25MHz;(sine wave relative to 1 kHz) Vpp, Vrms, dBm ±5 Vpk ac +dc (into 50Ω);±10Vpk ac +dc (Open circuit) 1% of setting + 2 mV+ 0.5% of amplitude 50Ω typical (fixed); > 10MΩ (output disabled) Short-circuit protected; Overload relay auto-matically disables main output TTL-compatible into>1kΩ 50Ω nominal ≤ 25ns						
SINEWAVE CHARACTERISTICS	Harmonic Distortion	-55dBc, DC~1MHz, Ampl>1Vpp ; -45dBc, 1MHz~5MHz, Ampl>1Vpp ; -30dBc, 5MHz~20MHz, Ampl>1Vpp						
SQUAREWAVE CHARACTERISTICS	Rise/Fall Time Overshoot Asymmetry Variable Duty Cycle	≤ 25ns at maximum output (into 50Ωload) < 5% 1% of period+1 ns 1%~99%≤100kHz; 10%~90%≤2MHz;20.0%~80.0%≤5MHz ; 40.0%~60.0%≤10MHz ; 50%≤ 25MHz ; (1% Resolution for full Frequency Range)						
RAMP CHARACTERISTICS	Linearity Variable Symmetry	< 0.1% of peak output 0%~100%(0.1% Resolution)						
AM MODULATION	Carrier Waveforms Modulating Waveforms Modulating Frequency Depth	Sine, Square, Triangle Sine, Square, Triangle 2 mHz to 20 kHz (Int);DC to 20KHz (Ext) 0% to 120.0%					-	
FM MODULATION	Carrier Waveforms Modulating Waveforms Modulating Frequency Deviation	Sine, Square, Triangle Sine, Square, Triangle 2 mHz to 20 kHz (Int);DC to 20KHz (Ext) DC to Max Frequency					-	
FSK	Sweep Time Carrier Waveforms Modulating Waveforms Internal Rate Frequency Range	1ms~500s Sine, Square, Triangle 50% duty cycle square 2mHz~20kHz 0.1Hz~Max Frequency					-	
SWEEP	Waveforms Type Start/Stop Frequency	Sine, Square, Triangle Linear or Logarithmic 0.1Hz to Max Frequency					-	
FREQUENCY COUNTER	Range Accuracy Time base Resolution Input Impedance Sensitivity	5Hz~150MHz Time Base accuracy±1 count ±20ppm (23°C ± 5°C) after 30 minutes warm up The maximum resolution is:100nHz for 1Hz,0.1Hz for 100MHz 1MΩ/150pf ≤35mVrms(5Hz~100MHz) ; ≤45mVrms(100MHz~150MHz)					-	
STORE/RECALL INTERFACE		10 Groups of Setting Memories USB(Device)						
POWER SOURCE		AC100 ~ 240V , 50 ~ 60Hz						
POWER CONSUMPTION		65 VA						
DIMENSIONS & WEIGHT		266(W)×107(H)×293(D) mm ; Approx. 3.2 kg				266(W)×107(H)×293(D) mm ; Approx. 3.1 kg		

Specifications subject to change without notice. FG-2000GD1DH

### ORDERING INFORMATION

AFG-2100 Series Arbitrary Waveform Function Generator  
AFG-2000 Series Arbitrary Waveform Function Generator

### ACCESSORIES

AFG-2100 Series - GTL-110 × 2, Instruction Manual × 1, Power cord × 1  
AFG-2000 Series - GTL-110 × 1, Instruction Manual × 1, Power cord × 1

### OPTIONAL ASSESSORIES

GTL-242 USB Cable, USB 2.0 Type A - Type B, 4P

### FREE DOWNLOAD

PC Software FreeWave software  
Driver USB driver

#### Global Headquarters

**GOOD WILL INSTRUMENT CO., LTD.**  
No.7-1, Jhongsing Road, Tucheng Dist., New Taipei City 236, Taiwan  
T +886-2-2268-0389 F +886-2-2268-0639  
E-mail: marketing@goodwill.com.tw

#### China Subsidiary

**GOOD WILL INSTRUMENT (SUZHOU) CO., LTD.**  
NO. 69, Lushan Road, Snd, Suzhou Jiangsu 215011 China  
T +86-512-6661-7177 F +86-512-6661-7277  
E-mail: marketing@instek.com.cn

#### Malaysia Subsidiary

**GOOD WILL INSTRUMENT (M) SDN. BHD.**  
27, Perstarian Mahsuri 1/1, Sunway Tunas,  
11900 Bayan Lepas, Penang, Malaysia  
T +604-6309988 F +604-6309989  
E-mail: sales@goodwill.com.my

#### U.S.A. Subsidiary

**INSTEK AMERICA CORP.**  
3661 Walnut Avenue Chino, CA 91710, U.S.A.  
T +1-909-5918358 F +1-909-5912280  
E-mail: sales@instekamerica.com

#### Japan Subsidiary

**INSTEK JAPAN CORPORATION**  
4F, Prosper Bldg, 1-3-3 Iwamoto-Cho Chiyoda-Ku,  
Tokyo 101-0032 Japan  
T +81-3-5823-5656 F +81-3-5823-5655  
E-mail: info@instek.co.jp

#### Korea Subsidiary

**GOOD WILL INSTRUMENT KOREA CO., LTD.**  
Room No.805, Ace Hightech-City B/D 1 Dong,  
Mullae-Dong 3Ga 55-20, Yeongduengpo-Gu, Seoul, Korea  
T +82-2-3439-2205 F +82-2-3439-2207  
E-mail: gwinstek@gwinstek.co.kr

**GW INSTEK**  
Simply Reliable

www.gwinstek.com