

# N9021B MXA Signal Analyzer

10 Hz to 8.4/513.6/26.5/32/44/50 GHz



## Table of Contents

Definition and Terms .....	3
Frequency and Time Specifications .....	4
Amplitude Accuracy and Range Specifications .....	6
Dynamic Range Specifications .....	9
Powersuite Specifications .....	13
General Specifications .....	14
Inputs and Outputs .....	16
IQ analyzer .....	19
IQ analyzer – Option B2X .....	23
IQ analyzer – Option B5X .....	24
Real-time spectrum analyzer .....	25
Option RT1 and RT2 .....	25

## Definition and Terms

**Specifications** describe the performance of parameters covered by the product warranty and apply to the full temperature range of 0 to 55 °C, unless otherwise noted.

**95th percentile values** indicate the breadth of the population (approx.  $2\sigma$ ) of performance tolerances expected to be met in 95 percent of the cases with a 95 percent confidence, for any ambient temperature in the range of 20 to 30 °C. In addition to the statistical observations of a sample of instruments, these values include the effects of the uncertainties of external calibration references. These values are not warranted. These values are updated occasionally if a significant change in the statistically observed behavior of production instruments is observed.

**Typical values** describe additional product performance information that is not covered by the product warranty. It is performance beyond specifications that 80 percent of the units exhibit with a 95 percent confidence level over the temperature range 20 to 30 °C. Typical performance does not include measurement uncertainty.

**Nominal values** indicate expected performance, or describe product performance that is useful in the application of the product, but are not covered by the product warranty.

The analyzer will meet its specifications when:

- It is within its calibration cycle
- Under auto couple control, except when Auto Sweep Time Rules = Accy
- Signal frequencies < 10 MHz, with DC coupling applied
- The analyzer has been stored at an ambient temperature within the allowed operating range for at least two hours before being turned on
- The analyzer has been turned on at least 30 minutes with Auto Align set to Normal, or, if Auto Align is set to off or partial, alignments must have been run recently enough to prevent an Alert message; if the Alert condition is changed from “Time and Temperature” to one of the disabled duration choices, the analyzer may fail to meet specifications without informing the user

This data sheet is a summary of the specifications and conditions for the N9021B MXA signal analyzer. For the complete specifications guide, visit: [www.keysight.com/find/N9021B](http://www.keysight.com/find/N9021B)



### Quickly adapt to evolving test requirements

Industries from wireless to satellite communications require wider analysis bandwidth to meet demands for higher data throughput. As higher bandwidth technologies such as 5G NR move into mainstream use, engineers need tools for design validation and manufacturing that offer the accuracy, speed, and bandwidth to accelerate device development. Keysight's new **N9021B MXA Signal Analyzer** offers best-in-class bandwidth and phase noise for accurate and repeatable signal analysis across millimeter-wave and 5G NR frequencies.

## Frequency and Time Specifications

Frequency range		DC coupled	
Option 508		10 Hz to 8.4 GHz	
Option 513		10 Hz to 13.6 GHz	
Option 526		10 Hz to 26.5 GHz	
Option 532		10 Hz to 32 GHz	
Option 544		10 Hz to 44 GHz	
Option 550		10 Hz to 50 GHz	
Band	LO Multiple (N)	Swept or FFT, with FFT width $\leq$ 40 MHz	FFT, with FFT width $>$ 40 MHz
0	1	10 Hz to 3.6 GHz	10 Hz – 3.4 GHz
1	1	3.5 to 8.4 GHz	3.4 – 8.2 GHz
2	2	8.3 to 13.6 GHz	8.2 – 13.2 GHz
3	2	13.5 to 17.1 GHz	13.2 – 17.1 GHz
4	4	17.0 to 26.5 GHz	17.1 – 26.5 GHz
5	4	26.4 to 34.5 GHz	26.5 – 34.5 GHz
6	8	34.4 to 50 GHz	34.5 – 50 GHz
Frequency reference			
Accuracy	$\pm$ [(time since last adjustment x aging rate) + temperature stability + calibration accuracy]		
Aging rate	Option PFR	Standard	
	$\pm 1 \times 10^{-7}$ / year	$\pm 1 \times 10^{-6}$ / year	
	$\pm 1.5 \times 10^{-7}$ / 2 years		
Temperature stability	Option PFR	Standard	
20 to 30 °C	$\pm 1.5 \times 10^{-8}$	$\pm 2 \times 10^{-6}$	
Full temperature range	$\pm 5 \times 10^{-8}$	$\pm 2 \times 10^{-6}$	
Achievable initial calibration accuracy	Option PFR	Standard	
	$\pm 4 \times 10^{-8}$	$\pm 1.4 \times 10^{-6}$	
Residual FM ( with option PFR)	$\leq (0.25 \text{ Hz} \times N)_{p-p}$ in 20 ms (nominal)		
Residual FM ( Standard)	$\leq (10 \text{ Hz} \times N)_{p-p}$ in 20 ms (nominal)		
Frequency readout accuracy (start, stop, center, marker)			
$\pm$ (marker frequency x frequency reference accuracy + 0.25 % x span + 5 % x RBW + 2 Hz + 0.5 x horizontal resolution <sup>1</sup> )			
Marker frequency counter			
Accuracy	$\pm$ (marker frequency x frequency reference accuracy + 0.100 Hz)		
Delta counter accuracy	$\pm$ (delta frequency x frequency reference accuracy + 0.141 Hz)		
Counter resolution	0.001 Hz		
Frequency span (FFT and swept mode)			
Range	0 Hz (zero span), 10 Hz to maximum frequency of instrument		
Resolution	2 Hz		
Accuracy			
Stepped/Swept	$\pm (0.25 \% \times \text{span} + \text{horizontal resolution})$		
FFT	$\pm (0.1\% \times \text{span} + \text{horizontal resolution})$		

1. Horizontal resolution is span / (sweep points – 1).

## Sweep time and triggering

Range	Span = 0 Hz	1 $\mu$ s to 6000 s
	Span $\geq$ 10 Hz	1 ms to 4000 s
Accuracy	Span = 0 Hz, swept	$\pm$ 0.01 % (nominal)
	Span $\geq$ 10 Hz, FFT	$\pm$ 40 % (nominal)
	Span = 0 Hz	$\pm$ 0.01 % (nominal)
Trigger	Free run, line, video, external 1, external 2, RF burst, periodic timer	
Trigger delay	Span = 0 or FFT	-150 to +500 ms
	Span $\geq$ 10 Hz, swept	0 $\mu$ s to 500 ms
	Resolution	0.1 $\mu$ s

## Time gating

Gate methods	Gated LO; gated video; gated FFT
Gate length range	100.0 ns to 5.0 s (Except method = FFT)
Gate delay range	0 to 100.0 s
Gate delay jitter	33.3 ns p-p (nominal)

## Sweep (trace) point range

All spans	1 to 40,001
-----------	-------------

## Resolution bandwidth (RBW)

EMI bandwidths (CISPR compliant)	200 Hz, 9 kHz, 120 kHz, 1 MHz	
EMI bandwidths (Mil STD 461 compliant)	10 Hz, 100 Hz, 1 kHz, 10 kHz, 100 kHz, 1 MHz	
Range (with -3 dB bandwidth, standard)	1 Hz to 3 MHz (10% steps), 4, 5, 6, 8 MHz	
With option B2X/B5X and Option RBE	10, 15, 20, 25, 30, 40, 50, 60, 70, 80, 100, 133, 150, 200, and 212 MHz, in spectrum analyzer mode and zero span	
Bandwidth accuracy (power)		
1 Hz to 750 kHz		$\pm$ 1.0 % ( $\pm$ 0.044 dB)
820 kHz to 1.2 MHz (< 3.6 GHz CF)		$\pm$ 2.0 % ( $\pm$ 0.088 dB)
1.3 to 2 MHz (< 3.6 GHz CF)		$\pm$ 0.07 dB (nominal)
2.2 to 3 MHz (< 3.6 GHz CF)		$\pm$ 0.15 dB (nominal)
4 to 8 MHz (< 3.6 GHz CF)		$\pm$ 0.25 dB (nominal)
Bandwidth accuracy (-3 dB)	1 Hz to 1.3 MHz	$\pm$ 2% (nominal)
Selectivity (-60 dB/-3 dB)		4.1: 1 (nominal)

## Video Bandwidth (VBW)

Range	1 Hz to 3 MHz (10% steps), 4, 5, 6, 8 MHz, and wide open (labeled 50 MHz)
Accuracy	$\pm$ 6%, nominal

## Analysis bandwidth <sup>1</sup>

Maximum bandwidth	Option B2X	255 MHz
	Option B5X	510 MHz

1. Analysis bandwidth is the instantaneous bandwidth available around a center frequency over which the input signal can be digitized for further analysis or processing in the time, frequency, or modulation domain

## Amplitude Accuracy and Range Specifications

<b>Amplitude range</b>		
Measurement range	Preamp Off	Displayed average noise level (DANL) to +30 dBm
	Preamp On	Displayed average noise level (DANL) to +20 dBm
Input attenuator range	0 to 70 dB in 2 dB steps	
<b>Maximum safe input level</b>		
Average total power	+30 dBm (1 W)	
Peak pulse power	+50 dBm (100 W)	< 10 $\mu$ s pulse width, < 1% duty cycle, and input attenuation $\geq$ 30 dB
DC volts	$\pm$ 0.2 Vdc	
<b>Display range</b>		
Log scale	0.1 to 1 dB/division in 0.1 dB steps	
	1 to 20 dB/division in 1 dB steps (10 display divisions)	
Linear scale	10 divisions	
Scale units	dBm, dBmV, dB $\mu$ V, dBmA, dB $\mu$ A, V, W, A, dBuV/m, dBuA/m, dBpT, dBG, dBpW	
<b>Electronic attenuator (option EA3)</b>		
Frequency range	10 Hz to 3.6 GHz <sup>1</sup>	
Attenuation range		
Electronic attenuator range	0 to 24 dB, 1 dB steps	
Full attenuation range	0 to 94 dB, 1 dB steps (Mechanical + Electronic)	
<b>Preamplifier</b>		
Frequency range	Option P08	100 kHz to 8.4 GHz
	Option P13	100 kHz to 13.6 GHz
	Option P26	100 kHz to 26.5 GHz
	Option P32	100 kHz to 32 GHz
	Option P44	100 kHz to 44 GHz
	Option P50	100 kHz to 50 GHz
Gain	100 kHz to 3.6 GHz	+20 dB nominal
	3.6 to 26.5 GHz	+35 dB, nominal
	26.5 to 50 GHz	+40 dB, nominal
Noise figure	100 kHz to 3.6 GHz	11 dB, nominal
	3.6 to 8.4 GHz	9 dB, nominal
	8.4 to 13.6 GHz	10 dB, nominal
	13.6 to 50 GHz	DANL + 176.24 dB, nominal

1. Frequency range of option EA3 varies according to sweep types. Please refer to the frequency band definition on page 4.

Frequency response		Specification		95th percentile	
20 to 30°, preselector centering applied above 3.6 GHz		Option 508/513/526	Option 532/544/550	Option 508/513/526	Option 532/544/550
Preamp Off	20 Hz to 10 MHz	±0.50 dB	±0.43 dB	±0.25 dB	±0.23 dB
10 dB attenuation	10 to 50 MHz	±0.40 dB	±0.43 dB	±0.20 dB	±0.21 dB
	50 to 3.6 GHz	±0.50 dB	±0.36 dB	±0.25 dB	±0.22 dB
	3.5 to 5.2 GHz	±1.50 dB	±1.5 dB	±0.65 dB	±0.76 dB
	5.2 to 8.4 GHz	±1.50 dB	±1.3 dB	±0.60 dB	±0.56 dB
	8.3 to 13.6 GHz	±2.00 dB	±1.8 dB	±0.60 dB	±0.67 dB
	13.5 to 17.1 GHz	±2.00 dB	±1.8 dB	±0.65 dB	±0.62 dB
	17.0 to 22.0 GHz	±2.00 dB	±1.8 dB	±0.65 dB	±0.73 dB
	22.0 to 26.5 GHz	±2.50 dB	±2.3 dB	±0.85 dB	±0.76 dB
	26.4 to 34.5 GHz		±2.3 dB		±0.82 dB
	34.4 to 50 GHz		±3.0 dB		±1.21 dB
Preamp On	100 kHz to 50 MHz	±0.70 dB	±0.7 dB	±0.30 dB	±0.31 dB
0 dB attenuation	50 MHz to 3.6 GHz	±0.60 dB	±0.55 dB	±0.50 dB	±0.25 dB
	3.5 to 5.2 GHz	±2.00 dB	±1.8 dB	±0.70 dB	±0.78 dB
	5.2 to 8.4 GHz	±2.00 dB	±1.8 dB	±0.65 dB	±0.63 dB
	8.3 to 13.6 GHz	±2.30 dB	±2.1 dB	±0.60 dB	±0.51 dB
	13.5 to 17.1 GHz	±2.50 dB	±2.3 dB	±0.80 dB	±0.8 dB
	17.0 to 22.0 GHz	±2.90 dB	±2.6 dB	±0.85 dB	±0.94 dB
	22 to 26.5 GHz	±3.50 dB	±3.3 dB	±1.10 dB	±0.96 dB
	26.4 to 34.5 GHz		±2.8 dB		±1.04 dB
34.4 to 50 GHz		±3.9 dB		±1.37 dB	
<b>Input attenuation switching uncertainty</b>					
Attenuation > 2 dB, Preamp off, Relative to 10 dB, all frequency options					
	50 MHz (ref frequency)		± 0.20 dB		± 0.08 dB, typical
	20 Hz to 3.6 GHz				± 0.3 dB, nominal
	3.5 to 8.4 GHz				± 0.5 dB, nominal
	8.3 to 13.6 GHz				± 0.7 dB, nominal
	13.5 to 26.5 GHz				± 0.7 dB, nominal
	26.4 to 50 GHz				± 1.0 dB, nominal
<b>Total absolute amplitude accuracy</b>					
10 dB attenuation, 20 to 30 °C, 1 Hz ≤ RBW ≤ 1 MHz, input signal –10 to –50 dBm, RF preselector Off, Preamp Off and On, all settings auto-coupled except Auto Swp Time = Accy, any reference level, any scale, σ = nominal standard deviation)					
Preamp Off	Specification		95% percentile		AutoAlign = Light, nominal
At 50 MHz	± 0.45 dB		± 0.19 dB		± 0.27 dB
At all frequencies	± (0.45 dB + freq response)		± (0.19 dB + freq response@ 95% percentile)		± (0.27 dB + freq response@ 95% percentile)
Preamp On, at all frequencies	± (0.49 dB + freq response)				± (0.3 dB + freq response@ 95% percentile)

<b>Input voltage standing wave ratio (VSWR)</b>		<b>Option 508/513/526</b>	<b>Option 532/544/550</b>
Preamp Off,	10 MHz to 3.6 GHz	1.140	1.125
Input atten 10 dB,	3.5 to 8.4 GHz	1.230	1.162
95% percentile	8.3 to 13.6 GHz	1.387	1.217
	13.5 to 17.1 GHz	1.542	1.262
	17.0 to 26.5 GHz	1.671	1.319
	26.4 to 34.5 GHz		1.546
	34.4 to 50 GHz		1.676
Preamp On,	10 MHz to 3.6 GHz	1.499	1.386
Input atten 0 dB,	3.5 to 8.4 GHz	1.516	1.539
95% percentile	8.3 to 13.6 GHz	1.623	1.385
	13.5 to 17.1 GHz	1.634	1.345
	17.0 to 26.5 GHz	1.785	1.372
	26.4 to 34.5 GHz		1.571
	34.4 to 50 GHz		1.725
<b>RBW switching uncertainty (reference to 30 kHz RBW)</b>			
1 Hz to 1.5 MHz RBW	± 0.05 dB		
1.6 to 3 MHz RBW	± 0.10 dB		
4, 5, 6, 8 MHz RBW	± 1.0 dB		
<b>Reference level</b>			
Range	Log scale	-170 to +30 dBm in 0.01 dB steps	
	Linear scale	Same as log (707 pV to 7.07 V)	
Accuracy	0 dB		
<b>Display scale switching uncertainty</b>			
Switching between linear and log	0 dB		
Log scale/div switching	0 dB		
<b>Display scale fidelity</b>			
-10 dBm < mixer level < -80 dBm	± 0.10 dB total		
<b>Detector type</b>			
Normal, peak, sample, negative peak, log power average, RMS average, and voltage average			



## Dynamic Range Specifications

<b>1 dB gain compression (two-tone)</b>		<b>Option 508/513/526</b>	<b>Option 532/544/550</b>
<i>(At 1 kHz RBW with 100 kHz tone spacing, 20 to 30 °C)</i>			
Preamp Off	20 MHz to 3.6 GHz	+4 dBm, typical	+5 dBm, nominal
	3.6 to 16 GHz	+9 dBm, typical	+8 dBm, nominal
	16 to 26.5 GHz	+8 dBm, typical	+7 dBm, nominal
	26.5 to 50 GHz		0 dBm, nominal
Preamp On	10 MHz to 3.6 GHz	-14 dBm, nominal	-14 dBm, nominal
	3.6 to 26.5 GHz		
	Tone spacing 100 kHz to 20 MHz	-28 dBm, nominal	-28 dBm, nominal
	Tone spacing > 70 MHz	-20 dBm, nominal	-20 dBm, nominal
	26.5 to 50 GHz		-30 dBm, nominal

### Displayed average noise level

Input terminated, 1 Hz RBW, sample or average detector, averaging type = Log, 0 dB input attenuation, IF Gain =High, 20 to 30 °C

Preamp Off	Option 508/513/526	Option 532/544/550
10 Hz	-123 dBm, nominal	-123 dBm, nominal
20 Hz	-129 dBm, nominal	-129 dBm, nominal
100 Hz	-126 dBm, nominal	-126 dBm, nominal
1 kHz	-146 dBm, nominal	-146 dBm, nominal
9 kHz to 5 MHz	-147 dBm, typical	-147 dBm, typical
5 to 10 MHz	-158 dBm, -159 dBm, typical	-155 dBm, -158 dBm, typical
10 MHz to 1.2 GHz	-157 dBm, -158 dBm, typical	-154 dBm, -157 dBm, typical
1.2 to 2.1 GHz	-155 dBm, -156 dBm, typical	-152 dBm, -155 dBm, typical
2.1 to 3 GHz	-153 dBm, -154 dBm, typical	-151 dBm, -154 dBm, typical
3 to 3.6 GHz	-150 dBm, -151 dBm, typical	-150 dBm, -153 dBm, typical
3.5 to 4.2 GHz	-149 dBm, -150 dBm, typical	-143 dBm, -147 dBm, typical
4.2 to 6.6 GHz	-151 dBm, -152 dBm, typical	-144 dBm, -148 dBm, typical
6.6 to 8.4 GHz	-152 dBm, -152 dBm, typical	-147 dBm, -149 dBm, typical
8.3 to 13.6 GHz	-151 dBm, -152 dBm, typical	-147 dBm, -149 dBm, typical
13.5 to 14 GHz	-149 dBm, -150 dBm, typical	-143 dBm, -147 dBm, typical
14 to 17.1 GHz	-147 dBm, -149 dBm, typical	-145 dBm, -148 dBm, typical
17 to 22.5 GHz	-145 dBm, -146 dBm, typical	-145 dBm, -146 dBm, typical
22.5 to 26.5 GHz	-136 dBm, -139 dBm, typical	-139 dBm, -143 dBm, typical
26.4 to 30 GHz		-140 dBm, -143 dBm, typical
30 to 34.5 GHz		-138 dBm, -143 dBm, typical
34.5 to 37 GHz		-134 dBm, -139 dBm, typical
37 to 40 GHz		-132 dBm, -138 dBm, typical
40 to 49 GHz		-130 dBm, -136 dBm, typical
49 to 50 GHz		-128 dBm, -135 dBm, typical

**Displayed average noise level (continued)**

Preamp On	Option 508/513/526	Option 532/544/550
100 kHz to 5 MHz	-159 dBm, nominal	-159 dBm, nominal
5 to 10 MHz	-166 dBm, -167 dBm, typical	-163 dBm, -167 dBm, typical
10 MHz to 1.2 GHz	-166 dBm, -167 dBm, typical	-164 dBm, -166 dBm, typical
1.2 to 2.1 GHz	-164 dBm, -165 dBm, typical	-163 dBm, -165 dBm, typical
2.1 to 3.6 GHz	-163 dBm, -164 dBm, typical	-162 dBm, -164 dBm, typical
3.5 to 8.4 GHz	-163 dBm, -164 dBm, typical	-158 dBm, -161 dBm, typical
8.3 to 13.6 GHz	-164 dBm, -165 dBm, typical	-160 dBm, -162 dBm, typical
13.5 to 17.1 GHz	-161 dBm, -162 dBm, typical	-161 dBm, -163 dBm, typical
17 to 20 GHz	-159 dBm, -161 dBm, typical	-160 dBm, -162 dBm, typical
20 to 26.5 GHz	-156 dBm, -158 dBm, typical	-158 dBm, -160 dBm, typical
26.4 to 30 GHz		-157 dBm, -159 dBm, typical
30 to 34.5 GHz		-155 dBm, -158 dBm, typical
34.5 to 37 GHz		-153 dBm, -157 dBm, typical
37 to 40 GHz		-152 dBm, -155 dBm, typical
40 to 44 GHz		-149 dBm, -154 dBm, typical
44 to 46 GHz		-149 dBm, -154 dBm, typical
46 to 50 GHz		-146 dBm, -151 dBm, typical

**DANL with noise floor extension (option NF2)**

DANL improvement exceeds 9 dB with 95% confidence in the avg of all bands, frequency options and signal path

Band	Frequency	Preamp Off		Preamp On	
		Opt. 508/513/526	Opt. 532/544/550	Opt.508/513/526	Opt. 532/544/550
0	10 Hz to 3.5 GHz	-162 dBm	-163 dBm	-177 dBm	-174 dBm
$f > 20$ MHz					
1	3.5 to 8.4 GHz	-164 dBm	-159 dBm	-178 dBm	-172 dBm
2	8.3 to 13.6 GHz	-164 dBm	-159 dBm	-177 dBm	-172 dBm
3	13.5 to 17.1 GHz	-158 dBm	-159 dBm	-174 dBm	-173 dBm
4	17.0 to 26.5 GHz	-152 dBm	-154 dBm	-167 dBm	-169 dBm
5	26.4 to 34.5 GHz		-153 dBm		-167 dBm
6	34.4 to 50 GHz		-144dBm		-158 dBm

**Spurious response**

Residual responses	200 kHz to 8.4 GHz (swept)	-100 dBm nominal
	Zero span or FFT or other frequencies	-100 dBm nominal
Images response		
Mixer level -10 dBm	10 MHz to 26.5 GHz	$f \pm 45$ MHz -103 dBc typ.
Mixer level -10 dBm	10 MHz to 3.6 GHz	$f \pm 10245$ MHz -107 dBc typ.
Mixer level -10 dBm	10 MHz to 3.6 GHz	$f \pm 645$ MHz -108 dBc typ.
Mixer level -10 dBm	3.5 to 13.6 GHz	$f \pm 645$ MHz -87 dBc typ.
Mixer level -10 dBm	13.5 to 17.1 GHz	$f \pm 645$ MHz -85 dBc typ.
Mixer level -10 dBm	17.0 to 22 GHz	$f \pm 645$ MHz -81 dBc typ.
Mixer level -10 dBm	22 to 26.5 GHz	$f \pm 645$ MHz -77 dBc typ.
Mixer level -30 dBm	26.5 to 34.5 GHz	$f \pm 645$ MHz -94 dBc typ.
Mixer level -30 dBm	34.4 to 42 GHz	$f \pm 645$ MHz -79 dBc typ.
Mixer level -30 dBm	42 to 50 GHz	$f \pm 645$ MHz -75 dBc nominal
LO related spurious ( $f > 600$ MHz from carrier)	10 MHz to 3.6 GHz	-90 dBc typical

Other spurious	Mixer level	Response
Carrier frequency $\leq$ 3 GHz		-80 dBc nominal
Carrier frequency 3 to 26.5 GHz		
First RF order ( $f \geq$ 10 MHz from carrier)	-10 dBm	-80 dBc + 20log(N <sup>1</sup> ), including IF feedthrough, LO harmonic mixing responses
Higher RF order ( $f \geq$ 10 MHz from carrier)	-40 dBm	-80 dBc + 20log(N <sup>1</sup> ), including higher order mixer response
Carrier frequency > 26.5 GHz		
First RF order ( $f \geq$ 10 MHz from carrier)	-30 dBm	-90 dBc nominal
Higher RF order ( $f \geq$ 10 MHz from carrier)	-30 dBm	-90 dBc nominal

1. N is the LO multiplication factor. Refer to page 4 for the N value verses frequency ranges.

Second harmonic distortion (SHI)		Distortion			SHI	
Source frequency	Mixer level	Option 508/513/526	Option 508/513/526	Option 508/513/526	Option 508/513/526	Option 508/513/526
Preamp Off	10 MHz to 1.0 GHz	-15 dBm	-56 dBc	-63 dBc	+41 dBm, +54 dBm typ.	+48 dBm, +55 dBm typ.
	1.0 to 1.8 GHz	-15 dBm	-55 dBc	-60 dBc	+40 dBm, +52 dBm typ.	+45 dBm, +57 dBm typ.
	1.75 to 3 GHz	-15 dBm	-72 dBc	-69 dBc	+57 dBm, +61 dBm typ.	+54 dBm, +60 dBm typ.
	3 to 6.5 GHz	-15 dBm	-79 dBc	-74 dBc	+64 dBm, +68 dBm typ.	+59 dBm, +67 dBm typ.
	6.5 to 10 GHz	-15 dBm	-75 dBc	-72 dBc	+60 dBm, +66 dBm typ.	+57 dBm, +70 dBm typ.
	10 to 13.25 GHz	-15 dBm	-64 dBc	-65 dBc	+49 dBm, +58 dBm typ.	+50 dBm, +61 dBm typ.
	13.2 to 25 GHz	-15 dBm		-70 dBc nom.		+55 dBm nom.
	Preamp On	10 MHz to 1.8 GHz	-45 dBm	-78 dBc	-78 dBc	+33 dBm nominal
1.8 to 13.25 GHz		-50 dBm	-60 dBc	-60 dBc	+10 dBm nominal	+10 dBm nominal
13.25 to 25 GHz		-50 dBm	-50 dBc	-50 dBc	0 dBm nominal	0 dBm nominal


Third-order intermodulation distortion (TOI)					
Two -18 dBm tones at input at input mixer with tone separation at 100 kHz, 20 to 30 °C					
		Option 508/513/5256		Option 532/544/550	
Preamp Off	10 to 150 MHz	+13.5 dBm	+17 dBm typ.	+14.5 dBm	+19.5 dBm typ.
	150 to 300 MHz	+14 dBm	+20 dBm typ.	+16 dBm	+20 dBm typ.
	300 MHz to 1.1 GHz	+16 dBm	+21 dBm typ.	+17 dBm	+21 dBm typ.
	1.1 to 3 GHz	+16 dBm	+21 dBm typ.	+21 dBm	+22.5 dBm typ.
	3 to 3.6 GHz	+18 dBm	+23 dBm typ.	+21 dBm	+22.5 dBm typ.
	3.5 to 8.4 GHz	+18 dBm	+22 dBm typ.	+18 dBm	+20 dBm typ.
	8.3 to 13.6 GHz	+19.5 dBm	+22 dBm typ.	+18 dBm	+23 dBm typ.
	13.5 to 17.1 GHz	+13 dBm	+19 dBm typ.	+13 dBm	+16.5 dBm typ.
	17.0 to 26.5 GHz	+12 dBm	+19 dBm typ.	+13 dBm	+16 dBm typ.
	26.4 to 34.5 GHz			+12 dBm	+19 dBm typ.
	34.4 to 50 GHz			+8 dBm	+12 dBm typ.

**Preamp On**

Two-tone at preamp input		Option 508/513/5256	Option 532/544/550
Two -45 dBm	10 MHz to 500 MHz	+3 dBm nominal	+4 dBm nominal
	500 MHz to 3.6 GHz	+3.5 dBm nominal	+4.5 dBm nominal
Two -50 dBm	3.5 to 13.6 GHz	-10 dBm nominal	-15 dBm nominal
	13.5 to 26.5 GHz	-10 dBm nominal	-18 dBm nominal
	26.4 to 34.5 GHz	-10 dBm nominal	-15 dBm nominal
	34.4 to 50 GHz	-10 dBm nominal	-18 dBm nominal

Phase noise	Offset	Specification	Typical
20 to 30 °C, CF = 1 GHz	10 Hz		-80 dBc/Hz nominal
	100 Hz	-94 dBc/Hz	-100 dBc/Hz typical
	1 kHz	-121 dBc/Hz	-124 dBc/Hz typical
	10 kHz	-129 dBc/Hz	-130 dBc/Hz typical
	100 kHz	-129 dBc/Hz	-130 dBc/Hz typical
	1 MHz	-145 dBc/Hz	-146 dBc/Hz typical
	10 MHz	-155 dBc/Hz	-158 dBc/Hz typical

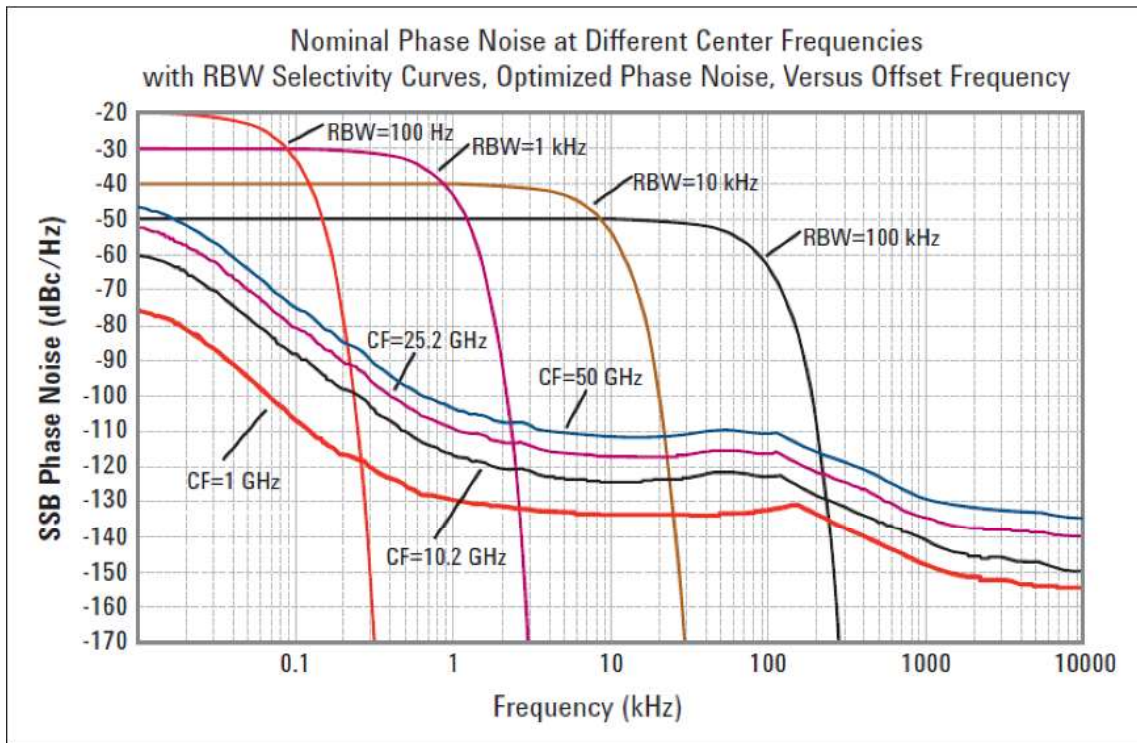

## Powersuite Specifications

(From firmware revision A.30 onward, Powersuite requires N90EMPSMB software license)

<b>Channel Power</b>		
Amplitude accuracy, W-CDMA or IS95 (20 to 30 °C, attenuation = 10 dB)	± 0.82 dB	± 0.23 dB (95th percentile)
<b>Occupied bandwidth</b>		
Frequency accuracy		± [span/1000] nominal
<b>Adjacent channel power</b>		
	Adjacent	Alternate
Accuracy, W-CDMA (ACLR) (at specific mixer levels and ACLR ranges)		
MS	± 0.14 dB	± 0.18 dB
BTS	± 0.49 dB	± 0.42 dB
Dynamic range		
Without noise correction	-73 dB typical	-79 dB typical
With noise correction	-78 dB typical	-82 dB typical
Offset channel pairs measured	1 to 6	
ACP measurement and transfer time (fast method)	10 ms nominal ( $\sigma = 0.2$ dB)	
Multiple number of carriers measured	Up to 12	
<b>Power statistics CCDF</b>		
Histogram resolution	0.01 dB	
<b>Harmonic distortion</b>		
Maximum harmonic number	10 <sup>th</sup>	
Result	Fundamental power (dBm), relative harmonics power (dBc), total harmonic distortion in %	
<b>Intermod (TOI)</b>		
	Measure the 3 <sup>rd</sup> order products and intercepts from two tones	
<b>Burst power</b>		
Methods	Power above threshold, power within burst width	
Result	Single burst output power, average output power, max. power, minimum power within burst, burst width	
<b>Spurious emission</b>		
W-CDMA (1 to 3.6 GHz) table-driven spurious signals; search across regions		
Dynamic range	81.3 dB	82.2 dB typical
Absolute sensitivity	-84.5 dBm	-89.5 dBm typical
<b>Spectrum emission mask (SEM)</b>		
cdma2000@ (750 kHz offset)		
Relative dynamic range (30 kHz RBW)	78.6 dB	84.8 dB typical
Absolute sensitivity	-99.7 dBm	-104.7 dBm typical
Relative accuracy	± 0.12 dB	
3GPP W-CDMA (2.515 MHz offset)		
Relative dynamic range (30 kHz RBW)	81.9 dB	88.1 dB typical
Absolute sensitivity	-99.7 dBm	-104.7 dBm typical
Relative accuracy	± 0.16 dB	

## General Specifications

<b>Temperature range</b>		
Operating	0 to 55 °C 0 to 47 °C	Altitude ≤2,300 m Altitude =4,600 m
Storage	-40 to 70°C	
<b>Altitude</b>	4,600 m (approx. 15,000 feet)	
<b>Relative humidity</b>	95% relative humidity, non-condensing up to 40°C and decreasing linearly to 50% relative humidity at 55°C From 40°C to 50°C, the maximum % relative humidity follows the line of constant dew point	
<b>Environment</b>	Indoor use	

### EMC

Complies with the essential requirements of the European EMC Directive as well as current editions of the following standards (dates and editions are cited in the Declaration of Conformity):

- IEC/EN 61326-1
- CISPR 11 Group 1, Class A
- AS/NZS CISPR 11
- ICES/NMB-001

This ISM device complies with Canadian ICES-001

Cet appareil ISM est conforme à la norme NMB-001 du Canada

### Safety

Complies with European Low Voltage Directive 2014/35/EU

- IEC/EN 61010-1: 2010 AMD1: 2016 / EN61010-1: 2010+A1: 2019; IEC61010-2-030: 2017 / EN 61010-2-030: 2010
- Canada: CAN/CSA-C22.2 No.61010-1-12, UPD1: 2015, UPD2: 2016, AMD1:2018; CAN/CSA-C22.2 No. 61010-2-030-18
- USA: ANSI/UL Std. No. 61010-1:2012 AMD1:2018; ANSI/UL Std No.61010-2-030:2018

<b>Acoustic noise emission</b>	Geraeuschemission
LpA < 70 dB	LpA < 70 dB
Operator position	Am Arbeitsplatz
Normal position	Normaler Betrieb
Per ISO 7779	Nach DIN 45635 t.19

### Environmental stress

Samples of this product have been type tested in accordance with the Keysight Environmental Test Manual and verified to be

robust against the environmental stresses of storage, transportation, and end-use; those stresses include, but are not limited to, temperature, humidity, shock, vibration, altitude, and power line conditions; test methods are aligned with IEC 60068-2 and levels are similar to MIL-PRF-28800F Class 3

### Power requirements

Voltage and frequency (nominal)	100/120 V, 50/60/400 Hz 220/240 V, 50/60 Hz	The instruments can operate with mains supply voltage fluctuations up to ± 10% of the nominal voltage
Power consumption		
On	630 W maximum	
Standby	45 W	

**Display**

Resolution	1280 x 800
Size	269 mm (10.6 in.) diagonal (nominal) capacitive multi-touch screen

**Data storage**

Internal	Removable solid state drive ( $\geq$ 256 GB) and secure digital SD memory device
External	Supports USB 3.0/2.0 compatible memory devices

**Weight** (without options)

Net	25.5 kg (56.2 lbs) (nominal)
Shipping	37.5 kg (82.7 lbs) (nominal)

**Dimensions**

Height	177 mm (7.0 in)
Width	426 mm (16.8 in)
Length	556 mm (21.9 in)

**Calibration cycle**

The recommended calibration cycle is one year; calibration services are available through Keysight service centers

---

## Inputs and Outputs

Front panel	
RF input	
Option 508, 513, 526	Type N female, 50 $\Omega$ (nominal) (standard); 3.5mm optional for opt 526
Option 532, 544, 550	2.4mm male, 50 $\Omega$ (nominal) (standard)
External Mixing (Option EXM)	
Connection port	
Connector	SMA, female
Impedance	50 $\Omega$ , nominal
Functions	Triplexed for LO output, IF input, and mixer bias
Mixer bias range	$\pm 10$ mA in 10 $\mu$ A step
IF input center frequency	
IF BW path < 25 MHz	322.5 MHz
IF BW path = 40 MHz	250.0 MHz
IF BW path = 255 MHz	750 MHz
IF BW path = 510 MHz	877.148375 MHz
LO output frequency range	3.75 to 14.0 GHz
Probe power	
Voltage/current	+15 Vdc, $\pm 7\%$ at 150 mA max (nominal) -12.6 Vdc, $\pm 10\%$ at 150 mA max (nominal)
Probes supported	
Active probe	1130A, 1131A, 1132A, 1134A 1161A
Passive probe	-5 dB (0-10 MHz, nominal)
Input return loss	-0 dB (10-40 MHz, nominal)
USB ports	
Host (3 ports)	
Standard	Compatible with USB 2.0
Connector	USB Type-A female
Output current	
Port marked with lightning bolt	1.2 A (nominal)
Port not marked with lightning bolt	0.5 A (nominal)
Headphone jack	Miniature stereo audio jack 3.5 mm



## Rear panel

10 MHz out	
Connector	BNC female, 50 $\Omega$ (nominal)
Output amplitude	$\geq 0$ dBm (nominal)
Frequency	10 MHz $\times$ (1+ frequency reference accuracy)
Ext Ref In	
Connector	BNC female, 50 $\Omega$ (nominal)
Input amplitude range	-5 to 10 dBm (nominal)
Input frequency	1 to 50 MHz (nominal)
Frequency lock range	$\pm 2 \times 10^{-6}$ of specified external reference input frequency
Trigger 1 and 2 inputs	
Connector	BNC female
Impedance	10 k $\Omega$ (nominal)
Trigger level range	-5 to 5 V
Trigger 1 and 2 outputs	
Connector	BNC female
Impedance	50 k $\Omega$ (nominal)
Trigger level range	0 to 5 V (CMOS)
Monitor output 1 (Option PC6, PC6S, PC8 CPUs)	
Connector	VGA compatible, 15-pin mini D-SUB
Format	XGA (60 Hz vertical sync rates, non-interlaced) Analog RGB
Resolution	1024 x 768
Monitor output 2 (Option PC6, PC6S, PC8 CPUs)	
Connector	Mini DisplayPort
Resolution	1280 x 768
Monitor Output (Option PCA CPU)	
Connector	DisplayPort
Resolution	1280 x 768
Noise source drive +28 V (pulsed)	
Connector	BNC female
SNS Series noise source	
	For use with Keysight Technologies' SNS series noise sources
Analog out	
Connector	BNC female (used by Option YAS and N9063EM0E analog demodulation measurement application)
USB ports (Option PC6, PC6S, PC8 CPUs)	
Host (2 ports)	
Standard	Stacked with each other
Connector	Compatible with USB 3.0
Output current	USB Type-A female
Host (1 port)	
Standard	0.9 A (nominal)
Connector	Stacked with LAN
Output current	Compatible with USB 2.0
Device (1 port)	
Standard	USB Type-A female
Connector	0.5 A (nominal)
Standard	Compatible with USB 3.0
Connector	USB Type-A female

USB ports (Option PCA CPU)	
Host (4 ports)	
Standard	Compatible with USB 3.0
Connector	USB Type-A female
Output current	0.9 A (nominal)
Device	
Standard	Compatible with USB 3.0
Connector	USB Type-B female
Thunderbolt (Option PCA CPU)	
Connector	USB Type-C female, 2 ports
Output current	5V, 1.0 A max
GPIB interface	
Connector	IEEE-488 bus connector
GPIB codes	SH1, AH1, T6, SR1, RL1, PP0, DC1, C1, C2, C3, C28, DT1, L4, C0
GPIB mode	Controller or device
LAN TCP/IP interface (Option PC6, PC6S, PC8 CPUs)	
Standard	1G Base-T
Connector	RJ45 Ethertwist
LAN TCP/IP interface (Option PCA CPU)	
Standard	1G Base-T
Connector	RJ45 Ethertwist
Standard	10G Base-T
Connector	RJ45 Ethertwist
IF output	
Connector	SMA female, shared by CR3, CRP
Impedance	50 $\Omega$ nominal

## Rear panel

2 <sup>nd</sup> IF output, Option CR3	Center frequency
SA mode	322.5 MHz
IQ analyzer with IF BW $\leq$ 25 MHz	322.5 MHz
IQ analyzer with IF path 40 MHz	250 MHz
IQ analyzer with IF path 255 MHz	750 MHz
IQ analyzer with IF path 510 MHz	877.1484375 MHz
Conversion gain	-1 to +4 dB (nominal) plus RF frequency response
Bandwidth	
Low band	Up to 1 GHz nominal
High band, with preselector bypass	Depends on RF center frequency

## Programmable IF output, Option CRP

Center frequency	
Range	10 to 75 MHz (user selectable)
Resolution	0.5 MHz
Conversion Gain	-1 to +4 dB (nominal) plus RF frequency response
Bandwidth	
Output at 70 MHz	100 MHz nominal
Lower output frequencies	Subject to folding
Residual output signals	$\leq$ -88 dBm nominal

## IQ Analyzer

<b>Frequency</b>				
Band	LO Multiple (N)	IF BW ≤ 40 MHz	IF BW > 40 MHz	
0	1	10 Hz to 3.6 GHz	10 Hz – 3.4 GHz	
1	1	3.5 to 8.4 GHz	3.4 – 8.2 GHz	
2	2	8.3 to 13.6 GHz	8.2 – 13.2 GHz	
3	2	13.5 to 17.1 GHz	13.2 – 17.1 GHz	
4	4	17.0 to 26.5 GHz	17.1 – 26.5 GHz	
5	4	26.4 to 34.5 GHz	26.5 – 34.5 GHz	
6	8	34.4 to 50 GHz	34.5 – 50 GHz	
<b>Frequency span</b>				
Option B2X	20 Hz – 255 MHz			
Option B5X	20 Hz – 510 MHz			
Resolution bandwidth	Overall	100 mHz to 3 MHz		
	Span = 1 MHz	50 Hz to 1 MHz		
(spectrum measurement)	Span = 10 kHz	1 Hz to 10 kHz		
	Span = 100 Hz	100 mHz to 100 Hz		
Window shapes	Flat top, Uniform, Hanning, Gaussian, Blackman, Blackman-Harris, Kaiser Bessel (K-B 70/90/110 dB)			
<b>Analysis bandwidth</b>				
	Option B2X	255 MHz		
	Option B5X	510 MHz		
<b>IF frequency response (standard 10 MHz IF path)</b>				
<b>IF frequency response</b> (demodulation and FFT response relative to the center frequency)				
Center frequency	Span	Preselector	Max. error	RMS (nominal)
f < 3.6 GHz	≤ 10 MHz	NA	± 0.3 dB	0.04 dB
3.6 GHz ≤ f ≤ 26.5 GHz	≤ 10 MHz	Off	± 0.3 dB	0.02 dB
26.5 < f ≤ 50 GHz	≤ 10 MHz	Off	± 0.35 dB	0.026 dB
<b>IF phase linearity (BW ≤ 10 MHz)</b>				
Center frequency	Span	Preselector	Peak-to-Peak	RMS (nominal)
≤ 3.6 GHz	≤ 10 MHz	N/A	0.4° nominal	0.1°
> 3.6 GHz	≤ 10 MHz	Off	0.4° nominal	0.1°
<b>Dynamic range</b>				
Clipping level at mixer	Center frequency	≥ 20 MHz		
IF gain = Low	-10 dBm	-8 dBm nominal		
IF gain = High	-20 dBm	-17.5 dBm nominal		
<b>Data acquisition (Standard 10 MHz IF path)</b>				
<b>Time record length</b>				
IQ analyzer	32,000,001 IQ sample pairs		Waveform measurement	
Advanced tool	Data packing		89600 VSA software or fast capture	
	32-bit		64-bit	
Length (IQ pairs)	536 MSa (2 <sup>29</sup> Sa)		268 MSa (2 <sup>28</sup> Sa)	
Length (time units)	Samples/Sample rate (IQ pairs)			
2 GB total memory				
<b>Sample rate</b>				
IQ pairs	1.25 × IFBW			
ADC resolution	16 bits			

**25 MHz analysis bandwidth (Standard 25 MHz IF path, licensed as B25)****IF frequency response** (demodulation and FFT response relative to the center frequency, 20 to 30°C)

Center frequency	Span	Preselector	Max. error	RMS (nominal)
< 3.6 GHz	10 to ≤ 25 MHz	N/A	±0.45 dB	0.04 dB
3.6 GHz ≤ f ≤ 26.5 GHz	10 to ≤ 25 MHz	On		0.40 dB
3.6 GHz ≤ f ≤ 26.5 GHz	10 to ≤ 25 MHz	Off	±0.42 dB	0.05 dB
26.5 GHz < f ≤ 50 GHz	10 to ≤ 25 MHz	On		0.50 dB
26.5 GHz < f ≤ 50 GHz	10 to ≤ 25 MHz	Off	±0.44 dB	0.03 dB

**IF phase linearity**

Center frequency	Span	Preselector	Peak-to-Peak (nominal)	RMS (nominal)
20 MHz ≤ f < 3.6 GHz	≤ 25 MHz	N/A	0.6°	0.14°
f ≥ 3.6 GHz	≤ 25 MHz	Off	1.9°	0.42°

**Dynamic range**

Full scale (ADC clipping)	Default settings, signal at CF			
IF gain = Low	Band	Mixer level		
	0	-8 dBm nominal		
	1 to 6	-7 dBm nominal		
IF gain = High	Band	Mixer level		
	0	-18 dBm nominal, subject to gain limitations		
	1 to 6	-17 dBm nominal, subject to gain limitations		
Effect of signal frequency ≠ CF		Up to ±3 dB nominal		

**Data Acquisition****Time record length**

IQ analyzer	32,000,001 IQ sample pairs	Waveform measurement
Advanced tool	Data packing	89600 VSA software or fast capture
	32-bit	64-bit
Length (IQ pairs)	536 MSa (2 <sup>29</sup> Sa)	268 MSa (2 <sup>28</sup> Sa)
Length (time units)	Samples/Sample rate (IQ pairs)	
2 GB total memory		

**Sample rate**

IQ pairs	1.25 × IFBW
ADC resolution	16 bits

**40 MHz analysis bandwidth (Standard 40 MHz IF path, licensed as B40)**

IF frequency response (demodulation and FFT response relative to the center frequency, 20 to 30°C)

Center frequency	Span	Preselector	Max. error	RMS (nominal)
$30 \text{ MHz} \leq f < 3.6 \text{ GHz}$	$\leq 40 \text{ MHz}$	N/A	$\pm 0.45 \text{ dB}$ , $\pm 0.30 \text{ dB}$ typical	0.08 dB
$3.6 \text{ GHz} \leq f \leq 8.4 \text{ GHz}$	$\leq 40 \text{ MHz}$	Off	$\pm 0.35 \text{ dB}$ , $\pm 0.25 \text{ dB}$ typical	0.08 dB
$8.4 \text{ GHz} \leq f \leq 26.5 \text{ GHz}$	$\leq 40 \text{ MHz}$	Off	$\pm 0.46 \text{ dB}$ , $\pm 0.33 \text{ dB}$ typical	0.08 dB
$26.5 \text{ GHz} < f \leq 34.4 \text{ GHz}$	$\leq 40 \text{ MHz}$	Off	$\pm 0.67 \text{ dB}$ , $\pm 0.25 \text{ dB}$ typical	0.1 dB
$34.4 \text{ GHz} < f \leq 50 \text{ GHz}$	$\leq 40 \text{ MHz}$	Off	$\pm 0.71 \text{ dB}$ , $\pm 0.35 \text{ dB}$ typical	0.1 dB

**IF phase linearity**

Center frequency	Span	Preselector	Peak-to-Peak (nominal)	RMS (nominal)
$20 \text{ MHz} \leq f < 3.6 \text{ GHz}$	$\leq 40 \text{ MHz}$	N/A	$0.5^\circ$	$0.10^\circ$
$f \geq 3.6 \text{ GHz}$	$\leq 40 \text{ MHz}$	Off	$1.5^\circ$	$0.35^\circ$

**Dynamic range**

SFDR (spurious-free dynamic range)

Signal frequency within $\pm 12 \text{ MHz}$ of center	Band	SFDR
	0	-77 dBc nominal
	1 to 6	-80 dBc nominal
Signal frequency within $\pm 18 \text{ MHz}$ of center	Band	SFDR
	0	-74 dBc nominal
	1 to 6	-78 dBc nominal
Signal frequency anywhere within analysis BW	Band	SFDR
	0	-74 dBc nominal
	1 to 6	-77 dBc nominal

**Full scale (ADC clipping)**

Default settings, signal at CF

IF gain = Low	Band	Mixer level
	0	-8 dBm nominal
	1 to 4	-7 dBm nominal
	5 to 6	-11 dBm nominal
IF gain = High	Band	Mixer level
	0	-13 dBm
	1 to 2	-17 dBm
	3 to 4	-16 dBm
	5 to 6	-15 dBm

Effect of signal frequency  $\neq$  CFUp to  $\pm 4 \text{ dB}$  nominal**Data Acquisition****Time record length (IQ pairs)**

IQ analyzer	32,000,001 IQ sample pairs		Waveform measurement
Advanced tools	32-bit packing	64-bit packing	89600 VSA software or fast capture
Length (IQ sample pairs)	536 MSa	268 MSa	2 GB total memory
Length (Time units)	Samples/Sample rate (IQ pairs)		
Sample rate	IFBW x 1.25		
ADC resolution	12 bits		

## IQ Analyzer – Option B2X

<b>255 MHz analysis bandwidth (Option B2X is automatically included with option B5X)</b>				
<b>IF frequency response</b> (demodulation and FFT response relative to the center frequency, 20 to 30°C)				
Center frequency	Span	Preselector	Max. error	RMS (nominal)
400 MHz ≤ f < 1 GHz	≤ 255 MHz	N/A	±0.8 dB, ±0.4 dB typical	0.1 dB
1 GHz ≤ f < 3.4 GHz	≤ 255 MHz	N/A	±0.5 dB, ±0.3 dB typical	0.1 dB
3.4 GHz ≤ f ≤ 8.2 GHz	≤ 255 MHz	Off	±0.5 dB, ±0.35 dB typical	0.1 dB
8.2 GHz ≤ f ≤ 26.5 GHz	≤ 255 MHz	Off	±0.6 dB nominal	0.2 dB
26.5 GHz ≤ f ≤ 50 GHz	≤ 255 MHz	Off	±0.8 dB nominal	0.2 dB
<b>IF phase linearity</b>				
Center frequency	Span	Preselector	Peak-to-Peak (nominal)	RMS (nominal)
20 MHz ≤ f < 3.4 GHz	≤ 255 MHz	N/A	3°	0.6°
3.4 GHz ≤ f < 26.5 GHz	≤ 255 MHz	Off	2°	0.5°
26.5 GHz ≤ f ≤ 50 GHz	≤ 255 MHz	Off	4°	0.8°
<b>Dynamic range</b>				
SFDR (spurious-free dynamic range)				
Signal frequency anywhere within analysis BW		-78 dBc nominal		
<b>Full scale clipping</b>				
Default settings, signal at CF				
IF gain = Low	Band	Mixer level		
		Option 508/513/526	Option 532/544/550	
	0	-7 dBm nominal	+2 dBm nominal	
	1 to 2	-5 dBm nominal	+3 dBm nominal	
	3 to 4	0 dBm nominal	0 dBm nominal	
	5 to 6		-11 dBm nominal	
IF gain = High IF gain offset = 0 dB	0	-7 dBm	-3 dBm	
	1 to 2	-5 dBm	-6 dBm	
	3 to 4	0 dBm	-9 dBm	
	5 to 6		-11 dBm	
Effect of signal frequency ≠ CF			Up to ±4 dB nominal	
<b>Data Acquisition</b>				
<b>Time record length (IQ pairs)</b>				
IQ analyzer	32,000,001 IQ sample pairs		Waveform measurement	
Advanced tools	32-bit packing	64-bit packing	89600 VSA or fast capture	
Length (IQ sample pairs)	1073 MSa (230 Sa)	536 MSa (229 Sa)	4 GB total memory (option DP4)	
Length (Time units)	Length of IQ sample pairs/sample rate (IQ pairs)			
<b>Sample rate</b>				
IQ pairs	Minimum of (Span x 1.25, 300 MSa/s)			
ADC resolution	14 bits			

## IQ Analyzer – Option B5X

<b>510 MHz analysis bandwidth</b>				
<b>IF frequency response</b> (demodulation and FFT response relative to the center frequency, 20 to 30°C)				
Center frequency	Span	Preselector	Max. error	RMS (nominal)
$600 \text{ MHz} \leq f < 3.4 \text{ GHz}$	$\leq 500 \text{ MHz}$	N/A	$\pm 0.75 \text{ dB}$ , $\pm 0.41 \text{ dB}$ typical	0.1 dB
$3.4 \text{ GHz} \leq f < 8.2 \text{ GHz}$	$\leq 500 \text{ MHz}$	Off	$\pm 0.5 \text{ dB}$ , $\pm 0.42 \text{ dB}$ typical	0.3 dB
$8.2 \text{ GHz} \leq f \leq 26.5 \text{ GHz}$	$\leq 510 \text{ MHz}$	Off	$\pm 0.8 \text{ dB}$ nominal	
$26.5 \text{ GHz} \leq f \leq 50 \text{ GHz}$	$\leq 510 \text{ MHz}$	Off	$\pm 1.0 \text{ dB}$ nominal	
<b>IF phase linearity</b>				
Center frequency	Span	Preselector	Peak-to-Peak (nominal)	RMS (nominal)
$20 \text{ MHz} \leq f < 3.4 \text{ GHz}$	$\leq 510 \text{ MHz}$	N/A	5°	1.0°
$3.4 \text{ GHz} \leq f < 26.5 \text{ GHz}$	$\leq 510 \text{ MHz}$	Off	6°	1.4°
$26.5 \text{ GHz} \leq f \leq 50 \text{ GHz}$	$\leq 510 \text{ MHz}$	Off	7°	1.6°
<b>Dynamic range</b>				
SFDR (spurious-free dynamic range)				
Signal frequency anywhere within analysis BW		-75 dBc nominal		
<b>Full scale clipping</b>				
Default settings, signal at CF				
IF gain = Low	Band	Mixer level		
		Option 508/513/526	Option 532/544/550	
	0	-9 dBm nominal	+1 dBm nominal	
	1 to 2	-7 dBm nominal	+3 dBm nominal	
	3 to 4	-4 dBm nominal	0 dBm nominal	
	5 to 6		-11 dBm nominal	
IF gain = High	Band	Mixer level		
IF gain offset = 0 dB	0	-9 dBm nominal	-3 dBm nominal	
	1 to 2	-7 dBm nominal	-9 dBm nominal	
	3 to 4	-4 dBm nominal	-13 dBm nominal	
	5 to 6		-11 dBm nominal	
Effect of signal frequency $\neq$ CF	Up to $\pm 4 \text{ dB}$ nominal			
<b>Data acquisition</b>				
<b>Time record length (IQ pairs)</b>				
IQ analyzer	32,000,001 IQ sample pairs		Waveform measurement	
Advanced tools	32-bit packing	64-bit packing	89600 VSA software or fast capture	
Length (IQ pairs)				
IFBW $\leq 255.176 \text{ MHz}$	1073 MSa ( $2^{30}$ Sa)	536 MSa ( $2^{29}$ Sa)	4 GB total memory (opt. DP4)	
IFBW $> 255.176 \text{ MHz}$	2147 MSa ( $2^{31}$ Sa)	1073 MSa ( $2^{30}$ Sa)	8 GB total memory (opt. DP4)	
Length (Time units)	Length of IQ sample pairs/sample rate (IQ pairs)			
<b>Sample rate</b>				
IFBW $\leq 255.176 \text{ MHz}$	Minimum of (Span x 1.25, 300 MSa/s)			
IFBW $> 255.176 \text{ MHz}$	Minimum of (Span x 1.25, 600 MSa/s)			
ADC resolution	14 bits			



## Real-Time Spectrum Analyzer

### Option RT1 and RT2

Real-time analysis		
Real-time analysis bandwidth		
Option RT1	Up to 509.47 MHz	Analysis bandwidth determines the maximum real-time bandwidth
Option RT2	Up to 509.47 MHz	
Option DUA	Up to 2 x 255 MHz at same center frequency, requires Option B5X	
Minimum detectable signal duration with > 60 dB		3.33 ns, with option B2X or B5X
Minimum signal duration with 100% POI at full amplitude range		For frequency mask triggering (FMT)
Option RT1	17.3 $\mu$ s	Signal is at mask level
Option RT2	3.57 $\mu$ s	Signal is at mask level
Minimum acquisition time	104 $\mu$ s	
FFT rate	292,969/s	

Learn more at: [www.keysight.com](http://www.keysight.com)

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: [www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)

