

# BM15 MJ15

## Analogue 5 kV Insulation Tester



- **Four test voltages to 5 kV**
- **Dual power supply option giving the best of both worlds**
- **Resilient mounted analogue scale for robustness**
- **Voltage range to 600 V indicates auto discharge**
- **Pass/fail overlays for rapid testing**
- **Single scale for insulation values to avoid operator error**

### DESCRIPTION

The Megger® BM15 & MJ15 are compact 5 kV insulation testers. They are very simple to use and provide a quick and accurate reading of insulation resistance. The instruments use an analogue display with a maximum reading of 20 GΩ. The BM15 is powered by batteries. The MJ15 has an additional hand-cranked generator.

The instrument operation is extremely simple. A voltage range enables measurement of a.c. or d.c. conductor potential. Four test voltages are available at 500 V, 1 kV, 2,5 kV and 5 kV. A choice of push buttons is supplied; a locking button simplifies long term testing, or a non-locking version is preferred for maximum safety.

A bezel allows a scale plate overlay to be added with pass/fail bands for go/no go testing. This is particularly useful for less experienced users and enables a rapid decision to be made.

The new instruments have a choice of power source. The BM15 is powered by 8 x LR6 (AA) alkaline cells. The MJ15 comes with a hand cranked generator plus batteries. If the test button is pressed the MJ15 uses battery power. Otherwise the crank handle is turned to save battery power or for use when the batteries are unavailable.

Both units are built into a rugged case designed for outdoor use. The instruments are also supplied with a soft carrying case, a test lead set, test record cards and batteries.

Safety terminals suitable for locking connectors are used for connection to the test piece. An automatic discharge circuit eliminates the voltage on capacitive loads after a test. The decaying voltage can also be viewed on the scale.

Fused test leads are available as an option for voltage measurement. The instruments meet the IEC1010 safety specification and EMC specifications and are fully CE marked.

### FEATURES

- Large, single scale analog display
- Auto voltage measurement function indicates conductor and auto discharge potential
- Supplied with optional locking test button
- Safety recessed terminals and long connectors
- Four output test voltages
- Simple to use
- CE marked
- Dual power supply option on MJ15
- Unique scale overlay for pass/fail bands
- Resilient mounted analogue scale for robustness
- Single scale for insulation values to avoid operator error
- Light weight and rugged
- Range down to 100kΩ ideal for go/no go testing

## APPLICATIONS

Insulation is important for the safety of all electrical systems, providing a barrier to hazardous live conductors. Insulation can deteriorate due to the affects of moisture, sunlight and heat. A reduction in the value of insulation resistance can lead to a potentially dangerous situation caused by the dangers of electric shock, or arcing causing fire. If insulation resistance is regularly monitored unusually low values can be investigated before they cause danger, or inconvenience and cost due to equipment downtime for repairs.

The BM15 & MJ15 are general purpose, 5 kV insulation testers for electrical contractors and engineers who test machinery, transformers, switchgear, cables, etc.

This Product is used by:

- Electrical Contractors
- Maintenance Engineers
- Telecommunications Engineers
- Gas and Water Utilities
- Railway Companies
- Cable Manufacturers
- Mining Companies

## SPECIFICATION

### Insulation Range:

100 k $\Omega$  to 20 G $\Omega$  (also 0  $\Omega$  and  $\infty$ )

### Test Voltages (d.c.)

500 V, 1000 V, 2500 V & 5000 V

### Test Voltage Accuracy

$\pm 5\%$  of nominal test voltages on 20 M $\Omega$  load

### Test Voltage Stability

$< \pm 1\%$  (180 r.p.m. to 240 r.p.m. MJ15)

### Insulation Accuracy (at 0 - 30°C) (32 to 86°F)

$\pm 2,5\%$  of full scale deflection

### Short Circuit Current

1,5 mA  $\pm$  0,5 mA

### Maximum capacitance of load

5  $\mu$ F

### Interference Rejection

1 mA rms at 50 to 60 Hz

### Discharge Resistor

$< 500$  k $\Omega$

### Voltage RANGE

#### Range

0 to 600 V a.c.

### Indication of d.c.

#### Accuracy

$\pm 2,5\%$  f.s.d. a.c.

(with rotary switch in the V position)

### General

#### Overload rating

720 V a.c. or d.c.

#### Scale Length

2,8 in. (72 mm) (96°)

#### Power Supply

##### BM15

8 x AA cells (LR6)

##### MJ15

Low voltage brushless Generator and 8 x AA cells (LR6)

#### Battery Life

Typically 2000 five second tests at 5 kV on 100 M $\Omega$  load

#### Battery Indicator

Loaded battery test

#### Safety

Meets the safety requirements for double insulation to IEC 1010-1 (1995) EN61010 (1995) to installation Category III\*\*\*, 300 V phase to earth (ground) or 600 V Category I\*

\*\*\*Relates to transient overvoltage likely to be found in fixed installation wiring.

\*Relates to transient overvoltage likely to be found in special equipment or parts of equipment, telecommunication, electronic etc.

**Non Replaceable Fuse**

1 Amp, 250 V, HBC type (F)

(20 mm x 5 mm) to IEC 127/1

This fuse protects the instrument against any faults occurring when using rechargeable batteries.

**EMC**

In accordance with IEC61326 including Amendment No. 1.

**Temperature Range Operating**

32°F to 86°F (0°C to 30°C) at full specification

-4°F to 122°F (-20°C to 50°C) with temperature coefficient  $\pm 0,1\%/^{\circ}\text{C}$  (0,05% /°F)

**Storage**

-13°F to 149°F (-25°C to 65°C)

**Humidity Range**

90% RH at 104°F (40°C)

**Dimensions**


8,9 in. x 6,3 in. x 4,5 in.

(220 mm x 160 mm x 115 mm)

**Weight**

BM15 Approx 2,6 lbs (1,2 kg)

MJ15 Approx 3,5 lbs (1,6 kg), or 4 lbs (1,8 kg) with battery holder and cells.

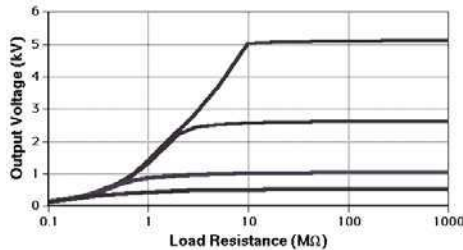

Typical Terminal Voltage Characteristics

**ORDERING INFORMATION**

| Item (Qty)                                | Order No.     |
|---|---------------|
| Battery powered 5 kV insulation tester    | BM15          |
| Hand crank/battery 5 kV insulation tester | MJ15          |
| <b>Included Accessories</b>               |               |
| User Guide                                | 6172-209      |
| 3 x 3m HV leads                           | 8101-181      |
| Carrying case with lead storage           | 6420-117      |
| Slide in Pass Band overlay (5 supplied)   | 6121-401      |
| Test Record Card (pack of 5)              | (U.S. 210949) |
| 8 x AA cells (LR6)                        |               |
| <b>Optional Accessories</b>               |               |
| Fused test probes, 1,5 m long (2 used)    | 6320-240      |
| Test Record Card (Pack of 20)             | 6111-216      |
| CB101; 5 kV Calibration Box               | 6311-077      |
| <b>Publications</b>                       |               |
| 'A Stitch In Time'                        | AVTM21-P8B    |
| 'Lowdown on HV d.c. Testing'              | AVTM22P-1     |

**UK**  
Archcliffe Road Dover  
CT17 9EN England  
T +44 (0) 1304 502101  
F +44 (0) 1304 207342

**UNITED STATES**  
4271 Bronze Way  
Dallas TX 75237-1088 USA  
T 800 723 2861 (USA only)  
T +1 214 333 3201  
F +1 214 331 7399

**OTHER TECHNICAL SALES OFFICES**  
Norristown USA, Toronto CANADA,  
Mumbai INDIA, Trappes FRANCE,  
Sydney AUSTRALIA, Madrid SPAIN  
and the Kingdom of BAHRAIN.

Registered to ISO 9001:2000 Reg no. Q 09290  
Registered to ISO 14001 Reg no. EMS 61597

**BM15\_MJ15\_DS\_en\_V12**

**www.megger.com**  
Megger is a registered trademark