

HX 500 and HX 750 process chillers provide you with years of reliable cooling for your critical process applications.

## NESLAB HX 500 and HX 750 Series Process Chillers

Long-term reliability and flexible configurations tailored to your application



Typical applications for the HX 500 and HX 750:

- Sputtering
- CMP
- Test equipment
- Laser engraving
- Laser machining
- MRI
- CT
- Linear accelerators
- Printing
- Injection molding
- Military applications
- Reactor vessels



### Tight Stability for Process Control

NESLAB HX 500 and HX 750 chillers offer the tight stability ( $\pm 0.1^\circ\text{C}$ ) necessary to keep critical processes running at constant temperatures. Better process control keeps your equipment running at optimal levels, giving you the results you need.

### Worry-free Operation

NESLAB HX 500 and HX 750 process chillers are easy to install and offer years of reliable cooling. These robust units are designed for trouble-free operation to maximize uptime. Panels are easy to remove for quick access to components.

### Versatile, Flexible Configurations

Depending on your facility requirements, you can select air or water-cooled condensers. Choose the TC 400 for more automated, powerful operation. Different pump types are available to suit a wide range of pressures and flow rates.

### Choice of Options and Accessories

While each Thermo unit comes with many standard features, a full range of options and accessories is available to meet your specific application needs.



Thermo Electron Corporation has a well-established reputation in temperature control through its NESLAB and HAAKE product lines. Formerly independent companies, NESLAB and HAAKE have joined forces within Thermo to offer you more than 75 years of industry experience in temperature control technology. Thermo professionals worldwide continue to develop and support the solutions that help you analyze, detect, measure, and control your business with increasingly advanced precision.

### Specifications

	HX 500	HX 750
<b>Standard temperature range</b>		
C	5° to 35°	5° to 35°
F	41° to 95°	41° to 95°
<b>Ambient temperature range</b>		
C	13° to 35°	13° to 35°
F	55° to 95°	55° to 95°
<b>Stability</b>		
C	+/- 0.1°	+/- 0.1°
F	+/- 0.2°	+/- 0.2°
<b>Condenser</b>		
	air or water cooled	air or water cooled
<b>Reservoir size</b>		
	28 Gallons/106 liters	40 Gallons/151.4 liters
<b>Cooling capacity</b>		
60 Hz at 20°C	15,700 watts	24,000 watts
50 Hz at 20°C	13,030 watts	19,920 watts
<b>Pump performance</b>		
60 Hz Pump 1	23 gpm at 50 psig (TU 9)	23 gpm at 50 psig (TU 9)
60 Hz Pump 2	19 gpm at 50 psig (CP 75)	19 gpm at 50 psig (CP 75)
50 Hz Pump 1	16 gpm at 50 psig (TU 9)	16 gpm at 50 psig (TU 9)
50 Hz Pump 2	10 gpm at 40 psig (CP 75)	10 gpm at 40 psig (CP 75)
<b>Power requirements</b>		
60 Hz	208-230V 3ø/460V 3ø	208-230V 3ø/460V 3ø
50 Hz	380-415V 3ø	380-415V 3ø
<b>Unit dimensions</b>		
in (H x W x D)	51.625 x 46 x 28.75	64.75 x 46 x 29
cm (H x W x D)	131.1 x 116.8 x 73	164.5 x 116.8 x 73.7
<b>Plumbing connections</b>		
inlet/outlet process	1" FNPT	1" FNPT
inlet/outlet facility (W/C only)	1" FNPT	1" FNPT
<b>Plumbing connection</b>		
drain	1/2" FNPT	1/2" FNPT
auto refill	3/8" OD SS barb	3/8" OD SS barb
<b>Refrigerant</b>		
60 Hz	R22	R404A
50 Hz	R134A	R404A
<b>Compliance</b>		
50 Hz units	CE	CE
<b>Unit weight</b>		
lb	746	971
kg	338.4	440.4

Specification listed for standard units circulating water at 20°C fluid temperature and 20°C ambient. Other fluids, fluid temperatures, or ambient temperatures will affect performance. Cooling capacity and amperage based on units with CP 75 pumps.

## Standard Features

Feature	Benefit
<b>Auto-refill</b>	Allows for self-filling of the chiller to ensure that the proper level in the reservoir is maintained
<b>Stainless steel reservoir (look at RTE)</b>	Convenient easy cleaning. Compatible with a wide range of fluids
<b>Temperature stability of +/- 0.1°C</b>	Keeps your process stable giving you consistent, reliable results
<b>High and low temperature safeties</b>	Can be configured as warnings or, will shut the unit down to keep your application safe
<b>Auto-restart</b>	In the event of power failure, the unit will automatically restart, upon power restoration which ensures productivity
<b>Low level safety</b>	Alarms you if the reservoir level is too low
<b>Hot gas by-pass</b>	Refrigeration design that allows for tight temperature stability and longer compressor life
<b>Compact footprint</b>	Efficient design keeping your valuable floor space to a minimum
<b>15-Pin analog control port</b>	Allows for remote status of alarms and remote on/off capabilities
<b>Integrated fluid pressure gauge and flow control</b>	Provides integral pressure and flow control to adjust to your process needs


## Options

Feature	Benefit
<b>Pump selection</b>	Various pumps available to meet the flow and pressure requirements of your application
<b>Air-cooled or water-cooled condenser</b>	Configurable to your facilities needs
<b>High temperature range</b>	Allows heating as well as cooling and high temperature operation up to +90°C
<b>Powerful TC 400 Controller</b>	User-friendly interface that allows more sophisticated monitoring and control of HX operation
<ul style="list-style-type: none"> <li>• LED status indicators</li> <li>• Alarm Status</li> <li>• Low flow</li> <li>• RS-232</li> </ul>	
<b>Communication RS-232</b>	Allows for control of your chiller from your PC or laptop


## Accessories

Feature	Benefit
<b>Remote temperature probe</b>	Allows for remote temperature control at your application
<b>Fluid filtration 5, 25, 40, micron full flow</b>	Maintains particulate-free operating fluid
<b>Fluid filtration 5, 25, 40, micron partial flow</b>	Maintains particulate-free operating fluid
<b>DI filtration</b>	Maintains a water resistivity level between 1 and 3 megohm/cm <sup>2</sup> for cooling applications requiring ultrapure water or electrical isolation of the application
<b>Plumbing package</b>	Provides tubing, insulation and plumbing connections for easy installation
<b>Condenser filters</b>	Keeps the condenser clean and your unit performance optimal
<b>Ethylene glycol</b>	Allows circulation to temperatures below 8°C

## Pumping Capacity

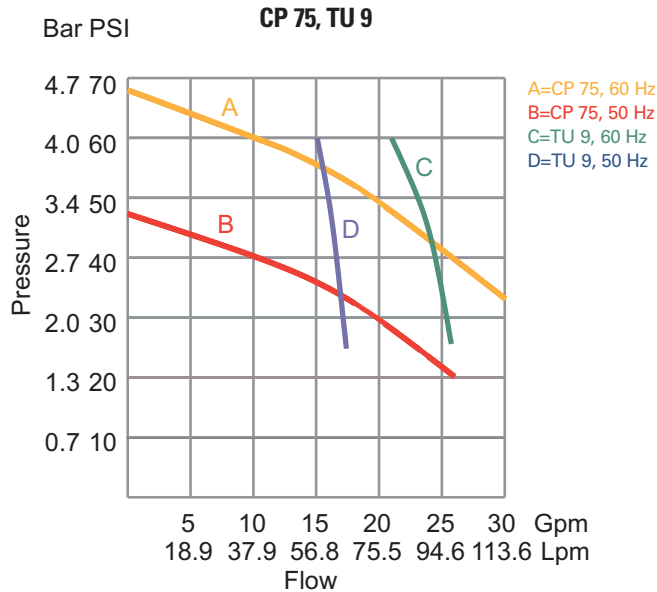

## Cooling Capacity

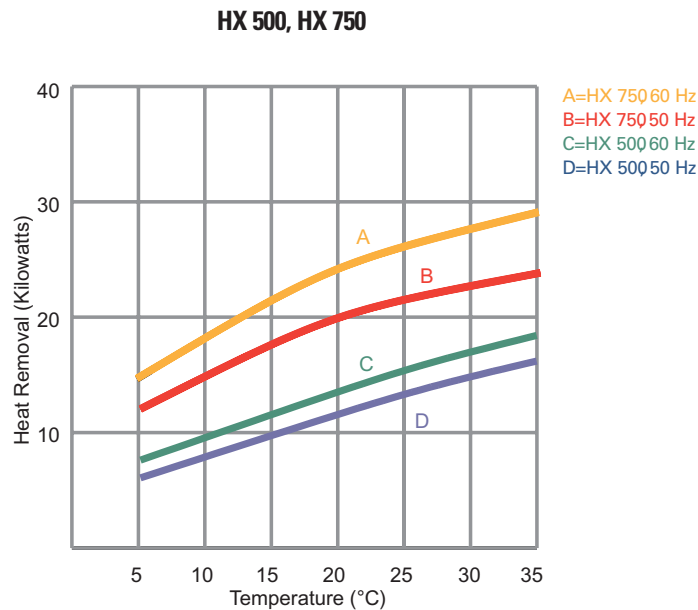

### USA

25 Nimble Hill Rd.  
Newington, NH 03801  
Tel. 800 258 0830  
info.tc.us@thermo.com

### France

16 Avenue du Québec - Silic 765  
91963 Courtaboeuf Cedex  
Tel. +33 (0) 1 60 92 48 00  
info.tc.fr@thermo.com

### United Kingdom

Unit 5, The Ringway Centre  
Basingstoke, Hampshire  
RG21 6YH  
Tel. +44 (0) 870 609 9254  
info.tc.uk@thermo.com

### Benelux

Takkebijsters  
4817 BL Breda  
Tel. +31 (0) 76 5 87 98 88  
info.tc.nl@thermo.com

### International/Germany

Dieselstr. 4  
76227 Karlsruhe  
Tel. +49 (0) 721 4 09 44 44  
info.tc.de@thermo.com

©2004 Thermo Electron Corporation. The information contained herein is subject to change without notice. Any trademarks, tradenames or copyrights remain solely the property of the manufacturer unless otherwise stated. The only warranties for Thermo products are set forth in the express limited warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Thermo shall not be liable for technical or editorial errors or omissions contained herein.

PSHX500HX750v1.0E10/04TC

[www.thermo.com/tc](http://www.thermo.com/tc)

**Thermo**  
ELECTRON CORPORATION

[www.valuetronics.com](http://www.valuetronics.com)