


**Model 1432  
Banana Jack to Pin Tip Plug**



**Model 1432  
Banana Jack to Pin Tip Plug**

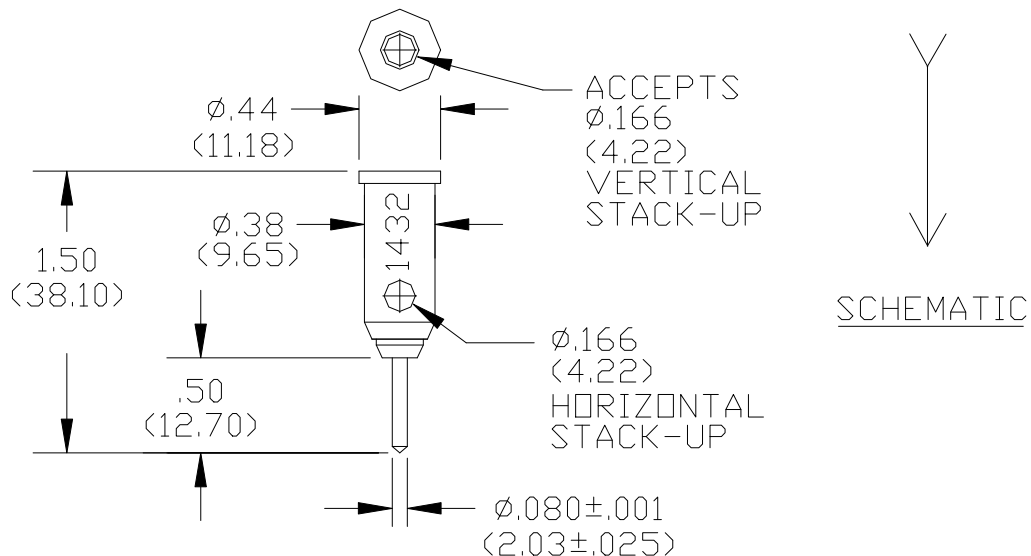

**Features**

- Permits banana plug cords to be used with equipment having pin tip jacks.

**Materials**

**Banana Jack:**

- Material: Brass rod per ASTM B16-85, Temper H02.  
Finish: Nickel plated per QQ-N-290, Class 2, 200/300 micro-inches.

**Pin Tip Plug:**

- Body: Brass rod per ASTM B16-85, Temper H02.  
Finish: Nickel plate per QQ-N-290, Class 2, 200/300 micro-inches.

**Insulation:**

- Material: Polypropylene molded to Banana Plug and Pin Tip bodies.  
Marking: "1432, POMONA ELECTRONICS, CALIF."

**Specifications**

**Operating Voltage:**

Hands free usage in controlled voltage environments: 3000 Vrms maximum.  
*For CE compliance:* not intended for hand-held use at voltages above 33 Vrms/70 Vdc.

Operating Temperature: +50°C (+122°F) Max.  
Current: 5 Amperes

**Ordering Information**

Model: 1432-\*

\*=Color, -0 (Black), -2 (Red)

**Ordering Example:** 1432-2 (Color is Red)  
Other colors are available upon request.

**USA:** Sales: 800-490-2361  
Technical Support: [technicalsupport@pomonatest.com](mailto:technicalsupport@pomonatest.com)  
Fax: 425-446-5844  
**Europe:** 31-(0) 40 2675 150 **International:** 425-446-5500  
**Where to Buy:** [www.pomonaelectronics.com](http://www.pomonaelectronics.com)

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.