


Model 1756 Shielded Low Voltage Spade Lug Patch Cord

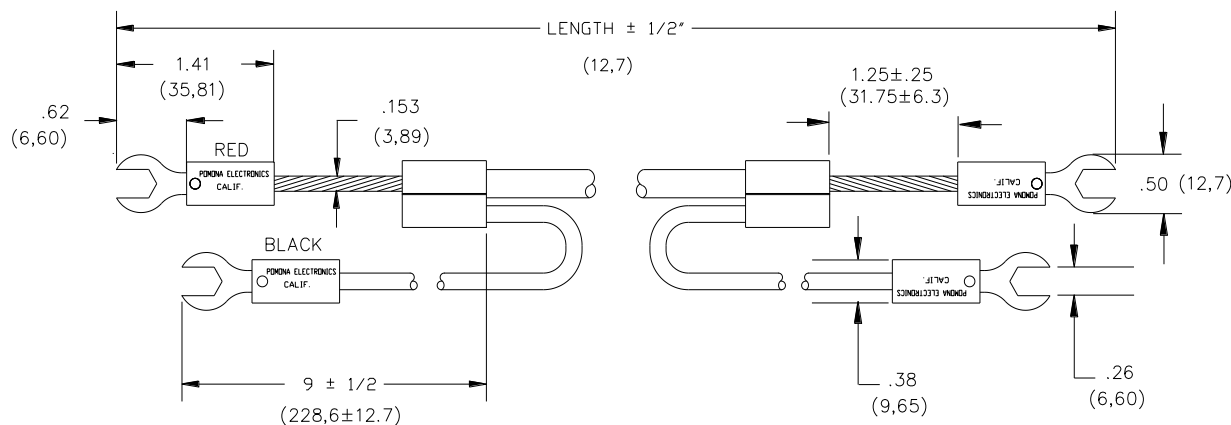

Features

- Pomona's Model 1756 is part of a family of test accessories ideal for low voltage precision measurements.
- Spade lugs are of high conductivity, gold plated ETP copper alloy 110, to greatly minimize the effects of Thermal Electric Voltage (Thermal EMF).
- Thermal EMF is generated at the junction of dissimilar metals at different temperatures and is a common source of error in low micro and nano volt measurements.
- In addition, low Thermal EMF spade lugs are attached to the wire shield to lessen interference, interaction, or leakage which might affect the accuracy of your precision voltage measurement.

Materials

- Spade Lugs: ETP (Electrolytic Tough Pitch) 110 Copper Alloy, 1/2 Hard, Gold Plated
Insulation: Polypropylene, molded to spade lug body and wire. Color: Red and Black
Marking: "POMONA ELECTRONICS CALIF"
- Cable: 12 AWG; Stranding 7 x 38/36 Bare Copper, Braided Bare Copper Shield
Inner Insulation: Natural Polyethylene, O.D. .153" (3,89mm)
Outer Jacket: PVC, Color: Black, O.D. .246" (6,25mm)
Marking: "POMONA 1756-XX"
- Shield Lead: 18 AWG, Stranding 65 x 36 t.c., PVC Insulated, O.D. .144" (3,66mm)

Ratings

Voltage: For *CE compliance* and for personal safety, do not hold in hand when voltages exceed 30 Vrms/60 Vdc.
Maximum voltage for *hands free use* in controlled testing environments: 2000 Vrms Max.
Do not use on circuits where transient stresses can exceed the rated voltage.

Temperature: +55°C (+131°F) Max.

Current: 20 Amperes Max.

Ordering Information

Model 1756-XX

XX = Lead Length in Inches, Standard Length: 24" (60,96cm) & 48" (121,92cm)

Additional lengths can be quoted upon request.

USA: Sales: 800-490-2361
Technical Support: technicalsupport@pomonatest.com
Fax: 425-446-5844

Europe: 31-(0) 40 2675 150 International: 425-446-5500

Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm),
.xxx = ±.005" (.127 mm). All specifications are to the latest revisions.
Specifications are subject to change without notice. Registered trademarks are
the property of their respective companies.