
## Pomona®

## Model 2455 Connector Type N (F) Panel Receptacle

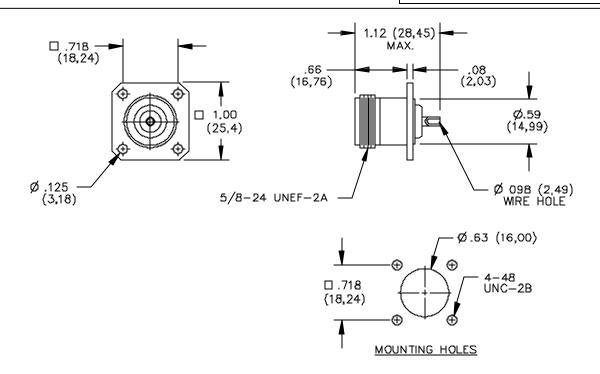

## **MATERIALS:**

Body: Gold Plated Brass

Center Contact: Gold Plated Beryllium Copper

Dielectric: PTFE

Finish:

Body: Tarnish Resistant Center Contact: Gold Plated

## **RATINGS:**

Operating Temperature:  $-65^{\circ}\text{C} (-85^{\circ}\text{F}) \text{ to } +165^{\circ}\text{C} (+329^{\circ}\text{F})$ 

Operating Voltage: 1000 VRMS Nominal Impedance: 50 Ohms

**ORDERING INFORMATION:** Model 2455

All dimensions are in inches. Tolerances (except noted):  $.xx = \pm .02$ " (,51 mm),  $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

