


Model 3014 Stacking Banana Plug To Miniature Stacking Banana Plug

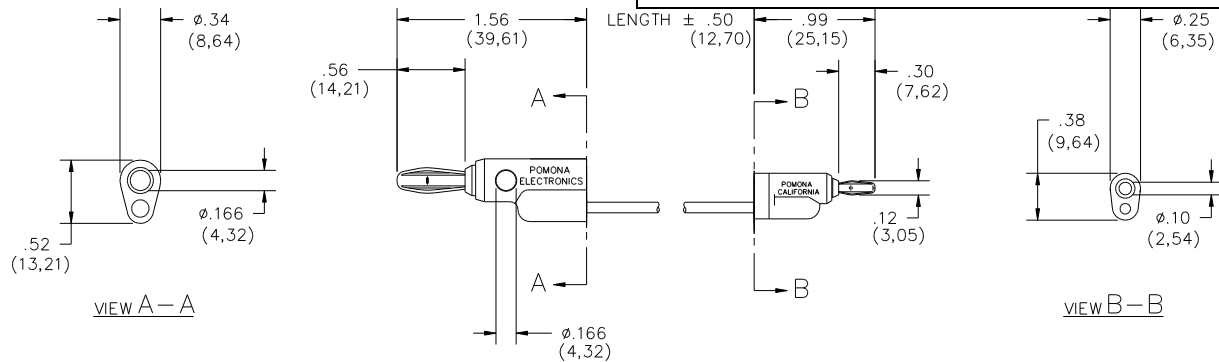

FEATURES:

- Converts a standard Banana Jack to a Mini Banana Plug or converts a Mini Banana Jack to a standard Banana Plug.
- Cross stacking type Banana Jack, vertical stacking Banana and Mini Banana Plug.

MATERIALS:

Conn: Stacking Banana Plug

Material: Spring, Beryllium Copper per QQ-C-533, Alloy 172, Cond. HT.

Plug Body – Brass per QQ-B-626, Alloy 360, ½ Hard.

Finish: Nickel plated per QQ-N-290, Class 2, 200/300 microinches.

Insulation: Polypropylene molded to plug body and wire. Color matches color of wire.

Marking: “POMONA ELECTRONICS POMONA CALIFORNIA.”

Wire: 20 AWG, stranding 41 x 36 t.c., PVC insulated, 2.1 (.087) O.D.

Color: See Ordering Information.

Marking: “POMONA 3014-XX-*”

Conn: Miniature Stacking Banana Plug

Material: Spring - Beryllium Copper per QQ-C-533, Alloy 172, Cond. HT.

Plug Body – Brass per QQ-B-626, Alloy 360, ½ Hard.

Finish: Gold plated per MIL-G-45204, Type II, Class 00 over electroless nickel

Insulation: Polypropylene molded to plug body and wire. Color matches color of wire.

Marking: “POMONA ELECTRONICS POMONA CALIFORNIA.”

RATINGS:

Operating Temperature: + 55°C. (+131°F.) Max.

Operating Voltage: Hand-held testing: 30VAC/60VDC Max.

Hands free testing in controlled voltage environments: 3000 WVDC Max.

Current: 5 Amperes

ORDERING INFORMATION: Model 3014-XX-*

XX = Cable Lengths, Standard Lengths. 36” (914), & 60” (1524).

Additional lengths and colors can be quoted upon request. *= Color, -0 Black, -2 Red.

All dimensions are in inches. Tolerances (except noted): .xx = ±.02” (.51 mm), .xxx = ± .005” (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA

6/9/99

SY/EH/LS

W:\pomona\grponly\Datasheet Updates\Updates 2005\d3014_1_02.doc

More drawings available at www.pomonaelectronics.com

Page 1 of 1