
Pomona[®]

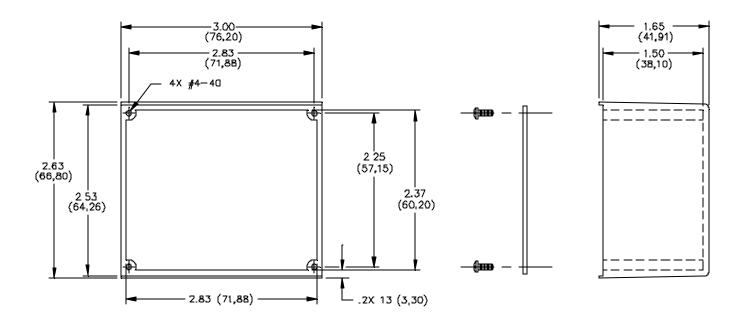

MATERIALS:

Screws: 4 each #4-40 x 6.35 (1/4") Phillips pan head pr MS 35206-213 with blue zinc plating. Cover: 1.60 (.063) thick aluminum Alloy 1100-H14 Finish: Clear anodized per MIL-A-8625, Shielded Housing: Die cast aluminum alloy A380 or A384. Finish: Blue baked enamel per Federal Standard 595 #25109 over primer wash per DOD-P-15328.

RATINGS:

Operating Temperature: +150°C. (+302°F.) Max.

ORDERING INFORMATION: Model 3601

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02"$ (.51 mm), $.xxx = \pm .005"$ (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.

Made in USA

6/9/99 SY/EH/LS

Sales: 800-490-2361 Fax: 888-403-3360 Technical Assistance: 800-241-2060 S:\Engineering \Release \DataSheets \FlukeDataSheet \d3601 1 01.doc

www.valuetronics.com