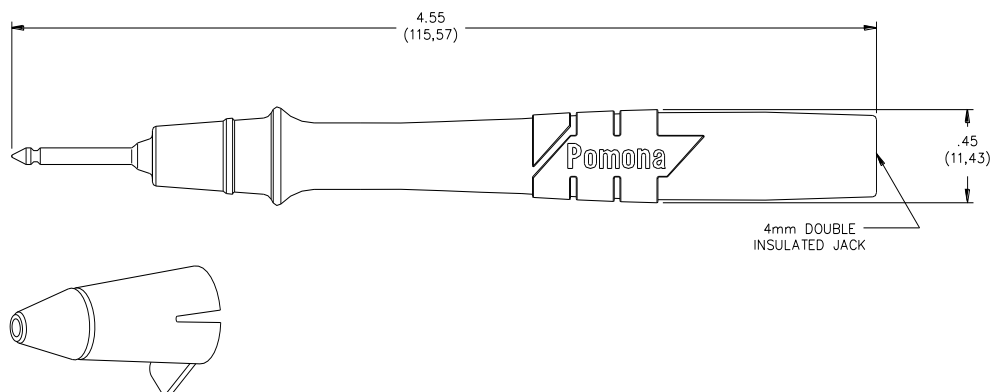


Model 6232A
Modular Test Probe with Standard 0.080 (2mm) Tip

PROTECTIVE CAP

**FEATURES**

- Modular designed for use with Pomona CE test lead sets, or any other modular test leads with a CE safety style sheathed banana jack.
- Notched .080" (2mm) probe tip; notch near probe tip end helps keep probe from sliding off test points.
- Probe tip mates with 0.080 (2mm) pin tip jacks.

MATERIALS

Probe Body: Black or Red Polypropylene
Tip: Nickel plated brass, notched .080" (2mm) tip
Jack: Nickel plated brass, .166" (4mm) safety style sheathed banana jack

RATINGS

Operating Voltage: IEC 61010-031, CAT III 1000 V (with protective cap),
CAT II 1000 V (without protective cap).
Current: 10 Amperes

ORDERING INFORMATION:

Model# 6232A (Set includes one black and one red probe)

Probes can be used with the following Pomona CE test lead sets:

- 5907A * Straight banana plug to right-angle banana plug test lead set; length 48" (122.0cm)
- 5908A * Straight banana plug to straight banana plug test lead set; length 48" (122.0cm)
- 5909A * Right-angle banana plug to right-angle banana plug test lead set; length , 48" (122.0cm)
- 6358 * Straight banana plug to Retractable sheath banana plug test lead set; length 48" (122.0cm)

* See data sheets for specifications

USA: Sales: 800-490-2361
Technical Support: technicalsupport@pomonatest.com
Fax: 425-446-5844

Europe: 31-(0) 40 2675 150 International: 425-446-5500
Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm),
.xxx = ±.005" (.127 mm). All specifications are to the latest revisions.
Specifications are subject to change without notice. Registered trademarks are
the property of their respective companies.