


Model 6517 BNC to Bantam Cable

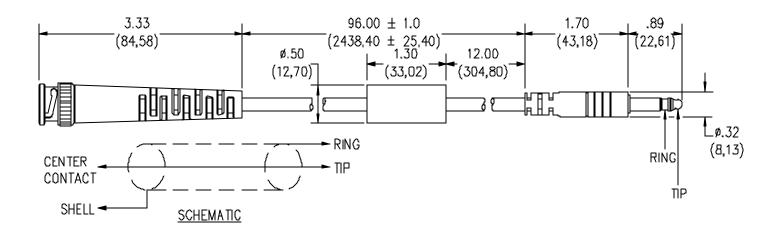

FEATURES:

• Provides quick access from a Bantam Jack to a BNC (Female)

• Plugs are molded directly to the cable for added pull strength

MATERIALS:

Connectors: BNC Male

Body: Brass, Tarnish resistant plating

Dielectric: PTFE

Center Contact – Gold Plated Brass

Strain Relief: PVC molded directly to cable and connectors

Bantam: 3 Conductor mini-phone connector, sleeve not connected

Cable Marking: "Pomona 6517-96"

RATINGS:

Operating Voltage: 300VRMS

ORDERING INFORMATION: Model 6517-96

Standard Length = 96" (243 cm)

All dimensions are in inches. Tolerances (except noted): $.xx = \pm .02$ ° (,51 mm), $.xxx = \pm .005$ ° (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

7/10/02 SY/EH/LS
Last saved by Laura Goldberg

C:\Laura Goldberg\FlukeDataSheet\d6517 1 02.doc

Sales: 800-490-2361 Fax: 888-403-3360 Technical Assistance: 800-241-2060 Pomona*ACCESS* **90913** (800) 444-6785 or (425) 446-6010 More drawings available at www.pomonaelectronics.com