


Model 72920
2mm SAFETY Sheathed Patch Cords

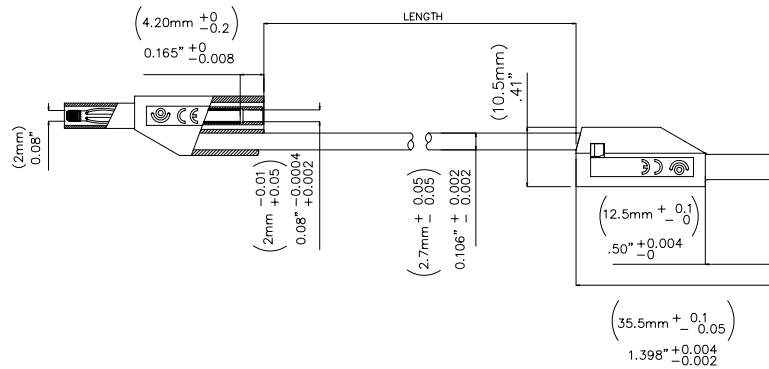

Features

- Multi-stacking 2mm safety sheathed male/male patch cord, PVC
- Rating: 600V Cat II
- 10A Max.

Materials

- Plug Body: Nickel Plated Brass
- Spring: Nickel plated Beryllium copper
- Spring tip: Polysulfone
- Insulation: Polpropylene.
- Wire Insulation: PVC.

Ordering Information

Model: 72920-Length-Color
 Lengths: 20 inch (50cm) or 39in (100mm)
 Colors: Black (-0) or Red (-2)

Specifications

| | |
|-----------------------|--|
| Operating Temperature | -20 °C to +80 °C |
| Max Current | 10A |
| Max Voltage | 600 V CAT II |
| Max Resistance | 15 m Ω at 20 inch 20 m Ω at 39 inch |

USA: Sales: 800-490-2361 Technical Support: 800-241-2060 Fax: 888-403-3360

Europe: 31-(0) 40 2675 150 **International:** 425-446-5500
 e-mail: technicalsupport@pomonatest.com

Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.