




VB1032 VSWR Bridge

Product Overview

VB1032 is used in combination with the **RIGOL** DSA series spectrum analyzer to measure S11-related parameters (such as return loss, reflection coefficient and VSWR). VB1032 provides three N (Female) connectors as shown in the figure below.

- **IN:** Signal input terminal. Here the signal generator or the output terminal of the tracking generator of the spectrum analyzer is connected.
- **OUT:** Signal output terminal. Here the power meter or the RF input terminal of the spectrum analyzer is connected.
- **DUT:** Here the device under test is connected.



Measurement Connection

Connect VB1032 to the spectrum analyzer as shown in the figure on the right.

Connect the spectrum analyzer


Use 2 Dual N (Male) adaptors to connect the output terminal of the tracking generator and the RF input terminal of the spectrum analyzer to the **IN** terminal and **OUT** terminal of the VSWR bridge respectively.

Connect the device under test

Do not use cables or adaptors as far as possible to avoid additional reflection.

Typical Applications

- Measurement of the S11-related parameters of the filter, amplifier, mixer, etc.
- Resonant frequency and VSWR tests of the antenna.

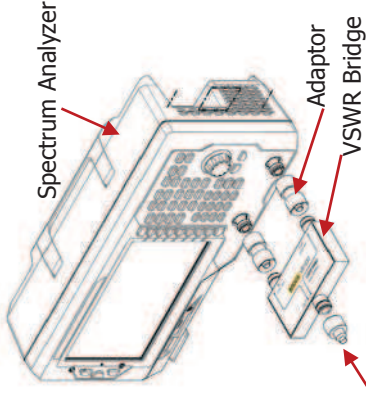

Specifications

Frequency	
Frequency Range	1 MHz to 3.2 GHz
Connector	
Connector Type	N (Female) Type
Adaptor	Dual N (Male) Type
Impedance	50 Ω
Insertion Loss	
IN to DUT	< 10 dB (Typical)
Directivity	
Typical	1 MHz to 10 MHz: ≥ 25 dB
	10 MHz to 3 GHz: ≥ 30 dB
	3 GHz to 3.2 GHz: ≥ 25 dB
Input Power	
Maximum Input Power (DC Not Allowed)	+27 dBm (0.5 W)
General Specifications	
Dimensions	115 mm $\times$ 62 mm $\times$ 18 mm
	256 mm $\times$ 190 mm $\times$ 43 mm (With Package)
Weight	0.2 kg
	0.9 kg (With Package)
Operation Temperature	25 $^{\circ}$ C $\pm$ 5 $^{\circ}$ C
Storage Temperature	-40 $^{\circ}$ C to 70 $^{\circ}$ C ^[1]

NOTE^[1]: In an environment with extremely high temperature or high humidity, the oxidation may occurs to the product surface.