

R&S[®]SMCVB-KS12

ISDB-T Streams

User Manual



1179266002
Version 01

ROHDE & SCHWARZ
Make ideas real



This document describes the following software options:

- R&S®SMCVB-KS12 ISDB-T Streams (1434.4973.xx)

© 2020 Rohde & Schwarz GmbH & Co. KG

Mühlhofstr. 15, 81671 München, Germany

Phone: +49 89 41 29 - 0

Email: info@rohde-schwarz.com

Internet: www.rohde-schwarz.com

Subject to change – data without tolerance limits is not binding.

R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG.

Trade names are trademarks of the owners.

1179.2660.02 | Version 01 | R&S®SMCVB-KS12

The following abbreviations are used throughout this manual: R&S®SMCV100B is abbreviated as R&S SMCV100B.

Contents

1	Welcome to the R&S SMCVB-KS12 Option.....	5
1.1	Key Features.....	5
1.2	Installation.....	5
1.3	Documentation Overview.....	5
1.3.1	Getting Started Manual.....	5
1.3.2	User Manuals and Help.....	6
1.3.3	Service Manual.....	6
1.3.4	Instrument Security Procedures.....	6
1.3.5	Printed Safety Instructions.....	6
1.3.6	Data Sheets and Brochures.....	6
1.3.7	Release Notes and Open Source Acknowledgment (OSA).....	7
1.3.8	Application Notes, Application Cards, White Papers, etc.....	7
2	Available Transport Stream Files.....	8
2.1	Basic Streams.....	8
2.1.1	Overview.....	8
2.1.2	SDTV_MPEG_Codec43 (29 Hz).....	9
2.1.2.1	Video.....	10
2.1.2.2	Audio.....	10
2.1.3	SDTV_MPEG_Codec169 (29 Hz).....	10
2.1.3.1	Video.....	11
2.1.3.2	Audio.....	11
2.1.4	HDTV_MPEG_Pattern (59 Hz).....	11
2.1.4.1	Video.....	12
2.1.4.2	Audio.....	12
2.1.5	HDTV_MPEG_Pattern (29 Hz).....	13
2.1.5.1	Video.....	13
2.1.5.2	Audio.....	13
2.1.6	SDTV_MPEG_Park (29 Hz).....	14
2.1.6.1	Video.....	14
2.1.6.2	Audio.....	15
2.1.7	HDTV_MPEG_Park (29 Hz).....	15

2.1.7.1	Video.....	15
2.1.7.2	Audio.....	16
2.2	Country-Specific Streams.....	16
2.2.1	Brazil.....	16
2.2.1.1	One*.ISDBT_C (1-Layer File).....	16
2.2.1.2	Two1.ISDBT_C (2-Layer File).....	18
2.2.1.3	Two2.ISDBT_C (2-Layer File).....	19
2.2.1.4	Two3.ISDBT_C (2-Layer File).....	21
2.2.1.5	Two4.ISDBT_C (2-Layer File).....	22
2.2.1.6	Two5.ISDBT_C (2-Layer File).....	23
2.2.1.7	Three1.ISDBT_C (3-Layer File).....	25
2.2.1.8	Three2.ISDBT_C (3-Layer File).....	26
2.2.1.9	Three3.ISDBT_C (3-Layer File).....	28
2.2.1.10	Three4.ISDBT_C (3-Layer File).....	29
2.2.2	Argentina.....	31
2.2.2.1	Arg_conf01.ISDBT_C (3-Layer File).....	31
2.2.2.2	Arg_conf02.ISDBT_C (3-Layer File).....	32
2.2.2.3	Arg_conf03.ISDBT_C (3-Layer File).....	34
2.2.2.4	Arg_conf04.ISDBT_C (3-Layer File).....	35
	Index.....	37

1 Welcome to the R&S SMCVB-KS12 Option

The R&S SMCVB-KS12 is a stream library that provides stream files in accordance with the ISDB-T/ISDB-T_{SB} digital standard.

This user manual contains a reference description of the functionality that the stream library provides. All functions not discussed in this manual are described in the R&S SMCV100B user manual. The latest version is available at:

www.rohde-schwarz.com/manual/SMCV100B

1.1 Key Features

The R&S SMCVB-KS12 features:

- Numerous stream files in accordance with ISDB-T/ISDB-T_{SB} digital standard
- Streaming of high-quality video contents
- Streaming of high-quality audio contents
- Efficient use with dedicated streams

1.2 Installation

You can find detailed installation instructions in the supplement document of the R&S SMCV100B user manual and in the R&S SMCV100B user manual describing firmware versions later than FW 4.70.176.xx of the R&S SMCV100B.

1.3 Documentation Overview

This section provides an overview of the R&S SMCV100B user documentation. Unless specified otherwise, you find the documents on the R&S SMCV100B product page at:

www.rohde-schwarz.com/manual/smcv100b

1.3.1 Getting Started Manual

Introduces the R&S SMCV100B and describes how to set up and start working with the product. Includes basic operations, typical measurement examples, and general information, e.g. safety instructions, etc. A printed version is delivered with the instrument.

1.3.2 User Manuals and Help

Separate manuals for the base unit and the software options are provided for download:

- **Base unit manual**
Contains the description of all instrument modes and functions. It also provides an introduction to remote control, a complete description of the remote control commands with programming examples, and information on maintenance, instrument interfaces and error messages. Includes the contents of the getting started manual.
- **Software option manual**
Contains the description of the specific functions of an option. Basic information on operating the R&S SMCV100B is not included.

The contents of the user manuals are available as help in the R&S SMCV100B. The help offers quick, context-sensitive access to the complete information for the base unit and the software options.

All user manuals are also available for download or for immediate display on the Internet.

1.3.3 Service Manual

Describes the performance test for checking compliance with rated specifications, firmware update, troubleshooting, adjustments, installing options and maintenance.

The service manual is available for registered users on the global Rohde & Schwarz information system (GLORIS):

<https://gloris.rohde-schwarz.com>

1.3.4 Instrument Security Procedures

Deals with security issues when working with the R&S SMCV100B in secure areas. It is available for download on the Internet.

1.3.5 Printed Safety Instructions

Provides safety information in many languages. The printed document is delivered with the product.

1.3.6 Data Sheets and Brochures

The data sheet contains the technical specifications of the R&S SMCV100B. It also lists the options and their order numbers and optional accessories.

The brochure provides an overview of the instrument and deals with the specific characteristics.

See www.rohde-schwarz.com/brochure-datasheet/smcv100b

1.3.7 Release Notes and Open Source Acknowledgment (OSA)

The release notes list new features, improvements and known issues of the current firmware version, and describe the firmware installation.

The open-source acknowledgment document provides verbatim license texts of the used open source software.

See www.rohde-schwarz.com/firmware/smcv100b

1.3.8 Application Notes, Application Cards, White Papers, etc.

These documents deal with special applications or background information on particular topics.

See www.rohde-schwarz.com/application/smcv100b

2 Available Transport Stream Files

This chapter contains a description of the available transport stream files.



2.1 Basic Streams





These streams are stored in the `non-BTS` subfolder.

2.1.1 Overview

Each of the ISDB-T transport streams consists of a video elementary stream (MPEG2) and an AAC-LC ADTS audio elementary stream.

The file name gives information about the video information (scene or pattern) and the size (SDTV or HDTV) of the coded video picture.

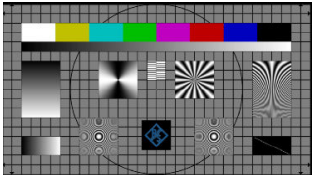Video elementary stream	ISDBT test stream & video elementary stream	
	29 Hz	59 Hz
Codec 4:3 Test Pattern Interlaced 4:3 480 lines / 	SDTV_MPEG_Codec43 Codec43 multiburst 06 Mbps 24 frames	
Codec 16:9 Test Pattern Interlaced 16:9 480 lines / 	SDTV_MPEG_Codec169 Codec169 multiburst 06 Mbps 24 frames	

Test Pattern Progressive 16:9 720 lines / 		HDTV_MPEG_Pattern Pattern 240 frames Note: Rotating white square moving every field (16.683 ms)
Test Pattern Interlace 16:9 1080 lines / 	HDTV_MPEG_Pattern Pattern 120 frames Note: Rotating white square moving every field (16.683 ms)	
Video elementary stream	ISDBT test stream & video elementary stream	
	29 Hz	59 Hz
Park Interlaced 16:9 1080 lines 576 lines / 	HDTV_MPEG_Park Park 960 frames	
Park Interlaced 16:9 480 lines / 	SDTV_MPEG_Park Park 0720 0480i 960 frames 06 Mbps	

2.1.2 SDTV_MPEG_Codec43 (29 Hz)

TSID: 32736 (0x7FE0)

SID: 1024 (0x0400)

Length: 80x24 video frames (64.064 s)

Tables: ISDB-T

Program

Program number: 1024

Service name: CH 1

2.1.2.1 Video



Figure 2-1: Codec 4:3 test pattern

MPEG2 MP@ML

- 29.97 frames/s
- 480 lines/picture
- 720 pixels/line
- 6 Mbit/s
- Seamless at sequence end
- Moving picture

2.1.2.2 Audio

Sine burst of 400 Hz with 0 dBfs for every 24th frame with a duration of 40 ms. If the "moving spot" is located on the left side (and is moving to the right), the 400 Hz burst sounds in the left channel. If the "moving spot" is located on the right side (and is moving to the left), the 1 kHz burst sounds in the right channel. There is no burst for the remaining time.

MPEG4 (AAC-LC ADTS)

- 48 ksample/s
- 144 kbit/s
- Seamless at sequence end
- Stereo

2.1.3 SDTV_MPEG_Codec169 (29 Hz)

TS ID: 32736 (0x7FE0)

SID: 1024 (0x0400)

Length: 80x24 video frames (64.064 s)

Tables: ISDB-T

Program

Program number: 1024

Service name: CH 1

2.1.3.1 Video

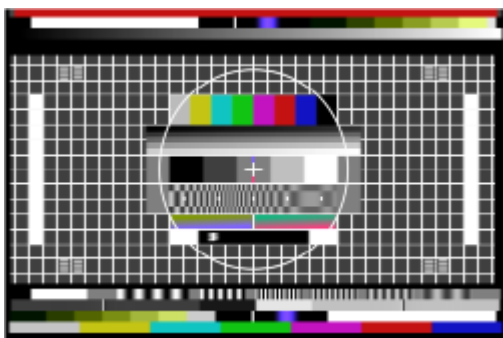


Figure 2-2: Codec 4:3 test pattern

MPEG2 MP@ML

- 29.97 frames/s
- 480 lines/picture
- 720 pixels/line
- 6 Mbit/s
- Seamless at sequence end
- Moving picture

2.1.3.2 Audio

Sine burst of 400 Hz with 0 dBfs for every 24th frame with a duration of 40 ms. If the "moving spot" is located on the left side (and is moving to the right), the 400 Hz burst sounds in the left channel. If the "moving spot" is located on the right side (and is moving to the left), the 1 kHz burst sounds in the right channel. There is no burst for the remaining time.

MPEG4 (AAC-LC ADTS)

- 48 ksample/s
- 144 kbit/s
- Seamless at sequence end
- Stereo

2.1.4 HDTV_MPEG_Pattern (59 Hz)

TS ID: 32736 (0x7FE0)

SID: 1024 (0x0400)

Length: 16x120 video frames (64.064 s)

Tables: ISDB-T

Program

Program number: 1024

Service name: CH 1

2.1.4.1 Video

This test pattern allows to assess the screen geometry, sharpness, quantization and display of all fields.

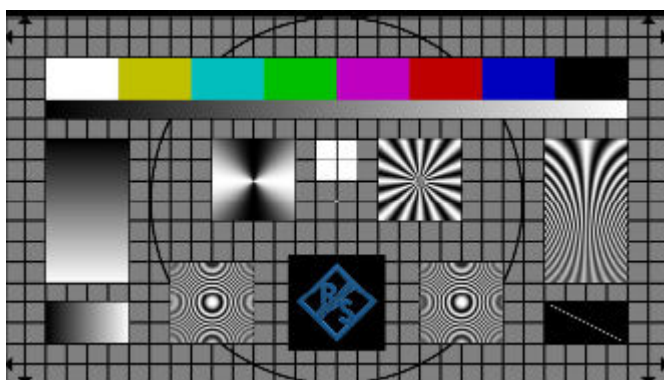


Figure 2-3: Test pattern

MPEG2 MP@HL

- 59.94 frames/s
- 720 lines/picture
- 1280 pixels/line
- 16 Mbit/s
- Seamless at sequence end
- Moving picture

2.1.4.2 Audio

Sine burst of 1 kHz with 0 dBfs at both left and right channel.

MPEG4 (AAC-LC ADTS)

- 48 ksample/s
- 144 kbit/s
- Seamless at sequence end
- Stereo

2.1.5 HDTV_MPEG_Pattern (29 Hz)

TS ID: 32736 (0x7FE0)

SID: 1024 (0x400)

Length: 16x120 video frames (64.064 s)

Tables: ISDB-T

Program

Program number: 1024

Service name: CH 1

2.1.5.1 Video

This test pattern allows to assess the screen geometry, sharpness, quantization and display of all fields.

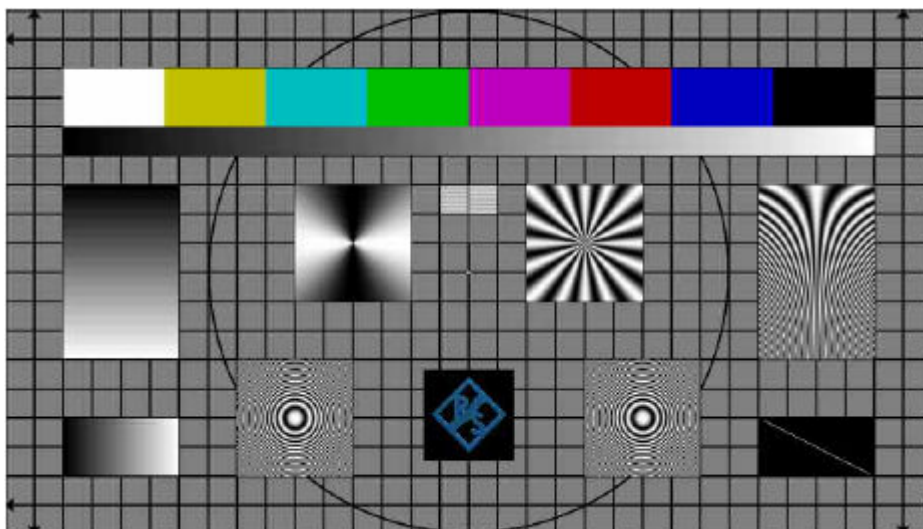


Figure 2-4: Test pattern

MPEG2 MP@HL

- 29.97 frames/s
- 1080 lines/picture
- 1920 pixels/line
- 16 Mbit/s
- Seamless at sequence end
- Moving picture

2.1.5.2 Audio

Sine burst of 1 kHz with 0 dBfs at both left and right channel.

MPEG4 (AAC-LC ADTS)

- 48 ksample/s
- 144 kbit/s
- Seamless at sequence end
- Stereo

2.1.6 SDTV_MPEG_Park (29 Hz)

TS ID: 32736 (0x7FE0)

SID: 1024 (0x400)

Length: 2x960 video frames (64.064 s)

Tables: ISDB-T

Program

Program number: 1024

Service name: CH 1

2.1.6.1 Video

This scene shows many details at a less critical rate of motion.

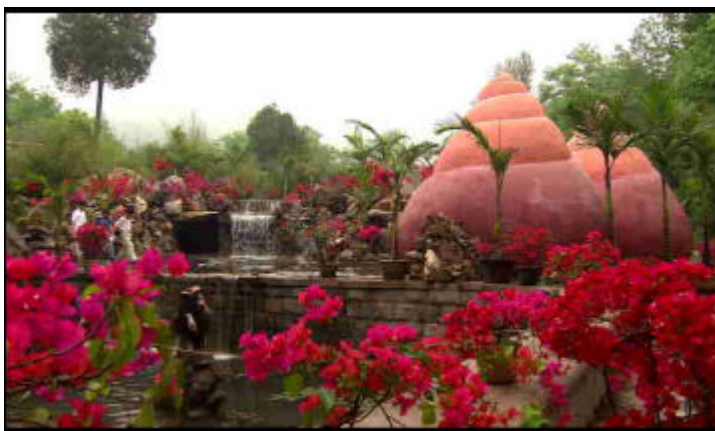


Figure 2-5: Park scene

MPEG2 MP@ML

- 29.97 frames/s
- 480 lines/picture
- 720 pixels/line
- 6 Mbit/s
- Seamless at sequence end
- Moving picture

2.1.6.2 Audio

Background noise at both left and right channel.

MPEG4 (AAC-LC ADTS)

- 48 ksample/s
- 144 kbit/s
- Seamless at sequence end
- Stereo

2.1.7 HDTV_MPEG_Park (29 Hz)

TS ID: 32736 (0x7FE0)

SID: 1024 (0x400)

Length: 2x960 video frames (64.064 s)

Tables: ISDB-T

Program

Program number: 1024

Service name: CH 1

2.1.7.1 Video

This scene shows many details at a less critical rate of motion.

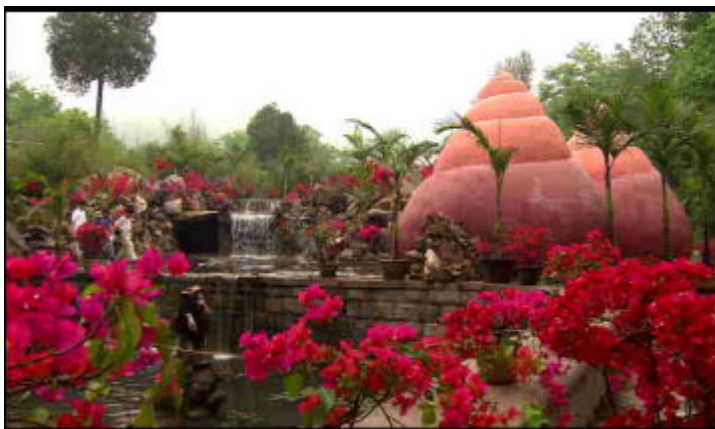


Figure 2-6: Park scene

MPEG2 MP@HL

- 29.97 frames/s
- 1080 lines/picture
- 1920 pixels/line
- 16 Mbit/s

- Seamless at sequence end
- Moving picture

2.1.7.2 Audio

Background noise at both left and right channel.

MPEG4 (AAC-LC ADTS)

- 48 ksample/s
- 144 kbit/s
- Seamless at sequence end
- Stereo

2.2 Country-Specific Streams

These streams are stored in the `BTS` subfolder.

2.2.1 Brazil

The transport streams described in this chapter comply with the Brazilian ISDB-Tb standard.

2.2.1.1 One*.ISDBT_C (1-Layer Files)

Filename	One1	One2	One3	One4	One5
Broadcaster prefix	ZYT-999				
Transmission parameters	1 layer				
Mode	Mode 3 (8K)				
Guard interval	1/8	1/16	1/8	1/16	1/16
Layer	A				
Number of segments	13				
Modulation	64QAM				
Code rate	3/4	3/4	2/3	2/3	3/4
Time interleaving	2				
Video					
Type	H.264 High Profile @L4.0				

Filename	One1	One2	One3	One4	One5
Content	Pattern	Pattern	Flowers	Flowers	Park
Aspect ratio	16:9				
Resolution	1920 x 1080				
Frame rate	30 / 1.001 Hz				
Audio					
Type	MPEG-4 HE-AAC v1 L2				
Format	LOAS / LATM				
Content	1 kHz	1 kHz	Flowers	Flowers	1 kHz
Mode	Stereo				
PID information					
Video PID	0x0201				
Audio PID	0x0202				
PMT PID	0x0020				
PCR PID	0x0200				
IIP	0x1FF0				
Tables					
PAT	Yes				
PMT	Yes	Yes	Yes	Yes	Yes
NIT	Yes	Yes	Yes	Yes	Yes
SDT	Yes	Yes	Yes	Yes	Yes
TOT	Yes	Yes	Yes	Yes	Yes
BIT	Yes	Yes	Yes	Yes	Yes
CDT	Yes	Yes	Yes	Yes	Yes
Program number	0x70E0	Yes	Yes	Yes	Yes
Network ID	0x1387				
Area code	0xA3D (São Paulo)				
Frequency	(599 + 1/7) MHz - Channel 35				
Virtual channel	35.1				
Service name	R&S HD				
Number of packets	387072				

Filename	One1	One2	One3	One4	One5
BTS frame size	4608	365568	387072	365568	696320
Number of BTS frames	84	4352	4608	4352	4352

2.2.1.2 Two1.ISDBT_C (2-Layer File)

Corresponds to "Pattern01.ISDBT_C" in former release.

Filename	Two1.ISDBT_C	
Broadcaster prefix	ZYT-999	
Transmission parameters	2 layers	
Mode	Mode 3 (8K)	
Guard interval	1/16	
Layer	A	B
Number of segments	1	12
Modulation	QPSK	64QAM
Code rate	2/3	3/4
Time interleaving	4	2
Video		
Type	H.264 Baseline Profile @L1.3	H.264 High Profile @L4.0
Content	Pattern	Pattern
Aspect ratio	4:3	16:9
Resolution	320 x 240	1920 x 1080
Frame rate	30 / 1.001 Hz	
Audio		
Type	MPEG-4 HE-AAC v2 L2	MPEG-4 HE-AAC v1 L2
Format	LOAS / LATM	
Content	1 kHz	1 kHz
Mode	Stereo	
PID information		
Video PID	0x0201	0x0101
Audio PID	0x0202	0x0102
PMT PID	0x1FC8	0x0020
PCR PID	0x0200	0x0100
IIP	0x1FF0	

Filename	Two1.ISDBT_C	
Tables	Layer A	Layer B
PAT		Yes
PMT	Yes	Yes
NIT	Yes	
SDT	Yes	
TOT	Yes	
BIT		
CDT		
Program number	0x70F8	0x70E0
Network ID	0x1387	
Area code	0xA3D (São Paulo)	
Frequency	(599 + 1/7) MHz - Channel 35	
Virtual channel	35.1	
Service name	R&S 1seg	R&S HD
Number of packets	382976	
BTS frame size	4352	
Number of BTS frames	88	

2.2.1.3 Two2.ISDBT_C (2-Layer File)

Corresponds to "Pattern02.ISDBT_C" in former release.

Filename	Two2.ISDBT_C	
Broadcaster prefix	ZYT-999	
Transmission parameters	2 layers	
Mode	Mode 3 (8K)	
Guard interval	1/16	
Layer	A	B
Number of segments	1	12
Modulation	QPSK	16QAM
Code rate	2/3	3/4
Time interleaving	4	2
Video		
Type	H.264 Baseline Profile @L1.3	H.264 High Profile @L4.0
Content	Pattern	Pattern

Filename	Two2.ISDBT_C	
Aspect ratio	4:3	16:9
Resolution	320 x 240	1920 x 1080
Frame rate	30 / 1.001 Hz	
Audio		
Type	MPEG-4 HE-AAC v2 L2	MPEG-4 HE-AAC v1 L2
Format	LOAS / LATM	
Content	1 kHz	1 kHz
Mode	Stereo	
PID information		
Video PID	0x0201	0x0101
Audio PID	0x0202	0x0102
PMT PID	0x1FC8	0x0020
PCR PID	0x0200	0x0100
IIP	0x1FF0	
Tables	Layer A	Layer B
PAT		Yes
PMT	Yes	Yes
NIT	Yes	
SDT	Yes	
TOT	Yes	
BIT		
CDT		
Program number	0x70F8	0x70E0
Network ID	0x1387	
Area code	0xA3D (São Paulo)	
Frequency	(599 + 1/7) MHz - Channel 35	
Virtual channel	35.1	
Service name	R&S 1seg	R&S HD
Number of packets	382976	
BTS frame size	4352	
Number of BTS frames	88	

2.2.1.4 Two3.ISDBT_C (2-Layer File)

Corresponds to "Pattern03.ISDBT_C" in former release.

Filename	Two3.ISDBT_C	
Broadcaster prefix	ZYT-999	
Transmission parameters	2 layers	
Mode	Mode 3 (8K)	
Guard interval	1/8	
Layer	A	B
Number of segments	1	12
Modulation	QPSK	64QAM
Code rate	2/3	3/4
Time interleaving	4	2
Video		
Type	H.264 Baseline Profile @L1.3	H.264 High Profile @L4.0
Content	Pattern	Pattern
Aspect ratio	4:3	16:9
Resolution	320 x 240	1920 x 1080
Frame rate	30 / 1.001 Hz	
Audio		
Type	MPEG-4 HE-AAC v2 L2	MPEG-4 HE-AAC v1 L2
Format	LOAS / LATM	
Content	1 kHz	1 kHz
Mode	Stereo	
PID information		
Video PID	0x0201	0x0101
Audio PID	0x0202	0x0102
PMT PID	0x1FC8	0x0020
PCR PID	0x0200	0x0100
IIP	0x1FF0	
Tables	Layer A	Layer B
PAT		Yes
PMT	Yes	Yes
NIT	Yes	
SDT	Yes	

Filename	Two3.ISDBT_C	
TOT	Yes	
BIT		
CDT		
Program number	0x70F8	0x70E0
Network ID	0x1387	
Area code	0xA3D (São Paulo)	
Frequency	(599 + 1/7) MHz - Channel 35	
Virtual channel	35.1	
Service name	R&S 1seg	R&S HD
Number of packets	405504	
BTS frame size	4608	
Number of BTS frames	88	

2.2.1.5 Two4.ISDBT_C (2-Layer File)

Filename	Two4.ISDBT_C	
Broadcaster prefix	ZYT-999	
Transmission parameters	2 layers	
Mode	Mode 3 (8K)	
Guard interval	1/16	
Layer	A	B
Number of segments	1	12
Modulation	QPSK	64QAM
Code rate	2/3	3/4
Time interleaving	4	2
Video		2 videos
Type	H.264 Baseline Profile @L1.3	H.264 High Profile @L4.0
Content	Pattern	Pattern & Flowers
Aspect ratio	4:3	16:9
Resolution	320 x 240	1920 x 1080
Frame rate	30 / 1.001 Hz	
Audio		
Type	MPEG-4 HE-AAC v2 L2	MPEG-4 HE-AAC v1 L2
Format	LOAS / LATM	

Filename	Two4.ISDBT_C	
Content	1 kHz	1 kHz & Flowers
Mode	Stereo	
PID information		
Video PID	0x0301	0x0101 & 0x0201
Audio PID	0x0302	0x0102 & 0x0202
PMT PID	0x1FC8	0x0020 & 0x0021
PCR PID	0x0300	0x0100 & 0x0200
IIP	0x1FF0	
Tables	Layer A	Layer B
PAT		Yes
PMT	Yes	Yes
NIT	Yes	
SDT	Yes	
TOT	Yes	
BIT	Yes	
CDT	Yes	
Program number	0x70F8	0x70E0 & 0x70E1
Network ID	0x1387	
Area code	0xA3D (São Paulo)	
Frequency	(599 + 1/7) MHz - Channel 35	
Virtual channel	35.1	35.1 & 35.2
Service name	R&S 1seg	R&S HD1 & R&S HD2
Number of packets	426496	
BTS frame size	4352	
Number of BTS frames	98	

2.2.1.6 Two5.ISDBT_C (2-Layer File)

Filename	Two5.ISDBT_C	
Broadcaster prefix	ZYT-999	
Transmission parameters	2 layers	
Mode	Mode 3 (8K)	
Guard interval	1/16	
Layer	A	B

Filename	Two5.ISDBT_C	
Number of segments	6	7
Modulation	16QAM	64QAM
Code rate	1/2	3/4
Time interleaving	2	2
Video		
Type	H.264 High Profile @L4.0	
Content	Park	Flowers
Aspect ratio	16:9	
Resolution	1920 x 1080	
Frame rate	30 / 1.001 Hz	
Audio		
Type	MPEG-4 HE-AAC v2 L2	MPEG-4 HE-AAC v1 L2
Format	LOAS / LATM	
Content	1 kHz	1 kHz & Flowers
Mode	Stereo	
PID information		
Video PID	0x0101	0x0201
Audio PID	0x0102	0x0202
PMT PID	0x0020	0x0021
PCR PID	0x0100	0x0200
IIP	0x1FF0	
Tables	Layer A	Layer B
PAT	Yes	
PMT	Yes	Yes
NIT	Yes	
SDT	Yes	
TOT	Yes	
BIT	Yes	
CDT	Yes	
Program number	0x70E0	0x70E1
Network ID	0x1387	
Area code	0xA3D (São Paulo)	
Frequency	(599 + 1/7) MHz - Channel 35	

Filename	Two5.ISDBT_C	
Virtual channel	35.1	35.2
Service name	R&S HD A	R&S HD B
Number of packets	435200	
BTS frame size	4352	
Number of BTS frames	100	

2.2.1.7 Three1.ISDBT_C (3-Layer File)

Filename	Three1.ISDBT_C		
Broadcaster prefix	ZYT-999		
Transmission parameters	3 layers		
Mode	Mode 3 (8K)		
Guard interval	1/16		
Layer	A	B	C
Number of segments	1	3	9
Modulation	QPSK	16QAM	64QAM
Code rate	2/3	3/4	3/4
Time interleaving	4	2	2
Video			
Type	H.264 Baseline Profile @L1.3	H.264 High Profile @L4.0	H.264 High Profile @L4.0
Content	Park	Pattern	Flowers
Aspect ratio	4:3	16:9	16:9
Resolution	320 x 240	1920 x 1080	1920 x 1080
Frame rate	30 / 1.001 Hz		
Audio			
Type	MPEG-4 HE-AAC v2 L2	MPEG-4 HE-AAC v1 L2	MPEG-4 HE-AAC v1 L2
Format	LOAS / LATM		
Content	1 kHz	1 kHz	Flowers
Mode	Stereo		
PID information			
Video PID	0x0301	0x0201	0x0101
Audio PID	0x0302	0x0202	0x0102
PMT PID	0x1FC8	0x0021	0x0020

Filename	Three1.ISDBT_C		
PCR PID	0x0300	0x0200	0x0100
IIP	0x1FF0		
Tables	Layer A	Layer B	Layer C
PAT		Yes	
PMT	Yes	Yes	Yes
NIT	Yes		
SDT	Yes		
TOT	Yes		
BIT	Yes		
CDT	Yes		
Program number	0x70F8	0x70E1	0x70E0
Network ID	0x1387		
Area code	0xA3D (São Paulo)		
Frequency	(599 + 1/7) MHz - Channel 35		
Virtual channel	35.1	35.2	35.1
Service name	R&S 1seg	R&S HD Layer B	R&S HD Layer C
Number of packets	435200		
BTS frame size	4352		
Number of BTS frames	100		

2.2.1.8 Three2.ISDBT_C (3-Layer File)

Filename	Three2.ISDBT_C		
Broadcaster prefix	ZYT-999		
Transmission parameters	3 layers		
Mode	Mode 3 (8K)		
Guard interval	1/16		
Layer	A	B	C
Number of segments	1	6	6
Modulation	QPSK	64QAM	64QAM
Code rate	1/2	2/3	3/4
Time interleaving	4	2	2
Video			

Filename	Three2.ISDBT_C		
Type	H.264 Baseline Profile @L1.3	H.264 High Profile @L4.0	H.264 High Profile @L4.0
Content	Flowers	Pattern	Park
Aspect ratio	4:3	16:9	16:9
Resolution	320 x 240	1920 x 1080	1920 x 1080
Frame rate	30 / 1.001 Hz		
Audio			
Type	MPEG-4 HE-AAC v2 L2	MPEG-4 HE-AAC v1 L2	MPEG-4 HE-AAC v1 L2
Format	LOAS / LATM		
Content	Flowers	1 kHz	1 kHz
Mode	Stereo		
PID information			
Video PID	0x0301	0x0201	0x0101
Audio PID	0x0302	0x0202	0x0102
PMT PID	0x1FC8	0x0021	0x0020
PCR PID	0x0300	0x0200	0x0100
IIP	0x1FF0		
Tables	Layer A	Layer B	Layer C
PAT		Yes	
PMT	Yes	Yes	Yes
NIT	Yes		
SDT	Yes		
TOT	Yes		
BIT	Yes		
CDT	Yes		
Program number	0x70F8	0x70E1	0x70E0
Network ID	0x1387		
Area code	0xA3D (São Paulo)		
Frequency	(599 + 1/7) MHz - Channel 35		
Virtual channel	35.1	35.2	35.1
Service name	R&S 1seg	R&S HD Layer B	R&S HD Layer C
Number of packets	435200		

Filename	Three2.ISDBT_C
BTS frame size	4352
Number of BTS frames	100

2.2.1.9 Three3.ISDBT_C (3-Layer File)

Filename	Three3.ISDBT_C		
Broadcaster prefix	ZYQ-327		
Transmission parameters	3 layers		
Mode	Mode 3 (8K)		
Guard interval	1/16		
Layer	A	B	C
Number of segments	1	3	9
Modulation	DQPSK	16QAM	64QAM
Code rate	2/3	3/4	3/4
Time interleaving	4	2	2
Video			
Type	H.264 Baseline Profile @L1.3	H.264 High Profile @L4.0	H.264 High Profile @L4.0
Content	Park	Pattern	Flowers
Aspect ratio	4:3	16:9	16:9
Resolution	320 x 240	1920 x 1080	1920 x 1080
Frame rate	30 / 1.001 Hz		
Audio			
Type	MPEG-4 HE-AAC v2 L2	MPEG-4 HE-AAC v1 L2	MPEG-4 HE-AAC v1 L2
Format	LOAS / LATM		
Content	1 kHz	1 kHz	Flowers
Mode	Stereo		
PID information			
Video PID	0x0301	0x0201	0x0101
Audio PID	0x0302	0x0202	0x0102
PMT PID	0x1FC8	0x0021	0x0020
PCR PID	0x0300	0x0200	0x0100
IIP	0x1FF0		
Tables	Layer A	Layer B	Layer C

Filename	Three3.ISDBT_C		
PAT		Yes	
PMT	Yes	Yes	Yes
NIT	Yes		
SDT	Yes		
TOT	Yes		
Program number	0x9FF8	0x9FE1	0x9FE0
Network ID	0xCFF		
Area code	0xA3F (Santos - São Paulo)		
Frequency	(539 + 1/7) MHz - Channel 25		
Virtual channel	44.1	44.2	44.1
Service name	R&S 1seg	R&S HD Layer B	R&S HD Layer C
Number of packets	435200		
BTS frame size	4352		
Number of BTS frames	100		

2.2.1.10 Three4.ISDBT_C (3-Layer File)

Filename	Three4.ISDBT_C		
Broadcaster prefix	ZYQ-327		
Transmission parameters	3 layers		
Mode	Mode 3 (8K)		
Guard interval	1/16		
Layer	A	B	C
Number of segments	1	6	6
Modulation	DQPSK	64QAM	64QAM
Code rate	1/2	2/3	3/4
Time interleaving	4	2	2
Video			
Type	H.264 Baseline Profile @L1.3	H.264 High Profile @L4.0	H.264 High Profile @L4.0
Content	Flowers	Pattern	Park
Aspect ratio	4:3	16:9	16:9
Resolution	320 x 240	1920 x 1080	1920 x 1080
Frame rate	30 / 1.001 Hz		

Filename	Three4.ISDBT_C		
Audio			
Type	MPEG-4 HE-AAC v2 L2	MPEG-4 HE-AAC v1 L2	MPEG-4 HE-AAC v1 L2
Format	LOAS / LATM		
Content	Flowers	1 kHz	1 kHz
Mode	Stereo		
PID information			
Video PID	0x0301	0x0201	0x0101
Audio PID	0x0302	0x0202	0x0102
PMT PID	0x1FC8	0x0021	0x0020
PCR PID	0x0300	0x0200	0x0100
IIP	0x1FF0		
Tables	Layer A	Layer B	Layer C
PAT		Yes	
PMT	Yes	Yes	Yes
NIT	Yes		
SDT	Yes		
TOT	Yes		
Program number	0x9FF8	0x9FE1	0x9FE0
Network ID	0xCFF		
Area code	0xA3F (Santos - São Paulo)		
Frequency	(539 + 1/7) MHz - Channel 25		
Virtual channel	10.1	10.2	10.1
Service name	R&S 1seg	R&S HD Layer B	R&S HD Layer C
Number of packets	435200		
BTS frame size	4352		
Number of BTS frames	100		

2.2.2 Argentina

2.2.2.1 Arg_conf01.ISDBT_C (3-Layer File)

Filename	Arg_conf01.ISDBT_C		
Transmission parameters	3 layers		
Mode	Mode 3 (8K)		
Guard interval	1/16		
Layer	A	B	C
Number of segments	1	3	9
Modulation	QPSK	16QAM	64QAM
Code rate	2/3	3/4	3/4
Time interleaving	4	2	2
Video			
Type	H.264 Baseline Profile @L1.3	H.264 High Profile @L4.0	H.264 High Profile @L4.0
Content	Flowers 84.4 kbps 320 frames 21.355 s	Codec43 2.76 Mbps 24 frames 0.96 s	Flowers 11.3 Mbps 960 frames 38.4 s
Aspect ratio	4:3	4:3	16:9
Resolution	352 x 288	720 x 576 i	1920 x 1080 i
Frame rate	15 / 1.001 Hz	25 Hz	
Audio			
Type	MPEG-4 HE-AAC v2 L2	MPEG-4 HE-AAC v1 L2	MPEG-4 HE-AAC v1 L2
Format	LOAS / LATM		
Content	Music Flower 48.1 kbps 918 frames 39.168 s	Tone (L1k,R1kHz) @ -6 dB 64 kbps 1409 frames 60.117 s	Music Flower 64 kbps 917 frames 39.125 s
Mode	Stereo		
PID information			
Video PID	0x0301	0x0201	0x0101
Audio PID	0x0302	0x0202	0x0102
PMT PID	0x1FC8	0x0021	0x0020
PCR PID	0x0300	0x0200	0x0100
IIP	0x1FF0		
Tables	Layer A		

Filename	Arg_conf01.ISDBT_C		
PAT		Layer B	Layer C
PMT	Yes	Yes	
NIT	Yes	Yes	Yes
SDT	Yes		
TOT	Yes		
Program number	0x70F8		
Network ID	0x1387	0x70E1	0x70E0
Area code	2621		
Frequency	CH UHF user selectable		
Virtual channel	35		
Service name	R&S 1seg		
Number of packets	765952	R&S SD Layer B	R&S HD Layer C
BTS frame size	4352		
Number of BTS frames	176		

2.2.2.2 Arg_conf02.ISDBT_C (3-Layer File)

Filename	Arg_conf02.ISDBT_C		
Transmission parameters	3 layers		
Mode	Mode 3 (8K)		
Guard interval	1/16		
Layer	A	B	C
Number of segments	1	6	6
Modulation	QPSK	64QAM	64QAM
Code rate	1/2	2/3	3/4
Time interleaving	4	2	2
Video			
Type	H.264 Baseline Profile @L1.3	H.264 High Profile @L4.0	H.264 High Profile @L4.0
Content	FlowerLogo 310 kbps 640 frames 21.355 s	Codec169 2.8 Mbps 24 frames 0.96 s	Mcobar 5.7 Mbps 160 frames 6.4 s
Aspect ratio	16:9	16:9	16:9
Resolution	320 x 180	720 x 576 i	1920 x 1080 i
Frame rate	30 / 1.001 Hz	25 Hz	

Filename	Arg_conf02.ISDBT_C		
Audio			
Type	MPEG-4 HE-AAC v2 L2	MPEG-4 HE-AAC v1 L2	MPEG-4 HE-AAC v1 L2
Format	LOAS / LATM		
Content	Tone (L1k,R1kHz) @ -6 dB 48 kbps 1410 frames 60.160 s	Tone (L1k,R1kHz) @ -6 dB 64 kbps 1409 frames 60.117 s	[1*] 160 kbps 1002 frames 42.752 s
Mode	Stereo		5.1
PID information			
Video PID	0x0301	0x0201	0x0101
Audio PID	0x0302	0x0202	0x0102
PMT PID	0x1FC8	0x0021	0x0020
PCR PID	0x0300	0x0200	0x0100
IIP	0x1FF0		
Tables	Layer A	Layer B	Layer C
PAT		Yes	
PMT	Yes	Yes	Yes
NIT	Yes		
SDT	Yes		
TOT	Yes		
Program number	0x70F8	0x70E1	0x70E0
Network ID	0x1387		
Area code	2621		
Frequency	CH UHF user selectable		
Virtual channel	35		
Service name	R&S 1seg	R&S HD Layer B	R&S HD Layer C
Number of packets	382976		
BTS frame size	4352		
Number of BTS frames	88		

1*) L= 1kHz, R=3kHz, RL=4kHz, RR=5kHz, C=2kHz, W=100Hz

2.2.2.3 Arg_conf03.ISDBT_C (3-Layer File)

Filename	Arg_conf03.ISDBT_C		
Transmission parameters	3 layers		
Mode	Mode 3 (8K)		
Guard interval	1/16		
Layer	A	B	C
Number of segments	1	3	9
Modulation	QPSK	16QAM	64QAM
Code rate	2/3	3/4	3/4
Time interleaving	4	2	2
Video			
Type	H.264 Baseline Profile @L1.3	H.264 High Profile @L4.0	H.264 High Profile @L4.0
Content	Hockey	Hockey 5.9 Mbps 1920 frames 38.4 s	Hockey 11.8 Mbps 1920 frames 38.4 s
Aspect ratio	16:9	16:9	16:9
Resolution	320 x 180	720 x 576 p	1280 x 720 p
Frame rate	30 / 1.001 Hz	50 Hz	
Audio			
Type	MPEG-4 HE-AAC v2 L2	MPEG-4 HE-AAC v1 L2	MPEG-4 HE-AAC v1 L2
Format	LOAS / LATM		
Content	Tone (L1k,R1kHz) @ -6 dB 48 kbps 1410 frames 60.160 s	Hockey 160 kbps 1002 frames 42.752 s	Hockey 160 kbps 1002 frames 42.752 s
Mode	Stereo	5.1	
PID information			
Video PID	0x0301	0x0201	0x0101
Audio PID	0x0302	0x0202	0x0102
PMT PID	0x1FC8	0x0021	0x0020
PCR PID	0x0300	0x0200	0x0100
IIP	0x1FF0		
Tables	Layer A	Layer B	Layer C
PAT		Yes	
PMT	Yes	Yes	Yes

Filename	Arg_conf03.ISDBT_C		
NIT	Yes		
SDT	Yes		
TOT	Yes		
Program number	0x70F8	0x70E1	0x70E0
Network ID	0x1387		
Area code	2621		
Frequency	CH UHF user selectable		
Virtual channel	25		
Service name	R&S 1seg	R&S SD Layer B	R&S HD Layer C
Number of packets	652800		
BTS frame size	4352		
Number of BTS frames	150		

2.2.2.4 Arg_conf04.ISDBT_C (3-Layer File)

Filename	Arg_conf04.ISDBT_C		
Transmission parameters	3 layers		
Mode	Mode 3 (8K)		
Guard interval	1/16		
Layer	A	B	C
Number of segments	1	6	6
Modulation	QPSK	64QAM	64QAM
Code rate	1/2	2/3	3/4
Time interleaving	4	2	2
Video			
Type	H.264 Baseline Profile @L1.3	H.264 High Profile @L4.0	H.264 High Profile @L4.0
Content	Flowers 461 kbps 640 frames 21.355 s	Codec43 851 kbps 24 frames 0.801 s	Flowers 11.3 Mbps 640 frames 21.355 s
Aspect ratio	4:3	4:3	16:9
Resolution	320 x 240	720 x 480 i	1920 x 1080 i
Frame rate	30 / 1.001 Hz		
Audio			
Type	MPEG-4 HE-AAC v2 L2	MPEG-4 HE-AAC v1 L2	MPEG-4 HE-AAC v1 L2

Filename	Arg_conf04.ISDBT_C		
Format	LOAS / LATM		
Content	Tone (L1k,R1kHz) @ -6 dB 48 kbps 1410 frames 60.160 s	Tone (L1k,R1kHz) @ -6 dB 64 kbps 1409 frames 60.117 s	Tone (L1k,R1kHz) @ -6 dB 64 kbps 1409 frames 60.117 s
Mode	Stereo		
PID information			
Video PID	0x0301	0x0101	0x0201
Audio PID	0x0302	0x0102	0x0202
PMT PID	0x1FC8	0x0103	0x0203
PCR PID	0x0300	0x0100	0x0200
IIP	0x1FF0		
Tables	Layer A	Layer B	Layer C
PAT		Yes	
PMT	Yes	Yes	Yes
NIT	Yes		
SDT	Yes		
TOT	Yes		
Program number	0x70F8	0x70E1	0x70E0
Network ID	0x1387		
Area code	2621		
Frequency	CH UHF user selectable		
Virtual channel	35		
Service name	R&S 1seg	R&S HD Layer B	R&S HD Layer C
Number of packets	452608		
BTS frame size	4352		
Number of BTS frames	104		

Index

A

Application cards	7
Application notes	7

B

Brochures	6
-----------------	---

D

Data sheets	6
Documentation overview	5

G

Getting started	5
-----------------------	---

H

Help	6
------------	---

I

Installation	5
Instrument help	6
Instrument security procedures	6

K

Key features	5
--------------------	---

O

Open source acknowledgment (OSA)	7
--	---

R

Release notes	7
---------------------	---

S

Safety instructions	6
Security procedures	6
Service manual	6

T

Transport stream files	8
------------------------------	---

U

User manual	6
-------------------	---

W

Welcome	5
White papers	7