

R&S® SMW-K42/-K83

3GPP FDD incl. enhanced MS/BS tests, HSPA, HSPA+ User Manual



1175669002
Version 19

ROHDE & SCHWARZ
Make ideas real



This document describes the following software options:

- R&S®SMW-K42/-K83
1413.3784.xx, 1413.4580.xx

This manual describes firmware version FW 4.80.041.xx and later of the R&S®SMW200A.

© 2020 Rohde & Schwarz GmbH & Co. KG

Mühlhofstr. 15, 81671 München, Germany

Phone: +49 89 41 29 - 0

Email: info@rohde-schwarz.com

Internet: www.rohde-schwarz.com

Subject to change – data without tolerance limits is not binding.

R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG.

Trade names are trademarks of the owners.

1175.6690.02 | Version 19 | R&S®SMW-K42/-K83

The following abbreviations are used throughout this manual: R&S®SMW200A is abbreviated as R&S SMW, R&S®WinIQSIM2™ is abbreviated as R&S WinIQSIM2; the license types 02/03/07/11/13/16/12 are abbreviated as xx.

Contents

1	Preface.....	13
1.1	About this Manual.....	13
1.2	Documentation Overview.....	14
1.2.1	Getting Started Manual.....	14
1.2.2	User Manuals and Help.....	14
1.2.3	Tutorials.....	14
1.2.4	Service Manual.....	14
1.2.5	Instrument Security Procedures.....	15
1.2.6	Printed Safety Instructions.....	15
1.2.7	Data Sheets and Brochures.....	15
1.2.8	Release Notes and Open Source Acknowledgment (OSA).....	15
1.2.9	Application Notes, Application Cards, White Papers, etc.....	15
2	Welcome to the 3GPP FDD Options.....	16
2.1	Accessing the 3GPP FDD Dialog.....	18
2.2	Scope.....	18
2.3	Notes on Screenshots.....	18
3	About the 3GPP FDD Options.....	20
3.1	Required Options.....	20
3.2	Major 3GPP Parameters Overview.....	20
3.3	Modulation System 3GPP FDD.....	21
3.3.1	Scrambling Code Generator.....	22
3.3.1.1	Downlink Scrambling Code Generator.....	22
3.3.1.2	Uplink Scrambling Code Generator.....	23
3.3.2	Scrambling Unit.....	25
3.3.3	Channelization Code Generator.....	26
3.3.4	Data Source.....	26
3.3.5	Slot and Frame Builder.....	26
3.3.6	Timing Offset.....	27
3.3.7	Demultiplexer.....	28
3.3.8	Power Control.....	28
3.3.9	Summation and Filtering.....	29

3.3.10	Multicode.....	29
3.3.11	Orthogonal Channel Noise (OCNS).....	30
3.3.11.1	Standard, HSDPA and HSDPA2 modes.....	30
3.3.11.2	3i OCNS mode.....	31
3.3.12	HARQ Feedback.....	33
3.3.12.1	Limitations.....	33
3.3.12.2	Setup.....	33
3.3.12.3	Timing.....	33
3.3.13	HS-SCCH Less Operation.....	35
3.3.13.1	HS-SCCH Type 2.....	35
3.3.13.2	HS-SCCH Type Two Fixed Reference Channel: H-Set 7.....	36
3.3.14	Higher Order Modulation.....	36
3.3.14.1	64QAM in downlink.....	36
3.3.14.2	64QAM Fixed Reference Channel: H-Set 8.....	37
3.3.14.3	16QAM in uplink.....	37
3.3.14.4	16QAM Fixed Reference Channel: FRC 8.....	37
3.3.15	MIMO in HSPA+.....	38
3.3.15.1	D-TxAA Feedback signaling: PCI and CQI.....	38
3.3.15.2	MIMO downlink control channel Support.....	39
3.3.15.3	Redundancy Version.....	40
3.3.15.4	HARQ Processes.....	40
3.3.15.5	MIMO uplink control channel Support.....	41
3.3.15.6	CQI Reports: Type A and Type B.....	42
3.3.15.7	PCI Reports.....	42
3.3.15.8	MIMO Fixed Reference Channels: H-Set 9 and H-Set 11.....	43
3.3.16	Dual Cell HSDPA (DC-HSDPA).....	43
3.3.16.1	DC-HSDPA Data Acknowledgement (non-MIMO mode).....	44
	CQI Reports: CQI1 and CQI2.....	46
3.3.16.2	DC-HSDPA + MIMO.....	46
3.3.16.3	Dual Cell HSDPA (DC-HSDPA) Fixed Reference Channel: H-Set 12.....	46
3.3.17	HS-DPCCH Extension for 4C-HSDPA and 8C-HSDPA.....	47
3.3.18	Dual Cell HSUPA (Dual Cell E-DCH).....	47
3.3.19	UE Capabilities.....	47

3.3.19.1	MIMO and 64QAM UE Capabilities.....	47
3.3.19.2	UL 16QAM UE Capabilities.....	48
3.3.19.3	MIMO and DC-HSDPA Operation UE Capabilities.....	48
3.3.19.4	Dual Cell E-DCH Operation UE Capabilities.....	48
3.3.20	Uplink Discontinuous transmission (UL DTX).....	48
3.3.21	Uplink User Scheduling.....	50
3.4	Routing and Enabling an External Control Signal.....	53
4	3GPP FDD Configuration and Settings.....	54
4.1	General Settings for 3GPP FDD Signals.....	55
4.2	Trigger Settings.....	58
4.3	Marker Settings.....	62
4.4	Clock Settings.....	64
4.5	Local and Global Connector Settings.....	65
4.6	Basestations and User Equipment Settings.....	66
4.6.1	Common Configuration Settings.....	66
4.6.2	General Power Settings.....	69
4.7	Test Setups/Models.....	72
4.8	Predefined Settings - Downlink.....	75
4.9	Additional User Equipment - Uplink.....	77
4.10	Base Station Settings.....	78
4.10.1	Common Settings.....	79
4.10.2	Orthogonal Channel Noise (OCNS) Settings.....	81
4.10.3	Channel Table.....	82
4.10.4	Channel Graph - BS.....	88
4.10.5	Code Domain Graph - BS.....	89
4.11	Compressed Mode.....	92
4.11.1	Compressed Mode General Settings.....	93
4.11.2	Compressed Mode Configuration Graph.....	95
4.11.2.1	Transmission Gaps.....	96
4.11.2.2	Compressed Ranges.....	97
4.11.2.3	Non-compressed ranges.....	97
4.12	HSDPA Settings - BS.....	98
4.12.1	Enhanced HSDPA Mode Settings.....	98

4.12.2	MIMO Configuration.....	100
4.13	HSDPA H-Set Mode Settings - BS.....	102
4.13.1	HSDPA H-Set General Settings.....	102
4.13.2	H-Set Configuration Common Settings.....	103
4.13.3	MIMO Settings.....	106
4.13.4	Global Settings.....	107
4.13.5	Coding Configuration.....	110
4.13.6	Signal Structure.....	113
4.13.7	HARQ Simulation.....	115
4.13.8	Error Insertion.....	116
4.13.9	Randomly Varying Modulation and Number of Codes (Type 3i) Settings.....	117
4.14	Enhanced Settings for P-CPICH - BS1.....	120
4.15	Enhanced Settings for P-CCPCH - BS1.....	121
4.15.1	Channel Number and State.....	121
4.15.2	Channel Coding - Enhanced P-CCPCH BS1.....	122
4.16	Enhanced Settings for DPCHs - BS1.....	123
4.16.1	Channel Number and State.....	124
4.16.2	Channel Coding.....	125
4.16.3	Transport Channel - Enhanced DPCHs BS1.....	128
4.16.4	Error Insertion - Enhanced DPCHs BS1.....	131
4.16.5	Dynamic Power Control - Enhanced DPCHs BS1.....	133
4.17	S-CCPCH Settings - BS Channel Table.....	138
4.18	Config AICH/AP-AICH - BS Channel Table.....	140
4.19	DPCCH Settings - BS Channel Table.....	141
4.19.1	Common Slot Structure (DPCCH).....	141
4.19.2	TPC Settings.....	144
4.19.3	DPCCH Power Offset.....	147
4.20	Config E-AGCH - BS Channel Table.....	148
4.21	Config E-RGCH/E-HICH - BS Channel Table.....	150
4.22	Config F-DPCH - BS Channel Table.....	152
4.22.1	Common Settings.....	152
4.22.2	TPC Settings.....	153
4.23	Multi Channel Assistant - BS.....	156

4.24	User Equipment Configuration (UE)	160
4.24.1	General Settings.....	161
4.24.2	Code Domain Graph - UE.....	164
4.24.3	Channel Settings.....	164
4.25	UL-DTX/User Scheduling - UE	165
4.26	Dynamic Power Control - UE	169
4.27	Scheduling List	174
4.28	DPCCH Settings - UE	175
4.29	DPDCH Settings - UE	182
4.29.1	DPDCH Common Settings.....	182
4.29.2	Channel Table.....	184
4.30	HS-DPCCH Settings - UE	186
4.30.1	About HS-DPCCH.....	187
4.30.2	HS-DPCCH Common Settings.....	189
4.30.3	HS-DPCCH Scheduling Table (Release 8 and Later/RT).....	193
4.30.4	HS-DPCCH Settings for Normal Operation (Up to Release 7).....	202
4.30.5	MIMO Settings HS-DPCCH (Up to Release 7).....	204
4.31	E-DPCCH Settings - UE	207
4.32	HSUPA FRC Settings - UE	209
4.32.1	FRC General Settings.....	209
4.32.2	Coding and Physical Channels Settings.....	211
4.32.3	DTX Mode Settings.....	214
4.32.4	HARQ Simulation Settings.....	216
4.32.5	Bit and Block Error Insertion Settings.....	219
4.33	E-DPDCH Settings - UE	221
4.33.1	E-DPDCH Common Settings.....	222
4.33.2	Channel Table.....	223
4.34	E-DCH Scheduling - UE	224
4.35	Global Enhanced Channel Settings - UE1	228
4.35.1	Enhanced Channels State.....	229
4.35.2	Channel Coding.....	229
4.35.3	Transport Channel.....	233
4.35.4	Error Insertion.....	236

4.36 PRACH Settings - UE.....	237
4.36.1 Graphical Display.....	239
4.36.2 Preamble Settings.....	243
4.36.3 Message Part Settings.....	244
4.36.4 Channel Coding State.....	246
4.37 PCPCH Settings - UE.....	248
4.37.1 Graphical Display.....	250
4.37.2 Preamble Settings.....	253
4.37.3 Message Part Settings.....	255
4.37.4 Channel Coding Settings.....	259
4.38 Filtering, Clipping, ARB Settings.....	260
4.38.1 Filter Settings.....	261
4.38.2 Clipping Settings.....	262
4.38.3 ARB Settings.....	265
5 How to Work with the 3GPP FDD Option.....	266
5.1 Resolving Domain Conflicts.....	266
5.2 Using the DL-UL Timing Offset Settings.....	269
5.3 Configuring UL-DTX Transmission and Visualizing the Scheduling.....	269
5.4 Configuring and Visualizing the Uplink User Scheduling.....	272
5.5 How to Configure the HS-DPCCH Settings for 4C-HSDPA Tests.....	274
6 Application Sheets.....	276
6.1 Uplink Dual Cell HSDPA Test Signal Generation.....	276
6.1.1 Options and Equipment Required.....	276
6.1.2 Test Setup.....	276
6.1.3 Generating an uplink DC-HSDPA Test Signal (Non-MIMO Mode).....	277
6.1.4 Generating an Uplink Test Signal for Simultaneous Dual Cell and MIMO Operation..	279
7 Performing Base Stations Tests According to TS 25.141.....	280
7.1 Introduction.....	280
7.1.1 General Considerations.....	282
7.1.2 General Settings.....	284
7.1.3 Base Station Configuration.....	288
7.1.4 Apply.....	289

7.2 Receiver Tests.....	289
7.2.1 Overview.....	289
7.2.1.1 Basic Configuration.....	289
7.2.1.2 Test Setups - Receiver Tests.....	290
Standard Test Setup - One Path.....	290
Standard Test Setup - Two Paths.....	290
Standard Test Setup - Diversity Measurements.....	291
7.2.1.3 Carrying Out a Receiver Test Measurement.....	291
7.2.1.4 General Wanted Signal Parameters.....	292
7.2.2 Receiver Characteristics.....	293
7.2.2.1 Test Case 7.2 - Reference Sensitivity Level.....	293
Test Purpose and Test Settings - Test Case 7.2.....	294
7.2.2.2 Test Case 7.3 - Dynamic Range.....	295
Test Purpose and Test Settings - Test Case 7.3.....	295
7.2.2.3 Test Case 7.4 - Adjacent Channel Selectivity (ACS).....	297
Test Purpose and Test Settings - Test Case 7.4.....	297
7.2.2.4 Test Case 7.5 - Blocking Characteristics.....	300
Test Purpose and Test Settings - Test Case 7.5.....	300
Interferer Signal.....	302
Blocking Performance Requirements.....	304
7.2.2.5 Test Case 7.6 - Intermodulation Characteristics.....	308
Test Purpose and Test Settings - Test Case 7.6.....	309
7.2.2.6 Test Case 7.8 - Verification of Internal BER.....	312
Test Purpose and Test Settings - Test Case 7.8.....	313
7.2.3 Performance Requirements.....	314
7.2.3.1 Test Case 8.2.1 - Demodulation of DCH in Static Propagation Conditions.....	314
Test Purpose and Test Settings - Test Case 8.2.1.....	315
7.2.3.2 Test Case 8.3.1 - Demodulation of DCH in Multipath Fading Case 1 Conditions.....	318
Test Purpose and Test Settings - Test Case 8.3.1.....	319
7.2.3.3 Test Case 8.3.2 - Demodulation of DCH in Multipath Fading Case 2 Conditions.....	320
7.2.3.4 Test Case 8.3.3 - Demodulation of DCH in Multipath Fading Case 3 Conditions.....	321
7.2.3.5 Test Case 8.3.4 - Demodulation of DCH in Multipath Fading Case 4 Conditions.....	321
7.2.3.6 Test Case 8.4 - Demodulation of DCH in Moving Propagation Conditions.....	323

7.2.3.7	Test Case 8.5 - Demodulation of DCH in Birth/Death Propagation Conditions.....	323
7.2.3.8	Test Case 8.6 - Verification of Internal BLER.....	324
	Test Purpose and Test Settings - Test Case 8.6.....	325
7.2.3.9	Test Case 8.8.1 - RACH Preamble Detection in Static Propagation Conditions.....	326
	Test Purpose and Test Settings - Test Case 8.8.1.....	327
7.2.3.10	Test Case 8.8.2 - RACH Preamble Detection in Multipath Fading Case 3 Conditions	330
	Test Purpose and Test Settings - Test Case 8.8.2.....	330
7.2.3.11	Test Case 8.8.3 - RACH Demodulation of Message Part in Static Propagation Condi- tions.....	332
	Test Purpose and Test Settings - Test Case 8.8.3.....	333
7.2.3.12	Test Case 8.8.4 - RACH Demodulation of Message Part in Multipath Fading Case 3	335
	Test Purpose and Test Settings - Test Case 8.8.4.....	336
7.2.3.13	Test Case 8.9.1 - CPCH Access Preamble and Collision Detection in Static Propaga- tion Conditions.....	338
7.2.3.14	Test Case 8.9.2 - CPCH Access Preamble and Collision Detection in Multipath Fading Case 3.....	338
7.2.3.15	Test Case 8.9.3 - Demodulation of CPCH Message in Static Propagation Conditions	338
7.2.3.16	Test Case 8.9.4 - Demodulation of CPCH Message in Multipath Fading Case 3 Condi- tions.....	339
7.3	Transmitter Tests.....	339
7.3.1	Basic Configuration.....	339
7.3.2	Test Case 6.4.2 - Power Control Steps.....	339
7.3.2.1	Test Purpose and Test Settings - Test Case 6.4.2.....	340
7.3.2.2	Carrying Out the Test Case 6.4.2 Measurement.....	345
7.3.3	Test Case 6.6 - Transmit Intermodulation.....	346
7.3.3.1	Test Purpose and Test Settings - Test Case 6.6.....	346
7.3.3.2	Carrying Out a Test Case 6.6 Measurement.....	349
8	Remote-Control Commands.....	351
8.1	General Commands.....	352
8.2	Filter/Clipping Settings.....	358
8.3	Trigger Settings.....	363
8.4	Marker Settings.....	367

8.5	Clock Settings.....	369
8.6	Test Models and Predefined Settings.....	370
8.7	Setting Base Stations.....	374
8.8	Enhanced Channels of Base Station 1.....	421
8.8.1	General Settings.....	422
8.8.2	Channel Coding.....	423
8.8.3	Dynamic Power Control Settings.....	435
8.8.4	Error Insertion.....	439
8.9	User Equipment Settings.....	443
8.9.1	General Settings.....	443
8.9.2	Compressed Mode Settings.....	448
8.9.3	DPCCH Settings.....	450
8.9.4	HS-DPCCH Settings.....	457
8.9.4.1	Common Settings.....	457
8.9.4.2	Up to Release 7 Settings.....	459
8.9.4.3	Release 8 and Later (RT) Settings.....	467
8.9.5	DPDCH Settings.....	475
8.9.6	PCPCH Settings.....	479
8.9.7	PRACH Settings.....	490
8.9.8	HSUPA Settings.....	499
8.9.9	UL-DTX and Uplink Scheduling Settings.....	519
8.9.10	Dynamic Power Control Settings.....	524
8.10	Enhanced Channels of the User Equipment.....	528
8.11	Setting Up Test Cases According to TS 25.141.....	541
	Annex.....	563
A	Reference.....	563
	List of Commands.....	570
	Index.....	581

1 Preface

1.1 About this Manual

This user manual provides all the information **specific to the digital standard 3GPP FDD**.

All general instrument functions and settings common to all applications and operating modes are described in the main R&S SMW User Manual.

The main focus in this manual is on the provided settings and the tasks required to generate a signal. The following topics are included:

- **Welcome to the 3GPP FDD options R&S SMW-K42/-K83**
Introduction to and getting familiar with the option
- **About the 3GPP FDD and Basics**
Background information on basic terms and principles in the context of the signal generation
- **3GPP FDD Configuration and Settings**
A concise description of all functions and settings available to configure signal generation with their corresponding remote control commands
- **How to generate a Signal with the 3GPP FDD Options**
The basic procedure to perform signal generation tasks and step-by-step instructions for more complex tasks or alternative methods
As well as detailed examples to guide you through typical signal generation scenarios and allow you to try out the application immediately
- **Application Examples**
Example signal generation scenarios in which the option is frequently used.
- **Test Case Wizard**
Description of the provided test cases for tests on Base Stations in conformance with the 3G Standard 3GPP FDD
- **Remote Control Commands**
Remote commands required to configure and perform signal generation in a remote environment, sorted by tasks
(Commands required to set up the instrument or to perform common tasks on the instrument are provided in the main R&S SMW user manual)
Programming examples demonstrate the use of many commands and can usually be executed directly for test purposes
- **Annex**
Reference material, such as extensive lists
- **List of remote commands**
Alphabetical list of all remote commands described in the manual
- **Index**

1.2 Documentation Overview

This section provides an overview of the R&S SMW user documentation. Unless specified otherwise, you find the documents on the R&S SMW product page at:

www.rohde-schwarz.com/manual/smw200a

1.2.1 Getting Started Manual

Introduces the R&S SMW and describes how to set up and start working with the product. Includes basic operations, typical measurement examples, and general information, e.g. safety instructions, etc. A printed version is delivered with the instrument.

1.2.2 User Manuals and Help

Separate manuals for the base unit and the software options are provided for download:

- **Base unit manual**
Contains the description of all instrument modes and functions. It also provides an introduction to remote control, a complete description of the remote control commands with programming examples, and information on maintenance, instrument interfaces and error messages. Includes the contents of the getting started manual.
- **Software option manual**
Contains the description of the specific functions of an option. Basic information on operating the R&S SMW is not included.

The contents of the user manuals are available as help in the R&S SMW. The help offers quick, context-sensitive access to the complete information for the base unit and the software options.

All user manuals are also available for download or for immediate display on the Internet.

1.2.3 Tutorials

The R&S SMW provides interactive examples and demonstrations on operating the instrument in form of tutorials. A set of tutorials is available directly on the instrument.

1.2.4 Service Manual

Describes the performance test for checking compliance with rated specifications, firmware update, troubleshooting, adjustments, installing options and maintenance.

The service manual is available for registered users on the global Rohde & Schwarz information system (GLORIS):

<https://gloris.rohde-schwarz.com>

1.2.5 Instrument Security Procedures

Deals with security issues when working with the R&S SMW in secure areas. It is available for download on the Internet.

1.2.6 Printed Safety Instructions

Provides safety information in many languages. The printed document is delivered with the product.

1.2.7 Data Sheets and Brochures

The data sheet contains the technical specifications of the R&S SMW. It also lists the options and their order numbers and optional accessories.

The brochure provides an overview of the instrument and deals with the specific characteristics.

See www.rohde-schwarz.com/brochure-datasheet/smw200a

1.2.8 Release Notes and Open Source Acknowledgment (OSA)

The release notes list new features, improvements and known issues of the current firmware version, and describe the firmware installation.

The open-source acknowledgment document provides verbatim license texts of the used open source software.

See www.rohde-schwarz.com/firmware/smw200a

1.2.9 Application Notes, Application Cards, White Papers, etc.

These documents deal with special applications or background information on particular topics.

See www.rohde-schwarz.com/application/smw200a and www.rohde-schwarz.com/manual/smw200a

2 Welcome to the 3GPP FDD Options

The R&S SMW-K42/-K83 are firmware applications that add functionality to generate signals in accordance with the WCDMA standard 3GPP FDD.

WCDMA (Wideband CDMA) describes a group of mobile radiocommunication technologies, the details of which differ greatly. The R&S SMW supports the 3GPP FDD standard developed by the 3GPP (3rd Generation Partnership Project) standardization committee.

The R&S SMW generates the 3GPP FDD signals in a combination of realtime mode (enhanced channels) and arbitrary waveform mode. Channel coding and simulation of bit and block errors can be activated for the enhanced channels of Release 99 and for H-Sets 1 to 5 generated in real time. Channel coding can also be activated for HSDPA/HSPA+ H-Sets and all HSUPA/HSPA+ FRC channels which are generated in arbitrary wave mode. Data lists can also be used for the data and TPC fields. The enhanced state of realtime channels can be switched off to generate specific test scenarios. In arbitrary waveform mode, the signal is first calculated and then output.

The R&S SMW simulates 3GPP FDD at the physical channel level and also at the transport layer level for all channels for which channel coding can be activated.

3GPP FDD/HSDPA/HSUPA/HSPA+ key features

- Support of all physical channels of 3GPP FDD, HSDPA, HSUPA and HSPA+
- HSDPA H-Sets 1 to 12 with channel coding; user-definable H-Set configuration
- HSUPA fixed reference channels with channel coding and HARQ feedback simulation
- Realtime generation of P-CCPCH and up to three DPCHs in downlink
- One UE in real time in uplink, up to 128 additional mobile stations via ARB
- Dynamic power control of a code channel possible
- Support of UL-DTX, DC-HSDPA, 4C-HSDPA and 8C-HSDPA

Functional overview of option R&S SMW-K42

The following list gives an overview of the functions provided by the option R&S SMW-K42 for generating a 3GPP FDD signal:

- Configuration of up to four base stations and four user equipment.
- Combination of realtime mode (enhanced channels) and arbitrary waveform mode
- All special channels and up to 512 channels on the downlink, except HSDPA, HSUPA and HSPA+
- Various test models and pre-defined settings for the uplink and the downlink
- Modulation 16QAM and 64QAM (downlink) for configuring high-speed channels in continuous mode (test model 5&6, HSDPA)
- Clipping for reducing the crest factor
- Misuse TPC" parameter for varying the original normal transmit power over time
- Simulation of up to 128 additional user equipment

The following functions are provided specifically for the receiver test:

- Realtime generation of up to four code channels with the option of using data lists for the data and TPC fields
- Channel coding of the reference measurement channels, AMR and BCH in real time
- Feeding through of bit errors (to test a BER tester) and block errors (to test a BLER tester)
- Simulation of orthogonal channel noise (OCNS in accordance with TS 25.101)
- Presettings in accordance with 3GPP specifications
- HSDPA Downlink in continuous mode (test model 5&6 for TX tests)

Functional overview of the extension R&S SMW-K83

Enhanced MS/BS tests incl. HSDPA extends the 3GPP FDD signal generation with simulation of high-speed channels in the downlink (HS-SCCH, HS-PDSCH) and the uplink (HS-DPCCH) and with dynamic power control. HSDPA (high speed downlink packet access) mode enhances the 3GPP FDD standard by data channels with high data rates especially for multi-media applications.

The following functions are provided for enhanced BS/MS tests including HSDPA:

- HSDPA uplink
- HSDPA downlink (packet mode and H-Set mode without CPC, 64QAM and MIMO)
- Dynamic Power Control
- Predefined and user-definable H-Sets
- Assistance in the setting of the appropriate sequence length for arbitrary waveform mode

HSUPA extends the 3GPP FDD signal generation with full HSUPA (high speed uplink packet access) support. Option K59 3GPP FDD HSPA+ extends the HSDPA and/or HSUPA signal generation with HSPA+ features in the downlink and uplink

The following functions are provided for HSUPA:

- HSUPA Downlink (RX measurements on 3GPP FDD UEs with correct timing)
- HSUPA Uplink (RX measurements on 3GPP FDD node BS supporting HSUPA)
- HSUPA HARQ Feedback support

The following functions are provided for HSPA+:

- Downlink 64QAM with channel coding
- Uplink 16QAM (4PAM)
- Downlink MIMO
- Uplink ACK/PCI/CQI feedback for downlink MIMO and/or Dual-Cell HSDPA
- CPC in downlink (HS-SCCH less operation, enhanced F-DPCH) and uplink (UL-DTX, Uplink DPCCH slot format 4)
- Support for the generation of 3i OCNS and for randomly varying modulation and the number of HS-PDSCH channels in H-Set over time (type 3i enhanced performance requirements tests).

This user manual contains a description of the functionality that the application provides, including remote control operation.

All functions not discussed in this manual are the same as in the base unit and are described in the R&S SMW user manual. The latest version is available at:

www.rohde-schwarz.com/manual/SMW200A

Installation

You can find detailed installation instructions in the delivery of the option or in the R&S SMW service manual.

2.1 Accessing the 3GPP FDD Dialog

To open the dialog with 3GPP FDD settings

- ▶ In the block diagram of the R&S SMW, select "Baseband > 3GPP FDD".

A dialog box opens that display the provided general settings.

The signal generation is not started immediately. To start signal generation with the default settings, select "State > On".

2.2 Scope



Tasks (in manual or remote operation) that are also performed in the base unit in the same way are not described here.

In particular, it includes:

- Managing settings and data lists, like saving and loading settings, creating and accessing data lists, or accessing files in a particular directory.
- Information on regular trigger, marker and clock signals and filter settings, if appropriate.
- General instrument configuration, such as checking the system configuration, configuring networks and remote operation
- Using the common status registers

For a description of such tasks, see the R&S SMW user manual.

2.3 Notes on Screenshots

When describing the functions of the product, we use sample screenshots. These screenshots are meant to illustrate as many as possible of the provided functions and

possible interdependencies between parameters. The shown values may not represent realistic usage scenarios.

The screenshots usually show a fully equipped product, that is: with all options installed. Thus, some functions shown in the screenshots may not be available in your particular product configuration.

3 About the 3GPP FDD Options

Some background knowledge on basic terms and principles used in the 3GPP FDD modulation system is provided here for better understanding of the required configuration settings.

3.1 Required Options

The basic equipment layout for generating 3GPP FDD signals includes the:

- Standard or wideband Baseband Generator (R&S SMW-B10/-B9)
- Baseband Main Module (R&S SMW-B13) or Wideband baseband main module (R&S SMW-B13XT)
- Frequency option (e.g. R&S SMW-B1003)
- Digital standard 3GPP FDD (R&S SMW-K42)

The following options are required to **support all 3GPP-related settings** described in this user manual:

- Standard or wideband Baseband Generator (R&S SMW-B10/-B9)
- Baseband Main Module, two I/Q paths (R&S SMW-B13T) or Wideband baseband main module (R&S SMW-B13XT)
- Frequency option (e.g. R&S SMW-B1003)
- Frequency option (e.g. R&S SMW-B2003)
- Option digital standard 3GPP FDD (R&S SMW-K42)
- Option 3GPP FDD HSPA/HSPA+, Enhanced BS/MS Tests (R&S SMW-K83)
- Further options are required to perform all test cases implemented in the "Test Case Wizard".

For more information, see data sheet.

3.2 Major 3GPP Parameters Overview

[Table 3-1](#) gives an overview of parameters of the modulation system 3GPP FDD.

Table 3-1: Parameters of the modulation system

Parameter	Value
Chip rate	3.84 Mcps
Channel types	Downlink: • Primary Common Pilot Channel (P-CPICH) • Secondary Common Pilot Channel (S-CPICH) • Primary Sync Channel (P-SCH) • Secondary Sync Channel (S-SCH) • Primary Common Control Phys. Channel (P-CCPCH) • Secondary Common Control Phys. Channel (S-CCPCH) • Page Indication Channel (PICH) • Acquisition Indication Channel (AICH) • Access Preamble Acquisition Indication Channel (AP-AICH) • Collision Detection Acquisition Indication Channel (CD-AICH) • Phys. Downlink Shared Channel (PDSCH) • Dedicated Physical Control Channel (DL-DPCCH) • Dedicated Phys. Channel (DPCH) • High-Speed Shared Control Channel (HS-SCCH) • High-Speed Physical Downlink Shared Channel (HS-PDSCH), Modulation QPSK, 16 QAM or 64QAM • HSUPA channels (E-AGCH, E-RGCH, E-HICH, F-DPCH) Uplink: • Phys. Random Access Channel (PRACH) • Phys. Common Packet Channel (PCPCH) • Dedicated Physical Control Channel (DPCCH) • Dedicated Physical Data Channel (DPDCH) • High Speed Dedicated Physical Control Channel (HS-DPCCH) • E-DCH Dedicated Physical Control Channel (E-DPCCH) • E-DCH dedicated physical data channel (E-DPDCH)
Symbol rates	7.5 ksps, 15 ksps, 30 ksps to 960 ksps depending on the channel type (downlink) 15 ksps, 30 ksps, 60 ksps to 1920 ksps depending on the channel type (uplink)
Channel count	In downlink 4 base stations each with up to 128 DPCHs and 11 special channels. In uplink 4 user equipment either with PRACH or PCPCH or a combination of DPCCH, up to 6 DPDCH, HS-DPCCH, E-DPCCH and up to 4 E-DPDCH channels.
Frame structure	Timeslot: 0.667 ms, Subframe: 3 timeslots = 2 ms Radio frame: 15 timeslots = 10 ms The frame structure in symbols depends on the symbol rate.
Scrambling code	Downlink: 18-bit M sequence Uplink: 25-bit M sequence in long mode and 8-bit M sequence in short mode
Channelization code for most of the channel types	"Orthogonal Variable Spreading Factor Code (OVSF)" square matrix of dimension chip rate/symbol rate

3.3 Modulation System 3GPP FDD

The following block diagram shows the components of the 3GPP FDD transmission system.

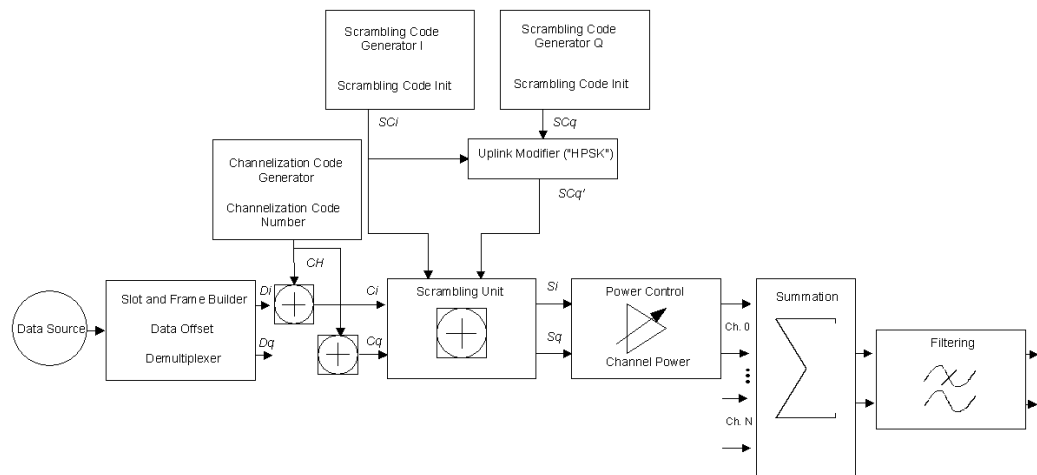


Figure 3-1: Components of the 3GPP FDD transmission system

3.3.1 Scrambling Code Generator

The scrambling code generator (previously called long code generator) is used to scramble the chip sequence as a function of the transmitter.

Depending on the link direction and mode (long or short), the structure and initialization regulation of the generator are different.

3.3.1.1 Downlink Scrambling Code Generator

This generator consists of a pair of shift registers from which the binary sequences for in-phase and orthogonal component of the scrambling code are determined. The [Figure 3-2](#) shows that the I component is produced as EXOR operation of the LSB outputs. However the register contents are first masked and read out for the Q component and then EXORed.

Table 3-2: Generator polynomials of the downlink scrambling code generators

Shift register 1	$x^{18} + x^7 + 1$
Shift register 2	$x^{18} + x^{10} + x^7 + x^5 + 1$

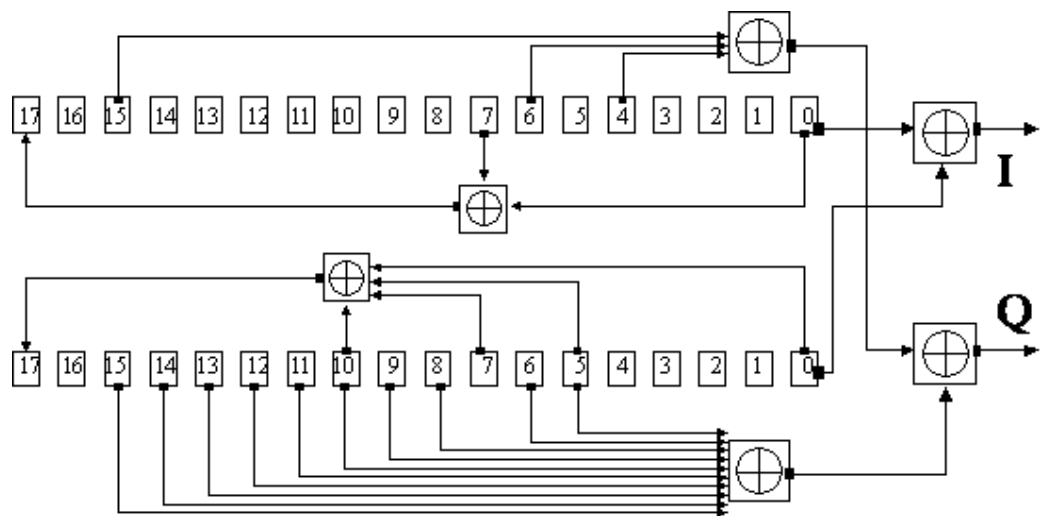


Figure 3-2: Structure of downlink scrambling code generator

The shift registers are initialized by loading shift register 1 with "0...01" and shift register 2 completely with "1". In addition, shift register 1 is wound forward by n cycles, n being the scrambling code number or scrambling code (SC) for short.

After a cycle time of one radio frame the generators are reset, i.e. the above initialization is carried out again.

3.3.1.2 Uplink Scrambling Code Generator

In the uplink, a differentiation is made between two SC modes. The long SC can be used for all types of channel. The short SC can be used as an alternative to the long SC for all channels except PRACH and PCPCH.

Uplink long scrambling code

Principally, the code generator of the long SC in the uplink is of the same structure as the SC in the downlink. However, the generator polynomials of the shift registers and the type of initialization are different.

Table 3-3: Generator polynomials of the uplink long scrambling code generator

Shift register 1	$x^{25} + x^3 + 1$
Shift register 2	$x^{25} + x^3 + x^2 + x + 1$

The shift registers are initialized by allocating 1 to shift register 1-bit number 24 and the binary form of the scrambling code number n to bits 23 to 0. Shift register 2 is loaded with "1".

The read-out positions for the Q component are defined such that they correspond to an IQ offset of 16.777.232 cycles.

After a cycle time of one radio frame the generators are reset, i.e. the above initialization is carried out again.

Uplink short scrambling code

The code generator of the short SC in the uplink consists of a total of three coupled shift registers.

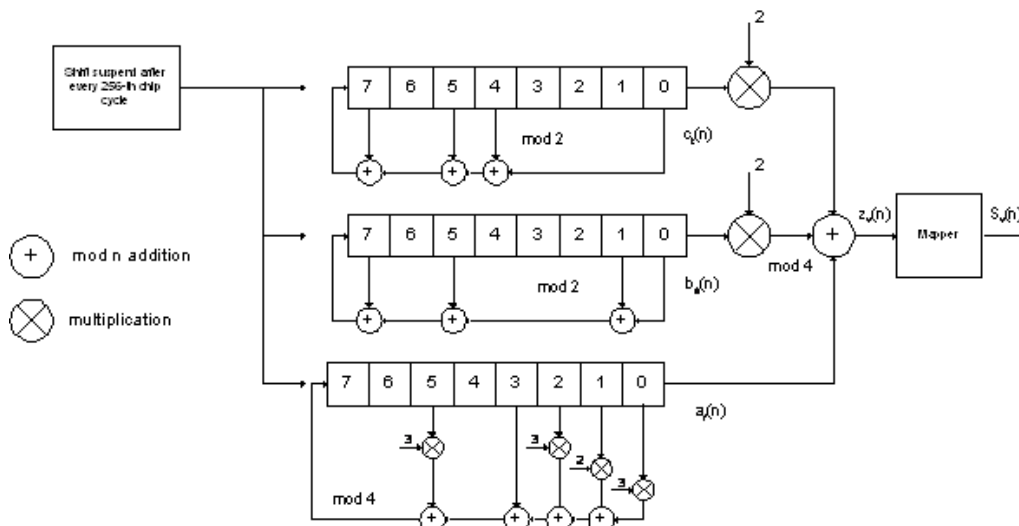


Figure 3-3: Structure of uplink short scrambling code generator

Table 3-4: Generator polynomials of uplink short scrambling code generator

Shift register 1 (binary)	$x^8 + x^7 + x^5 + x^4 + 1$
Shift register 2 (binary)	$x^8 + x^7 + x^5 + x + 1$
Shift register 3 (quaternary)	$x^8 + x^5 + 3x^3 + x^2 + 2x + 1$

The output sequences of the two binary shift registers are weighted with factor 2 and added to the output sequence of the quaternary shift register. The resulting quaternary output sequence is mapped into the binary complex level by the mapper block.

For initialization, of the three 8-bit shift registers (in a modified way) the binary form of the 24-bit short SC number n is used. For details see 3GPP TS 25 213, "Spreading and Modulation".

Table 3-5: Mapping of the quaternary output sequence into the binary IQ level

$z_v(n)$	$S_v(n)$
0	$+1 + j1$
1	$-1 + j1$
2	$-1 - j1$
3	$+1 - j1$

Preamble scrambling code generator

When generating the preambles of the PRACH and PCPCH, a special SC is used. It is based on the Long SC described under a), however only the I component is taken and subsequently a pointer ($e^{j(\pi/4 + \pi/4 * k)}$, $k=0$ to 4095) modulated upon it.

Modification of the long and short scrambling code output sequence

The scrambling code sequence of the Q component is modified as standard to reduce the crest factor of the signal. Zero-crossings can thus be avoided for every second cycle. (This method is often called "HPSK").

For details see 3GPP TS 25 213, "Spreading and Modulation". The R&S SMW uses a decimation factor of 2.

3.3.2 Scrambling Unit

In the scrambling unit, the output of the scrambling code generator is linked with spread symbols.

The input signal and the scrambling code signal are interpreted as complex signal:

$$(C_i, C_q, SC_i, SC_q') \in \{-1, +1\}$$

The output signal is a complex multiplication of two signals:

$$S_i + j S_q = (C_i + j C_q) * (SC_i + j SC_q')$$

The following equations apply:

$$S_i = C_i SC_i - C_q SC_q'$$

$$S_q = C_i SC_q' + C_q SC_i$$

The signal thus obtained can be interpreted as a QPSK signal with the following constellation diagram:

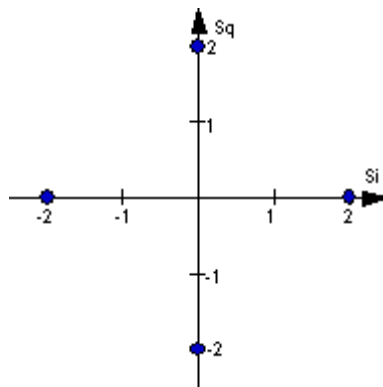


Figure 3-4: Constellation diagram of a channel with 0 dB power



There are auxiliary conditions for some types of channels that can result in different constellation diagrams. If, for instance, symbols of the SCH are coded, a BPSK constellation is obtained without the scrambling unit.

Furthermore, with HSDPA and HSPA+, the higher order modulations 4PAM, 16QAM and 64QAM were introduced.

3.3.3 Channelization Code Generator

The channelization code generator cyclically outputs a channel-specific bit pattern. The length of the cycle corresponds to the period of the source symbol to be spread, i.e. the number of bits corresponds to the spread factor. The spreading sequence for the I and Q branch is identical (real value). Spreading is a simple EXOR operation.

Two different channelization code generators are used depending on the type of channel:

Channelization code generator for all channels except SCH

Due to this channelization code, the channel separation takes place in the sum signal. The channelization code number is the line of an orthogonal spreading matrix which is generated according to an iterative scheme ("OVSF").

Channelization code generator SCH

This generator replaces the one described above if the synchronization code symbol of the SCH channels is spread.

The spreading matrix is replaced by a method that forms the spreading sequence. For details, see 3GPP TS 25 213.

3.3.4 Data Source

The data and TPC fields of the enhanced channels (realtime channels) can be filled from data lists containing user-defined data. This allows user information from the physical layer or from higher layers such as the transport layer to be introduced into the signal generation process.

The choice of data sources is crucially important for the signal characteristics. The constellation diagram and the crest factor in particular are modeled to a great extent by a suitable choice of data.

3.3.5 Slot and Frame Builder

The bits from the data source are first entered into a frame structure. The frames are made up of three hierarchical levels:

Table 3-6: Hierarchical structure of 3GPP FDD frames

Hierarchy	Length in ms	Remarks
Timeslot	0.667	
Subframe	2 ms	One subframe consists of 3 timeslots.
Radio frame	10	After a radio frame, pilot symbols are repeated. One radio frame consists of 15 timeslots. A frame is also the length of a scrambling code cycle. Frames are the basic unit. The sequence length is stated in radio frames.

The configuration of the timeslots depends on the channel type and symbol rate. The following components are distinguished:

- **Pilot sequence**
The pilot sequence characterizes the timeslot position within the radio frame and also depends on the symbol rate, transmit diversity and the pilot length parameter. Channel types DPCH, S-CCPCH, DL-DPCCH, DPCCH, PRACH and PCPCH have a pilot sequence.
- **Synchronization code symbol**
The synchronization code symbol is the only symbol of the SCH.
- **TPC symbol**
This symbol is used to control the transmit power. It is used in DPCH, DL-DPCCH and DPCCH.
A bit pattern for the sequence of TPC symbols can be indicated as a channel-specific pattern.
- **Data symbols**
These symbols carry the user information and are fed from the data source. They are used in DPCH, P-CCPCH, S-CCPCH, PDSCH, E-AGCH, E-RGCH, E-HICH, DPDCH, PRACH, PCPCH, HS-PDSCH and E-DPDCH.
- **Signature**
The signature is used in PRACH and PCPCH. 16 fixed bit patterns are defined.
- **TFCI (transport format combination indicator)**
If enabled, the TFCI is used in DPCH/DPCCH. In this case, a code sequence with the length of 30 is defined using this value and distributed among 15 subsequent timeslots. In PRACH and PCPCH, the TFCI field is provided as standard.
- **FBI**
Feedback indication bits are only used in DPCCH and PCPCH.

3.3.6 Timing Offset

The symbol stream can be shifted in time relative to the other channels. For this purpose, a timing offset can be entered into the channel table, stating the range of shifting in multiples of 256 chips. Since the generator does not generate infinite symbol streams like a real-time system, this offset is implemented as a rotation.

Example:

DPCH 30 ksps, 1 timeslot, timing offset = 2;

2×256 chips = 512 chip offset;

4 data symbols shifting at a symbol rate of 30 ksps (1 symbol corresponds to 3.84 Mcps / 30 ksps = 128 chips).

Previously:

11	11	11	11	00	01	10	11	00	10	01	11	11	01	00	01	10	11	01	00

Afterwards:

10	11	01	00	11	11	11	11	00	01	10	11	00	10	01	11	11	01	00	01

The use of the timing offset usually causes a reduction of the crest factor of the total signal. This is based on the fact that the spreading chips CH and scramble chips SC_i/SC_q that are applied to the pilot sequences of the channels are not always the same.

3.3.7 Demultiplexer

In the downlink, the symbol stream is divided into 2-bit streams D_i and D_q before processing in the spreading unit.

For example, if QPSK modulation is used for a channel, the symbol stream is processed as follows:

- It is divided by allocating bits 1, 3, 5, to $2n-1$ to the in-phase bitstream D_i
- It is divided by allocating bits 2, 4, 6, $2n$ to the quadrature bitstream D_q .

For the above example with timing offset:

$D_i = 1\ 1\ 0\ 0\ 1\ 1\ 1\ 1\ 0\ 0\ 1\ 1\ 0\ 1\ 0\ 1\ 1\ 0\ 0\ 0$

$D_q = 0\ 1\ 1\ 0\ 1\ 1\ 1\ 1\ 0\ 1\ 0\ 1\ 0\ 0\ 1\ 1\ 1\ 1\ 0\ 1$

(left-hand bit is always the first one in the time sequence)

In the uplink, independent data are used for the two paths.

PRACH/PCPCH:	Preamble : signature parallel to I and Q
	Message part : data to I, pilot, TPC and TFCI to Q
DPCCH/E-DPCCH:	all bits to I, Q always unused
DPDCH/HS-DPCCH/E-DPDCH:	all bits are always to I or Q (dependent on channel number), the other path is unused.

3.3.8 Power Control

After spreading and scrambling, a channel-specific power factor p is applied to the signal. A value of -6 dB therefore results in half the level (or $\frac{1}{4}$ power) and the following diagram (DPCH):

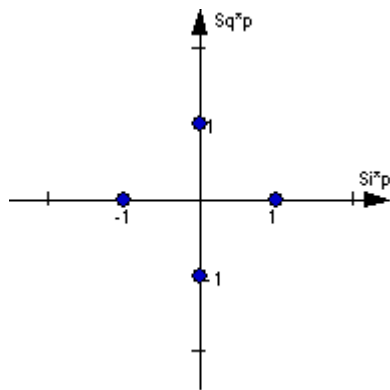


Figure 3-5: Constellation diagram of a channel with -6 dB power

3.3.9 Summation and Filtering

After application of the channel power, the components of the individual channels are summed up.

The constellation diagram of the sum signal is obtained by superposition of the diagrams of the individual channels. If the signal consists of two channels with power of -6 dB and -12 dB and each channel contains independent source data (DPCH), the following constellation diagram is obtained:

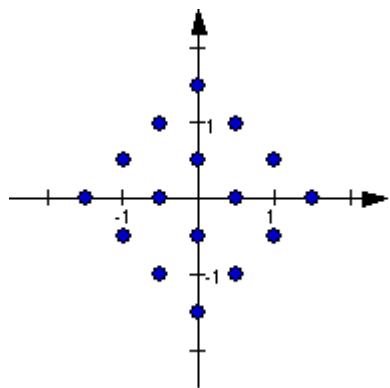


Figure 3-6: Constellation diagram of a 3GPP WCDMA signal with two DPCH channels

3.3.10 Multicode

3GPP FDD supports multicode transmission for downlink-dedicated physical channels (DPCH).

This form of transmission is used for channels intended for the same receiver, i.e. those receivers that belong to a radio link. The first channel of this group is used as a master channel.

Shared parts (pilot, TPC and TCFI) are spread for all channels using the spreading code of the master channel.



Instead of changing the spreading code within a slot several times, the master code rather than the shared parts can be sent at higher power. Then blank out the other channels correspondingly.

3.3.11 Orthogonal Channel Noise (OCNS)

With orthogonal channel noise, a practical downlink signal is generated to test the maximum input levels of user equipment in accordance with standard specifications. This simulates the data and control signals of the other orthogonal channels in the downlink. 3GPP TS 25.101 contains a precise definition of the required appearance of the OCNS signal.

Four different OCNS scenarios are defined in the standard. One standard scenario, two scenarios for HSDPA test cases and one scenario for type 3i enhanced performance requirements tests according to 3GPP TS34.121-1.

When activating OCNS and depending on the selected OCNS mode, different channel groups with different presetting are assigned as in the following tables. These channels cannot be edited in the channel table.

3.3.11.1 Standard, HSDPA and HSDPA2 modes

For the "Standard", "HSDPA" and "HSDPA2" modes, the OCNS channels are all normal DPCHs. The symbol rate is set at 30 kbps and the pilot length to 8 bits.

The powers of the OCNS channel outputs are relative. In the R&S SMW, the power of the OCNS component is set so that OCNS channels supplement the remaining channels in BS1 to make total power of 0 dB (linear 1).

It is not possible to adapt the OCNS power if the linear power of the remaining channels is >1, this produces an error message. The OCNS channels are then given the maximum power (all -80 dB).

The "Total Power" display is updated after automatic calculation of the output; it is not possible to use "Adjust Total Power" to make the setting.

Table 3-7: Defined settings for the OCNS signal in base station 1 in Standard mode

Chan. code	Timing offset (x256Tchip)	Level setting (dB)	Channel type	Symbol rate	Pilot length
2	86	-1	DPCH	30 kbps	8 bit
11	134	-3	DPCH	30 kbps	8 bit
17	52	-3	DPCH	30 kbps	8 bit
23	45	-5	DPCH	30 kbps	8 bit
31	143	-2	DPCH	30 kbps	8 bit
38	112	-4	DPCH	30 kbps	8 bit
47	59	-8	DPCH	30 kbps	8 bit
55	23	-7	DPCH	30 kbps	8 bit

Chan. code	Timing offset (x256Tchip)	Level setting (dB)	Channel type	Symbol rate	Pilot length
62	1	-4	DPCH	30 ksps	8 bit
69	88	-6	DPCH	30 ksps	8 bit
78	30	-5	DPCH	30 ksps	8 bit
85	18	-9	DPCH	30 ksps	8 bit
94	30	-10	DPCH	30 ksps	8 bit
125	61	-8	DPCH	30 ksps	8 bit
113	128	-6	DPCH	30 ksps	8 bit
119	143	0	DPCH	30 ksps	8 bit

Table 3-8: Defined settings for the OCNS signal in base station 1 in HSDPA mode

Channelization code at SF=128	Relative Level setting (dB)	Channel type	Symbol rate	Pilot length
122	0	DPCH	30 ksps	8 bit
123	-2	DPCH	30 ksps	8 bit
124	-2	DPCH	30 ksps	8 bit
125	-4	DPCH	30 ksps	8 bit
126	-1	DPCH	30 ksps	8 bit
127	-3	DPCH	30 ksps	8 bit

Table 3-9: Defined settings for the OCNS signal in base station 1 in HSDPA2 mode

Channelization code at SF=128	Relative Level setting (dB)	Channel type	Symbol rate	Pilot length
4	0	DPCH	30 ksps	8 bit
5	-2	DPCH	30 ksps	8 bit
6	-4	DPCH	30 ksps	8 bit
7	-1	DPCH	30 ksps	8 bit

3.3.11.2 3i OCNS mode

Option: R&S SMW-K83

In the "3i" OCNS mode, 16 DPCH channels are inserted in the BS 1 channel according to 3GPP TS34.121-1, chapter E.5E.

According to 3GPP TS34.121-1, table E.5E.1.3, the channelization code of each of these channels changes randomly on a symbol-by-symbol basis between two possible values.

23	DPCH (OCNS)		10	30	2	-1.70	PN 9
24					108		
25	DPCH (OCNS)		10	30	3	-2.70	PN 9
26					103		
27	DPCH (OCNS)		10	30	5	-3.50	PN 9
28					109		

The power control sequence modeling according to 3GPP TS34.121-1, chapter E.5E.3 is applied to these channels. The power relationship between these channels is according to 3GPP TS34.121-1, table E.5E.1.3 only during the first slot. It can deviate in the subsequent slots up to a certain range, but the total power of these channels is maintained constant (by normalization).



If the "3i" OCNS mode is activated, the OCNS channels are automatically leveled to have total power of 0 dB for all channels of BS 1.

Table 3-10: Defined settings for the OCNS signal in base station 1 in 3i mode

Slot format	Symbol Rate, kbps	First Ch. code of the channel	Second Ch. code of the channel	Relative Power, dB (before the 0 dB adjustment)
10	30	2	108	-1.7
10	30	3	103	-2.7
10	30	5	109	-3.5
10	30	6	118	-0.8
10	30	90	4	-6.2
10	30	94	123	-4.6
10	30	96	111	-2.3
10	30	98	106	-4.1
10	30	99	100	-3.1
10	30	101	113	-5.1
12	60	52	44	0.0
10	30	110	124	-4.6
10	30	114	115	-4.8
10	30	116	126	-4.8
12	60	60	46	-1.1
10	30	125	95	-4.1



Refer to [Chapter 4.13.9, "Randomly Varying Modulation and Number of Codes \(Type 3i\) Settings"](#), on page 117 for description of the further settings required for the 3i enhanced performance requirements tests according to 3GPP TS 34.121-1.

3.3.12 HARQ Feedback

The HARQ Feedback functionality extends the basic 3GPP FDD option in order to meet the requirements defined in 3GPP TS 25.141, chapter 8.12 and 8.13.

This allows you to control the transmission of the HSUPA fixed reference channels (FRC 1-7), the HSPA+ fixed reference channel (FPC 8) and the user defined fixed reference channels dynamically. An ACK from the base station leads to the transmission of a new packet. In contrast, a NACK forces the instrument to retransmit the packet with a new channel coding configuration (i.e. new redundancy version RV) of the concerned HARQ process.

3.3.12.1 Limitations

Although an arbitrary data source can be selected, the same user data is used for all HARQ processes and for all retransmissions.

Example:

If FRC4 is configured and the data source is set to PN9, then the first 5076 bits of the PN9 are used as input for all four HARQ processes. This happens regardless of which retransmission is performed. Note that the bitstream after channel coding is different for different retransmissions due to different redundancy versions.

Furthermore, "DTX-Mode" and "Bit-Error-Insertion/Block-Error-Insertion" are not available in this mode.

3.3.12.2 Setup

If an instrument with fading simulation is available, no more test equipment is needed in order to fulfill the test setup described in 3GPP TS 25.141, annex B.3.4.

As the instrument has no RF input available, the HARQ feedback from the base station is expected as a TTL signal. The instrument provides two input connectors for this signal, the LEVATT connector on the external AUX I/O BNC adapter board R&S SMx-Z5 and the USER 1 connector on the instrument. Use the parameter [Connector \(HARQ\)](#) to enable the currently used in each baseband.

A high level (TTL) is interpreted as an ACK, while a low level corresponds to a NACK. Use the parameter [ACK Definition \(HARQ\)](#) to redefine it.

3.3.12.3 Timing

In general, the ACK/NACK feedback from the base station is available at the selected instruments connector (LEVATT or the USER 1) with the same timing as the E-HICH is

transmitted. The instrument reads out this port at time T_{SMx} after the start of the HARQ process the feedback is related to (see Figure 3-7). You can adjust this time via the parameter [Additional User Delay](#) parameter. The signal at the input connector has to be constant for 0.5 ms before and after the defined point in time.

It takes some time for the base station to be synchronized to the signal transmitted from the instrument. Transmit NACK during that time, so that the instrument is forced to retransmit the packets until the base station reads out the first packet correctly.

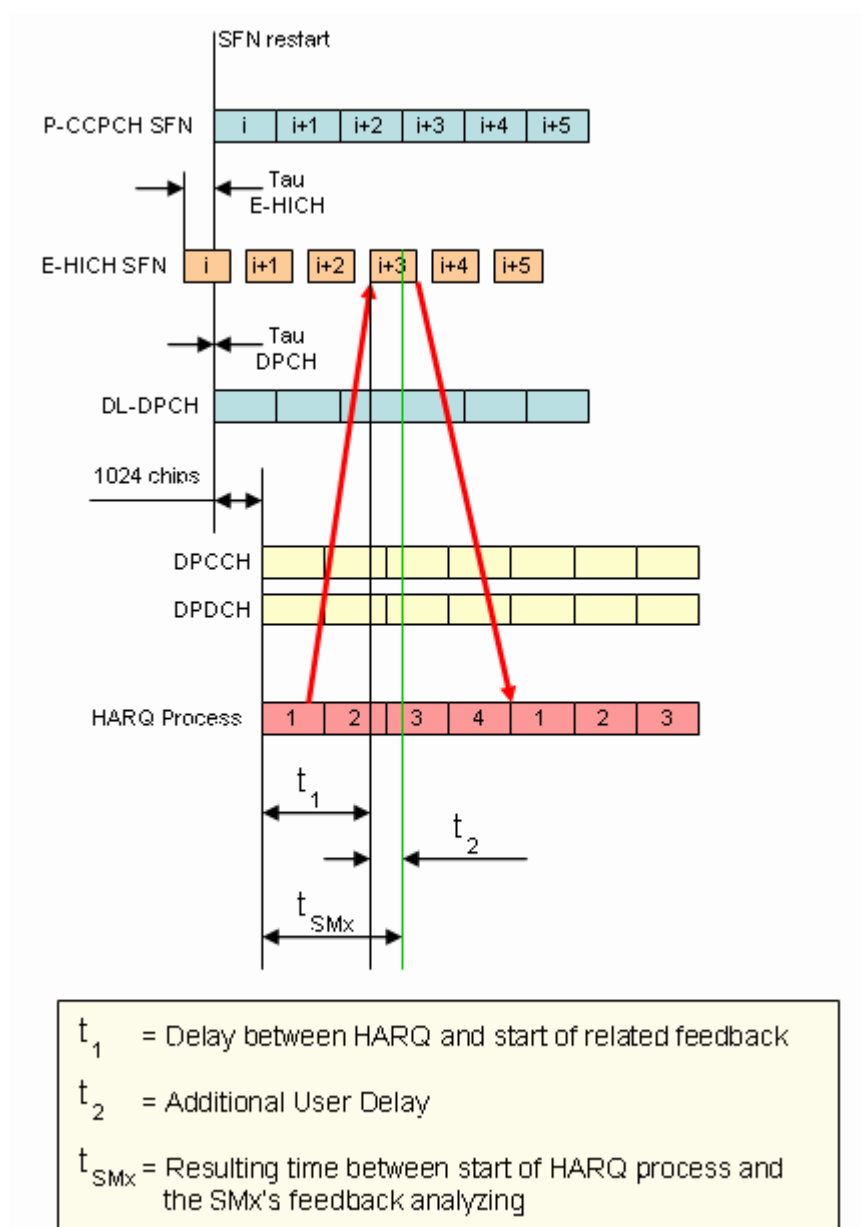


Figure 3-7: Timing diagram for TTI 10ms, $\tau_{dpch} = 0$, $\tau_{E-HICH} = -7\text{slots}$

3.3.13 HS-SCCH Less Operation

HS-SCCH less operation is a special HSDPA mode of operation which reduces the HS-SCCH overhead and reduces UE battery consumption. It changes the conventional structure of HSDPA data reception. In HSDPA as defined from 3GPP release 5 onwards, UE is supposed to read continuously HS-SCCH where data allocations are being signaled. The UE is being addressed via a UE-specific identity (16-bit H-RNTI / HSDPA radio network temporary identifier) on HS-SCCH. As soon as the UE detects relevant control information on HS-SCCH, it switches to the associated HS-PDSCH resources and receives the data packet.

This scheme is fundamentally changed in HS-SCCH less operation and HS-SCCH less operation is optimized for services with relatively small packets, e.g. VoIP.

In HS-SCCH less operation mode, the base station can decide for each packet again whether to apply HS-SCCH less operation or not, i.e. conventional operation is always possible.

The first transmission of a data packet on HS-DSCH is done without an associated HS-SCCH. The first transmission always uses QPSK and redundancy version of 0. Only four pre-defined transport formats can be used so the UE can blindly detect the correct format. The four possible transport formats are configured by higher layers. Only pre-defined channelization codes can be used for this operation mode and are configured per UE by higher layers: the parameter HS-PDSCH code index provides the index of the first HS-PDSCH code to use. For each of the transport formats, it is configured whether one or two channelization codes are required.

In order to allow detection of the packets on HS-DSCH, the HS-DSCH CRC (Cyclic Redundancy Check) becomes UE specific based on the 16-bit HRNTI. This is called CRC attachment method 2 (CRC attachment method 1 is conventional as of 3GPP release 5).

In case of successful reception of the packet, the UE sends an ACK on HS-DPCCH. If the packet was not received correctly, the UE sends nothing.

If the packet is not received in the initial transmission, the base station retransmits it. The number of retransmissions is limited to two in HS-SCCH less operation.

In contrast to the initial transmission, the retransmissions are using HS-SCCH signaling. However, the coding of the HS-SCCH deviates from release 5, since the bits on HS-SCCH are reinterpreted. This is called HS-SCCH type 2. The conventional HS-SCCH as of 3GPP release 5 is called HS-SCCH type 1.

3.3.13.1 HS-SCCH Type 2

The table below gives a comparison of the HS-SCCH Type 1 (normal operation) and HS-SCCH Type 2 (less operation) formats.

Table 3-11: Comparison of HS-SCCH Type 1 and Type 2

HS-SCCH Type 1 (normal operation)	HS-SCCH Type 2 (less operation)
Channelization code set information (7 bits)	Channelization code set information (7 bits)
Modulation scheme information (1 bit)	Modulation scheme information (1 bit)
Transport block size information (6 bits)	Special information type (6 bits)
HARQ process information (3 bits)	Special information (7 bits)
Redundancy and constellation version (3 bits)	UE identity (16 bits)
New data indicator (1 bit)	
UE identity (16 bits)	

The special information type on HS-SCCH type 2 must be set to 111110 to indicate HS-SCCH less operation. The 7 bits special information then contains:

- 2-bit transport block size information (one of the four possible transport block sizes as configured by higher layers)
- 3-bit pointer to the previous transmission of the same transport block (to allow soft combining with the initial transmission)
- 1-bit indicator for the second or third transmission
- 1 bit reserved.

QPSK is also used for the retransmissions. The redundancy version for the second and third transmissions are equal to 3 and 4, respectively.

For the retransmissions, also HS-DSCH CRC attachment method 2 is used.

ACK or NACK is reported by the UE for the retransmitted packets.

3.3.13.2 HS-SCCH Type Two Fixed Reference Channel: H-Set 7

In order to support HS-SCCH Type 2 (less operation) testing, a fixed reference channel has been introduced. H-Set 7 is specified as reference test channel for HSDPA test cases.

The H-Set 7 consists of one HS-PDSCH and its parameterization and coding chain is based on one code with QPSK modulation and one HARQ process.

3.3.14 Higher Order Modulation

3.3.14.1 64QAM in downlink

With the possibility to use 64QAM in downlink, HSPA+ can achieve downlink data rates of 21 Mbps. This theoretical peak data rate (physical channel bit rate) with 64QAM is calculated as follows:

$$\text{Peak data rate (64QAM)} = 15 [\text{codes}] * 2880 \text{ bits} / 2 \text{ ms [subframe]} = 21.6 \text{ MBps}$$

3.3.14.2 64QAM Fixed Reference Channel: H-Set 8

In order to support 64QAM testing, a fixed reference channel has been introduced. H-Set 8 is specified as reference test channel for HSPA+ test cases.

The H-Set 8 parameterization and coding chain is based on 15 codes with 64QAM modulation. Six hybrid ARQ processes are used, and HS-DSCH is continuously transmitted.

3.3.14.3 16QAM in uplink

With the possibility to use 16QAM on E-DCH (enhanced dedicated channel) in uplink, HSPA+ can achieve uplink peak data rates of 11.5 Mbps. A new uplink UE category 7 has been introduced which supports 16QAM in addition to BPSK.

Uplink transmission in HSPA+ is based on IQ multiplexing of E-DPDCH (enhanced dedicated physical data channel) physical channels as in HSUPA of 3GPP release 6. In fact, the 16QAM constellation is made up of two orthogonal 4PAM (pulse amplitude modulation) constellations. In case of 4PAM modulation, a set of two consecutive binary symbols n_k and n_{k+1} is converted to a real valued sequence following the mapping described in the table below.

Table 3-12: Mapping of E-DPDCH with 4PAM modulation

n_k, n_{k+1}	00	01	10	11
Mapped real value	0.4472	1.3416	-0.4477	-1.3416

This results in the following symbol mapping:



An E-DPDCH uses BPSK or 4PAM modulation symbols.

3.3.14.4 16QAM Fixed Reference Channel: FRC 8

To support 16QAM (4PAM) testing in the uplink, an E-DPDCH fixed reference channel (FRC 8) has been introduced.

The FRC 8 parameterization and channel coding is based on the following:

- Four physical channel codes (2xSF2 and 2xSF4) with overall symbol rate of 2x960 + 2x1920 ksps
- 4PAM modulation
- E-DCH TTI of 2 ms
- Eight hybrid ARQ processes

3.3.15 MIMO in HSPA+

HSPA+ uses full MIMO approach including spatial multiplexing. The approach is called D-TxAA (double transmit antenna array). It is only applicable for the high-speed down-link shared channel, the HS-DSCH.

The figure below shows the basic principle of the 2x2 approach. The figure is taken from 3GPP TS 25.214.

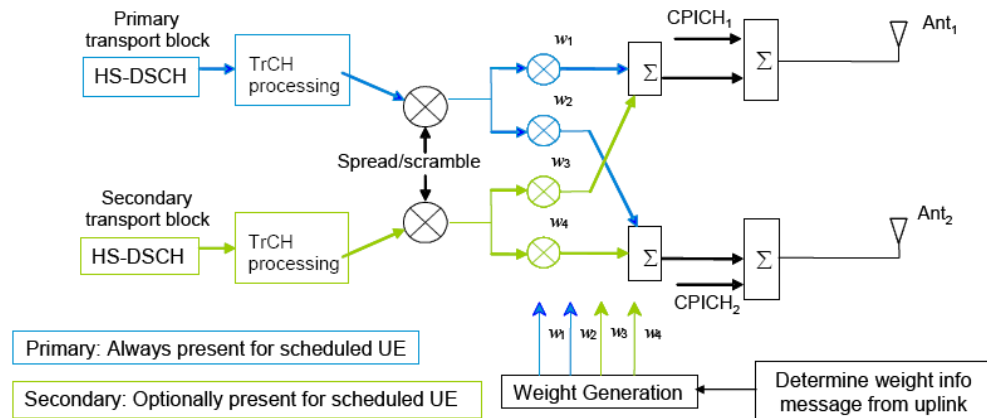


Figure 3-8: MIMO for HSPA+

With D-TxAA, two independent data streams (transport blocks) can be transmitted simultaneously over the radio channel over the same WCDMA channelization codes. Each transport block is processed and channel coded separately. After spreading and scrambling, **precoding** based on weight factors is applied to optimize the signal for transmission over the mobile radio channel.

Four precoding weights $w_1 - w_4$ are available. The first stream is multiplied with w_1 and w_2 , the second stream is multiplied with w_3 and w_4 . The weights can take the following values:

$$w_3 = w_1 = 1/\sqrt{2},$$

$$w_4 = -w_2,$$

$$w_2 \in \left\{ \frac{1+j}{2}, \frac{1-j}{2}, \frac{-1+j}{2}, \frac{-1-j}{2} \right\}$$

Precoding weight w_1 is always fixed, and only w_2 can be selected by the base station. Weights w_3 and w_4 are automatically derived from w_1 and w_2 , because they have to be orthogonal.

3.3.15.1 D-TxAA Feedback signaling: PCI and CQI

D-TxAA requires a **feedback signaling** from the UE to assist the base station in taking the right decision in terms of modulation and coding scheme and precoding weight selection. The UE has to determine the preferred primary precoding vector for transport block 1 consisting of w_1 and w_2 . Since w_1 is fixed, the feedback message only

consists of a proposed value for w_2 . This feedback is called **precoding control information (PCI)**. The UE also recommends whether one or two streams can be supported in the current channel situation. If dual stream transmission is used, the secondary precoding vector consists of the weights w_3 and w_4 . It is inferred in the base station, because it has to be orthogonal to the first precoding vector with w_1 and w_2 . Thus, the UE does not have to report it explicitly. The UE also indicates the optimum modulation and coding scheme for each stream. This report is called **channel quality indicator (CQI)**.

Based on the composite PCI/CQI reports, the base station scheduler decides whether to schedule one or two data streams to the UE. It also decides what packet sizes (transport block sizes) and modulation schemes to use for each stream.

3.3.15.2 MIMO downlink control channel Support

In order to support MIMO operation, changes to the HSDPA downlink control channel have become necessary, i.e. the HS-SCCH.

There is a new **HS-SCCH Type 3** for MIMO operation defined. The table below gives a comparison of the HS-SCCH Type 1 and Type 3 formats.

HS-SCCH Type 1	HS-SCCH Type 3	MIMO
(normal operation)	One transport block	Two transports blocks
Channelization code set information (7 bits)	Channelization code set information (7 bits)	Channelization code set information (7 bits)
Modulation scheme information (1 bit)	Modulation scheme and number of transport blocks information (3 bits)	Modulation scheme and number of transport blocks information (3 bits)
Transport block size information (6 bits)	Precoding weight information (2 bits)	Precoding weight information for primary transport block (2 bits)
HARQ process information (3 bits)	Transport block size information (6 bits)	Transport block size information for primary transport block (6 bits)
Redundancy and constellation version (3 bits)	HARQ process information (4 bits)	Transport block size information for secondary transport block (6 bits)
New data indicator (1 bit)	Redundancy and constellation version (2 bits)	HARQ process information (4 bits)
UE identity (16 bits)	UE identity (16 bits)	Redundancy and constellation version for primary transport block (2 bits)
		Redundancy and constellation version for secondary transport block (2 bits)
		UE identity (16 bits)

The "Precoding weight info for the primary transport block" contains the information on weight factor w_2 as described above. Weight factors w_1 , w_3 , and w_4 are derived accordingly. The number of transport blocks transmitted and the modulation scheme information are jointly coded as shown in [Table 3-13](#).

Table 3-13: Interpretation of "Modulation scheme and number of transport blocks info" sent on HS-SCCH

Modulation scheme + number of transport blocks info (3 bits)	Modulation for primary transport block	Modulation for secondary transport block	Number of transport blocks
111	16QAM	16QAM	2
110	16QAM	QPSK	2
101	64QAM	n.a.	1
	64QAM	QPSK	2
100	16QAM	n.a.	1
011	QPSK	QPSK	2
010	64QAM	64QAM	2
001	64QAM	16QAM	2
000	QPSK	n.a.	1

3.3.15.3 Redundancy Version

Redundancy versions for the primary transport block and for the secondary transport block are signaled. Four redundancy version values are possible (unlike HSDPA in 3GPP release 5 where eight values for the redundancy version could be signaled).

3.3.15.4 HARQ Processes

Also the signaling of the HARQ processes differs from HSDPA in 3GPP release 5. In 3GPP release 5, up to eight HARQ processes can be signaled. Configure a minimum of six HARQ processes to achieve continuous data transmission. Similarly, in MIMO with dual stream transmission, a minimum of 12 HARQ processes would be needed to achieve continuous data transmission.

Each HARQ process has independent acknowledgements and retransmissions. In theory, HARQ processes on both streams can run independently from one another. Independent HARQ processes, however, increases the signaling overhead to 8 bits.

To save signaling overhead, a restriction is introduced: HARQ processes are only signaled for the primary transport block within 4 bits, the HARQ process for the secondary transport block is derived from that according to a fixed rule. According to 3GPP TS 25.212. Thus, there is a one-to-one mapping between the HARQ process used for the primary transport block and the HARQ process used for the secondary transport block. The relation is shown in the table below for the example of 12 HARQ processes configured.

Table 3-14: Combinations of HARQ process numbers for dual stream transmission (12 HARQ processes configured)

HARQ process number on primary stream	0	1	2	3	4	5	6	7	8	9	10	11
HARQ process number on secondary stream	6	7	8	9	10	11	0	1	2	3	4	5



Only an even number of HARQ processes is allowed to be configured with MIMO operation.

3.3.15.5 MIMO uplink control channel Support

Also the uplink control channel for HSDPA operation is affected by MIMO, i.e. the HS-DPCCH (high-speed dedicated physical control channel). In addition to CQI reporting as already defined from 3GPP release 5 onwards, PCI reporting for precoding feedback is introduced. Channel coding is done separately for the composite precoding control indication (PCI) / channel quality indication (CQI) and for HARQ-ACK (acknowledgement or negative acknowledgement information). The figure below shows the principle.

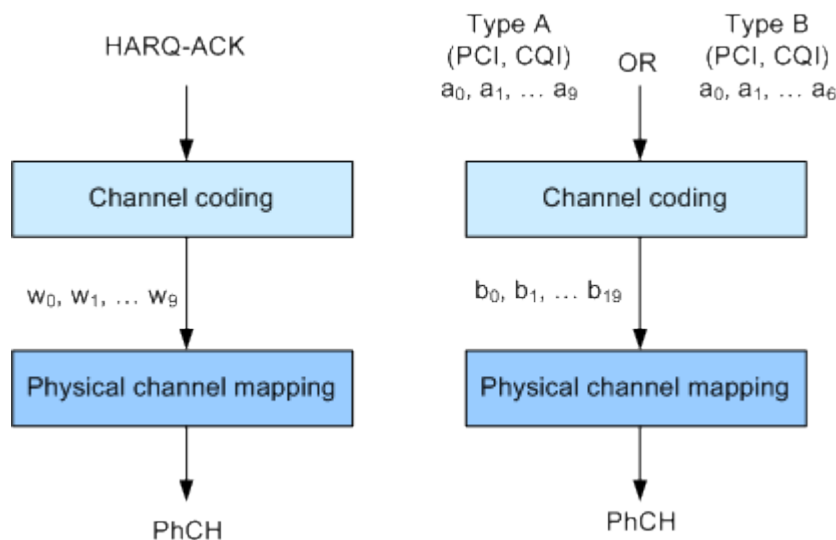


Figure 3-9: Channel coding for HS-DPCCH (MIMO mode)

The 10 bits of the HARQ-ACK messages are interpreted according to 3GPP TS 25.212 (see table below). ACK/NACK information is provided for the primary and for the secondary transport block.

Table 3-15: Interpretation of HARQ-ACK in MIMO operation (non-DC-HSDPA case)

HARQ-ACK message to be transmitted		w ₀	w ₁	w ₂	w ₃	w ₄	w ₅	w ₆	w ₇	w ₈	w ₉
HARQ-ACK in response to a single scheduled transport block											
ACK		1	1	1	1	1	1	1	1	1	1
NACK		0	0	0	0	0	0	0	0	0	0
HARQ-ACK in response to two scheduled transport blocks											
Response to primary transport block	Response to secondary transport block										
ACK	ACK	1	0	1	0	1	1	1	1	0	1
ACK	NACK	1	1	0	1	0	1	0	1	1	1

NACK	ACK	0	1	1	1	1	0	1	0	1	1
NACK	NACK	1	0	0	1	0	0	1	0	0	0
PRE/POST indication											
PRE		0	0	1	0	0	1	0	0	1	0
POST		0	1	0	0	1	0	0	1	0	0

3.3.15.6 CQI Reports: Type A and Type B

In MIMO case, two types of CQI reports are supported:

- **Type A CQI reports** can indicate the supported transport formats for the number of transport blocks that the UE prefers. Single and dual stream transmissions are supported.
- **Type B CQI reports** are used for single stream transmission according to what has been defined from 3GPP release 5 onwards.

For type A CQI reports, the UE selects the CQI1 and CQI2 values for each transport block in dual stream transmission, or the CQIS value in single stream transmission. Then it creates the CQI value to report on HS-DPCCH as follows:

$$CQI = \begin{cases} 15 * CQI_1 + CQI_2 + 31 & \text{when 2 transport blocks are preferred by the UE} \\ CQIs & \text{when 1 transport block is preferred by the UE} \end{cases}$$

For dual stream transmission, new CQI tables are specified in 3GPP TS25.214 for correct interpretation of transport formats based on CQI1 and CQI2.

3.3.15.7 PCI Reports

The PCI value to report in the uplink is created in the UE according to the preferred precoding weight w_2 according to the table below.

Table 3-16: Mapping of preferred precoding weight to PCI values

w_2^{pref}	$\frac{1+j}{2}$	$\frac{1-j}{2}$	$\frac{-1+j}{2}$	$\frac{-1-j}{2}$
PCI value	0	1	2	3

The PCI value is transmitted together with the CQI value as a composite PCI/CQI value. The figure below shows how the composite PCI/CQI report is created.

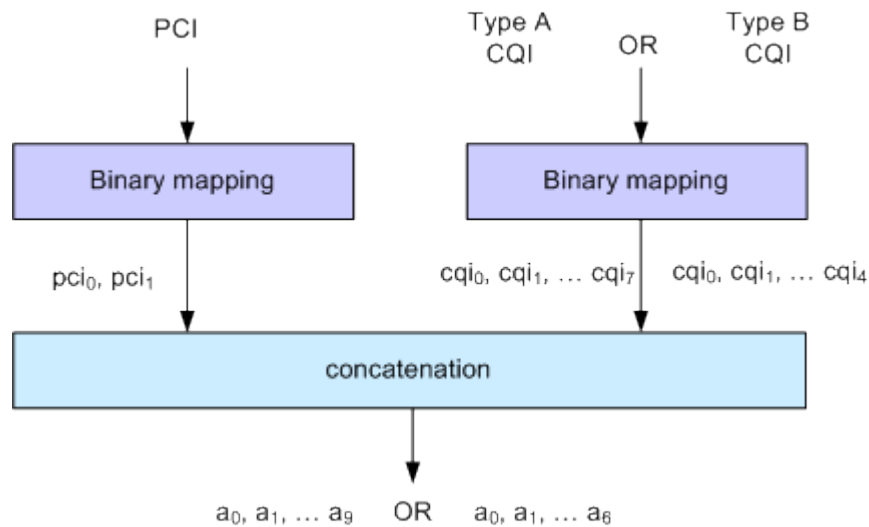


Figure 3-10: Composite PCI/CQI information (MIMO mode)

3.3.15.8 MIMO Fixed Reference Channels: H-Set 9 and H-Set 11

In order to support MIMO testing, two fixed reference channels have been introduced. H-Set 9 and H-Set 11 are specified as reference test channel for HSPA+ test cases.

The H-Set 9 parameterization and coding chain is based on 15 codes with two different modulations, 16QAM and QPSK, for the primary and secondary transport blocks respectively. Six HARQ processes are used, and HS-DSCH is continuously transmitted.

The H-Set 11 parameterization and coding chain is also based on 15 codes and uses two different modulations, six HARQ processes and HS-DSCH is continuously transmitted. The modulation schemes specified for the H-Set 11 are however **64QAM** and **16QAM** for the primary and secondary transport blocks respectively.

3.3.16 Dual Cell HSDPA (DC-HSDPA)

Within 3GPP Release 7 the peak user throughput was enhanced (MIMO, higher order modulation).

In DC-HSDPA operation, the UE is configured with secondary serving HS-DSCH cell. With one HS-SCCH in each of the two cells scheduling flexibility to have different transport formats depending on CQI feedback on each carrier is maintained.

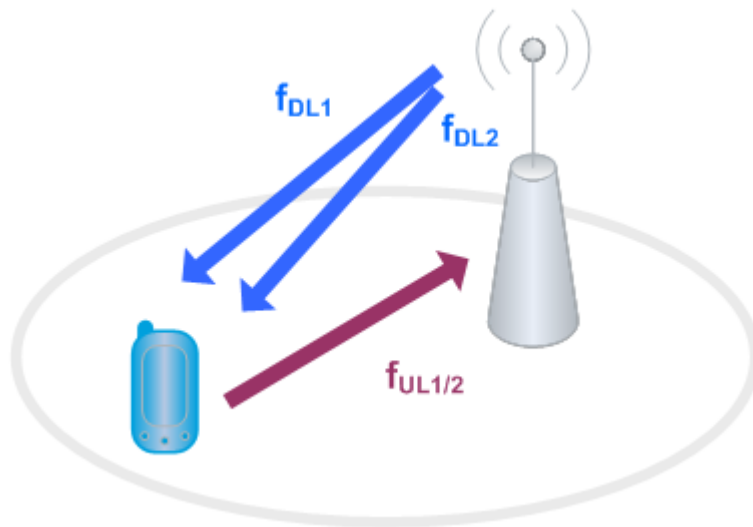


Figure 3-11: Dual-cell HSDPA operation

The following restrictions apply in case of DC-HSDPA operation:

- The dual cell transmission only applies to HSDPA physical channels
- The two cells belong to the same Node-B
- In Release 8, it is required that the two cells are on adjacent carriers; from Release 9 onwards the paired cells can operate on two different frequency bands.
- The two cells use MIMO to serve UEs configured for dual cell operation

3.3.16.1 DC-HSDPA Data Acknowledgement (non-MIMO mode)

When the UE is configured to work in DC-HSDPA non-MIMO mode, the coding of the HS-DPCCH is performed according to the general coding flow. The HARQ-ACK and the CQI are coded in parallel. The figure below shows the principle.

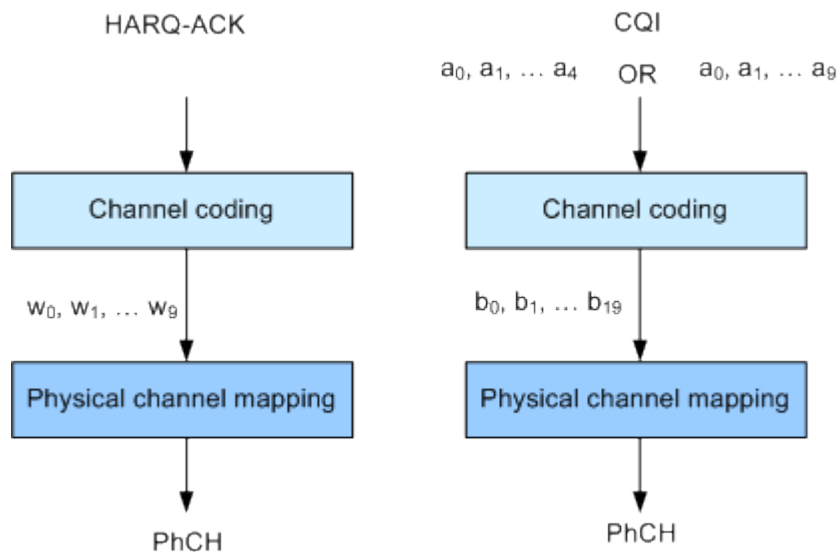


Figure 3-12: Channel coding for HS-DPCCH (non-MIMO mode)

The 10 bits of the HARQ-ACK messages are interpreted according to 3GPP TS 25.212 (see the table below). ACK/NACK information is provided for the transport block of the serving and secondary serving HS-DSCH cells.

Table 3-17: Interpretation of HARQ-ACK in DC-HSDPA non-MIMO operation

HARQ-ACK message to be transmitted	w ₀	w ₁	w ₂	w ₃	w ₄	w ₅	w ₆	w ₇	w ₈	w ₉
HARQ-ACK in response to a single scheduled transport block, detected on the serving HS-DSCH cell										
ACK	1	1	1	1	1	1	1	1	1	1
NACK	0	0	0	0	0	0	0	0	0	0
HARQ-ACK in response to a single scheduled transport block, detected on the secondary serving HS-DSCH cell										
ACK	1	1	1	1	1	0	0	0	0	0
NACK	0	0	0	0	0	1	1	1	1	1
HARQ-ACK in response to a single scheduled transport block, detected on each of the serving and secondary serving HS-DSCH cells										
Response to transport block from serving HS-DSCH cell	Response to transport block from secondary serving HS-DSCH cell									
ACK	ACK	1	0	1	0	1	0	1	0	1
ACK	NACK	1	1	0	0	1	1	0	0	1
NACK	ACK	0	0	1	1	0	0	1	1	0
NACK	NACK	0	1	0	1	0	1	0	1	0
PRE/POST indication										

PRE		0	0	1	0	0	1	0	0	1	0
POST		0	1	0	0	1	0	0	1	0	0

CQI Reports: CQI1 and CQI2

Two individual CQI reports CQI1 and CQI2 are concatenated to form the composite channel quality information. CQI1 corresponds to the serving HS-DSCH cell and CQI2 to the secondary serving cell respectively. The figure below show how the CQI report is constructed.

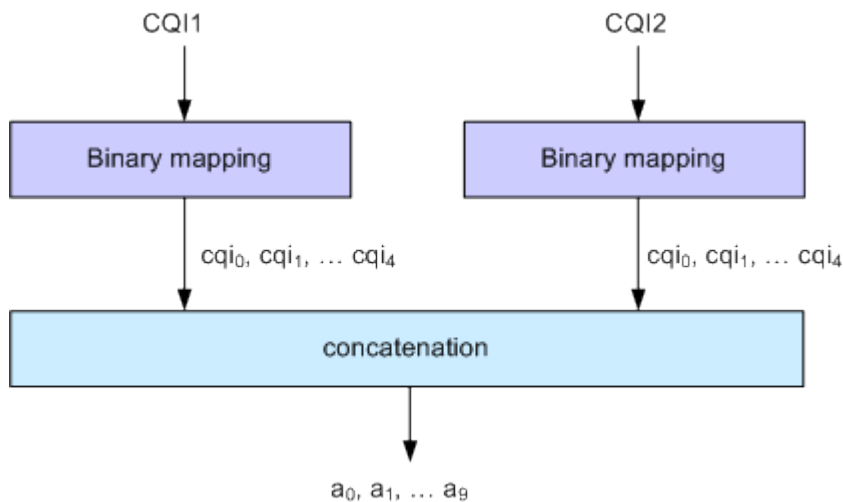


Figure 3-13: Composite CQI information (DC-HSDPA operation, non-MIMO mode)

3.3.16.2 DC-HSDPA + MIMO

Channel coding is done separately for the composite PCI/CQI and for HARQ-ACK information.

The principle is shown on figure [Figure 3-9](#).

The composite PCI/CQI report is created as illustrated on figure [Figure 3-10](#).

The HARQ-ACK message is coded to 10 bits according to 3GPP TS 25.212. The standard defines the HARQ-ACK coding for the feedback of the serving and secondary serving HS-DSCH cells for normal and dual stream transmission.

3.3.16.3 Dual Cell HSDPA (DC-HSDPA) Fixed Reference Channel: H-Set 12

In order to support DC-HSDPA testing, a fixed reference channel has been introduced. H-Set 12 is specified as reference test channel for HSDPA test cases.

The H-Set 12 parameterization and coding chain is based on 1 code with QPSK modulation. Six hybrid ARQ processes are used, and HS-DSCH is continuously transmitted.

3.3.17 HS-DPCCH Extension for 4C-HSDPA and 8C-HSDPA

The 3GPP Release 11 extends the dual cell HSDPA (DC-HSDPA) transmission up to 8 cells HSDPA (8C-HSDPA). This extension enables the simultaneous scheduling of HSDPA transmission over four or eight cells, one serving and up to three or up to seven secondary serving cells. The transmissions on the serving cells are independent and are dynamically activated and deactivated.

For each of the cells, MIMO can be enabled. The channel coding of the feedback data transmitted via the HS-DPCCH is based on the same principle as in MIMO single cell transmission.

For detailed description on the channel coding, refer to the 3GPP specification TS 25.212.

The related instrument settings are described in [Chapter 4.30, "HS-DPCCH Settings - UE"](#), on page 186.

3.3.18 Dual Cell HSUPA (Dual Cell E-DCH)

The Dual-Cell HSUPA employs carrier aggregation in the uplink. The DC-HSUPA operation is available only in combination with the DC-HSDPA. This operation uses two independent carriers, each assigned to one of the DC-HSDPA "cells".

3.3.19 UE Capabilities

MIMO, 64QAM and DC-HSDPA operation in downlink as well as 16QAM in uplink are UE capability, i.e. not all UEs have to support them.

Several UE categories have been introduced to provide:

- DL MIMO support and support of 64QAM in addition to 16QAM and QPSK in downlink
- 16QAM support in uplink
- Support of dual cell operation and MIMO

The R&S SMW supports all UE categories.

3.3.19.1 MIMO and 64QAM UE Capabilities

According to 3GPP TS25.306 V8.4.0, the following release 8 HS-DSCH categories with MIMO and 64QAM support are defined:

- Categories 13 and 14:
 - Support of 64QAM
 - No support of MIMO
 - Maximum data rate of category 14 is 21 Mbps
- Categories 15 and 16:
 - Support of MIMO with modulation schemes QPSK and 16QAM
 - No support of 64QAM
 - Maximum data rate of category 16 is 27.6 Mbps

- Categories 17 and 18:
Support of MIMO with modulation schemes QPSK and 16QAM
Support of 64QAM and MIMO, but not simultaneously
Maximum data rate of category 18 is 27.6 Mbps when MIMO is used and 21 Mbps when 64QAM is used
- Categories 19 and 20:
Simultaneous support of MIMO and all modulation schemes (QPSK, 16QAM and 64QAM)
Maximum data rate of category 20 is 42.1 Mbps

3.3.19.2 UL 16QAM UE Capabilities

According to 3GPP TS25.306 V9.5.0, the following release 8 E-DCH categories with 16QAM uplink support are defined:

- Category 7 and 9:
Support of 16QAM in addition to BPSK

3.3.19.3 MIMO and DC-HSDPA Operation UE Capabilities

According to 3GPP TS25.306 V9.0.0, the following release 9 HS-DSCH categories with MIMO and dual cell operation support are defined:

- Categories 21, 22, 23 and 24:
Support of QPSK, 16QAM and for categories 23 and 24 also 64QAM
Support of dual cell operation, but without MIMO
- Categories 25, 26, 27 and 28:
Support of QPSK, 16QAM and for categories 27 and 28 also 64QAM
Simultaneous support of MIMO and dual cell operation

3.3.19.4 Dual Cell E-DCH Operation UE Capabilities

According to 3GPP TS25.306 V9.5.0, the following release 9 E-DCH categories with Dual-Cell E-DCH support are defined:

- Category 8:
Supports only QPSK in Dual-Cell E-DCH operation
- Category 9:
Supports QPSK and 16QAM in Dual-Cell E-DCH operation

3.3.20 Uplink Discontinuous transmission (UL DTX)

Uplink discontinuous transmission (UL DTX) is one of the features of the continuous packet connectivity (CPC) provided to reduce the uplink control channel overhead. UL DTX allows the UE to stop transmission of uplink DPCCH in case there is no transmission activity on E-DCH or HS-DPCCH. This is sometimes also called uplink DPCCH gating.

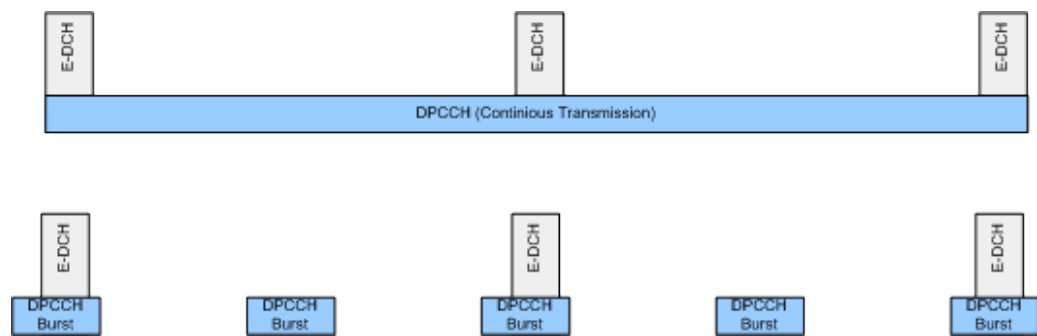


Figure 3-14: Principle of UL-DTX

Uplink DPCCH is not transmitted continuously any more, but it is transmitted from time to time according to a known activity pattern (UE-DTX cycle). This regular activity is needed in order to maintain synchronization and power control loop. Gating is only active if there is no uplink data transmission on E-DCH or HS-DPCCH transmission ongoing. In case E-DCH or HS-DPCCH is used, the uplink DPCCH is transmitted in parallel.

The 3GPP specifications define two patterns that can be applied to adapt the DTX cycle to the traffic conditions, the UE-DTX cycle 1 and the UE-DTX cycle 2 (see also [Chapter 5.3, "Configuring UL-DTX Transmission and Visualizing the Scheduling"](#), on page 269). The UE-DTX cycle 1 is applied depending on the duration of E-DCH inactivity. The UE-DTX cycle 2 has less frequent DPCCH transmission instants and is applied whenever there is no uplink data transmission. The switching from UE-DTX cycle 1 to UE-DTX cycle 2 is determined by a configurable period of inactivity.

The transmission of control signaling on the HS-DPCCH is not affected by the UL-DTX pattern. With enabled UL-DTX, the HARQ-ACK messages and the CQI reporting remain unchanged and the UE transmits acknowledgment according to the HARQ-ACK pattern, regardless of the UL-DTX cycle. Transmission of control signals does not cause switching from UE-DTX cycle 2 to UE-DTX cycle 1.

A preamble and postamble are added to the DPCCH burst for synchronization reasons. The length of the uplink DPCCH preamble and postamble depend whether the DPCCH burst transmission is caused by user-data transmission on the E-DCH or control signaling on the HS-DPCCH.

- For the E-DCH transmission
During the UE-DTX cycle 1, the DPCCH transmission starts two slots before the start of E-DPDCH and terminates one slot after it. For the UE-DTX cycle 2, an extended preamble of up to 15 slots is applied.
- For the HS-DPCCH transmission
The preamble length depends whether an HARQ-ACK or CQI report is transmitted. Two slots are applied for the HARQ-ACK case (unless an HARQ preamble PRE is transmitted) and three in case of CQI reporting. For the latter case, an extended preamble is applied too.
The DPCCH transmission terminates at the end of the first full DPCCH slot after the end of the HARQ-ACK/CQI field.

An instrument equipped with the required options provided an UL-DTX functionality, that is fully compliant with 3GPP TS 25.214. All dependencies from E-DCH transmis-

sions, HARQ-ACK transmissions or CQI transmissions on the DPCCH are respected. The corresponding settings are described in [Chapter 4.25, "UL-DTX/User Scheduling - UE"](#), on page 165.



Use the [Scheduling List](#) to display the UL-DTX burst pattern and transmissions of E-DCH and HS-DPCCH, as well as the impact on the UL-DPCCH transmissions or the configured uplink user scheduling.

Refer to [Chapter 5.3, "Configuring UL-DTX Transmission and Visualizing the Scheduling"](#), on page 269 for an example on how to use the UL-DTX function.

3.3.21 Uplink User Scheduling

The R&S SMW equipped with R&S SMW-B10 supports uplink user scheduling in Baseband A/B.

The uplink user scheduling is a function that enables you to configure the scheduling of the uplink transmission flexibly. The instrument provides an interface for loading of externally created XML-like files with predefined file structure. The corresponding settings are described in [Chapter 4.25, "UL-DTX/User Scheduling - UE"](#), on page 165

Inter-dependencies

- The UL-DTX and the user scheduling functions exclude each other and cannot be activated simultaneously.
- The uplink scheduling information is processed in real time and this feature can be enabled together with the "Dynamic Power Control". All UE1 channels can be power controlled.
- With enabled "User Scheduling", the value of the parameter [Power Reference](#) is fixed to "First DPCCH".
- Activated "User Scheduling" limits the number of E-DPDCH physical channel configurations. The "Overall Symbol Rates = 2x960 ksps, 2x1920 ksps and 2x960 + 2x1920 ksps" are not allowed. ¹⁾
- The features uplink user scheduling and the internal E-DCH channel coding exclude each other. ²⁾
- A PRACH preamble cannot be directly scheduled in the user scheduling file, because the user scheduling is enabled in the "DPCCH+DPDCH" mode. ³⁾



Some possible workaround approaches

- 1) To generate a signal with "Overall Symbol Rates = 2x960 ksp/s, 2x1920 ksp/s and 2x960 + 2x1920 ksp/s", enable two Baseband blocks to generate the corresponding "I only" and "Q only" channels. Combine the outputs of the two Basebands. The resulting composite signal comprises the physical channel configuration according to the specifications.
- 2) If channel coded data in the E-DCH is required, consider the use of pre-channel-coded data lists as data source for the physical E-DPDCH channel.
- 3) Enable a PRACH preamble for UE2, configure the required user scheduling for UE1 and "delay" the beginning of the UE1 transmission (use the commands with parameters `slot="0"` and `action="DPCCH_OFF"`, `"DPDCH_OFF"` and `"EDCH_OFF"`)

File Structure

Files with user scheduling information use the predefined file extension `*.3g_sch` and follow a predefined file structure. To explain the file structure, the following simple scheduling example is used:

```
<?xml version="1.0"?>
<SMxScheduling>
<head type="3GPP FDD" subtype="Uplink User Scheduling" Version="1" />
  <!-- Comment -->
  <command slot="0" action="DPCCH_OFF" />
  <command slot="15" action="DPCCH_ON" />
</SMxScheduling>
```

The highlighted lines are mandatory. Do not change them. The user scheduling is performed with the `<command>` tag. The [Table 3-18](#) describes the tag structure. All parameters of this tag are mandatory.

Table 3-18: Structure of tag `<command>`

Parameter name	Value range	Description
<code><slot></code>	0 to 3749	Value range deviates in the following cases: - for <code><action="EDCH_TTIS"></code>, the <code><slot></code> must be a multiple of 15 (changes in the E-DCH TTI size are allowed only at the beginning of a 3GPP frame) - for <code><action="REPEAT"></code> the <code><slot></code> must be a multiple of 15 and within the value range 15 to 3750.
<code><action></code>	DPCCH_OFF	Disables DPCCH transmission starting from the beginning of the specified slot
	DPCCH_ON *	Enables DPCCH transmission starting from the beginning of the specified slot
	DPDCH_OFF	Disables DPDCH transmission starting from the beginning of the specified slot
	DPDCH_ON *	Enables DPDCH transmission starting from the beginning of the specified slot. The DPDCH must be activated with the corresponding settings in the instrument's user interface, see State (DPDCH) .

Parameter name	Value range	Description
	EDCH_OFF	Disables E-DCH transmission (i.e. the transmission in the E-DPCCH and E-DPDCH physical channels) starting from the beginning of the specified slot.
	EDCH_ON *	Enables E-DCH transmission starting from the beginning of the specified slot. The E-DPCCH and/or the E-DPDCH must be activated in the instrument's user interface, see State (E-DPCCH) and State (E-DPDCH) . This <action> affects only the currently active channels (E-DPCCH and/or E-DPDCH).
	EDCH_TTIS	Determines the TTI size of all E-DCH transmissions starting from the beginning of the specified slot.
	EDCH_ETFCI	Determines the E-TFCI (transport block size index) of all subsequent E-DCH transmissions. The change of the E-TFCI applies always at the beginning of the next E-DCH TTI, i.e. the E-TFCI cannot be changed during an ongoing E-DCH TTI.
	DYNPC_OFF	Disables the dynamic power control starting from the beginning of the specified slot.
	DYNPC_ON **	Enables the dynamic power control starting from the beginning of the specified slot, i.e. the instrument applies changes in the channel transmit powers starting from the specified slot. The dynamic power control must be activated with the corresponding settings in the instrument's user interface, see Dynamic Power Control State .
	REPEAT	Performs a loop in the action's sequence and repeats all prior defined actions starting from the beginning of the specified slot. The repetition periodicity of the user scheduling is determined by the <slot> value. If <action="REPEAT"> is omitted, the instrument follows the defined user scheduling sequence once. Note: The <action="REPEAT"> causes a repetition of the scheduling commands, but not necessarily guarantee an identical signal. For example, long data lists are not restarted and the effects of former dynamic power control commands still persist, even after the sequence is looped.
ttis	2 10	For <action="EDCH_TTIS">, determines the TTI size (2 ms or 10 ms)
etfci	0 to 127	For <action="EDCH_ETFCI">, determines the E-TFCI

*) The instrument schedules DPCCH/DPDCH/E-DCH transmissions by default, unless an <action="DPCCH_OFF">, <action="DPDCH_OFF"> and/or <action="EDCH_OFF"> is scheduled.

**) If dynamic power control is activated in the user interface, the instrument applies the power control by default, unless an <action="DYNPC_OFF"> is scheduled.

**Scheduling example**

Refer to [Chapter 5.4, "Configuring and Visualizing the Uplink User Scheduling"](#), on page 272 for an example on how to use the user scheduling function.

3.4 Routing and Enabling an External Control Signal



The R&S SMW uses a flexible signal to connector mapping concept. In the default instrument state, no one connector is configured as inputs of the external control signal.

To route and enable an external control signal, perform the following *general steps*:

- Define the connector type, "Global" or "Local", the external control signal is expected at.
- Use the [Local and Global Connector Settings](#) and define:
 - "Connector > Direction > Input".
 - "Connector > Signal > Feedback" to route and map the corresponding signal.
- Connect the control line to the configured connector.

In this firmware version, the "Global" connector is disabled.

4 3GPP FDD Configuration and Settings

Access:

- Select "Baseband > 3GPP FDD".

Functions that require standard baseband and are disabled in Baseband C/D

The 3GPP FDD options run on both the standard and the wideband baseband generators. You can also access the 3GPP FDD settings in each of the baseband blocks.

Consider, however, that the following realtime functions are not available in "Baseband C/D". These functions also require standard baseband generator (R&S SMW-B10):

- UL and DL Dynamic Power Control, see [Dynamic Power Control - Enhanced DPCHs BS1](#) and [Dynamic Power Control - UE](#)
- User scheduling, see [UL-DTX/User Scheduling - UE](#)
- Real Time HS-DPCCH, see [Compatibility Mode \(HS-DPCCH\)](#)
- HARQ Feedback, see [HARQ Simulation Settings](#)
- The HSDPA H-Set Advanced mode is always active, see [Advanced Mode \(requires ARB\)](#)



The 3GPP FDD dialog is comprehensive. To simplify the description and the orientation through this documentation, the headings of the following section follow a common naming convention:

<DialogName/TabName>< - ><SourceDialog>

This common structure is intended to identify your current location in the dialog.

The remote commands required to define these settings are described in [Chapter 8, "Remote-Control Commands"](#), on page 351.


• General Settings for 3GPP FDD Signals	55
• Trigger Settings	58
• Marker Settings	62
• Clock Settings	64
• Local and Global Connector Settings	65
• Basestations and User Equipment Settings	66
• Test Setups/Models	72
• Predefined Settings - Downlink	75
• Additional User Equipment - Uplink	77
• Base Station Settings	78
• Compressed Mode	92
• HSDPA Settings - BS	98
• HSDPA H-Set Mode Settings - BS	102
• Enhanced Settings for P-CPICH - BS1	120
• Enhanced Settings for P-CCPCH - BS1	121
• Enhanced Settings for DPCHs - BS1	123
• S-CCPCH Settings - BS Channel Table	138
• Config AICH/AP-AICH - BS Channel Table	140

• DPCCH Settings - BS Channel Table.....	141
• Config E-AGCH - BS Channel Table.....	148
• Config E-RGCH/E-HICH - BS Channel Table.....	150
• Config F-DPCH - BS Channel Table.....	152
• Multi Channel Assistant - BS.....	156
• User Equipment Configuration (UE).....	160
• UL-DTX/User Scheduling - UE.....	165
• Dynamic Power Control - UE.....	169
• Scheduling List.....	174
• DPCCH Settings - UE.....	175
• DPDCH Settings - UE.....	182
• HS-DPCCH Settings - UE.....	186
• E-DPCCH Settings - UE.....	207
• HSUPA FRC Settings - UE.....	209
• E-DPDCH Settings - UE.....	221
• E-DCH Scheduling - UE.....	224
• Global Enhanced Channel Settings - UE1.....	228
• PRACH Settings - UE.....	237
• PCPCH Settings - UE.....	248
• Filtering, Clipping, ARB Settings.....	260

4.1 General Settings for 3GPP FDD Signals

Access:

- Select "Baseband > 3GPP FDD".

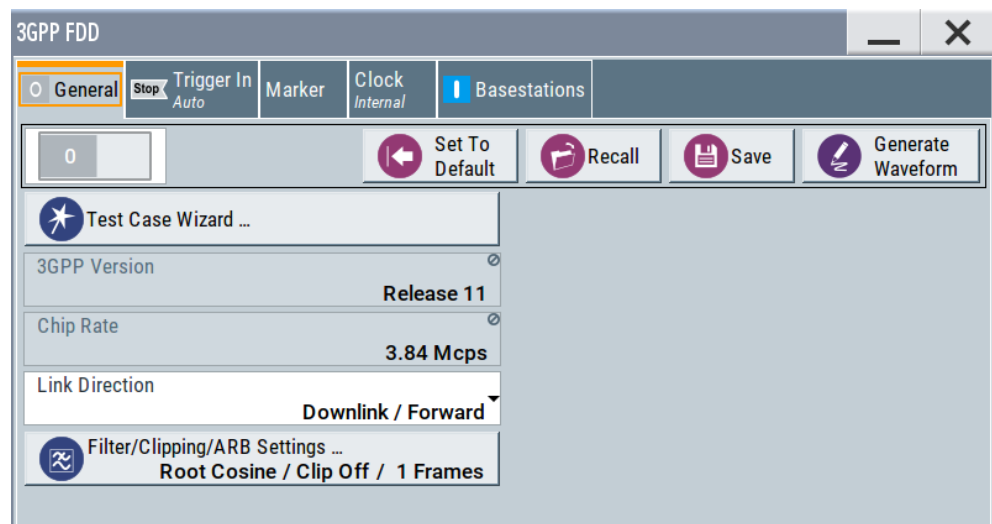

This tab comprises the standard general settings, valid for the signal in both transmission directions.

State.....	56
Set to default.....	56
Save/Recall.....	56
Generate Waveform.....	57
Test Case Wizard.....	57
3GPP Version.....	57
Chip Rate.....	57
Link Direction.....	57
Offline Signal Generation > On.....	57
Filtering/Clipping/ARB Settings.....	58

State

Activates the standard and deactivates all the other digital standards and digital modulation modes in the same path.

The instrument generates the 3GPP FDD signal as a combination of realtime mode (enhanced channels) and arbitrary waveform mode (all the other channels). The following is a more detailed list of the channels generated in **real time**:

- *Downlink channels*: P-CCPCH and up to three DPCHs of base station 1 and H-Sets 1 to 5.
- *Uplink channels*: DPCH and one DPDCH of user equipment 1.
Depending on the actual configurations, other channels of user equipment 1 can also be generated in real time.

Generated in **arbitrary waveform mode** and added to the realtime signal are: PRACH and PCPCH channels and the channels of the other user equipment.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:STATe` on page 354

Set to default

Calls the default settings. Test Model 1 (64 channels) is preset.

The parameter "State" is not affected.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:PRESet` on page 352

Save/Recall

Accesses the "Save/Recall" dialog, i.e. the standard instrument function for storing and recalling the complete dialog-related settings in a file. The provided navigation possibilities in the dialog are self-explanatory.

The filename and the directory it is stored in are user-definable; the file extension is however predefined.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:SETTing:CATalog?` on page 353

`[ :SOURce<hw> ] :BB:W3GPp:SETTing:LOAD` on page 353

`[ :SOURce<hw> ] :BB:W3GPp:SETTing:STORe` on page 354

`[ :SOURce<hw> ] :BB:W3GPp:SETTing:DELeTe` on page 353

Generate Waveform

With enabled signal generation, triggers the instrument to save the current settings of an arbitrary waveform signal in a waveform file with predefined extension *.wv. You can define the filename and the directory, in that you want to save the file.

Using the ARB modulation source, you can play back waveform files and/or process the file to generate multi-carrier or multi-segment signals.

Remote command:

[:SOURce<hw>] :BB:W3GPp:WAVEform:CREate on page 355

Test Case Wizard

Option: R&S SMW-B10.

Access configuration dialog with a selection of predefined settings according to Test Cases in TS 25.141.

The provided test cases are described in [Chapter 7.1, "Introduction"](#), on page 280.

Remote command:

n.a.

3GPP Version

Displays the current implemented version of the 3GPP FDD standard.

The default settings and parameters provided are oriented towards the specifications of the version displayed.

Remote command:

[:SOURce] :BB:W3GPp:GPP3:VERSion? on page 355

Chip Rate

Displays the system chip rate, fixed at 3.84 Mcps.

To vary the output chip rate, use the parameters in the "Filter/Clipping/ARB Settings" dialog

See [Chapter 4.38, "Filtering, Clipping, ARB Settings"](#), on page 260.

Remote command:

[:SOURce<hw>] :BB:W3GPp:CRATe? on page 359

Link Direction

Selects the transmission direction. Further provided settings are in accordance with this selection.

"Downlink/ Forward Link" The transmission direction selected is base station to user equipment. The signal corresponds to that of a base station.

"Uplink/ Reverse Link" The transmission direction selected is user equipment to base station. The signal corresponds to that of user equipment.

Remote command:

[:SOURce<hw>] :BB:W3GPp:LINK on page 357

Offline Signal Generation > On

This indication appears in "Baseband C/D" to inform you that the signal generation is performed in offline.

A subset of realtime functions is not available in "Baseband C/D", see ["Functions that require standard baseband and are disabled in Baseband C/D"](#) on page 54.

Filtering/Clipping/ARB Settings

Access a dialog for setting baseband filtering, clipping and the sequence length of the arbitrary waveform component. An indication of the key parameters values is provided.

See [Chapter 4.38, "Filtering, Clipping, ARB Settings"](#), on page 260 for detailed description.

Remote command:

n.a.


4.2 Trigger Settings

This tab provides access to the settings necessary to select and configure the trigger, like trigger source, trigger delay, as well as to arm or trigger an internal trigger manually. The current signal generation status is displayed in the header of the tab together with information on the enabled trigger mode. As in the "Marker" and "Clock" tabs, this tab provides also access to the settings of the related connectors.



This section focus on the available settings.

For information on how the settings affect the signal, refer to chapter "Basics" in the R&S SMW User Manual.

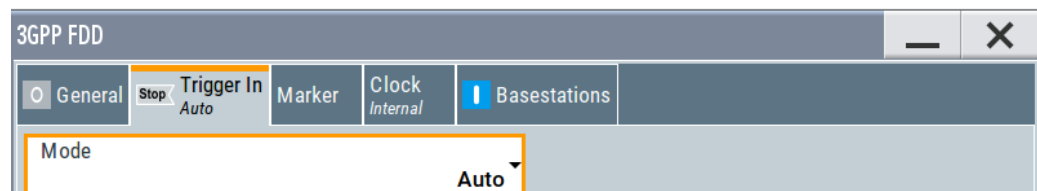

Routing and enabling a trigger

The provided trigger signals are not dedicated to a particular connector. Trigger signals can be mapped to one or more USER x or T/M connectors.

Use the [Local and Global Connector Settings](#) to configure the signal mapping, the polarity, the trigger threshold and the input impedance of the input connectors.

To route and enable a trigger signal, perform the following *general steps*:

- Define the signal source and the effect of a trigger event.
Select the "Trigger In > Mode" and "Trigger In > Source".
- Define the connector where the selected signal is provided.
Use the "Global Connectors" settings.

Trigger Settings Common to All Basebands

To enable simultaneous signal generation in all basebands, the R&S SMW couples the trigger settings in the available basebands in any instrument's configuration involving signal routing with signal addition. For example, in MIMO configuration, routing and summing of basebands or of streams.

The icon  indicates that common trigger settings are applied.

You can access and configure the common trigger source and trigger mode settings in any of the basebands. An arm or a restart trigger event applies to all basebands, too. You can still apply different delay to each of the triggers individually.

Trigger Mode

Selects trigger mode, i.e. determines the effect of a trigger event on the signal generation.

For more information, refer to chapter "Basics" in the R&S SMW user manual.

- "Auto"
The signal is generated continuously.
- "Retrigger"
The signal is generated continuously. A trigger event (internal or external) causes a restart.
- "Armed Auto"
The signal is generated only when a trigger event occurs. Then the signal is generated continuously.
An "Arm" stops the signal generation. A subsequent trigger event (internal or external) causes a restart.
- "Armed Retrigger"
The signal is generated only when a trigger event occurs. Then the signal is generated continuously. Every subsequent trigger event causes a restart.
An "Arm" stops signal generation. A subsequent trigger event (internal or external) causes a restart.
- "Single"
The signal is generated only when a trigger event occurs. Then the signal is generated once to the length specified at "Signal Duration".
Every subsequent trigger event (internal or external) causes a restart.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp [ :TRIGger ] :SEQuence` on page 363

Signal Duration Unit

Defines the unit for describing the length of the signal sequence to be output in the "Single" trigger mode.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:TRIGger:SLUNit` on page 366

Trigger Signal Duration

Enters the length of the signal sequence to be output in the "Single" trigger mode.

Use this parameter to output part of the signal deliberately, an exact sequence of the signal, or a defined number of repetitions of the signal.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:TRIGger:SLENgth` on page 366

Running/Stopped

With enabled modulation, displays the status of signal generation for all trigger modes.

- "Running"
The signal is generated; a trigger was (internally or externally) initiated in triggered mode.
- "Stopped"
The signal is not generated and the instrument waits for a trigger event.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:TRIGger:RMODe?` on page 366

Arm

Stops the signal generation until subsequent trigger event occurs.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:TRIGger:ARM:EXECute` on page 364

Execute Trigger

For internal trigger source, executes trigger manually.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:TRIGger:EXECute` on page 365

Trigger Source

The following sources of the trigger signal are available:

- "Internal"
The trigger event is executed manually by the "Execute Trigger".
- "Internal (Baseband A/B)"
The trigger event is provided by the trigger signal from the other basebands.
If common trigger settings are applied, this trigger source is disabled.
- "External Global Trigger"
The trigger event is the active edge of an external trigger signal provided and configured at the USER x connectors.
- "External Local Trigger"
The trigger event is the active edge of an external trigger signal provided and configured at the local T/M/C connector.
With coupled trigger settings, the signal has to be provided at the T/M/C1/2/3 connectors.
- "External Local Clock"
The trigger event is the active edge of an external local clock signal provided and configured at the local T/M/C connector.
With coupled trigger settings, the signal has to be provided at the T/M/C1 connector.
- "Baseband Sync In"
Option: R&S SMW-B9
In master-slave mode, slave instruments are triggered by the active edge of the synchronization signal.

"External Local Clock/Trigger" require R&S SMW-B10.

Remote command:

[:SOURce<hw>] :BB:W3GPp:TRIGger:SOURce on page 364


Sync. Output to External Trigger/Sync. Output to Trigger

Enables signal output synchronous to the trigger event.

- "On"

Corresponds to the default state of this parameter.


The signal calculation starts simultaneously with the trigger event. Because of the processing time of the instrument, the first samples are cut off and no signal is output. After elapsing of the internal processing time, the output signal is synchronous to the trigger event.

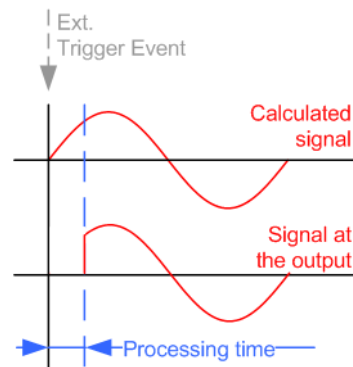

- "Off"

The signal output begins after elapsing of the processing time. Signal output starts with sample 0. The complete signal is output.

This mode is recommended for triggering of short signal sequences. Short sequences are sequences with signal duration comparable with the processing time of the instrument.

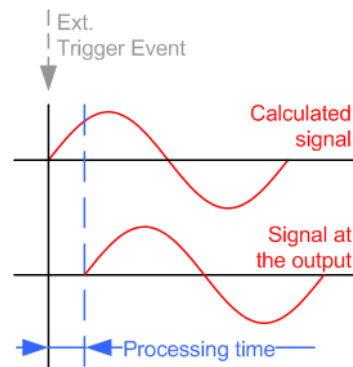

In master-slave mode, this setting ensures that once achieved, synchronization is not lost if the baseband signal sampling rate changes.

Remote command:

[:SOURce<hw>] :BB:W3GPp:TRIGger:EXtErnal:SYNChronize:OUTPut on page 365

External / Trigger Inhibit

For external trigger signal or trigger signal from the other path, sets the duration with that any following trigger event is suppressed. In "Retrigger" mode for example, a new trigger event does not cause a restart of the signal generation until the specified inhibit duration does not expire.

For more information, see chapter "Basics" in the R&S SMW User Manual.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:TRIGger[:EXternal]:INHibit` on page 367

`[ :SOURce<hw> ] :BB:W3GPp:TRIGger:OBASeband:INHibit` on page 365

Trigger Delay

Delays the trigger event of the signal from:

- The external trigger source
- The other path
- The other basebands (internal trigger), if common trigger settings are used.

Use this setting to:

- Synchronize the instrument with the device under test (DUT) or other external devices
- Postpone the signal generation start in the basebands compared to each other
- Compensate delays and align the signal generation start in multi-instrument setup

For more information, see chapter "Basics on ..." in the R&S SMW user manual.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:TRIGger[:EXternal]:DELay` on page 366

`[ :SOURce<hw> ] :BB:W3GPp:TRIGger:OBASeband:DELay` on page 365


4.3 Marker Settings

This tab provides access to the settings necessary to select and configure the marker output signal, like the marker mode or marker delay settings.



This section focus on the available settings.

For information on how the settings affect the signal, refer to chapter "Basics" in the R&S SMW User Manual.

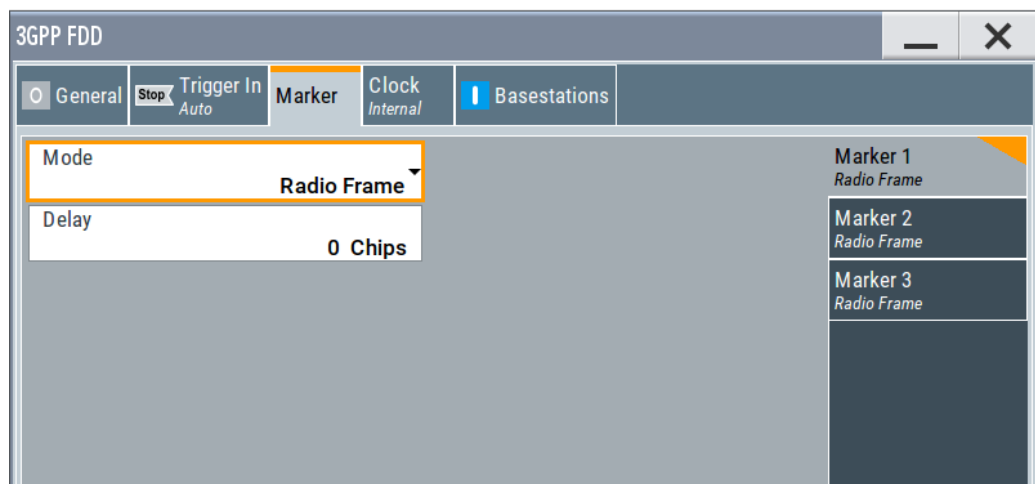

Routing and enabling a marker

The provided marker signals are not dedicated to a particular connector. They can be mapped to one or more USER x or T/M connectors.

To route and enable a marker signal, perform the following *general steps*:


- Define the shape of the generated marker, i.e. select the "Marker > Mode".
- Define the connector where the selected signal is provided.
Use the [Local and Global Connector Settings](#).

Marker Mode

Marker configuration for up to 3 markers. The settings are used to select the marker mode defining the shape and periodicity of the markers. The contents of the dialog change with the selected marker mode.

"Slot"	A marker signal is generated at the start of each slot (every 2560 chips or 0.667 ms).
"Radio Frame"	A marker signal is generated at the start of each frame (every 38400 chips or 10 ms).
"Chip Sequence Period (ARB)"	A marker signal is generated at the start of every arbitrary waveform sequence (depending on the setting for the arbitrary waveform sequence length). If the signal does not contain an arbitrary waveform component, a radio frame trigger is generated.
"System Frame Number (SFN) Restart"	A marker signal is generated at the start of every SFN period (every 4096 frames).

"ON/OFF Ratio" A regular marker signal that is defined by an on/off ratio is generated. A period lasts one on and off cycle.



Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:TRIGger:OUTPut<ch>:ONTime` on page 368

`[ :SOURce<hw> ] :BB:W3GPp:TRIGger:OUTPut<ch>:OFFTime` on page 368

"User" A marker signal is generated at the beginning of every user-defined "Period".

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:TRIGger:OUTPut<ch>:PERiod` on page 368

"Multi Gated" An internally used marker signal.

Marker 2 and Marker 3 are automatically set to this value in the following configuration:

- "Link Direction > Uplink"
- "User Equipment > UE1 > On"
- "User Equipment > UL-DTX/User Scheduling > State > On"
- "UL-DTX/User Scheduling > Mode > User Scheduling"

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:TRIGger:OUTPut<ch>:MODE` on page 367

Marker x Delay

Delays the marker signal at the marker output relative to the signal generation start.

Variation of the parameter "Marker x Delay" causes signal recalculation.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:TRIGger:OUTPut<ch>:DELay` on page 368


4.4 Clock Settings

This tab provides access to the settings necessary to select and configure the clock signal, like the clock source and clock mode.



This section focus on the available settings.

For information on how the settings affect the signal, refer to chapter "Basics" in the R&S SMW User Manual.

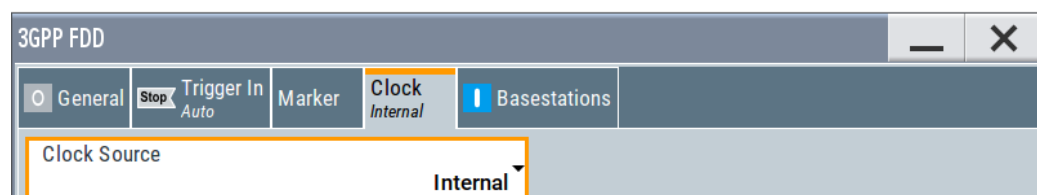



Defining the clock

The provided clock signals are not dedicated to a particular connector. They can be mapped to one or more USER x and T/M/C connectors.

Use the [Local and Global Connector Settings](#) to configure the signal mapping, the polarity, the trigger threshold, and the input impedance of the input connectors.

To route and enable a trigger signal, perform the following *general steps*:

- Define the signal source, that is select the "Clock > Source".
- Define the connector where the selected signal is provided.
Use the [Local and Global Connector Settings](#).

Clock Source

Selects the clock source.

- "Internal"
The instrument uses its internal clock reference.
- "External Local Clock"
Option: R&S SMW-B10
The instrument expects an external clock reference at the local T/M/C connector.
"External Local Clock" requires R&S SMW-B10.

Clock Mode

Option: R&S SMW-B10

Sets the type of externally supplied clock.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:CLOCK:MODE` on page 369

Measured External Clock

Provided for permanent monitoring of the enabled and externally supplied clock signal.

Remote command:

`CLOCK:INPut:FREQuency?`

4.5 Local and Global Connector Settings

Each of the "Trigger In", "Marker" and "Clock" dialogs and the "Trigger Marker Clock" dialog provides a quick access to the related connector settings.




See also chapter "Local and Global Connector Settings" in the user manual.


4.6 Basestations and User Equipment Settings

Depending on the selected link direction, the last tab comprises either the "Basestations" or the "User Equipment" common settings.

- "Link Direction > Downlink"

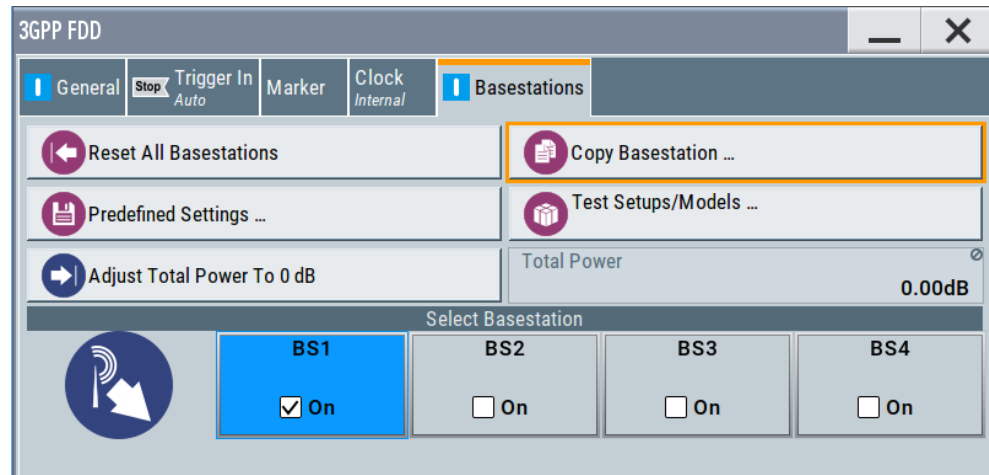

- "Link Direction > Uplink"

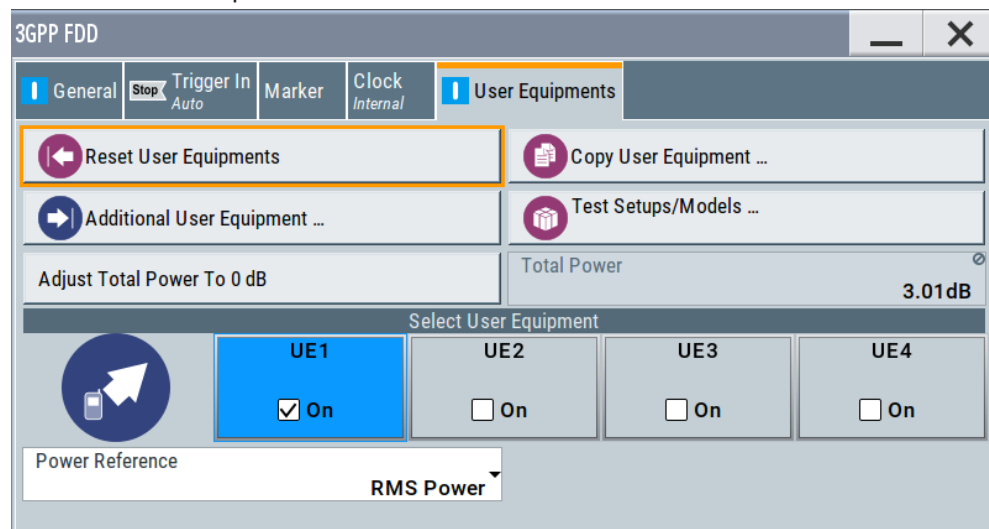

This section describes the configuration settings common for both tabs, like OCNS settings or power configuration.

4.6.1 Common Configuration Settings

The "Configure Basestations / User Equipments" tabs cover the general parameters for configuring the respective transmission direction.

Reset all Base Stations

Resets all base stations to the predefined settings. The preset value for each parameter is specified in the description of the remote-control commands.

Table 4-1: Overview of the base station predefined settings

Parameter	Value
State	Off
State (all channels)	Off
Scrambling Code	0
Slot Format DPCH	8
Symbol Rate DPCH	30 ksps
Channelization Code (all channels)	0
Data Source (all channels)	PN9
Timing Offset (all channels)	0
Multi-Code State (all channels)	Off

Remote command:

[\[:SOURce<hw>\]:BB:W3GPp:BSTation:PRESet](#) on page 355

Reset User Equipment

Resets all user equipment to the predefined settings. The preset value for each parameter is specified in the description of the remote-control commands.

Table 4-2: Overview of the user equipment predefined settings

Parameter	Value
State	Off
Mode	DPCCH + DPDCH
Scrambling Code (hex)	0
DPCCH Settings	
Power	0 dB
DPDCH Settings	
DPDCH State	On
HS-DPCCH, E-DPCCH and E-DPDCH State	Off
Channel Power	0 dB
Overall Symbol Rate	60 ksps

Remote command:

[\[:SOURce<hw>\]:BB:W3GPp:MSTation:PRESet](#) on page 445

Copy Basestation/Copy User Equipment...

Copies the settings of a base station or user equipment to a second base or user equipment. A dialog opens for creating the destination station.

Downlink / Forward link direction
Uplink / Reverse link direction
"Copy from Source"

Selects the base station or user equipment whose settings are to be copied.

Remote command:

[\[:SOURce<hw>\]:BB:W3GPp:COPY:SOURce](#) on page 357

"To Destination"

Selects the base station or user equipment whose settings are to be overwritten.

Remote command:

[\[:SOURce<hw>\]:BB:W3GPp:COPY:DESTination](#) on page 356

"Channelization Code Offset (Base Station only)"

Enters the offset to be applied when copying the base station to the channelization codes of the destination base station. The minimum value is 0 (channelization codes are identical), the maximum value is 511.

Remote command:

[\[:SOURce<hw>\]:BB:W3GPp:COPY:COFFset](#) on page 355

"Accept" Starts the copy process.

Remote command:

[\[:SOURce<hw>\]:BB:W3GPp:COPY:EXECute](#) on page 356

Test Setups/Models

Provides access to the test models defined in the 3GPP standard and further test setups, see [Chapter 4.7, "Test Setups/Models"](#), on page 72.

Remote command:

n.a.

Predefined Settings

Access a dialog for setting predefined configurations, see [Chapter 4.8, "Predefined Settings - Downlink"](#), on page 75.

Remote command:

n.a.

Additional User Equipment

Access a dialog for simulating up to 128 additional user equipment, see [Chapter 4.9, "Additional User Equipment - Uplink"](#), on page 77.

Remote command:

n.a.

Select Basestation/User Equipment

Selects the base station or user equipment by pressing the accompanying block.

A dialog for editing the selected basestation or user equipment opens (see [Chapter 4.10, "Base Station Settings"](#), on page 78 and [Chapter 4.24, "User Equipment Configuration \(UE\)"](#), on page 160).

To activate a base station or user equipment, enable its state.

Remote command:

(the base station or user equipment is selected by the keyword index

BSStation<[1] | 2 | 3 | 4> or MSTation<i>)

[\[:SOURCE<hw>\]:BB:W3GPp:BSStation<st>:STATE](#) on page 420

[\[:SOURCE<hw>\]:BB:W3GPp:MSTation<st>:STATE](#) on page 447

4.6.2 General Power Settings

The power settings are enabled for "3GPP FDD > State = On".

Adjust Total Power to 0dB

Sets the power of the enabled channels so that the total power of all the active channels is 0 dB. This does not change the power ratio among the individual channels.

Remote command:

[\[:SOURCE<hw>\]:BB:W3GPp:POWER:ADJust](#) on page 357

Total Power

Displays the total power of the active channels.

The total power is calculated from the power ratio of the powered up code channels with modulation on. If the value is not equal to 0 dB, the individual code channels are internally adapted so that the "Total Power" for achieving the set output level is 0 dB. The power ratios are maintained.

Remote command:

[\[:SOURCE<hw>\]:BB:W3GPp:POWER\[:TOTa1\]?](#) on page 358

Power Reference

Determines the power reference for the leveling of the output signal in uplink direction.

Parameter	Power leveling performed during	Power displayed in "Status bar > Level" is equal to	"Mode" of the first active UE
"RMS Power"	Complete signal	Output signal's mean power	• PRACH Standard • PRACH Preamble only • DPCCH+DPDCH and UL-DTX Off • PCPCH Standard • PCPCH Preamble only
"First DPCCH" "First E-DCH" "First HARQ-ACK" "First PCI/CQI"	First slot in which a DPCCH, an E-DCH, an HARQ-ACK or a PCI/CQI is transmitted in the first active UE	Output signal's mean power during the first active DPCCH Note: if there are other UEs or channels active during the reference slot, the total power is used as a reference, not only the DPCCH power. This mode is required if the UL-DTX is enabled, due to the long signal parts of inactivity.	• DPCCH+DPDCH and UL-DTX On • DPCCH+DPDCH and UL-DTX Off
"PRACH Message Part"	PRACH message part of the first active UE	Output signal's mean power during the PRACH message part	PRACH Standard
"Last PRACH Preamble"	Last PRACH preamble of the first active UE	Output signal's mean power during the last PRACH preamble	• PRACH Standard • PRACH Preamble only

Example:

- "RF Level" = -10 dBm (value displayed in the status bar of the instrument)
- DPCCH is activated
- E-DPCCH and one E-DPDCH are activated in the first subframe of each frame

The [Figure 4-1](#) displays the power versus time for "Power Reference = First DPCCH": the signal level in the first subframe is -10 dBm; the RMS power of the signal is -13.3 dBm.

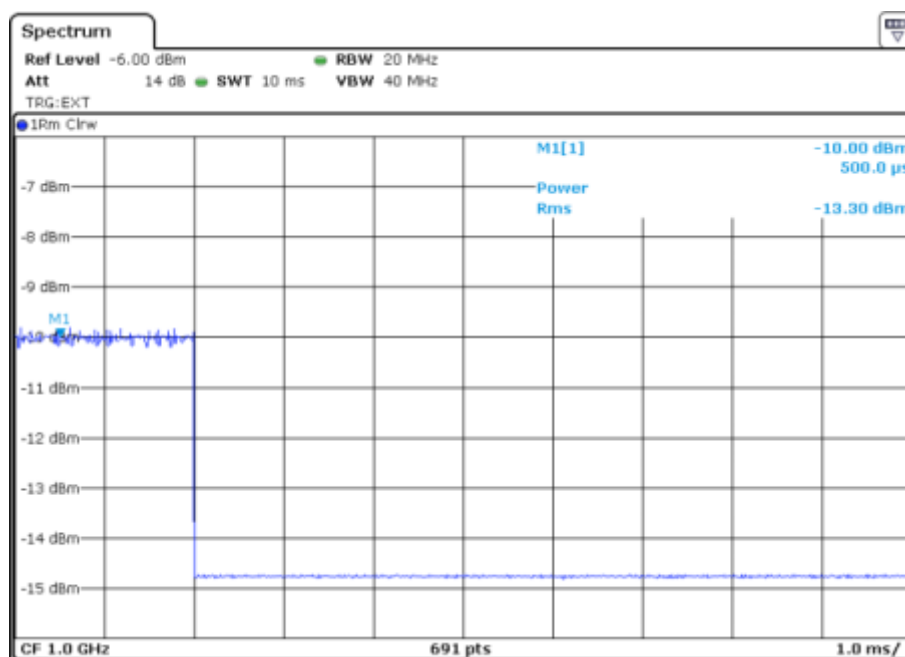


Figure 4-1: Example: Power Reference = First DPCCH

The Figure 4-2 displays the power versus time for "Power Reference = RMS": the RMS power of the signal is -10 dBm; the signal level in the first subframe is -6.7 dBm.

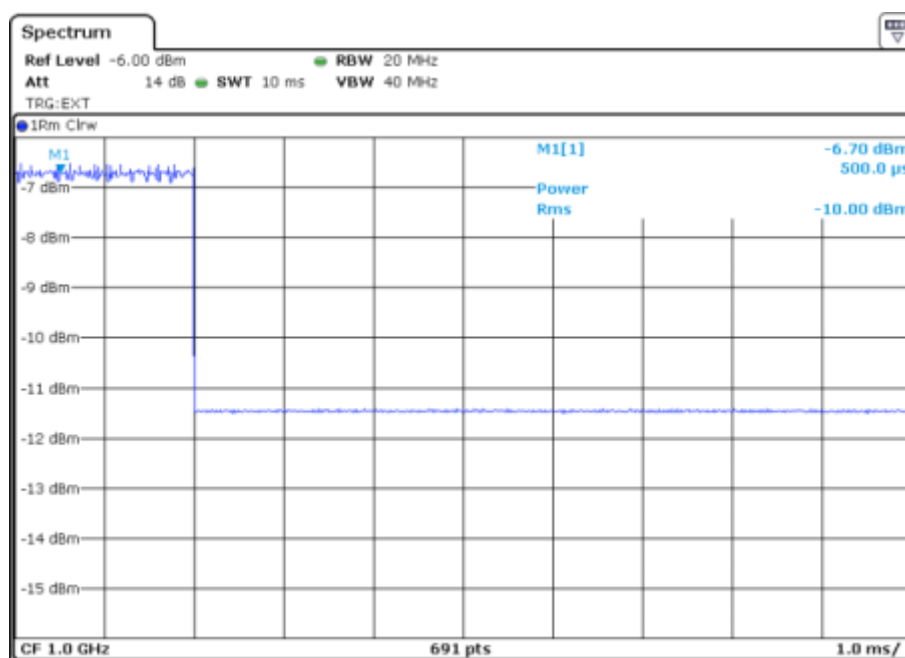


Figure 4-2: Example: Level Reference = RMS

Remote command:

[:SOURce<hw>] :BB:W3GPp:LREference on page 447

4.7 Test Setups/Models


Access:

- Select "3GPP FFD > Basestation/User Equipment > Test Setup/Models"

The dialog offers various test models, depending on the selected transmission direction. The presetting is defined in the 3GPP standard TS 25.141.

Test Models Downlink

Access a list of test models in accordance with the 3GPP standard TS 25.141.

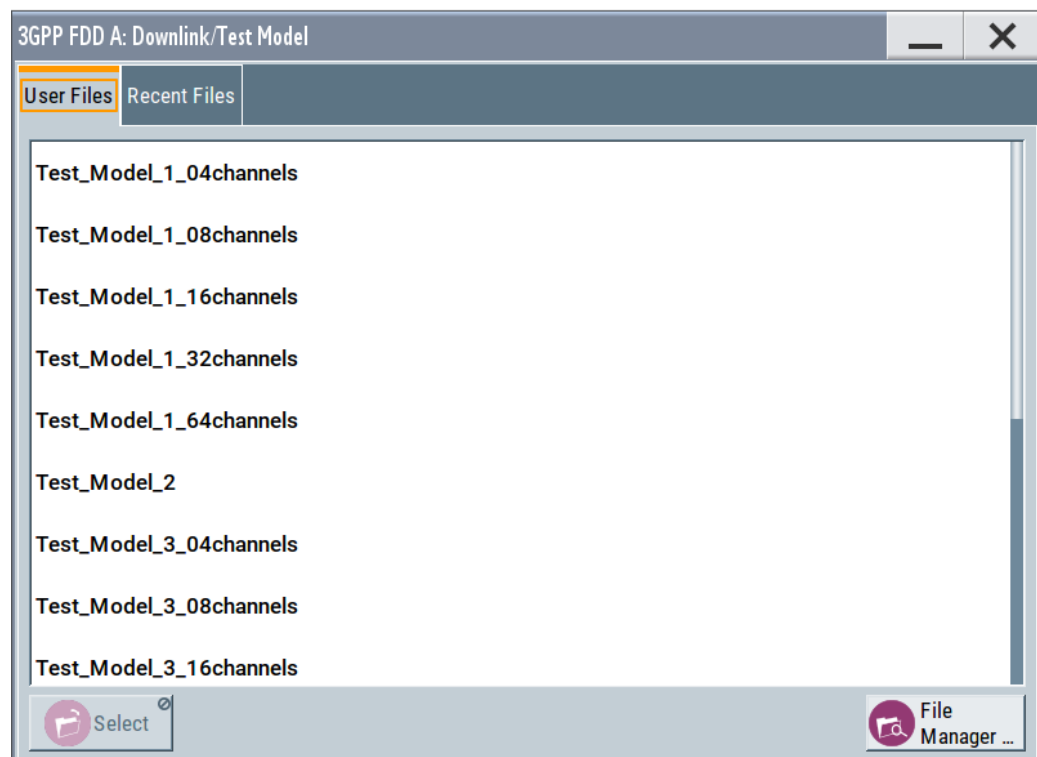

Selecting a test model for an active base station immediately generates the selected signal configuration.

The [Table 4-3](#) gives an overview of the available test models.

Table 4-3: Test Models Downlink

Test Model	Description
"Test Model 1 (4/8 channels)"	Test models for Home BS • Spectrum emission mask • ACLR • Spurious emissions • Transmit intermodulation • Modulation accuracy • Peak code domain error
"Test Model 1 (16/32/64 channels)"	• Spectrum emission mask • ACLR • Spurious emissions • Transmit intermodulation • Modulation accuracy • Peak code domain error
"Test Model 2"	Output power dynamics
"Test Model 3 (4/8 channels)"	Peak code domain error test models for Home BS
"Test Model 3 (16/32 channels)"	Peak code domain error
"Test Model 4"	Error Vector Magnitude, optional P-CPICH is not active
"Test Model 4 (CPICH)"	Error Vector Magnitude, optional P-CPICH is active.
"Test Model 5 (4 HS-PDSCH + 4 DPCH)"	Error Vector Magnitude test models for Home BS at base stations that support high-speed physical downlink shared channels with 16 QAM
"Test Model 5 (8 HS-PDSCH + 30 DPCH)" "Test Model 5 (4 HS-PDSCH + 14 DPCH)" "Test Model 5 (2 HS-PDSCH + 6 DPCH)"	Error Vector Magnitude at base stations that support high-speed physical downlink shared channels with 16 QAM
"Test Model 6_04_4channels"	Relative Code Domain Error test models for Home BS only applicable for 64QAM modulated codes.
"Test Model 6_30_8channels"	Relative Code Domain Error only applicable for 64QAM modulated codes.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:SETting:TMOdel:BSTation:CATalog?`
on page 373


`[ :SOURCE<hw> ] :BB:W3GPp:SETting:TMOdel:BSTation` on page 373

Test Models Uplink

Access the predefined test signals.

The 3GPP has not defined any test models for the Uplink transmission direction. This implementation however, provides a list of useful test signals and enables you to generate an uplink signal quickly.

This instrument generates the Uplink test models in the enhanced state of user equipment 1. An exception is the test models for the E-DPCCH and E-DPDCH, these channels are not calculated in real time. The sequence length is not changed.

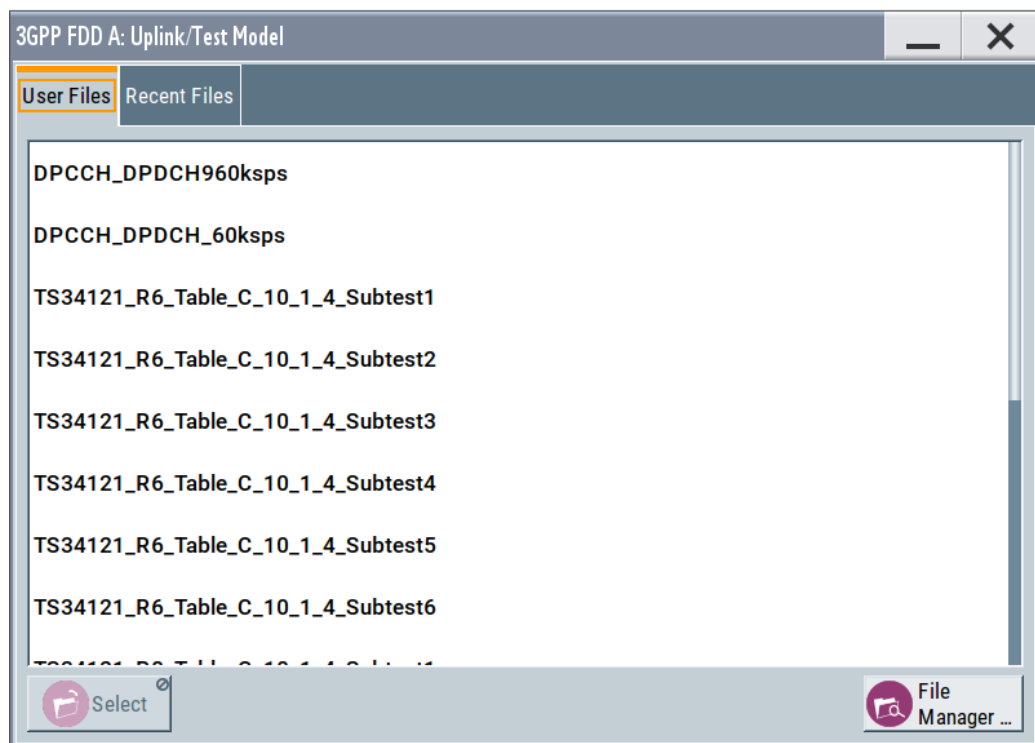

The following table lists some examples of configurations available for selection.

Table 4-4: Test Models Uplink

Test Model	Description
"DPCCH + DPDCH 60 kps"	User equipment 1 is activated in DPCCH + DPDCH mode. 60 kps is selected as the overall symbol rate. All the other settings correspond to the preset setting.
"DPCCH + DPDCH 960 kps"	User equipment 1 is activated in DPCCH + DPDCH mode. 960 kps is selected as the overall symbol rate. All the other settings correspond to the preset setting.
"TS34121_R6_Table_C_10_1_4_Subset1 .. 6"	Uplink test model according to 3GPP TS 34.121 Release 6, Table C.10.1.4.
"TS34121_R8_Table_C_10_1_4_Subset1 .. 4"	Uplink test models for transmitter characteristics tests with HS-DPCCH according to 3GPP TS 34.121 Release 8, Table C.10.1.4.
"TS34121_R8_Table_C_11_1_3_Subset1 .. 5"	Uplink test models for transmitter characteristics tests with HS-DPCCH and E-DCH according to 3GPP TS 34.121 Release 8, Table C.11.1.3.
"TS34121_R8_Table_C_11_1_4_Subset1"	Uplink test model for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM according to 3GPP TS 34.121 Release 8, Table C.11.1.4.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:SETTing:TMOdel:MSTation:CATalog?`

on page 374

`[ :SOURCE<hw> ] :BB:W3GPp:SETTing:TMOdel:MSTation` on page 373

4.8 Predefined Settings - Downlink

With the "Predefined Settings" function, it is possible to create highly complex scenarios with just a few modifications. This function is of use if, say, just the envelope of the signal is of interest.

Access:

1. Select "3GPP FDD > Link Direction > Downlink".
2. Select "Basestation > Predefined Settings".

3GPP FDD A: Predefined Settings

Use Channels needed for Sync of Mobile (UE):
P-CPICH,P-SCH,S-SCH,PCCPCH ☐

Use S-CCPCH ☐

Symbol Rate S-CCPCH 30 ksps

Number Of DPCH 10

Symbol Rate DPCH 30 ksps

Crest Factor Minimum

✓ Accept

The channel table of base station 1 is filled (preset) with the set parameters. The sequence length of the generated signal is 1 frame.

Use Channels

Selects whether P-CPICH, P-SCH, S-SCH and PCCPCH are used in the scenario or not. These "special channels" are required by user equipment for synchronization.

Remote command:

[\[:SOURce<hw>\]:BB:W3GPp:PPARameter:SCHannels](#) on page 372

Use S-CCPCH

Selects if S-CCPCH is used in the scenario or not.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:PPARameter:SCCPch:STATe` on page 372

Symbol Rate S-CCPCH

Sets the symbol rate of S-CCPCH.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:PPARameter:SCCPch:SRATe` on page 372

Number of DPCH

Sets the number of activated DPCHs.

The maximum number is the ratio of the chip rate and the symbol rate (maximum 512 at the lowest symbol rate of 7.5 ksps).

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:PPARameter:DPCH:COUNt` on page 371

Symbol Rate DPCH

Sets the symbol rate of all DPCHs.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:PPARameter:DPCH:SRATe` on page 371

Crest Factor

Selects desired range for the crest factor of the test scenario. The crest factor of the signal is kept in the desired range by automatically setting appropriate channelization codes and timing offsets.

"Minimum"	The crest factor is minimized. The channelization codes are distributed uniformly over the code domain. The timing offsets are increased by 3 per channel.
"Average"	An average crest factor is set. The channelization codes are distributed uniformly over the code domain. The timing offsets are all set to 0.
"Worst"	The crest factor is set to an unfavorable value (i.e. maximum). The channelization codes are assigned in ascending order. The timing offsets are all set to 0.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:PPARameter:CRESt` on page 370

Accept

Presets the channel table of basestation 1 with the parameters defined in the Predefined Settings menu. Scrambling Code 0 is automatically selected (as defined in the 3GPP test models).

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:PPARameter:EXECute` on page 371

4.9 Additional User Equipment - Uplink

Access:

1. Select "3GPP FDD > Link Direction > Uplink".
2. In the "User Equipment" tab , select "Additional User Equipment".

3GPP FDD A: Add UE (Based On UE4)	
State	☐
Number of additional UE	4
Scrambling Code Step	00 0001
Power Offset	0.00 dB
Time Delay Step	0 Chips

The dialog allows you to simulate up to 128 additional user equipment and thus to generate a signal that corresponds to the received signal for a base station with high capacity utilization.

The fourth user equipment (UE4) serves as a template for all other stations.

The following parameters are the only ones modified for the additional user equipment:

- Scrambling code (different for all stations)
- Power (different to UE4, but identical among themselves)

State

Enables/disables all additional user equipment.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPP:MSTation:ADDITIONAL:STATE` on page 445

Number of Additional UE

Sets the amount of additional user equipment. As many as 128 additional user equipment can be simulated.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation:ADDITIONal:COUNT` on page 443

Scrambling Code Step

Enters the step width for increasing the scrambling code of the additional user equipment. The start value is the scrambling code of UE4.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation:ADDITIONal:SCODE:STEP` on page 444

Power Offset

Sets the power offset of the active channels of the additional user equipment to the power outputs of the active channels of UE4.

The resultant power must fall within the range 0 dB to - 80 dB. If the value is above or below this range, it is limited automatically.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation:ADDITIONal:POWER:OFFSet`
on page 444

Time Delay Step

Enters the step width for the time delay of the additional user equipment to one another. The start value returns the time delay of UE4. Entry is made in chips and can be a maximum of one frame.

The time delay allows user equipment to be simulated even if the arrival of their signals is not synchronized at the base station.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation:ADDITIONal:TDElay:STEP` on page 445

4.10 Base Station Settings

Base stations can be configured independently of one another. Base station 1 (BS1) also includes enhanced channels (Enhanced Channels, Realtime).

Access:

1. Select "3GPP FDD > Link Direction > Downlink / Forward".
2. Select "Base Station > BS 1/2/3/4".

The "Base Station" dialog provides the parameters for configuring the general settings of the base station and specific base station-related settings. It also contains the channel table with graphical display of the structure of the currently selected channel.

4.10.1 Common Settings

- Select "Common".

3GPP FDD A: Basestation1	
Common	Channel Table Channel Graph Code Domain
State	2nd Search Code Group 0
☒ Scrambling Code (hex) 0000	Page Indicators/Frame 18
Time Delay 0 Chips	Diversity / MIMO Single Antenna
S-CPICH As Phase Reference ☐	Open Loop Transmit Diversity ☐
☐ OCNS Mode 3i	OCNS Seed 0

This tab comprises the general parameters required for configuring the base station.

State

Activates or deactivates the selected base station.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:STATe` on page 420

2nd Search Code Group

Displays the second search code group.

This parameter is specified in the table defined by the 3GPP standard. This table assigns a specific spreading code to the synchronization code symbol for every slot in the frame. The value is calculated from the scrambling code.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:SSCG?` on page 420

Scrambling Code On

Activates the scrambling code, selected with the parameter [Scrambling Code \(hex\)](#).

The scrambling code can be deactivated for test purposes.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:SCODE:STATe` on page 419

Scrambling Code (hex)

Sets the scrambling code and thus the base station identification.

This value is also the initial value of the scrambling code generator, see [Chapter 3.3.1, "Scrambling Code Generator"](#), on page 22.

To activate the scrambling code, set the check box to **On**.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:BSTation<st>:SCODE` on page 419

Page Indicators/Frame

Enters the number of page indicators (PI) per frame in the page indicator channel (PICH).

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:BSTation<st>:PINDicator:COUNT` on page 419

Time Delay

For basestation BS2/3/4, sets the time delay of the signal of the selected base station compared to the signal of base station 1.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:BSTation<st>:TDELay` on page 421

Diversity / MIMO

Selects the antenna and the antenna configuration to be simulated.

The R&S SMW supports two antenna configurations: a single-antenna system and a two-antenna system. Thus, an instrument equipped with two paths can simulate simultaneously the signals of both antennas of one two-antenna system. Moreover, for this two-antenna system, transmit diversity can be additionally activated or deactivated.

To simulate transmit diversity, a two-antenna system has to be selected and "Open Loop Transmit Diversity" has to be activated.

To configure HS-PDSCH MIMO channels, a two-antenna system has to be selected.

"Single Antenna"

The signal of single-antenna system is calculated and applied.

"Antenna 1 of 2"

Calculates and applies the output signal for antenna 1 of a two-antenna system.

"Antenna 2 of 2"

Calculates and applies the output signal for antenna 2 of a two-antenna system.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:BSTation<st>:TDIVersity` on page 421

S-CPICH As Phase Reference

Activates or deactivates the use of S-CPICH as reference phase.

If activated the phase of S-CPICH and the phase of all DPCHs is 180 degrees offset from the phase of P-CPICH.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:BSTation<st>:SCPich:PREFerence [ :STATe ]`
on page 420

Open Loop Transmit Diversity

(Enabled for two-antenna system only)

Activates/deactivates open loop transmit diversity. The antenna whose signal is to be simulated is selected with the parameter "Diversity/MIMO".

Various forms of transmit diversity are described in the 3GPP standard. Different coding is used to divide the signal between the two antennas. As a result, the receiver can decode the traffic signal from the two input signals and is less liable to fading and other interferences.

A fixed diversity scheme is assigned to each channel type:

- TSTD (time switched transmit diversity for SCH) for P-SCH, S-SCH
- STTD (space time block coding transmit antenna diversity) for all other channels, except HS-PDSCH MIMO.

The HS-PDSCH MIMO channels are precoded as described in [Chapter 3.3.15, "MIMO in HSPA+"](#), on page 38.

These two schemes are described in detail in TS 25.211.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:TDIVersity` on page 421

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:OLTDiversity` on page 418

4.10.2 Orthogonal Channel Noise (OCNS) Settings

With Orthogonal Channel Noise, a practical downlink signal is generated to test the maximum input levels of user equipment in accordance with standard specifications. This simulates the data and control signals of the other orthogonal channels in the downlink. 3GPP TS 25.101 contains a precise definition of the required appearance of the OCNS signal.

This section describes the provided settings. For detailed information, see [Chapter 3.3.11, "Orthogonal Channel Noise \(OCNS\)"](#), on page 30.

OCNS On

In BS1, activates OCNS channels according to the definition in the 3GPP standard.

The 3GPP specification defines different OCNS scenarios. Select the OCNS scenario with the parameter [OCNS Mode](#).

When activating OCNS and depending on the selected OCNS mode, different channel groups with different presetting are assigned, see tables in [Chapter 3.3.11, "Orthogonal Channel Noise \(OCNS\)"](#), on page 30. These channels cannot be edited in the channel table.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation:OCNS:STAtE` on page 375

OCNS Mode

Selects the scenario for activating OCNS channels. To activate the selected OCNS scenario, set the check box [OCNS > On](#).

Four different OCNS scenarios are defined in the 3GPP standard; one "standard" scenario, two scenarios for HSDPA test cases and one scenario for type 3i enhanced performance requirements tests according to 3GPP TS34.121-1 ("other user's channels"). For an overview of the provided scenarios and their settings, refer to [Chapter 3.3.11, "Orthogonal Channel Noise \(OCNS\)"](#), on page 30.

Note: If the "3i" OCNS mode is activated and the "3GPP FDD > State > On", the OCNS channels are automatically leveled in order to have total power of 0 dB for all channels of BS 1.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation:OCNS:MODE` on page 375

OCNS Seed

In "OCNS mode > 3i", sets the seed for both the random processes, the power control simulation process and the process controlling the switch over of the channelization codes.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation:OCNS:SEED` on page 375

4.10.3 Channel Table

The channel table allows you to configure the individual channel parameters. The structure of the currently selected channel is displayed graphically in the table header.

Access:

1. Select "3GPP FDD > Link Direction > Downlink / Forward".
2. Select "Base station > BS 1/2/3/4".
3. Select "Channel Table".

3GPP FDD A: Basestation1

Common

Channel Table

Channel Graph

Code Domain

 Multi Channel Assistant ...

 Reset All Channels

 Preset To HSDPA H-Set

Predefined Symbols

10

	Channel Type	Enh/HSDPA Settings	Slot Fmt	Sym Rate /ksp	Chan Code	Power /dB	Data	DList Patt	T Offs	DPCCH Settings	State	Dom Conf
0	P-CPICH	Config...		15	0	-10.00					On	
1	S-CPICH			15	0	0.00					Off	
2	P-SCH			15		-13.00					On	
3	S-SCH			15		-13.00					On	
4	P-CCPCH	Config...		15	1	-10.00	PN 9				On	
5	S-CCPCH		0	15	3	-18.00	PN 9		150	Config...	On	
6	PICH			15	16	-18.00	Pattern	10	120		On	

The channel table contains a list of all channels available for a base station, and the associated parameters required for configuring the channel.

139 channels are available for each base station. Channels 0 to 10 are assigned to the special channels, with the allocation of channels 0 to 8 being fixed. Channels 9 and 10

can be assigned a PDSCH, a DL-DPCCH, an HS-SCCH, an E-AGCH, an E-RGCH, or an E-HICH.

Code channels 11 to 138 can be assigned a DPCH, an HS-SCCH, an HS-PDSCH (QPSK/16QAM/64QAM), an HS-PDSCH (MIMO), an E-AGCH, an E-RGCH, an E-HICH, or an F-DPCH. This makes it possible to simulate the signal of a base station that supports high-speed channels. See also [Table A-1](#)

Channels 4 and 11 to 13 of base station 1 can be generated in realtime (enhanced channels) and are highlighted in color. User-definable channel coding can be activated for these channels. Bit and block errors can be simulated. Data can be added to the data and TPC fields from data lists either at the physical level or in the transport layer.

At the physical level, a downlink DPCH consists of the DPDCH (Dedicated Physical Data Channel) and the DPCCH (Dedicated Physical Control Channel). The channel characteristics are defined by the symbol rate. The DPDCH transports the user data that is fed directly into the data field.

The DPCCH transports the control fields, i.e. TFCI (Transport Format Combination Indicator), TPC (Transmit Power Control) and Pilot field. DPDCH is grouped with DPCCH using time division multiplexing in accordance with 3GPP TS 25.211 (see [Figure 4-3](#)). The formation of a downlink reference measurement channel is described in [Chapter 4.16, "Enhanced Settings for DPCHs - BS1"](#), on page 123.

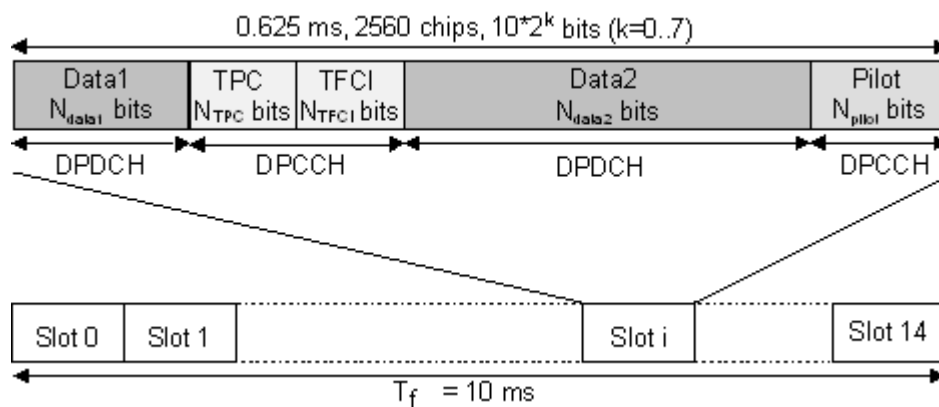


Figure 4-3: Structure of a downlink DPCH in the time domain

Multi Channel Assistant

Accesses a dialog for configuring several DPCH channels simultaneously, see [Chapter 4.23, "Multi Channel Assistant - BS"](#), on page 156.

Remote command:

n.a.

Reset All Channels

Loads the default settings for the channel table.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel:PRESet` on page 376

Preset HSDPA H-Set

(This feature is available for BS 1 only.)

Calls the default settings of the channel table for the HSDPA H-Set mode.

Channels 12 to 17 are preset for HSDPA H-Set 1.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel:HSDPa:HSET:PRESet`

on page 376

Channel Number

Displays the consecutive channel numbers from 0 to 138.

All the rows are always displayed, even if the channels are inactive. They are switched on and off by the "On/Off" button in the "State" column.

Remote command:

n.a.

(selected via the suffix to the keyword `:CHANnel<n>`)

Channel Type

Selects channel type.

The channel type is fixed for channel numbers 0...8; for the remaining channel numbers, the choice lays between the relevant standard channels and the high-speed channels.

The first 11 channels are reserved for special channels.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:TYPE` on page 409

Enhanced Settings / HSDPA Settings

(Enhanced Settings are available for BS1 only.)

Accesses the dialog for configuring the enhanced channels of BS1 or the dialog for configuring the high-speed channels for all base stations.

- **Enhanced Settings**

The channel state, "Enhanced On/Off", is displayed in different colors.

Enhanced channels are generated in real time. Channel coding in accordance with the 'Reference Measurement Channels' definition in TS 25.101, TS 25.104 and TS 25.141 can be activated. Any other user-defined coding can also be configured and stored.

If data lists are used as the data sources for data fields and TPC fields, it is possible to load external data. You can load, for example:

- User information from a higher layer
- TPC lists and use them to generate longer, non-repetitive power profiles
- Data lists with artificial bit errors or block errors to the CRC checksum to test the BER/BLER testers that are integrated in the BS.

The enhanced settings dialog is different for the P-CCPCH and the DPCHs (see [Chapter 4.16, "Enhanced Settings for DPCHs - BS1"](#), on page 123 and [Chapter 4.15, "Enhanced Settings for P-CCPCH - BS1"](#), on page 121).

- **HSDPA Settings**

The available settings and indications of the HSDPA settings dialog depend on the selected high-speed channel type HS-SCCH, HS-PDSCH (QPSK), HS-PDSCH (QAM) or HS-PDSCH (MIMO).

See [Chapter 4.12, "HSDPA Settings - BS"](#), on page 98.

Remote command:
n.a.

Slot Format

Enters the slot formats for the selected channel.

The range of values depends on the channel selected. For DPCH channels, for example, the slot formats are 0 to 16.

For F-DPCH channels, the slot formats 1 to 9 are enabled only for instruments equipped with additional option R&S SMW-K83. The difference between the F-DPCH slot formats is the position of the 2 bits TPC field.

A slot format defines the complete structure of a slot made of data and control fields and includes the symbol rate.

Parameters set via the slot format can subsequently be changed individually.

The structure of the channel currently selected is displayed in a graphic above the channel table (slot structure).

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:SFOFormat`
on page 407

Symbol Rate

Sets the symbol rate of the selected channel. The range of values depends on the channel selected.

A change in the symbol rate can lead to a change in the slot format and vice versa.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:SRATe` on page 408

Channelization Code

Enters the channelization code (formerly the spreading code number).

The code channel is spread with the set channelization code (spreading code). The range of values of the channelization code depends on the symbol rate of the channel.

The standard assigns a fixed channelization code to some channels (P-CPICH, for example, always uses channelization code 0).

The range of values runs from 0 to $((\text{Chip Rate} / \text{Symbol Rate}) - 1)$, where the Chip Rate is 3.84Mcps.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:CCODE` on page 378

Power

Sets the channel power in dB.

The power entered is relative to the powers of the other channels. If "3GPP > Adjust Total Power to 0 dB" is executed, all the power data is relative to 0 dB.

The set "Power" value is also the start power of the channel for "Misuse TPC", "Dynamic Power Control" and the power control sequence simulation of the OCNS mode 3i channels.

Note: The maximum channel power of 0 dB applies to non-blanked channels (duty cycle 100%).

With blanked channels, the maximum value can be increased to values greater than 0 dB. Where the maximum value is calculated as:

$$10 \cdot \log_{10} 1 / \text{duty\_cycle}$$

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:POWER` on page 407

Data

Selects data source.

The following standard data sources are available:

- "All 0, All 1"
An internally generated sequence containing 0 data or 1 data.
- "PNxx"
An internally generated pseudo-random noise sequence.
- "Pattern"
An internally generated sequence according to a bit pattern.
Use the "Pattern" box to define the bit pattern.
- "Data List/Select DList"
A binary data from a data list, internally or externally generated.
Select "Select DList" to access the standard "Select List" dialog.
 - Select the "Select Data List > navigate to the list file *.dm_iqd > Select" to select an existing data list.
 - Use the "New" and "Edit" functions to create internally new data list or to edit an existing one.
 - Use the standard "File Manager" function to transfer external data lists to the instrument.

See also:

- Section "Modulation Data" in the R&S SMW user manual.
- Section "File and Data Management" in the R&S SMW user manual.
- Section "Data List Editor" in the R&S SMW user manual

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:DATA` on page 378

`[ :SOURce<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:DATA:PATtern`
on page 379

`[ :SOURce<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:DATA:DSElect`
on page 379

Data Config

(This feature is available for BS1 with active channel coding only.)

Accesses a dialog for configuring the data sources of subchannels in the transport layer, see [Chapter 4.16, "Enhanced Settings for DPCHs - BS1"](#), on page 123.

Remote command:

n.a.

Timing Offset

Sets the timing offset (T_{Offset}).


The timing offset determines the shift of the source symbols before interleaving.

The absolute starting time of the frame (slot 0) is shifted relative to the start of the scrambling code sequence by the $\text{timing offset} * 256 \text{ chips}$. This means that whatever the symbol rate, the resolution of the timing offset is always 256 chips.

This procedure is used to reduce the crest factor. To obtain a lower crest factor, for example, a good offset from channel to channel is 1. For example, for DPCH11 a timing offset 0, for DPCH12 a timing offset 1, for DPCH13 a timing offset 2.

The illustration below shows the effect of the timing offset parameter. For various scenarios, the scrambling code sequence is shown in time relation to the data slots and to a reference time t_0 . The reference time t_0 is the starting time from that the signal is calculated in the instrument.

- Timing offset is not used ($T_{\text{Offset}} = 0$).
The beginning of the frame (slot 0) and the beginning of the scrambling code period are synchronous with starting point t_0 .
- Timing offset is used ($T_{\text{Offset}} > 0$).
The absolute starting time of the frames (slot 0) is shifted relative to the reference time t_0 by $T_{\text{Offset}} * 256 \text{ chips}$. The beginning of the scrambling code sequence is still synchronous with reference time t_0 . The beginning of the scrambling code period and the frame (slot 0) are no longer synchronous.

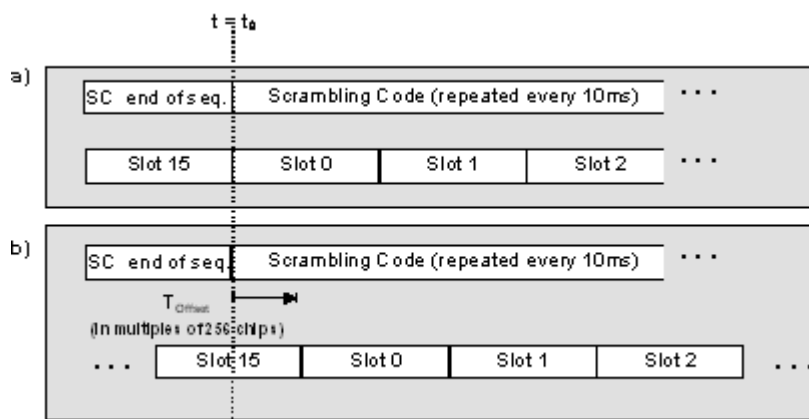

Remote command:

```
[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:TOFFset
on page 408
```

DPCH Settings

Access a dialog for configuring the control fields of the selected channel, see [Chapter 4.19, "DPCH Settings - BS Channel Table"](#), on page 141

The selected slot format predetermines the setting of the control fields. So a change is also made to the control fields by changing the slot format and vice versa.

Remote command:

n.a.

Channel State

Activates or deactivates the channel.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:STATe` on page 408

Domain Conflict, Resolving Domain Conflicts

Displays whether the channel has a code domain conflict with one of the channels lying above it (with a lower channel number). A special symbol marks a conflict and the column is colored soft orange. If there is no conflict, the column is colored soft blue.

The instrument helps you to resolve code domain conflicts by automatically adapting the channelization code of the channels involved.

To access the required function, in the "3GPP FDD > Base station > Channel Table" select the conflict symbol and trigger "Resolve Domain Conflicts".



Tip: Use the "Code Domain" to visualize the graphical display of code domain assignment by all the active code channels (see [Chapter 4.10.5, "Code Domain Graph - BS"](#), on page 89).

Refer to [Chapter 5, "How to Work with the 3GPP FDD Option"](#), on page 266 for step-by-step description.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:DCONflict[:STATe]?` on page 418


`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:DCONflict:RESolve` on page 418

4.10.4 Channel Graph - BS

The channel graph display shows the active code channels.

1. To access the base station channel graph, select "3GPP FDD > Link Direction > Downlink / Forward".
2. Select "Basestation > BS 1/2/3/4".

3. Select "Channel Graph".

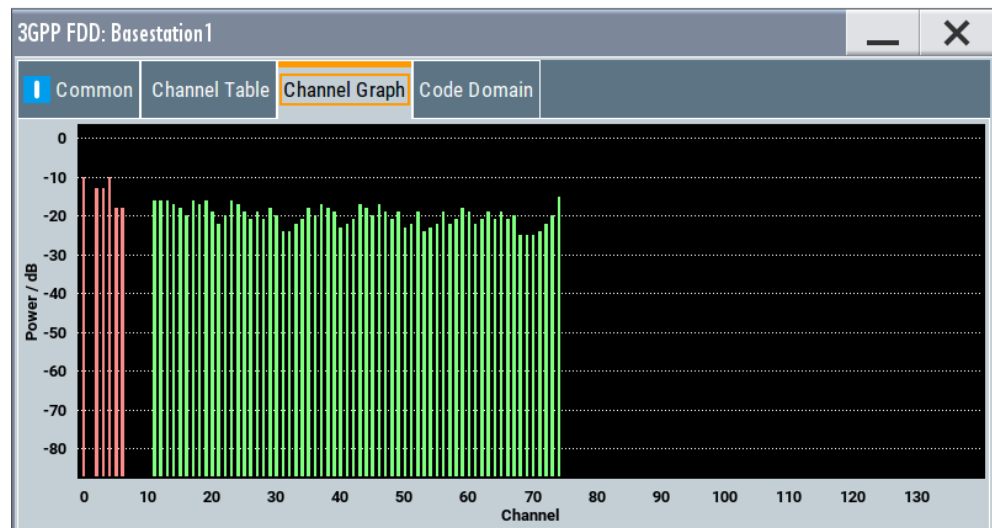

The channel number is plotted on the X-axis. The red bars represent the special channels (P-CPICH to DL-DPCCH), the green bars the other channels. The height of the bars shows the relative power of the channel

4.10.5 Code Domain Graph - BS

The channelization codes are taken from a code tree of hierarchical structure (see [Figure 4-4](#)).

The higher the spreading factor, the smaller the symbol rate and vice versa. The product of the spreading factor and symbol rate is constant and always yields the chip rate.

The outer branches of the tree (right-most position in the figure) indicate the channelization codes for the smallest symbol rate (and thus the highest spreading factor). Channelization codes with smaller spreading factor are contained in the codes with larger spreading factor in the same code branch. When using such competitive channelization codes at the same time, the signals of associated code channels are mixed such that they can no longer be separated in the receiver. Orthogonality is then lost.

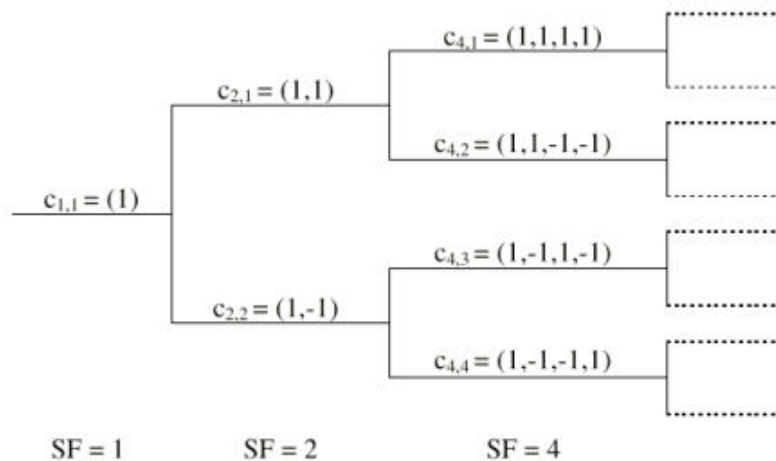


Figure 4-4: Code tree of channelization codes

Example:

If code $c_{2,1}$ is being used, the remaining branch with $c_{4,1}$ and $c_{4,2}$ is blocked.


The domain of a certain channelization code is the outer branch range (with minimum symbol rate and max. spreading factor). It is based on the channelization code selected in the code tree. Using a spreading code means that its entire domain is used.

At a chip rate of 3.84 Mcps, the domain ranges from 0 to 511


$$= \frac{\text{Chip\_rate}}{\text{min\_Symbol\_rate}} - 1 = \frac{3.84 \text{ Mcps}}{7.5 \text{ ksps}} - 1$$

Understanding the displayed information

The "Code Domain" display indicates the assigned code domain. The channelization code is plotted at the X-axis, the colored bars indicate coherent code channels. The colors are assigned to fixed symbol rates, the allocation is shown below the graph. The relative power can be taken from the height of the bar.

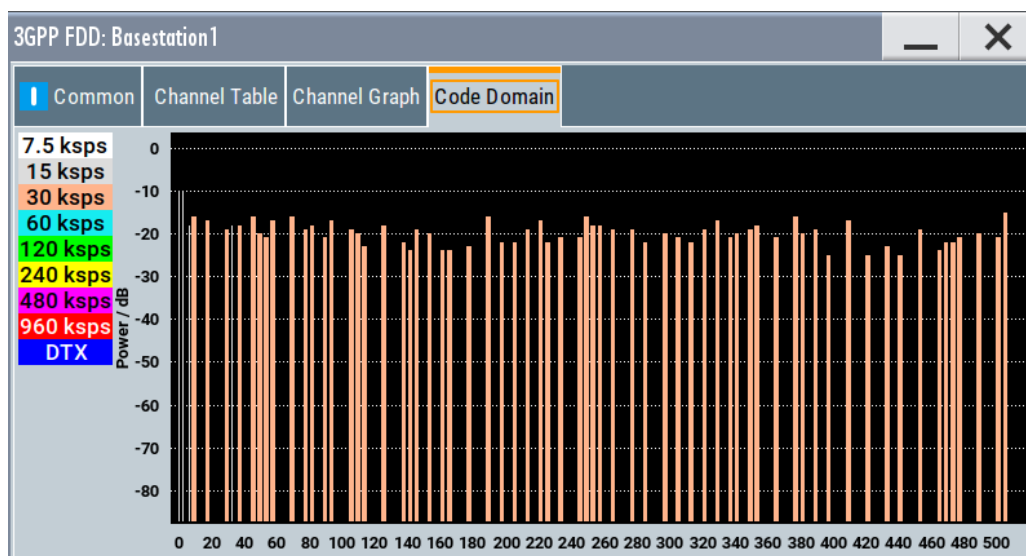

If the current settings result in a code domain conflict where the code domains of the active channels intersect, the code domain conflict is indicated by overlapping bars.

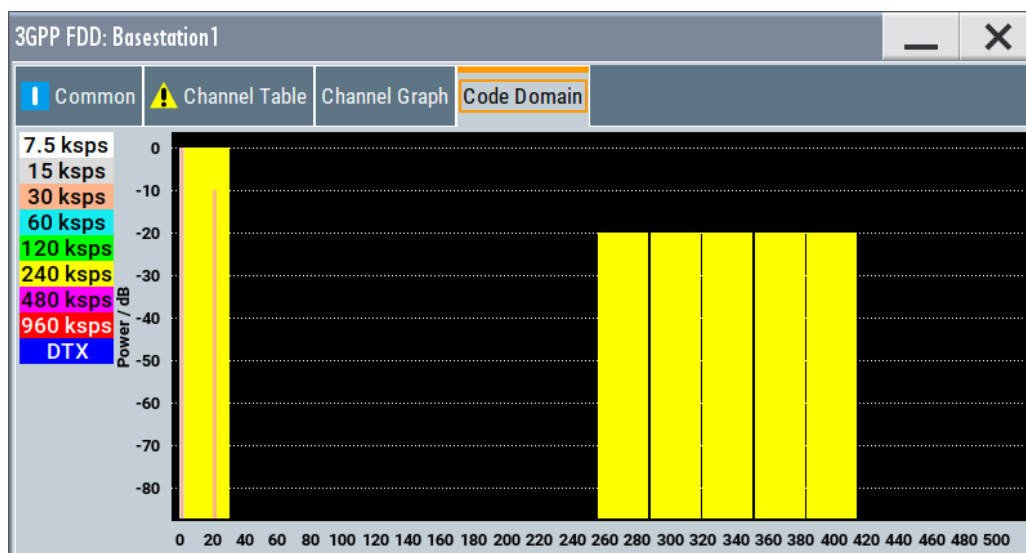

The occupied code domain of a channel is calculated as follows:

$$\text{Domain\_Factor} = \frac{\text{current\_symbol\_rate}}{\text{min\_symbol\_rate}(=7.5\text{ksp/s})}$$

As follows:

"Lower domain limit" = current channelization code number * domain factor

"Upper domain limit" = lower domain limit + domain_factor - 1.

Example:

Channel with symbol rate 30 ksps and channelization code 10:

Domain factor = $30/7.5 = 4$,

Lower domain limit = $10 \times 4 = 40$,

Upper domain limit = $40 + 4 - 1 = 43$.

The channel occupies the code domain 40 to 43.



Refer to [Chapter 5.1, "Resolving Domain Conflicts"](#), on page 266 for step-by-step description.


4.11 Compressed Mode

(This feature is available for BS 2...4 and UE 2...4 only.)

To enable handover of a mobile station from a 3GPP FDD base station/user equipment to another base station/user equipment, (3GPP FDD, 3GPP TDD, GSM or E-UTRA) at a different frequency, transmission and reception of the 3GPP FDD signal must be interrupted for a short time. During this time, the mobile station changes to the frequency of the new base station, for example to measure the receive level of this station or read system information.

To transmit a consistently high data volume also in the remaining (shorter) period of time, the data is compressed. This can be done by halving the spreading factor (SF/2 method) or reducing error protection (puncturing method). In both cases, transmit power in the ranges concerned is increased to maintain adequate signal quality.

Apart from these two methods, there is also the method of "higher layer scheduling". With this method, transmission of the data stream is stopped during the transmission gap. This method is suitable for packet-oriented services; it involves no power increase (power offset) in the active ranges.

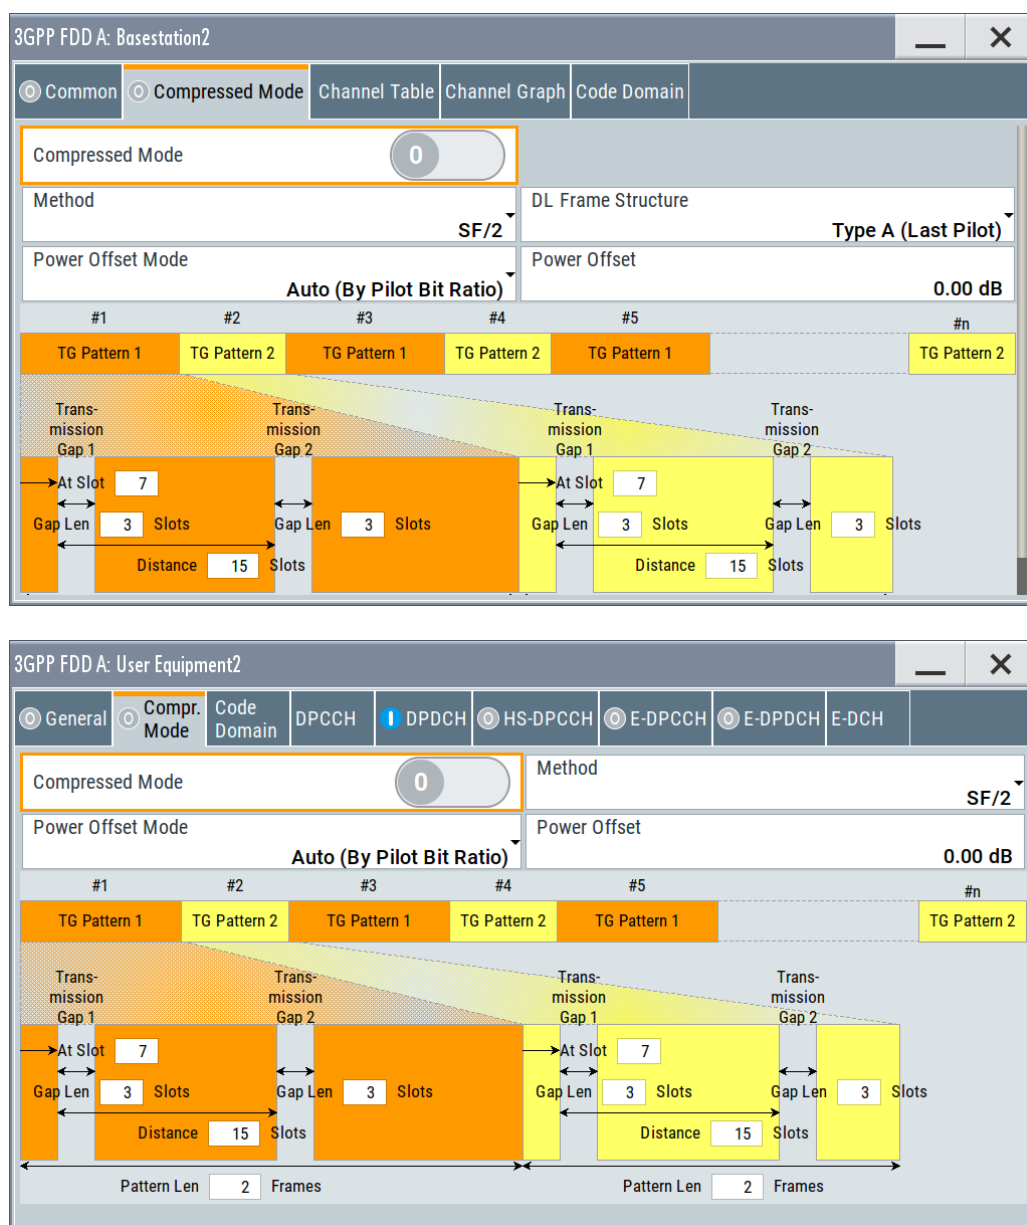

4.11.1 Compressed Mode General Settings

Compressed Mode State

Activates compressed mode.

The compressed mode is configured in [Chapter 4.11, "Compressed Mode"](#), on page 92.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CMODE:STATE` on page 418

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:CMODE:STATE` on page 449

Compressed Mode Method - UE

Selects compressed mode method.

"Higher layer scheduling" The data is compressed by stopping the transmission of the data stream during the transmission gap.

"SF/2" The data is compressed by halving the spreading factor.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:MSTation<st>:CMODE:METHod` on page 448


Compressed Mode Method - BS

Selects compressed mode method.

"Puncturing" The data is compressed by reducing error protection.

"Higher layer scheduling" The data is compressed by stopping the transmission of the data stream during the transmission gap.

"SF/2" The data is compressed by halving the spreading factor. This method can be demonstrated in the code domain graph. The graph is split into two windows. The upper window shows the code domain assignment with non-compressed slots, the lower window with compressed slots. It can be recognized clearly that the DPCH bars in the lower window are wider, which is due to the reduction of the spreading factor of these channels. The other channels (e.g. CPICH) have the same width in both halves.

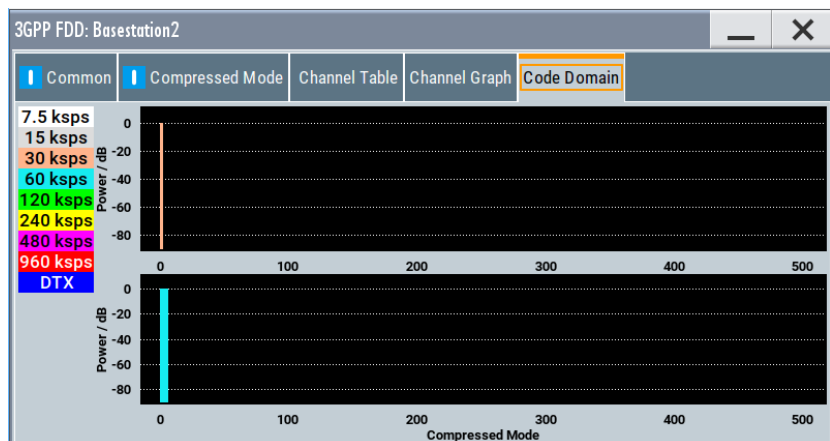

Remote command:


`[ :SOURce<hw> ] :BB:W3GPp:BSTation<st>:CMODE:METHod` on page 415

DL Frame Structure - BS

Selects frame structure. The frame structure determines the transmission of TPC and pilot field in the transmission gaps.

For 3GPP FDD radio communication to operate, the mobile station receiver requires information in the pilot field for synchronization and channel estimation and in the power control field TPC for control of the mobile station transmit power.

To keep the period during which no channel estimation takes place as short as possible, the pilot is sent in the last slot of each transmission gap.



Optionally, the first TPC field of the transmission gap can be sent in addition.



"Type A (Last Pilot)" The pilot field is sent in the last slot of each transmission gap.

"Type B (First TPC, Last Pilot)" The pilot field is sent in the last slot of each transmission gap. The first TPC field of the transmission gap is sent in addition.

Remote command:

[\[:SOURCE<hw>\]:BB:W3GPp:BSTation<st>:CMODE:DLFStructure](#) on page 415

Power Offset Mode

Selects power offset mode.

The compressed slots can be sent with a power offset, i.e. at an increased power level.

"Auto (By Pilot Bit Ratio)" The power offset is obtained as the relation between the Number of pilots bits of non-compressed slots and the Number of pilot bits by compressed slots.

"User" The power offset is defined manually. The value is input in entry field Power offset.

Remote command:

[\[:SOURCE<hw>\]:BB:W3GPp:BSTation<st>|MSTation<st>:CMODE:POMode](#) on page 417

Power Offset

Defines power offset. The entered value is only valid for "Power Offset Mode User".

Remote command:

[\[:SOURCE<hw>\]:BB:W3GPp:BSTation<st>|MSTation<st>:CMODE:POFFset](#) on page 417

4.11.2 Compressed Mode Configuration Graph

The remaining parameters of the compressed mode are set in the configuration graph. The graph displays the distribution of transmission gaps in a compressed mode signal.

The signal generated can be divided into three subranges.

4.11.2.1 Transmission Gaps

A transmission gap has a maximum length of 14 slots. Since at least eight active slots must be sent per frame, gaps comprising seven slots and more have to be distributed over two neighboring frames.

The transmitted signal consists of max. two patterns that are sent alternately. Each pattern comprises two transmission gaps.

The graph includes all parameters necessary to define the transmission gaps in the signal.



The settings in the graph are also valid for the compressed mode graph of the user equipment with the same number. For example, setting a distance of 9 slots for base station 4 also sets the distance to 9 slots for user equipment 4.

The parameters below are interrelated in many ways. For example, the transmission gap distance must be selected so that no frame contains more than one gap. In the event of an invalid entry, the next valid value is automatically set. If the entry is valid but changes the valid range for another parameter, the setting of the parameter is adapted.

At Slot:

Transmission gap slot number.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CMODE:PATtern<ch>:TGSN`
on page 416

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:CMODE:PATtern<ch>:TGSN`
on page 449

Gap Len:

Transmission gap lengths.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CMODE:PATtern<ch>:TGL<di>`
on page 416

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:CMODE:PATtern<ch>:TGL<di>`
on page 449

Distance

Transmission gap distance.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CMODE:PATtern<ch>:TGD`
on page 416

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:CMODE:PATtern<ch>:TGD`
on page 448

Pattern Len:

Transmission gap pattern length. The input range is 1 ... 100 frames for pattern 1 and 0 ... 100 frames for pattern 2. Thus, it is possible to configure transmission gap pattern with only one pattern.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CMODE:PATtern<ch>:TGPL`
on page 416

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:CMODE:PATtern<ch>:TGPL`
on page 449

4.11.2.2 Compressed Ranges

All slots of a frame that are not blanked are compressed. If the transmission gap is transmitted within one frame (single-frame method), an envelope as shown by the diagram on [Figure 4-5](#) is obtained:

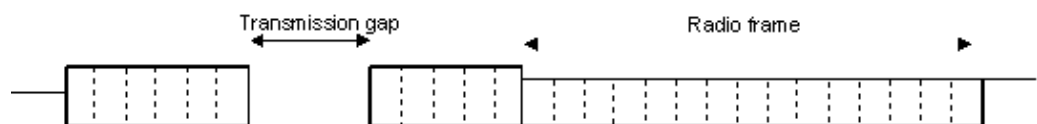


Figure 4-5: Envelope of compressed mode signal with single-frame method

If the transmission gap is distributed over two neighboring frames, all slots of the two frames that are not blanked are compressed (see [Figure 4-6](#)):



Figure 4-6: Envelope of compressed mode signal with double-frame method

A different slot format, usually with a higher number of pilot bits, is used in the compressed ranges.

The transmit power can be increased ("Power Offset Mode") automatically or manually by defining a power offset.

4.11.2.3 Non-compressed ranges

Frames containing no transmission gaps are sent with the same slot format and the same power as in the non-compressed mode.

4.12 HSDPA Settings - BS

Generation modes of the high-speed channels

The high-speed channels can be generated either *continuously* as defined in test model 5, in packet mode or in H-Set mode according to TS 25.101, annex A.7.

In *packet mode*, the start of the channel and the distance between the HSDPA packets can be set. The packet transmissions can start in one of the first five subframes (0 to 4). A subframe has the same length as a packet and is three slots long. An HS-SCCH starts at the beginning of the selected subframe, an HS-PDSCH starts with an offset of two slots to the selected subframe. The active parts of the HS-SCCH and the HS-PDSCH for a specific subframe setting differ by the slot offset of the HS-PDSCH.

Example:

Setting subframe 1

HS-SCCH: slot 3 to 5 active

HS-PDSCH: slot 5 to 7 active.

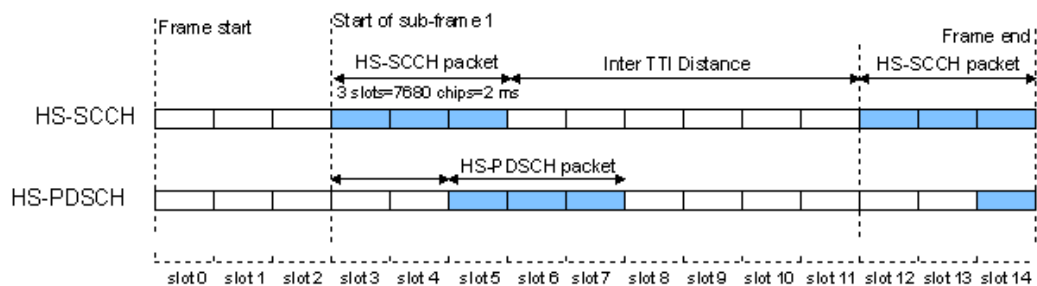


Figure 4-7: Timing diagram for the HS-SCCH and the associated HS-PDSCH, packet subframe 1 mode and inter-TTI distance = 3

In *H-Set mode*, the first packet is sent in the HS-SCCH subframe 0. Up to 15 HSDPA channels are coupled to be used in the fixed reference channels. The number of coupled channels depends on the selected H-Set. Channel coding is always performed over a certain number of bits. The resulting packets are distributed evenly over one subframe of all HS-PDSCH channelization codes. Therefore, the data stream is not assigned to a defined channel but to all coupled channels.

4.12.1 Enhanced HSDPA Mode Settings

Access:

1. Select "Baseband > 3GPP FDD > Link Direction > Downlink / Forward".
2. In the "Basestations" tab, select "Select Basestations > BS 1".
3. In the "Channel Table" tab, select e.g. "Channel Type > HS-PDS, QPSK 16QAM".
4. Select "Enh/HSDPA Settings > Config...".

5. Select "HSDPA-Mode > Subframe 1".

The available settings and indications in this dialog depend on the selected HSDPA mode and channel type.

HSDPA Mode

Selects the HSDPA mode.

"Continuous"	The high-speed channel is generated continuously. This mode is used in test model 5 and 6.
"Subframe 0 1 2 3 4"	The high-speed channel is generated in packet mode. The start of the channel is set by selecting the subframe in which the first packet is sent. The distance between subsequent packets is set with parameter "Inter TTI Distance".
"H-Set"	(Available for BS1 and HS-SCCH only.) The high-speed channel is generated in packet mode. The first packet is sent in the HS-SCCH subframe 0. The number of the coupled channel in the H-Set can be changed with the parameter "Number of HS-PDSCH Channel Codes".

Remote command:

```
[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:MODE
```

on page 406

Burst Mode

Activates/deactivates burst mode. The signal is bursted when on, otherwise dummy data are sent during transmission brakes.

Remote command:

```
[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:BMODE [ :STATE ]
```


on page 389

Inter TTI Distance (H-Set)

(Available for "subframe x")

Selects the distance between two packets in HSDPA packet mode.

The distance is set in number of sub-frames (3 slots = 2 ms). An "Inter TTI Distance" of 1 means continuous generation.

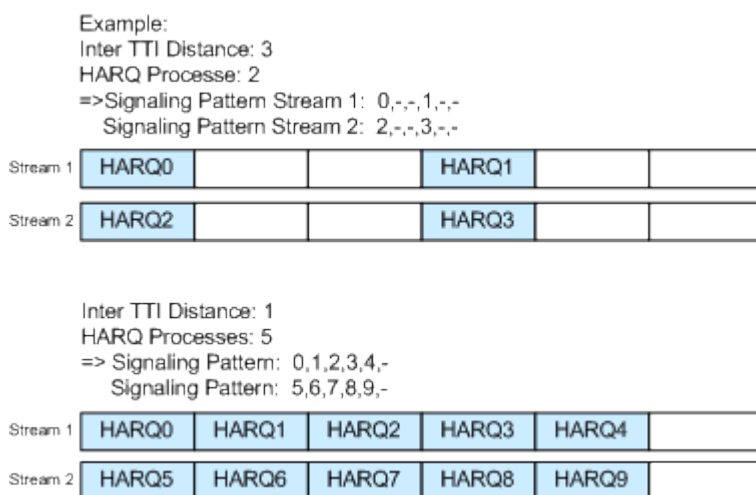**Figure 4-8: Example: Inter TTI Distance in HSDPA H-Set Mode**

Remote command:

```
[ :SOURce<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:
TTIDistance on page 406
```

Constellation Version Parameter b - BS

(Available for "HS-PDSCH 16QAM" and "64QAM" only)

Switches the order of the constellation points of the 16QAM or 64QAM mapping.

The rearrangement is done according to 3GPP TS25.212.

Remote command:

```
[ :SOURce<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:CVPB
on page 389
```

4.12.2 MIMO Configuration

The parameters in this section are available for instruments equipped with option R&S SMW-K83, BS1 and Channel Type HS-PDSCH (MIMO) only (see ["Diversity / MIMO"](#) on page 80).

Access:

1. Select "Baseband > 3GPP FDD > Link Direction > Downlink / Forward".
2. In the "Base Stations" tab, select "Select Base Stations > BS 1".

3. In the "Common" tab, select "Diversity / MIMO > Antenna 1/2 of 2".
4. In the "Channel Table" tab, select "Channel Type > HS-PDS MIMO".
5. Select "Enh/HSDPA Settings > Config...".
6. Select "HSDPA-Mode > Subframe 1".

The available settings and indications in this dialog depend on the selected HSDPA mode and channel type.

The screenshot shows a configuration window titled "3GPP FDD: BS1/Enhanced47 HSDPA Mode". It contains several input fields and tabs. The "HSDPA-Mode" dropdown is set to "Subframe 1". The "Burst-Mode" checkbox is checked. The "Inter TTI Distance" is set to 5. There are two tabs: "MIMO Settings" and "Modulation". The "Modulation" tab is selected, showing settings for "Stream 1" and "Stream 2". For "Stream 1", the "Modulation" dropdown is set to "64 QAM" and the "Constellation Version Parameter - b" is set to 0. For "Stream 2", the "Modulation" dropdown is set to "QPSK".

Precoding Weight Pattern (w2)

Sets the precoding weight parameter w2 for MIMO precoding.

The values of the weight parameters w1, w3 and w4 are calculated based on the value for w2 (see [Chapter 3.3.15, "MIMO in HSPA+",](#) on page 38).

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:MIMO:PWPattern` on page 405

Stream 2 Active Pattern

Enables/disables a temporal deactivation of stream 2 per TTI in form of sending pattern.

The stream 2 sending pattern is a sequence of max 16 values of "1" (enables stream 2 for that TTI) and "-" (disabled stream 2 for that TTI).

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:MIMO:STAPattern` on page 406

Modulation Stream 1/2 (HS-PDSCH MIMO)

Sets the modulation for stream 1 and respectively stream 2 to QPSK, 16QAM or 64QAM.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:MIMO:MODulation<di>` on page 405

Constellation Version Parameter b Stream 1/2 - BS

Switches the order of the constellation points of the 16QAM or 64QAM mapping.

The rearrangement is done according to 3GPP TS25.212.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:MIMO:CVPB<di>` on page 405

4.13 HSDPA H-Set Mode Settings - BS



The enhanced HSDPA H-Set mode settings are available for BS1, HS-SCCH and HSDPA Mode set to H-Set only.

Access:

1. Select "3GPP FDD > Link Direction > Downlink".
2. Select "3GPP FDD > Base Stations > Select Base Station > BS1".
3. In the "Base Station 1" dialog, select "Channel Table > Preset to HSDPA H-Set".
4. In the "Channel Table", select "Channel#12 HS-SCCH > Enhanced Settings > Config".

4.13.1 HSDPA H-Set General Settings

The screenshot shows a dialog box titled "3GPP FDD: BS1/Enhanced12 HSDPA Mode". It contains three settings:

- HSDPA-Mode**: A dropdown menu showing "Subframe 3".
- Burst-Mode**: A checkbox that is checked.
- Inter TTI Distance**: A text input field containing the value "3".

Provided are the following settings:

HSDPA Mode

Selects the HSDPA mode.

"Continuous" The high-speed channel is generated continuously. This mode is used in test model 5 and 6.

- "Subframe 0 | 1 | 2 | 3 | 4" The high-speed channel is generated in packet mode. The start of the channel is set by selecting the subframe in which the first packet is sent. The distance between subsequent packets is set with parameter "Inter TTI Distance".
- "H-Set" (Available for BS1 and HS-SCCH only.) The high-speed channel is generated in packet mode. The first packet is sent in the HS-SCCH subframe 0. The number of the coupled channel in the H-Set can be changed with the parameter "Number of HS-PDSCH Channel Codes".

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:MODE`
on page 406

Burst Mode

Activates/deactivates burst mode. The signal is bursted when on, otherwise dummy data are sent during transmission brakes.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:BMODE [ :STATE ]` on page 389

4.13.2 H-Set Configuration Common Settings



The parameters in this section are available for BS1 and HSDPA H-Set Mode only.

3GPP FDD A: BS1/Enhanced11 HSDPA Mode

HSDPA-Mode: H-Set Burst-Mode ☒

Common normal Global Settings Coding Signal Structure HARQ Simulation Type 3i

Predefined H-Set User

Advanced Mode (requires ARB) ☒

ARB Seq Length Suggested: 12 / Current:1 Adjust

Nominal Average Information Bitrate /kbps 1 073 UE Category 1

HS-SCCH Type Type 1 (normal)

Predefined H-Set

Selects the H-Set and the modulation according to TS 25.101, annex A.7 .

Table 4-5: Following combinations are possible:

H-Set	Modulation
1, 2, 3, 6, 10	QPSK 16QAM
4, 5, 7, 12	QPSK
8	64QAM
9	16QAM (stream 1) QPSK (stream 2)
11	64QAM (stream 1) 16QAM (stream 2)
User	-

Note: Option: R&S SMW-K83 for H-Sets 7 to 9 and H-Set 11, where H-Set 9 and H-Set 11 are available only for enabled two-antenna system (see ["Diversity / MIMO"](#) on page 80).

Several parameters are automatically set, depending on the selection made for the parameter "H-Set". However, it is also possible to change these parameters. In this case, the value of the parameter "H-Set" is automatically set to User.

Note: Use the predefined settings to let the instrument generate a signal equal to the one generated by an instrument equipped with older firmware.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:PREDefined` on page 396

Advanced Mode (requires ARB)

(in Baseband C/D, this function is permanently active)

Activates/deactivates the advanced mode in which the H-Set is generated by the ARB. The parameter can be configured only for H-Sets 1 - 5. For H-Sets 6 to 12 and User, it is always enabled.

For an H-Set calculated in arbitrary waveform mode, it is critical to set an appropriate "Current ARB Sequence Length". An appropriate sequence length is required for the generation of signals without unwanted artifacts when pre-calculated sequences are repeated cyclically. In particular, the HARQ cycles have to terminate completely before restarting the signal.

Assistance in setting an appropriate sequence length is provided by the parameter "Suggested ARB Sequence Length" and the "Adjust" button. When working in Advanced Mode, it is recommended to adjust the current ARB sequence length to the suggested one.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:AMODE` on page 389

`[ :SOURce<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:SENGth?` on page 399

ARB Seq Length

Displays the suggested and current ARB sequence length.

The "Suggested ARB Sequence Length" is the calculated minimum length that depends on several parameters: TTI distance, number of HARQ processes, HARQ cycles, HARQ mode, RV parameter sequence, HS-SCCH Type, precoding weight pattern and stream 2 active pattern.

"Adjust" sets the current sequence length.

When working in "[Advanced Mode](#)", it is recommended to adjust the current ARB sequence length to the suggested one.

Remote command:

```
[ :SOURce<hw> ] :BB:W3GPp:SENGth on page 354
[ :SOURce<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:
SENGth? on page 399
```

Adjust

Sets the current ARB sequence length to the suggested value.

When working in "[Advanced Mode](#)", it is recommended to adjust the current ARB sequence length to the suggested one.

Remote command:

```
[ :SOURce<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:
SENGth:ADJust on page 400
```

Nominal Average Information Bit Rate

Indicates the average data rate on the transport layer. In case of MIMO, the parameter indicates the combined nominal average information bit rate.

The "Nominal Average Information Bit Rate" is calculated for the ideal case of infinite sequence and with regard of the stream 2 active pattern.

Remote command:

```
[ :SOURce<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:
NAIBitrate? on page 395
```

UE Category

Displays the UE category that is minimum required to receive the selected H-Set (see also [Chapter 3.3.19, "UE Capabilities"](#), on page 47).

Remote command:

```
[ :SOURce<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:
UECategory? on page 403
```

HS-SCCH Type

Sets the HS-SCCH type.

"Type 1 (normal)" Normal operation mode.


"Type 2 (HS-SCCH less)" Option: R&S SMW-K83
HS-SCCH less operation mode (see also [Chapter 3.3.13, "HS-SCCH Less Operation"](#), on page 35).

"Type 3
(MIMO)"

Option: R&S SMW-K83 and enabled two-antenna system.
HS-SCCH Type 3 mode is defined for MIMO operation (see also [Chapter 3.3.15.2, "MIMO downlink control channel Support"](#), on page 39).

Enabling this operation mode, enables the parameters in section "MIMO Settings" and the stream 2 parameters in sections "HARQ Simulation, Signal Structure" and "Coding Configuration".

While working in HS-SCCH Type 3 mode and simulating Antenna 2 of one two-antenna system without transmit diversity, no control channel is sent. However, the HS-SCCH is displayed as an active in the channel table. To prove, that there is no control channel transmission, consult the "Code Domain Graph".

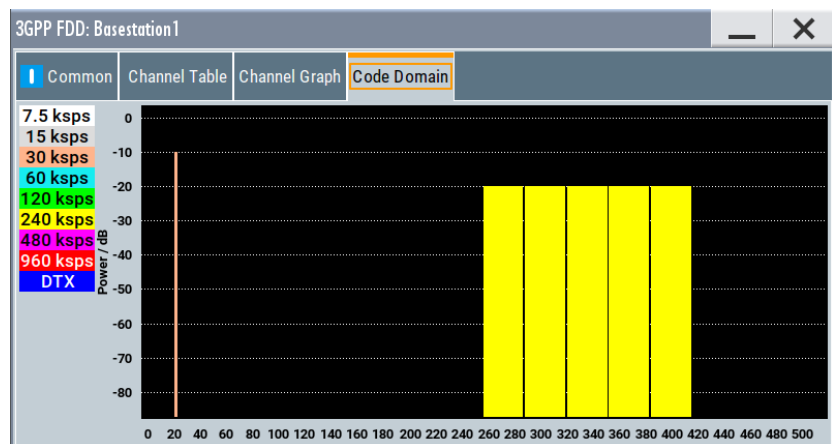

The HS-SCCH channel is displayed as DTX.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSStation<st>:CHANnel<ch0>:HSDPa:HSET:TYPE`
on page 403

4.13.3 MIMO Settings



Option: R&S SMW-K83, BS1, HSDPA H-Set Mode, and for HS-SCCH Type 3 (MIMO).

Access:

1. Select "3GPP FDD > Link Direction > Downlink".
2. Select "3GPP FDD > Base Stations > Select Base Station > BS1".
3. In the "Common" tab, select "Diversity/MIMO > Antenna 1 of 2".
4. In the "Base Station 1" dialog, select "Channel Table > Preset to HSDPA H-Set".
5. In the "Channel Table" tab, select "Channel#12 HS-SCCH > Enhanced Settings > Config...".

6. In the "BS1/Enhanced HSDPA Mode" dialog, select "Common > Predefined H-Set > H-Set 9/H-Set 11".
7. Select "MIMO Settings".

The screenshot shows a software interface for configuring HSDPA settings. The title bar reads '3GPP FDD A: BS1/Enhanced HSDPA Mode'. Below the title bar, there's a section for 'HSDPA-Mode' with a dropdown menu set to 'H-Set' and a 'Burst-Mode' checkbox that is checked. A tabbed interface follows, with 'MIMO Settings' currently selected. Under this tab, two parameters are visible: 'Precoding Weight Pattern (w2)' with a value of 0, and 'Stream 2 Active Pattern' with a value of 1. Other tabs like 'Common MIMO', 'Global Settings', 'Coding', 'Signal Structure', and 'HARQ Simulation' are also present but not active.

The dialog contains the parameters for configuring the MIMO settings in enhanced HSDPA mode.

Precoding Weight Pattern (w2)

Selects the sequence for the MIMO precoding weight parameter w2.

The values of the weight parameters w1, w3 and w4 are calculated based on the value for w2 (see [Chapter 3.3.15, "MIMO in HSPA+",](#) on page 38).

Remote command:

```
[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:
PWPattern on page 396
```

Stream 2 Active Pattern

Enables/disables a temporal deactivation of stream 2 per TTI in form of sending pattern.

The stream 2 sending pattern is a sequence of max 16 values of "1" (enables stream 2 for that TTI) and "-" (disabled stream 2 for that TTI).

Remote command:

```
[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:
STAPattern on page 400
```

4.13.4 Global Settings



The parameters in this section are available for BS1 and HSDPA H-Set Mode only.

3GPP FDD: BS1/Enhanced12 HSDPA Mode

HSDPA-Mode H-Set Burst-Mode ☒

Common MIMO MIMO Settings **Global Settings** Coding Signal Structure HARQ Simulation

Data Source (HS-DSCH) PN 9

UEID (H-RNTI) 0

Channelization Code HS-SCCH (SF128) 5

Number Of HS-PDSCH Channelization Codes 15

Total HS-PDSCH Power -8.24 dB

Start Channelization Code HS-PDSCH (SF16) 1

Data Source (HS-DSCH)

Selects the data source for the transport channel.

New data is retrieved from the data source each time an initial transmission is performed within one TTI. An initial transmission is performed in case of "HARQ Mode > Constant ACK" or by each new beginning of the "Redundancy Version Sequence".

The following standard data sources are available:

- "All 0, All 1"
An internally generated sequence containing 0 data or 1 data.
- "PNxx"
An internally generated pseudo-random noise sequence.
- "Pattern"
An internally generated sequence according to a bit pattern.
Use the "Pattern" box to define the bit pattern.
- "Data List/Select DList"
A binary data from a data list, internally or externally generated.
Select "Select DList" to access the standard "Select List" dialog.
 - Select the "Select Data List > navigate to the list file *.dm_iqd > Select" to select an existing data list.
 - Use the "New" and "Edit" functions to create internally new data list or to edit an existing one.
 - Use the standard "File Manager" function to transfer external data lists to the instrument.

See also:

- Section "Modulation Data" in the R&S SMW user manual.
- Section "File and Data Management" in the R&S SMW user manual.
- Section "Data List Editor" in the R&S SMW user manual

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:DATA`
on page 392

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:`
`DATA:PATtern` on page 393

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:`
`DATA:DSElect` on page 393

UEID (H-RNTI)

Enters the UE identity which is the HS-DSCH Radio Network Identifier (H-RNTI) defined in 3GPP TS 25.331: "Radio Resource Control (RRC); Protocol Specification".

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:UEID`
on page 404

Channelization Code HS-SCCH (SF128)

Sets the channelization code of the HS-SCCH.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:`
`HSCCode` on page 394

Number of HS-PDSCH Channelization Codes

Sets the number of physical HS-PDSCH data channels assigned to the HS-SCCH.

The maximum number of channels assigned to the H-Set depends on the "HS-SCCH Type" and the channel number of the first HS-PDSCH channel in the H-Set.

For HS-SCCH Type 2 (less operation), maximum of two channels can be assigned.

For HS-SCCH Type 1 (normal operation) and Type 3 (MIMO), the maximum number of assigned channels is 15.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:`
`CLENgth` on page 391

Start Channelization Code HS-PDSCH (SF16)

Sets the channelization code of the first HS-PDSCH channel in the H-Set.

The channelization codes of the rest of the HS-PDSCHs in the H-Set are set automatically.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:`
`SCCode` on page 399

Total HS-PDSCH Power

Sets the total HS-PDSCH power, i.e. sets the total power of all HS-PDSCH channels in the H-Set.

Note: In the 3GPP test specification, e.g. 3GPP TS34.121-1, the HS-PDSCH power is typically given as total power of all HS-PDSCH channels.

Use this parameter to set the HS-PDSCH power level directly as given in the 3GPP test specification.

There are two possibilities to set the power of an H-Set:

- Select "BS1 > Channel Table > HS-PDSCH Channel > Power" and set the power of the individual channels.

The total power of all HS-PDSCH channels of the H-Set depends on the [Number of HS-PDSCH Channelization Codes](#) and is calculated as follows:

$$TotalPower_{All\ HS-PDSCHs} = Power_{HS-PDSCH\ Channel} + 10 * \log_{10}(NumberOfHS-PDSCHChannelizationCodes)$$

The calculated total power is displayed with the parameter "Total HS-PDSCH Power"

- Set directly the total power of the H-Set, i.e set the parameter "Total HS-PDSCH Power"

The individual power levels of the HS-PDSCHs are calculated automatically and displayed in the "BS1 > Channel Table > HS-PDSCH Channel > Power".

Example:

Select "BS1 > HSDPA H-Set".

The default H-Set with five channelization codes ("BS1 > Channel table > HSDPA Settings > Config > Enhanced HSDPA Mode > Number of HS-PDSCH Channelization Codes") is configured.

The default individual power levels of the HS-PDSCH channels are -20 dB. The "Total HS-PDSCH Power" is -13.01 dB.

Set the "Total HS-PDSCH Power" to -10 dB. The individual power levels of the HS-PDSCH channels are -16.99 dB.

Remote command:

```
[ :SOURCE<hw> ] :BB:W3GPP:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:
TPower on page 401
```

4.13.5 Coding Configuration



Option: R&S SMW-K83 for stream 2 and "HS-SCCH Type 3"; other settings BS1 and "HSDPA H-Set Mode".

To access the dialog for the two streams case:

1. Select "3GPP FDD > Link Direction > Downlink".
2. Select "3GPP FDD > Base Stations > Select Base Station > BS1".
3. In the "Base Station 1" dialog, select "Channel Table > Preset to HSDPA H-Set".
4. In the "Common" tab, select "Diversity/MIMO > Antenna 1 of 2".
5. In the "Channel Table" tab, select "Channel#12 HS-SCCH > Enhanced Settings > Config...".

6. In the "BS1/Enhanced HSDPA Mode" dialog, select "Common > HS-SCCH Type > Type 3 (MIMO)".
7. Select "Coding".

Stream 1:		Stream 2:	
HS-PDSCH Modulation	QPSK	HS-PDSCH Modulation	QPSK
Binary Channel Bits Per TTI (Physical Layer)	4800	Binary Channel Bits Per TTI (Physical Layer)	4800
Transport Block Size Table	Table 0	Transport Block Size Table	Table 0
Transport Block Size Index	41	Transport Block Size Index	41
Information Bit Payload (TB-Size)	3202	Information Bit Payload (TB-Size)	3202
Coding Rate	0.667	Coding Rate	0.667
Virtual IR Buffer Size (per HARQ Process)		Virtual IR Buffer Size (per HARQ Process)	

This dialog contains the parameters required to configure the streams for HSDPA H-Set mode.

HS-PDSCH Modulation Stream1/2

Sets the HS-PDSCH modulation for stream 1 and stream 2 to QPSK, 16QAM or 64QAM.

Note: Option: R&S SMW-K83 for 64QAM.

For HS-SCCH Type 2, the available modulation scheme is QPSK only.

For HS-SCCH Type 3 (MIMO), the modulation selected for stream 1 has to be the higher-order one, i.e. combination 16QAM/64QAM is not allowed.

Remote command:

```
[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:
MODulation<di> on page 395
```

UE Supports 64QAM

(Available for BS1, "HSDPA H-Set Mode", "HS-SCCH Type 1" and "16QAM" only)

Enables/disables UE support of 64QAM.

In case this parameter is disabled, i.e. the UE does not support 64QAM, the 7 bit is used for channelization information.

Remote command:

```
[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:
S64Qam on page 398
```

Binary Channel Bits per TTI (Physical Layer) Stream1/2

Displays the coded binary channel bits per TTI and per stream.

The value displayed is calculated upon the values and selections for the parameters "HS-PDSCH Modulation", "Symbol Rate" and "Number of HS-PDSCH Channel Codes".

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:BCBTti<di>?` on page 390

Transport Block Size Table Stream1/2

Selects Table 0 or Table 1 as described in 3GPP TS 25.321.

For "HS-PDSCH Modulation" set to 64QAM, only Table 1 is available.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:TBS:TABLE<di>` on page 402

Transport Block Size Index Stream1/2

Selects the index k_i for the corresponding table and stream, as described in 3GPP TS 25.321.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:TBS:INDEX<di>` on page 402

Transport Block Size Reference Stream1/2

(Available for BS1, HSDPA H-Set Mode and HS-SCCH Type 2 only)

While working in less operation mode, this parameter is signaled instead of the parameter "Transport Block Size Index".

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:TBS:REFERENCE` on page 402

Information Bit Payload (TB-Size) Stream 1/2

Displays the payload of the information bit. This value determines the number of transport layer bits sent in each TTI before coding.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:BPAYload<di>?` on page 391

Coding Rate Stream 1/2

Displays the resulting coding rate per stream.

The coding rate is calculated as a relation between the "Information Bit Payload" and "Binary Channel Bits per TTI".

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:CRATE<di>?` on page 392

Virtual IR Buffer Size (per HARQ Process) Stream1/2

Sets the size of the virtual IR buffer (number of SMLs per HARQ process) per stream.

Remote command:

[:SOURCE<hw>] :BB:W3Gpp:BStation<st>:CHANnel<ch0>:HSDPa:HSET:
VIBSize<di> on page 404

4.13.6 Signal Structure



Option: R&S SMW-K83 for stream 2 and "HS-SCCH Type 3"; other settings BS1 and "HSDPA H-Set Mode".

Common	MIMO	MIMO Settings	Global Settings	Coding	Signal Structure	HARQ Simulation
3GPP FDD A: BS1/Enhanced11 HSDPA Mode						
HSDPA-Mode					H-Set	Burst-Mode ☒
Inter TTI Distance						
						3
Number Of HARQ Processes Per Stream						
						2
Signaling Pattern Stream 1						
						0,1,2
Signaling Pattern Stream 2						
						2,3,4

Inter TTI Distance (H-Set)

(Available for "subframe x")

Selects the distance between two packets in HSDPA packet mode.

The distance is set in number of sub-frames (3 slots = 2 ms). An "Inter TTI Distance" of 1 means continuous generation.

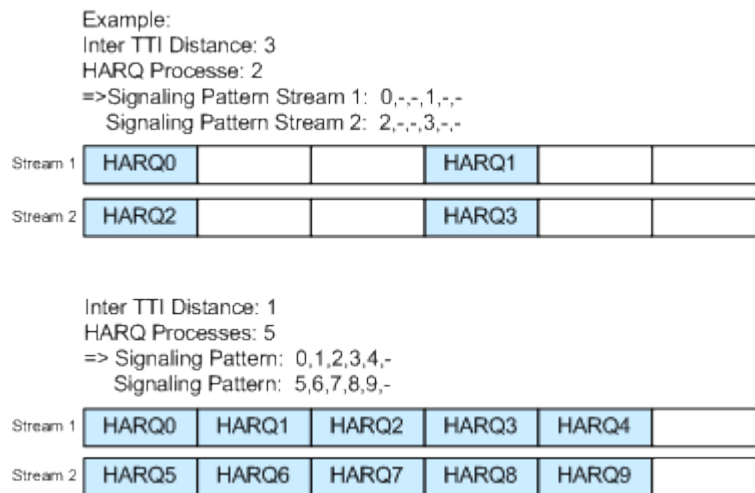


Figure 4-9: Example: Inter TTI Distance in HSDPA H-Set Mode

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:TTIDistance` on page 406

Number of HARQ Processes per Stream

Sets the number of HARQ processes. This value determines the distribution of the payload in the subframes and depends on the Inter "TTI Distance" (see figure).

A minimum of six HARQ Processes are required to achieve continuous data transmission.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:HARQ:LENGTH` on page 394

Signaling Pattern Stream1/2

Displays the distribution of packets over time. The "Signaling Pattern" displays a HARQ-Process cycle and is a sequence of HARQ-IDs and "-". An HARQ-ID indicates a packet, a "-" indicates no packet (see figure). The signaling pattern is cyclically repeated.

Long signaling patterns with regular repeating groups of HARQ-ID and "-" are not displayed completely. The signaling pattern is shortened and ". . ." is displayed but the scheduling is performed according to the selected "Inter TTI Distance". Long signaling patterns with irregularity in the HARQ-ID and "-" groups are displayed completely.

Depending on the selected "Burst Mode", a dummy TTI is sent within the no packet subframes.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:SPATtern<di>?` on page 400

4.13.7 HARQ Simulation



Option: R&S SMW-K83 for stream 2 and "HS-SCCH Type 3"; other settings BS1 and "HSDPA H-Set Mode".

3GPP FDD A: BS1/Enhanced11 HSDPA Mode

HSDPA-Mode Burst-Mode ☒

H-Set

Common MIMO	MIMO Settings	Global Settings	Coding	Signal Structure	HARQ Simulation
HARQ Mode Constant NACK					
Redundancy Version Sequence Stream 1					0
Redundancy Version Sequence Stream 2					0

Mode (HARQ Simulation)

Sets the HARQ simulation mode.

Note: To let the instrument generate a signal equal to the one generated by an instrument equipped with older firmware, set the "HARQ Mode" to "Constant ACK".

"Constant ACK"

New data is used for each new TTI. This mode is used to simulate maximum throughput transmission.

"Constant NACK"

(enabled in "Advanced Mode" only)

Enables NACK simulation, i.e. depending on the sequence selected with parameter "Redundancy Version Parameter Sequence" packets are retransmitted. This mode is used for testing with varying redundancy version.

Remote command:

```
[ :SOURce<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:
HARQ:MODE on page 394
```

Redundancy Version Stream1/2

The parameter is enabled for "HARQ Simulation Mode > Constant ACK".

Enters the redundancy version per stream. This value determines the processing of the Forward Error Correction and constellation arrangement (16/64QAM modulation), see TS 25.212 4.6.2.

For HS-SCCH Type 2 (less operation), the redundancy version is always 0.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:RVParameter<di>` on page 396

Redundancy Version Sequence Stream 1/2

The parameter is enabled for "HARQ Simulation Mode > Constant NACK".

Enters a sequence of redundancy version per stream. The value of the RV parameter determines the processing of the Forward Error Correction and constellation arrangement (16/64QAM modulation), see TS 25.212 4.6.2.

The sequence has a length of maximum 30 values. The sequence length determines the maximum number of retransmissions. New data is retrieved from the data source after reaching the end of the sequence.

For HS-SCCH Type 2 (less operation), the redundancy version sequence is always "0, 3, 4".

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:RVSequence<di>` on page 397

4.13.8 Error Insertion



The parameters in this section are available for BS1, HSDPA H-Set Mode and disabled Advanced Mode only.

3GPP FDD A: BS1/Enhanced11 HSDPA Mode

HSDPA-Mode

H-Set Burst-Mode ☒

Common normal Global Settings Coding Signal Structure HARQ Simulation Bit Error Insertion Block Error Insertion

State 0

Bit Error Rate 0.001 000 0

Insert Errors On Physical Layer

In the "Bit/Block Error Insertion" sections, errors can be inserted into the data source and into the CRC checksum. This can be used for example to test the bit and block error rate testers.

Bit Error State (HSDPA H-Set)

Activates or deactivates bit error generation.

Bit errors are inserted into the data stream of the coupled HS-PDSCHs. It is possible to select the layer in which the errors are inserted (physical or transport layer).

When the data source is read out, bits are deliberately inverted at random points in the data bitstream at the specified error rate so that an invalid signal is simulated.

Remote command:

```
[ :SOURce<hw> ] :BB:W3GPp:BSTation[:ENHanced]:CHANnel<ch0>:HSDPa:
DERRor:BIT:STATe on page 442
```

Bit Error Rate (HSDPA H-Set)

Sets the bit error rate.

Remote command:

```
[ :SOURce<hw> ] :BB:W3GPp:BSTation[:ENHanced]:CHANnel<ch0>:HSDPa:
DERRor:BIT:RATE on page 441
```

Insert Errors On (HSDPA H-Set)

Selects the layer at which bit errors are inserted.

"Transport layer"

Bit errors are inserted in the transport layer.

"Physical layer"

Bit errors are inserted in the physical layer.

Remote command:

```
[ :SOURce<hw> ] :BB:W3GPp:BSTation[:ENHanced]:CHANnel<ch0>:HSDPa:
DERRor:BIT:LAYer on page 441
```

Block Error State (HSDPA H-Set)

Activates or deactivates block error generation.

The CRC checksum is determined and then the last bit is inverted at the specified error probability in order to simulate an invalid signal.

Remote command:

```
[ :SOURce<hw> ] :BB:W3GPp:BSTation[:ENHanced]:CHANnel<ch0>:HSDPa:
DERRor:BLOCK:STATe on page 442
```

Block Error Rate (HSDPA H-Set)

Sets the block error rate.

Remote command:


```
[ :SOURce<hw> ] :BB:W3GPp:BSTation[:ENHanced]:CHANnel<ch0>:HSDPa:
DERRor:BLOCK:RATE on page 442
```

4.13.9 Randomly Varying Modulation and Number of Codes (Type 3i) Settings

Option: R&S SMW-K83, HS-SCCH Type 1 and enabled [Advanced Mode](#).

Access:

1. Select "3GPP FDD > Link Direction > Downlink".
2. Select "3GPP FDD > Base Stations > Select Base Station > BS1".
3. In the "Base Station 1" dialog, select "Channel Table > Preset to HSDPA H-Set".
4. In the "Channel Table" tab, select "Channel#12 HS-SCCH > Enhanced Settings > Config...".
5. In the "BS1/Enhanced HSDPA Mode" dialog, select "Common".
6. Select "Advanced Mode > On".
7. Select "HS-SCCH Type > Type 1 (normal)".
8. Select the "Type 3i" tab.

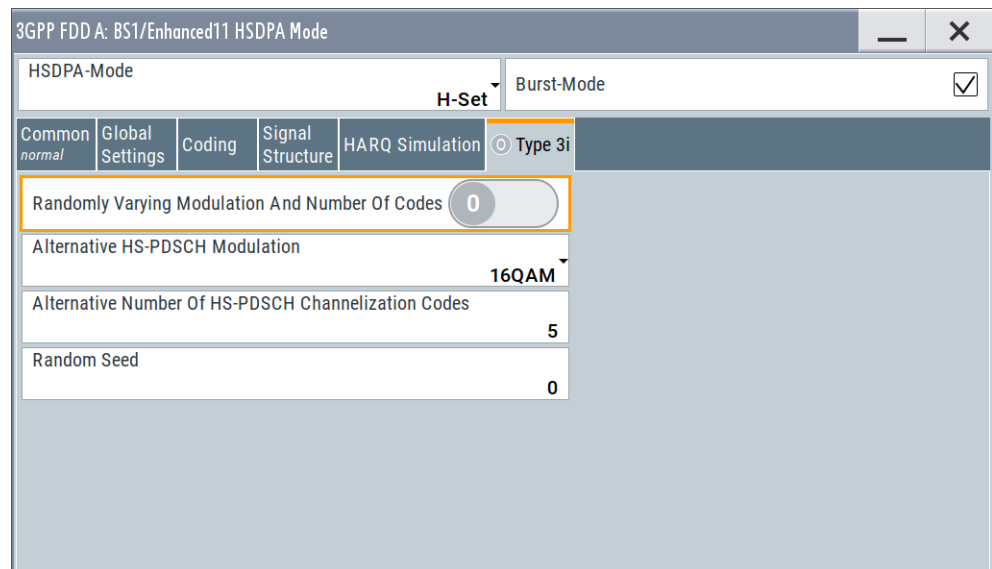

This section comprises the settings necessary to configure the signal of both interferer according to the 3i enhanced performance requirements tests, described in 3GPP TS34.12.-1, chapters 9.2.1L and 9.2.1LA.

The used modulation and number of HS-PDSCH codes in an H-Set is randomly selected every HSDPA TTI among four options with equal probability (see [Table 4-6](#)).

Table 4-6: Used modulation and number of HS-PDSCH codes

Option	Modulation	Number of HS-PDSCH codes
1	HS-PDSCH Modulation	Alternative Number of HS-PDSCH Channelization Codes
2	"Alternative HS-PDSCH Modulation" on page 119	Alternative Number of HS-PDSCH Channelization Codes
3	HS-PDSCH Modulation	Number of HS-PDSCH Channelization Codes
4	"Alternative HS-PDSCH Modulation" on page 119	Number of HS-PDSCH Channelization Codes



Although the number of active HS-PDSCH channels varies over time, the overall power of the HS-PDSCH channels in the H-Set stays constant. This is because the power of the individual HS-PDSCH channels is raised when the number is reduced. The channel powers displayed in the "BS > Channel Table" are the channel powers during the TTIs in which the [Number of HS-PDSCH Channelization Codes](#) is applied.

The ARB sequence length suggestion does not consider the statistical process of the selection among the four options. It can be necessary that you further increase the ARB sequence length to achieve the desired statistical properties.

See [ARB Seq Length](#).



To generate a signal without unwanted artifacts, select "3GPP FDD > Filter/Clipping/ARB Settings" and set the parameter [Sequence Length ARB](#) to a multiple of the suggested length.

The configured transport block size table and transport block size index are used in all TTIs, no matter which of the four options is used. The payload size can vary over time and can deviate from the value displayed with the parameter [Information Bit Payload \(TB-Size\) Stream 1/2](#).

Randomly Varying Modulation And Number Of Codes

Enables/disables the random variation of the modulation and codes.

Remote command:

```
[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:RVSTate on page 398
```

Alternative HS-PDSCH Modulation

Sets the alternative modulation (see [Table 4-6](#)).

Remote command:

```
[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:ALTModulation on page 390
```

Alternative Number of HS-PDSCH Channelization Codes

Sets the alternative number of HS-PDSCH channelization codes (see [Table 4-6](#)).

Remote command:

```
[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:ACLlength on page 390
```

Random Seed

Sets the seed for the random process deciding between the four options (see [Table 4-6](#)).


Remote command:

```
[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:SEED on page 398
```

4.14 Enhanced Settings for P-CPICH - BS1

Access:

- Select "3GPP FDD > BS > Channel Table > P-CPICH > Enhanced Settings > Config".

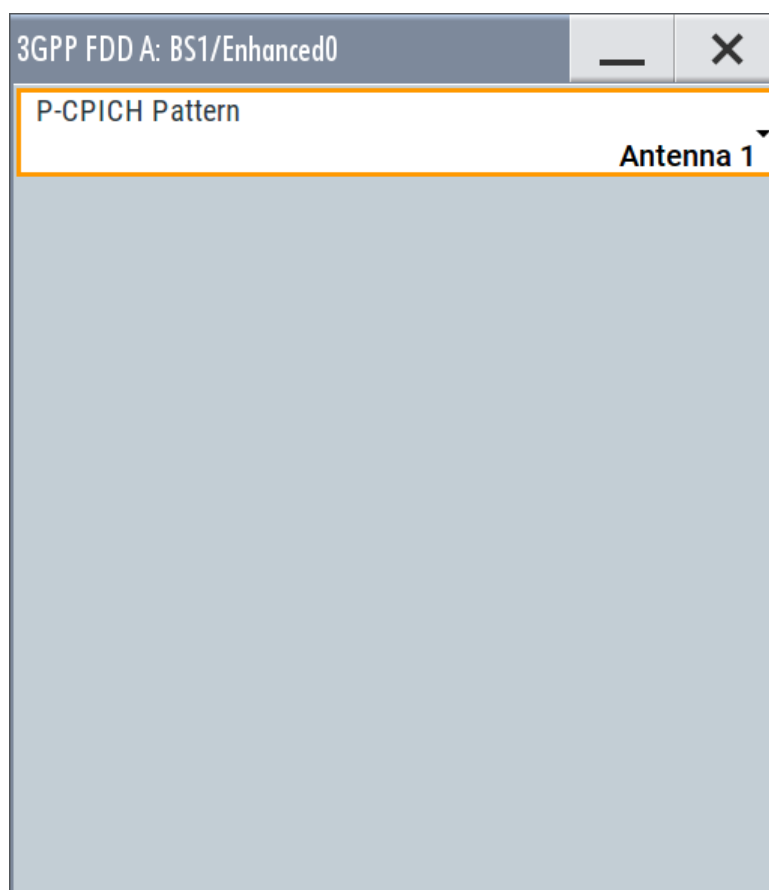

P-CPICH Pattern

Sets the P-CPICH pattern (channel 0).

Remote command:


```
[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:ENHanced:PCPich:PATtern
```

on page 422

4.15 Enhanced Settings for P-CCPCH - BS1

Access:

- Select "3GPP FDD > BS1 > Channel Table > P-CCPCH > Enhanced Settings > Config".

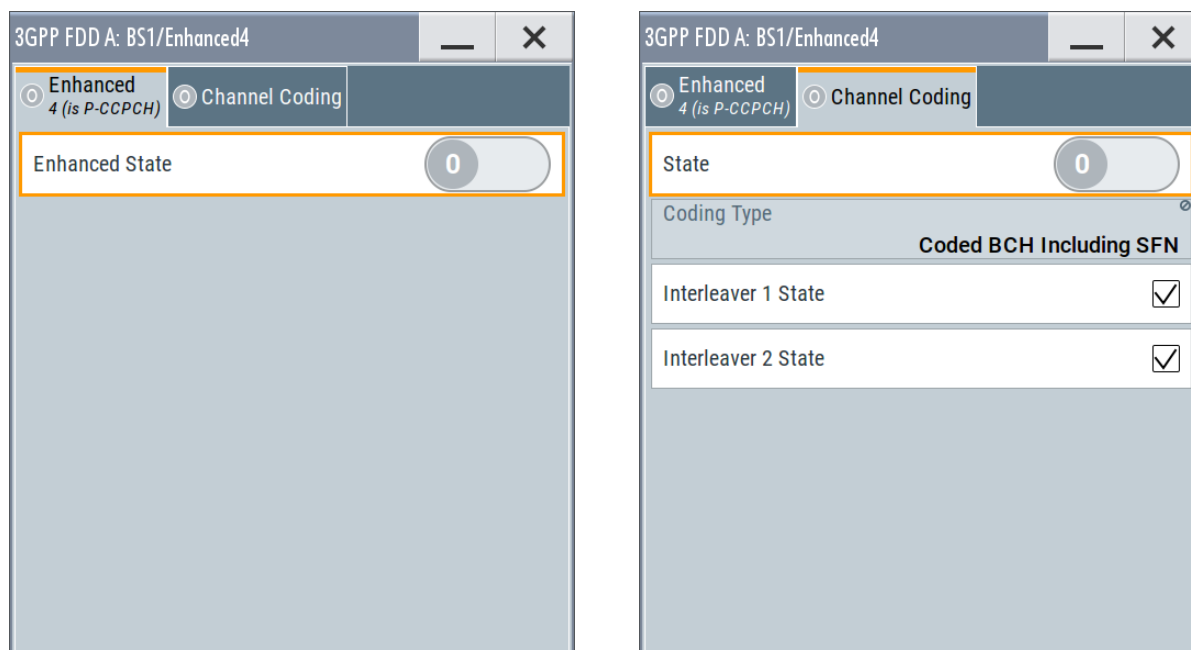

The dialog comprises the settings for configuring the enhanced state of this displayed channel and the channel coding settings. Interleaver states 1 and 2 can be activated separately.

The settings for the enhanced P-CCPCH channel and the enhanced DPCH channels are different (see [Chapter 4.16, "Enhanced Settings for DPCHs - BS1"](#), on page 123).

4.15.1 Channel Number and State

Channel Number (Enhanced P-CCPCH)

Displays the channel number and the channel type.

Remote command:

n.a.

State (Enhanced P-CCPCH)

Switches the P-CCPCH (Primary Common Control Phys. Channel) to the enhanced state. The channel signal is generated in real time.

Remote command:

[:SOURCE<hw>] :BB:W3GpP:BSTation:ENHanced:PCCPch:STAtE on page 422

4.15.2 Channel Coding - Enhanced P-CCPCH BS1

The "Channel Coding" section is where the channel coding settings are made.

The channel-coded P-CCPCH (Broadcast Channel BCH) with System Frame Number is generated according to the following principle.

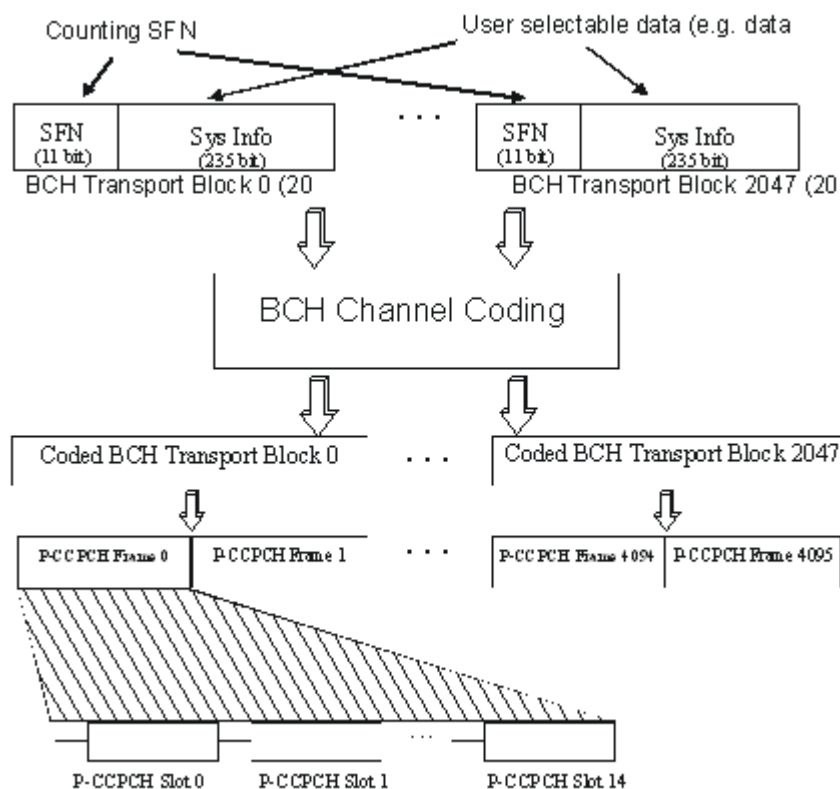


Figure 4-10: Generation of a channel coded P-CCPCH/BCH

The data blocks of the BCH at transport-channel level comprise data determined for 20 ms of the PCCPCH (i.e. 2 frames) after channel coding. The first field of such a data block is an 11bit long field for the system frame number (SFN). The SFN is automatically incremented by 1 (as stipulated in the standard) from transport block to transport block. This is equivalent to a step width of 2 frames due to the transport time interval length of 20 ms. After 2048 transport blocks (equivalent to 4096 frames), the SFN is reset and starts again at 0 (SFN restart). An output trigger indicating the SFN restart can be generated.

The SFN format is defined in the standard; it is MSB-first coded.

The remaining system information (a 235-bit long field per block) is filled from the data source selected for the P-CCPCH.

A data list can be used to transmit further specific system information in addition to the SFN. If only the SFN is required, "ALL 0" is recommended as data source for P-CCPCH.

The BCH transport blocks are then channel-coded. A coded transport block comprises the data sequence for two P-CCPCH frames.

Channel Coding State

Activates or deactivates channel coding.

The coding scheme is displayed in the field below.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation:ENHanced:PCCPch:CCODing:STATE`
on page 434

Channel Coding Type

Displays the coding scheme.

The coding scheme of P-CCPCH (BCH) is specified in the standard. The channel is generated automatically with the counting system frame number (SFN). The system information after the SFN field is completed from the selected data source.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation:ENHanced:PCCPch:CCODing:TYPE?`
on page 434

Interleaver

Activates or deactivates channel coding interleaver states 1 and 2.

Note: The interleaver states do not cause the symbol rate to change

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation:ENHanced:PCCPch:CCODing:INTerleaver<di>` on page 434

4.16 Enhanced Settings for DPCHs - BS1

The settings for the enhanced P-CCPCH channel (see [Chapter 4.15, "Enhanced Settings for P-CCPCH - BS1"](#), on page 121) and the enhanced DPCH channels are different. This section describes the settings for the enhanced DPCH channels (channels#11 to 13). The channels can be configured independently.




Use the [HSDPA Settings - BS](#) dialog to configure the high-speed channels.

4.16.1 Channel Number and State

Access:

- Select "3GPP FDD > BS1 > Channel Table > Channel#11 to 13 > DPCH > Enhanced/HSDPA Settings > Config... > Enhanced".

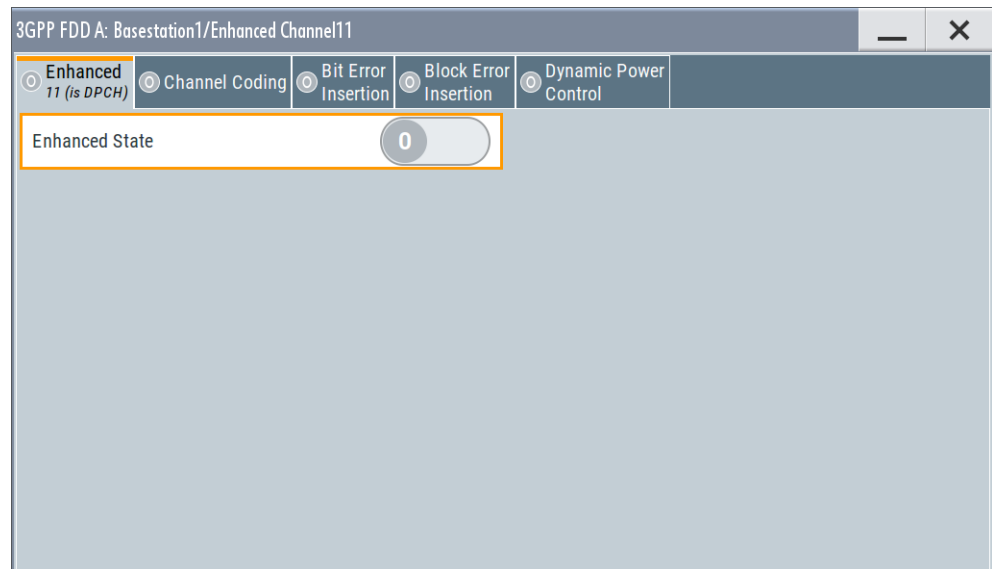

In this tab, you can activate the currently selected channel.

Enhanced State

Switches the DPCH channel to the enhanced state.

In the enhanced state, the modulation signal of the selected channel is generated in real time. It is possible to activate channel coding and simulate bit and block errors or use dynamic power control. Data lists, for example with user data for the transport layer, can be used as the data source.


Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:STATe`
on page 422

4.16.2 Channel Coding

Access:

- Select "3GPP FDD > BS1 > Channel Table > Channel#11 to 13 > DPCH > Enhanced/HSDPA Settings > Config... > Channel Coding".

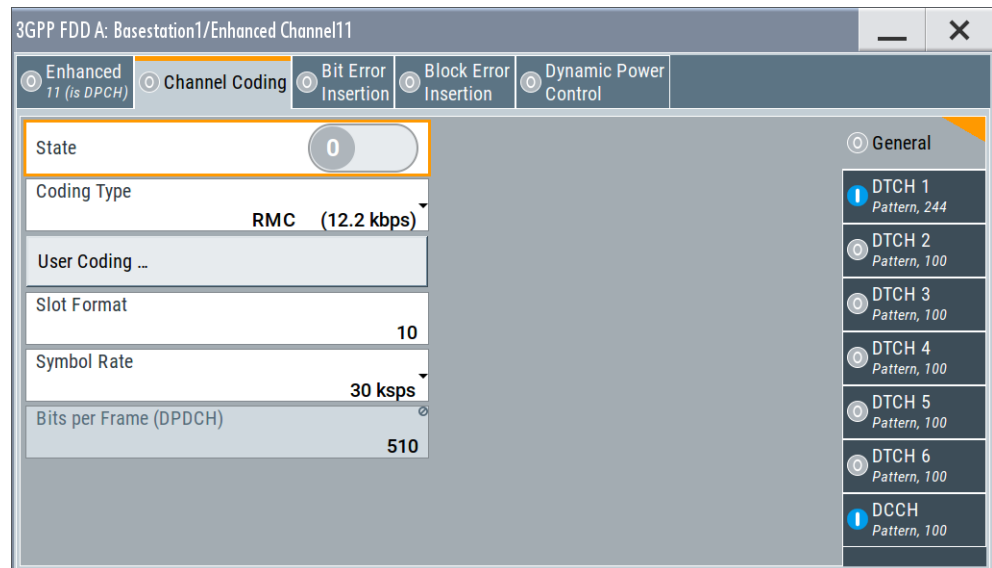

The "Channel Coding > General" tab comprises the settings for enabling and configuring the channel coding. The provided settings are divided into general settings and several subtabs, one per transport channel.

To access the channel coding settings of a transport channel, select the corresponding side tab, for example "DTCH1". Refer to [Chapter 4.16.3, "Transport Channel - Enhanced DPCHs BS1"](#), on page 128 for description of the provided settings.

According to 3GPP TS 25.101, a downlink reference measurement channel is generated when the transport channels DTCH and DCCH are mapped to a DPCH with a different data rate after channel coding and multiplexing. The figure below is taken from the standard (TS 25.101). It illustrates the generation of a 12.2 kbps reference measurement channel from the DTCH and DCCH transport channels (see standard for figures and tables of other reference measurement channels).

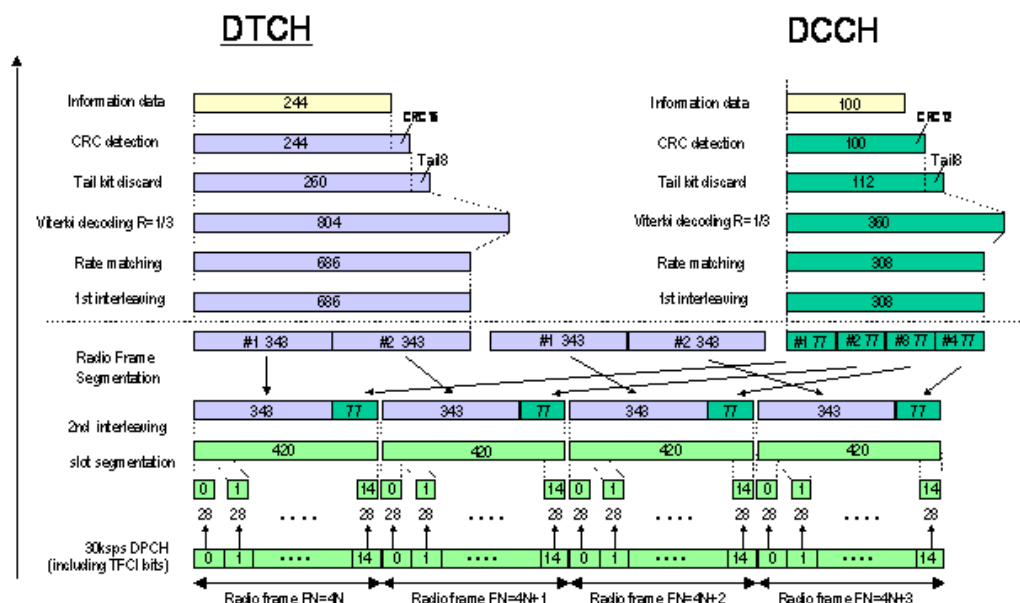


Figure 4-11: Channel coding of the 12.2 kbps reference measurement channel (downlink)

The Table 4-7 shows a summary of the transport channel parameters of the 12.2 kbps reference measurement channel

Table 4-7: Transport channel parameters (12.2 kbps reference measurement channel)

Parameter	DCCH	DTCH
Data Source	All 0	All 0
Transport Block Size	100	244
Transmission Time Interval	40 ms	20 ms
Type of Error Protection	Convolution Coding	Convolution Coding
Coding Rate	1/3	1/3
Rate Matching attribute	256	256
Size of CRC	12	16
Interleaver 1/2	On	On

Channel Coding State

Activates or deactivates channel coding.

Channel-coded measurement channels - so-called "reference measurement channels" - are required for many test procedures specified by the standard.

When channel coding is activated, the slot format, the symbol rate, the pilot length and the TFCI state are predetermined. The corresponding parameters in the channel table are disabled.

Remote command:

[:SOURCE<hw>] :BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:CCoding:STATe on page 426

Channel Coding Type

Selects channel coding.

The 3GPP specification defines 4 reference measurement channel coding types, which differ in the input data bit rate bit to be processed (12.2, 64, 144 and 384 kbps). The additional AMR CODER coding scheme generates the coding of a voice channel.

The BTFD coding types with different data rates are also defined in the 3GPP specification (TS 34.121). They are used for the receiver quality test Blind Transport Format Detection. DTX (discontinuous transmission) bits are included in the data stream between rate matching and interleaving 1.

User coding can be defined as required in the detailed coding settings menu section revealed with button "Show Details". They can be stored and loaded in the "User Coding" submenu. Selection User is indicated as soon as a coding parameter is modified after selecting a predefined coding type.

The input data bits are taken for channel coding from the data source specified in the "Transport Channel" dialog section. The bits are available with a higher rate at the channel coding output. The allocations between the measurement input data bit rate and the output symbol rate are fixed, that is to say, the symbol rate is adjusted automatically.

The following are available for selection:

"RMC 12.2 kbps"	12.2 kbps measurement channel
"RMC 64 kbps"	64 kbps measurement channel
"RMC 144 kbps"	144 kbps measurement channel
"RMC 384 kbps"	384 kbps measurement channel
"AMR 12.2 kbps"	Channel coding for the AMR coder
"BTFD Rate 1 12.2kps"	Blind Transport Format Detection Rate 1 (12.2 kbps)
"BTFD Rate 2 7.95kps"	Blind Transport Format Detection Rate 2 (7.95 kbps)
"BTFD Rate 3 1.95kps"	Blind Transport Format Detection Rate 3 (1.95 kbps)

Remote command:

`[[:SOURCE<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:CCODing:TYPE` on page 426

User Coding

Accesses the standard "File Select" function of the instrument. The provided navigation possibilities in the dialog are self-explanatory.

See also, chapter "File and Data Management" in the R&S SMW User Manual.

Files with user coding are files with the predefined file extension *.3g_ccod_dl. The filename and the directory they are stored in are user-definable; the file extension is assigned automatically.

The complete channel coding settings are saved and recalled.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation:ENHanced:CHANnel:DPCH:CCODing:USER:CATalog?` on page 427

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:CCODing:USER:STORE` on page 428

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:CCODing:USER:LOAD` on page 428

Slot Format (DPDCH)

Enters the slot format. The slot format (and thus the symbol rate, the pilot length and the TFCI state) depends on the coding type selected.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:CCODing:SFOFormat` on page 425

Symbol Rate (DPDCH)

Displays the symbol rate.

The symbol rate is determined by the slot format set.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:CCODing:SRATe?` on page 425

Bits per Frame (DPDCH)

Displays the data bits in the DPDCH component of the DPCH frame at physical level. The value depends on the slot format.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:CCODing:BPFRame?` on page 424

4.16.3 Transport Channel - Enhanced DPCHs BS1

Access:

1. Select "3GPP FDD > BS1 > Channel Table > Channel#11 to 13 > DPCH > Enhanced/HSDPA Settings > Config... > Channel Coding".

- To access the channel coding settings of a transport channel, select the corresponding side tab, for example "DTCH1".

3GPP FDD A: Basestation1/Enhanced Channel11

Enhanced 11 (is DPCH) Channel Coding Bit Error Insertion Block Error Insertion Dynamic Power Control

State ☐

Data Source **Data List** **Select Data List ...** **None**

Transport Time Interval **20 ms** Transport Blocks **1**

Transport Block Size **244** Size Of CRC **16**

Rate Matching Attribute **256** DTX Indication Bits **0**

Error Protection **Conv 1/3**

Interleaver 1 State ☒ Interleaver 2 State ☒

General

DTCH 1 Data List, 244

DTCH 2 Data List, 100

DTCH 3 Data List, 100

DTCH 4 Data List, 100

DTCH 5 Data List, 100

DTCH 6 Data List, 100

DCCH Data List, 100

The dialog provides access to the settings of up to seven transport channels (TCHs), the DTCHs (DTCH1 to 6) and the DCCH.

Transport Channel State

Activates or deactivates the transport channel.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH: TChannel<di0>:STATe` on page 433

In case of remote control, DCCH corresponds to :TChannel0, DTCH1 to :TChannel1, etc.

Data Source

Selects the data source for the transport channel.

The following standard data sources are available:

- "All 0, All 1"
An internally generated sequence containing 0 data or 1 data.
- "PNxx"
An internally generated pseudo-random noise sequence.
- "Pattern"
An internally generated sequence according to a bit pattern.
Use the "Pattern" box to define the bit pattern.
- "Data List/Select DList"
A binary data from a data list, internally or externally generated.
Select "Select DList" to access the standard "Select List" dialog.
 - Select the "Select Data List > navigate to the list file *.dm_iqd > Select" to select an existing data list.
 - Use the "New" and "Edit" functions to create internally new data list or to edit an existing one.

- Use the standard "File Manager" function to transfer external data lists to the instrument.

See also:

- Section "Modulation Data" in the R&S SMW user manual.
- Section "File and Data Management" in the R&S SMW user manual.
- Section "Data List Editor" in the R&S SMW user manual

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH: TCHannel<di0>:DATA` on page 430

`[ :SOURce<hw> ] :BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH: TCHannel<di0>:DATA:PATtern` on page 431

`[ :SOURce<hw> ] :BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH: TCHannel<di0>:DATA:DSElect` on page 430

Transport Time Interval

Sets the number of frames into which a TCH is divided. This setting also defines the interleaver depth.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH: TCHannel<di0>:TTInterval` on page 434

Transport Block

Sets the number of transport blocks for the TCH.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH: TCHannel<di0>:TBCount` on page 433

Transport Block Size

Sets the size of the transport block at the channel coding input.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH: TCHannel<di0>:TBSize` on page 433

Size of CRC

Defines the type (length) of the CRC. Checksum determination can also be deactivated (setting "None").

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH: TCHannel<di0>:CRCSize` on page 429

Rate Matching Attribute

Sets data rate matching.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH: TCHannel<di0>:RMATtribute` on page 432

DTX Indication Bits

Sets the number of DTX (discontinuous transmission) bits. These bits are entered in the data stream between rate matching and interleaver 1. Channel coding of BTFD reference measurement channels Rate 2 and Rate 3 includes DTX267 and DTX644, respectively (see 3GPP TS 34.121).

Remote command:

```
[ :SOURce<hw> ] :BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:
TCHannel<di0>:DTX on page 431
```

Error Protection

Selects error protection.

"None"	No error protection
"Turbo 1/3"	Turbo coder of rate 1/3 in accordance with the 3GPP specifications.
"Conv 1/2 1/3"	Convolution coder of rate 1/2 or 1/3 with generator polynomials defined by 3GPP.

Remote command:

```
[ :SOURce<hw> ] :BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:
TCHannel<di0>:EPRotecton on page 432
```

Interleaver 1 State

Activates or deactivates channel coding interleaver state 1 of the transport channel. Interleaver state 1 can be set independently in each TCH. Activation does not change the symbol rate.

Remote command:

```
[ :SOURce<hw> ] :BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:
TCHannel<di0>:INTerleaver on page 432
```

Interleaver 2 State

Activates or deactivates channel coding interleaver state 2 of all the transport channels. Interleaver state 2 can only be set for all the TCHs together. Activation does not change the symbol rate.

Remote command:

```
[ :SOURce<hw> ] :BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:
INTerleaver2 on page 429
```

4.16.4 Error Insertion - Enhanced DPCHs BS1

Access:

1. Select "3GPP FDD > BS1 > Channel Table > Channel#11 to 13 > Enhanced/HSDPA Settings > Config...".
2. In the "Base Station /Enhanced Channel" dialog, select one of the following:

a) Select "Bit Error Insertion".

The screenshot shows the '3GPP FDD A: Basestation1/Enhanced Channel11' dialog box. The 'Bit Error Insertion' tab is selected and highlighted with an orange border. The 'State' toggle switch is set to '0' (off). The 'Bit Error Rate' is set to '0.001 000 0'. The 'Insert Errors On' dropdown menu is set to 'Physical Layer'.

b) Select "Block Error Insertion".

The screenshot shows the '3GPP FDD A: Basestation1/Enhanced Channel11' dialog box. The 'Block Error Insertion' tab is selected and highlighted with an orange border. The 'State' toggle switch is set to '0' (off). The 'Block Error Rate' is set to '0.100 0'.

The dialogs provide the parameters for inserting errors into the data source and into the CRC checksum, for example, to check the bit and block error rate testers.

Bit Error State (Enhanced DPCHs)

Activates or deactivates bit error generation.

Bit errors are inserted into the data fields of the enhanced channels. When channel coding is active, it is possible to select the layer in which the errors are inserted (physical or transport layer).

When the data source is read out, individual bits are deliberately inverted at random points in the data bitstream at the specified error rate so that invalid signal is simulated.

Remote command:

```
[ :SOURce<hw> ] :BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:
DERRor:BIT:STATe on page 440
```


Bit Error Rate

Sets the bit error rate.

Remote command:

```
[ :SOURCE<hw> ] :BB:W3GPp:BStation:ENHanced:CHANnel<ch0>:DPCH:
DERRor:BIT:RATE on page 439
```

Insert Errors On

Selects the layer in the coding process at which bit errors are inserted.

"Transport layer"	Bit errors are inserted in the transport layer. This selection is only available when channel coding is active.
"Physical layer"	Bit errors are inserted in the physical layer.

Remote command:

```
[ :SOURCE<hw> ] :BB:W3GPp:BStation:ENHanced:CHANnel<ch0>:DPCH:
DERRor:BIT:LAYer on page 439
```

Block Error State

Activates or deactivates block error generation.

The CRC checksum is determined and then the last bit is inverted at the specified error probability in order to simulate an invalid signal.

Remote command:

```
[ :SOURCE<hw> ] :BB:W3GPp:BStation:ENHanced:CHANnel<ch0>:DPCH:
DERRor:BLOCK:STATe on page 441
```

Block Error Rate

Sets block error rate.

Remote command:

```
[ :SOURCE<hw> ] :BB:W3GPp:BStation:ENHanced:CHANnel<ch0>:DPCH:
DERRor:BLOCK:RATE on page 440
```

4.16.5 Dynamic Power Control - Enhanced DPCHs BS1

(R&S SMW-B10 required; not supported in Baseband C/D)

The "Dynamic Power Control" section comprises the settings necessary to configure the power of the selected enhanced channel. Power can be increased or decreased within the predefined dynamic range ("Up Range + Down Range") and with the predefined step size ("Power Step") depending on a control signal.

The control signal can be provided:

- Externally
- Internally (TPC pattern)
- Manually

See [Mode](#) .

Supply the external control signal at the connector, defined with the parameter "[Connector](#)" on page 137.

The "Dynamic Power Control" is suitable for testing of closed (inner) loop Power Control in two test constellations:

- To test whether the DUT (receiver) correctly performs the SIR (signal to interference ratio) measurement and inserts the corresponding bits into the TPC field of its transmitting signal.
The TPC control information is provided by an external "Dynamic Power Control" signal.
- To test whether the DUT (transmitter) responds with the correct output power to received TPC bits.
To perform this test, use a data list adapted to the test condition as TPC data source. The TPC pattern is defined in the channel table.

The power change of the channels is performed by a switchover of a mapping table, controlled by the "Dynamic Power Control" signal. This signal is queried at the beginning of the pilot field. The limited number of mappings restricts the maximum dynamic range to 30 dB and the step width to min. 0.5 dB. The output power of each channel is thus limited to the dynamic range around the channel-specific start power.



Obtaining optimum signal quality

Do not set the "Power Up Range" higher than necessary because the mapping of the I/Q level in this range must be maintained as a level margin.

Example: Principle of the downlink dynamic power control

"Power Up Range = Power Down Range"

Channel#11/13, "Direction > Up"

Channel#12, "Direction > Down"

External control signal is provided

The [Figure 4-12](#) illustrates the adjustment in the channel power of these three enhanced channels.

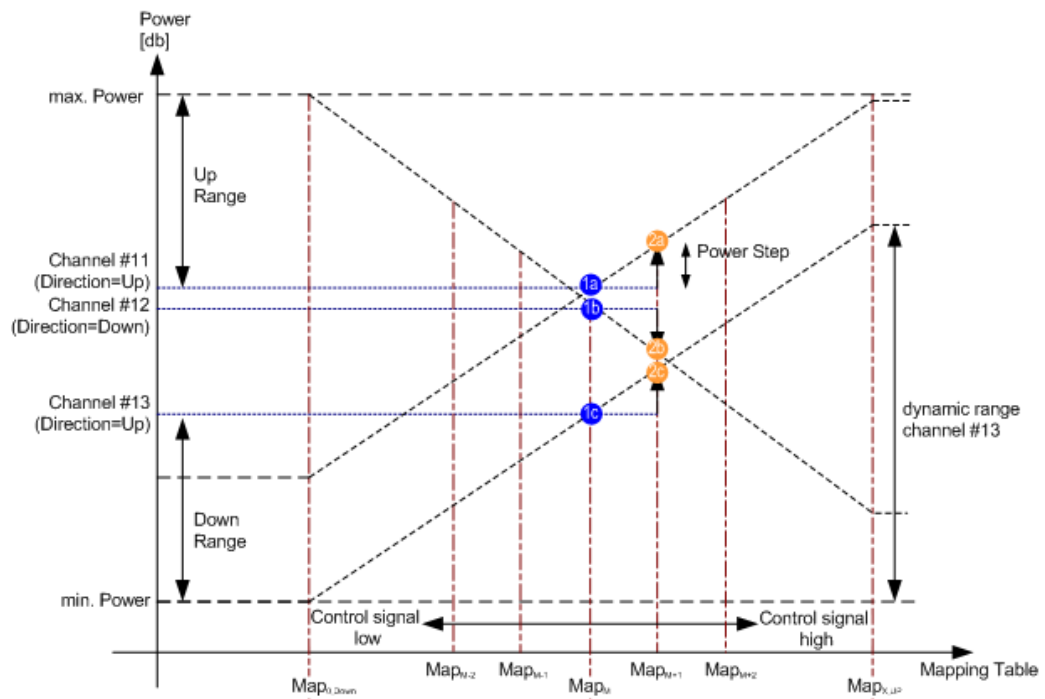


Figure 4-12: Dynamic Power Control (downlink)

1a, 1b, 1c = Start power of the corresponding channel#11 to 13

2a, 2b, 2c = Resulting channel power of channel#11 to 13 at high level of the control signal at the beginning of the pilot field.

The available mappings are shown on the X-axis with Map_M being the starting point. In this point, all channels have the start power as selected in the channel table.


At the beginning of the pilot field, the provided control signal is queried in each time-slot. Receiving of a logical "1" results in a switchover to the right mapping Map_{M+1} . This means an increase of the output power by "Power Step" for all channels with "Power Control Mode Up". In this example, the power of channel 12 is decreased by the same value (see Figure 4-12).

Receiving of a logical "0" results in a switchover to the left mapping Map_{M-1} . This means a reduction of the output power by "Power Step" for all channels with "Power Control Mode Down". The power of channel 12 is increased by the same value.

How to access the settings

Access:

- Select "3GPP FDD > Channel Table > DPCH > Enhanced Settings > Dynamic Power Control".

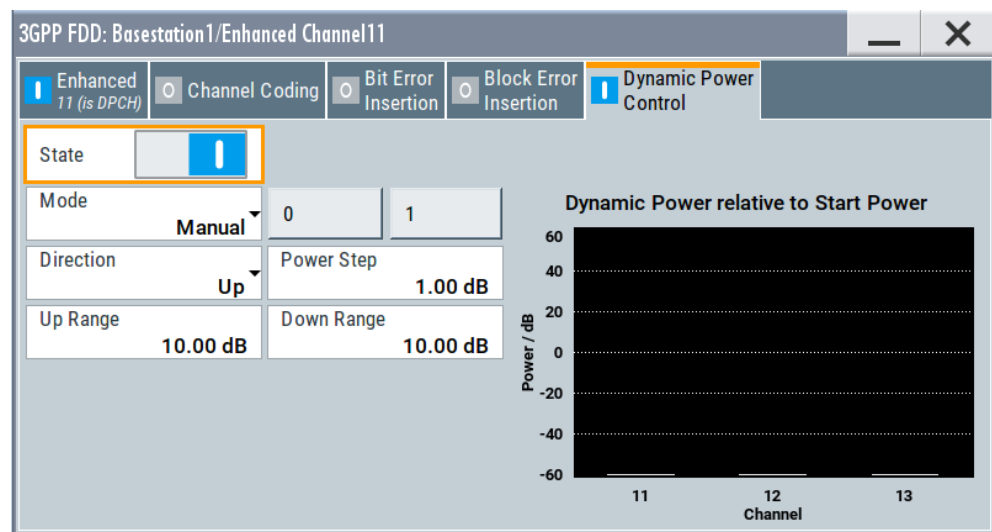

Dynamic Power Control State

Activates or deactivates the "Dynamic Power Control" for the selected enhanced channel.

With activated Dynamic Power Control, the power of the enhanced channel can be increased or decreased within the predefined dynamic range ("Up Range" + "Down Range"). The power is varied with the predefined step size ("Power Step").

The instrument expects an external control signal at the selected "[Connector](#)" on page 137.

The "Direction" settings determine if the channel power is increased or decreased by a high level of the control signal.

Remote command:

```
[ :SOURce<hw> ] :BB:W3GPp:BStation:ENHanced:CHANnel<ch0>:DPCH:
DPControl:STATe on page 437
```

Mode

Selects the control signal for Dynamic Power Control.

- "External" The instrument expects an external control signal at the selected "[Connector](#)" on page 137.
- "TPC" The TPC pattern is used for Dynamic Power Control. This selection corresponds to selection mis-use TPC for not enhanced DPCHs.
- "Manual" The control signal is manually produced by selecting one of the buttons 0 or 1. Button 1 corresponds to a positive control signal, button 0 to a negative control signal.
The channel power is increased or decreased depending on the "Direction" setting by the selected power step.

Remote command:

```
[ :SOURce<hw> ] :BB:W3GPp:BStation:ENHanced:CHANnel<ch0>:DPCH:
DPControl:MODE on page 437
[ :SOURce<hw> ] :BB:W3GPp:BStation:ENHanced:CHANnel<ch0>:DPCH:
DPControl:STEP:MANual on page 437
```

Connector

Determines the input connector the external control signal is supplied at.

In this firmware version, the "Global" connector is disabled.

See [Chapter 3.4, "Routing and Enabling an External Control Signal"](#), on page 53.

Remote command:

`[:SOURce<hw>] :BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:
DPControl:CONNector` on page 436

Direction

Determines whether the channel power is increased or decreased by a high level of the control signal (see [Figure 4-12](#)).

"Up" A high level of the control signal leads to an increase of channel power.

"Down" A high level of the control signal leads to a decrease of channel power.

Remote command:

`[:SOURce<hw>] :BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:
DPControl:DIRection` on page 436

Power Step

Sets step width by which the channel power of the selected enhanced channel in the timeslot grid is increased or decreased. The variation applies to the set dynamic range ("Up Range + Down Range") and if "Dynamic Power Control" is enabled.

The start power of the channel is set in the "Power" column of the channel table.

Remote command:

`[:SOURce<hw>] :BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:
DPControl:STEP[:EXTernal]` on page 438

Up Range / Down Range

Sets dynamic range by which – with "Dynamic Power Control" switched on – the channel powers of the enhanced channels can be increased. The resulting "Dynamic Power Control" dynamic range ("Up Range" + "Down Range") depends on the selected "Power Step" and is as follow:

- For "Power Step" < 1 dB, the dynamic range ("Up Range" + "Down Range") <= 30 dB
- For "Power Step" => 1 dB, the dynamic range ("Up Range" + "Down Range") <= 60 dB

Remote command:

`[:SOURce<hw>] :BB:W3GPp:BSTation<st>:ENHanced:CHANnel<ch0>:DPCH:
DPControl:RANGe:UP` on page 437

`[:SOURce<hw>] :BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:
DPControl:RANGe:DOWN` on page 437

Power Control Graph

Indicates the deviation of the channel power (delta POW) from the set power start value of the corresponding enhanced channels.

The graph is automatically displayed with "Dynamic Power Control" switched on.

Note: A realtime update of the display in the timeslot (= 0.667 ms) is not possible and is performed in a coarser time interval. The power control graph does not display fast channel power changes. The settled state of the control loop is however easy to recognize.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BStation:ENHanced:CHANnel<ch0>:DPCH:DPControl[:POWer] ?` on page 438

4.17 S-CCPCH Settings - BS Channel Table

Access:

- Select "3GPP FDD > BS > Channel Table > Channel type > S-CCPCH > DPCCH Settings > Config...".

3GPP FDD A: BS1/S-CCPCH5

Common

Data
20

Slot Format
0

TF CI
is Not Use ☐

TF CI
0

Pilot Length
0 Bit

The selected slot format determines the provided settings. Whenever the "TF CI State" and [Pilot Length] settings are changed, the slot format is adjusted accordingly.

Slot Structure (S-CCPCH)

Displays the slot structure.

TFCI 8	Data 296	Pilot 16

The structure of the slot depends on the selected slot format (see also 3GPP TS 25.211, Table 18: Secondary CCPCH fields)

Slot Format (S-CCPCH)

Displays the slot format.

The slot format displayed changes when a change is made to the TFCI and Pilot control field settings.

Remote command:

n.a.

Use TFCI

Activates TFCI field usage.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:DPCCh:TFCI:STATE` on page 382

The remote-control command is not valid for multi channel mode.

TFCI Value

Enters the value of the TFCI field (Transport Format Combination Indicator) . This value is used to select a combination of 30 bits, which is divided into two groups of 15 successive slots.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:DPCCh:TFCI` on page 382

The remote-control command is not valid for multi channel mode.

Pilot Length

Sets the length of the pilot fields.

The range of values for this parameter depends on the channel type and the symbol rate.

To achieve a constant slot length, the data fields are lengthened or shortened depending on the pilot length, as defined in the standard.

Note: The pilot fields of all active power-controlled DPCHs must be of the same length if [Dynamic Power Control State](#) with external control signal is active.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:DPCCh:PLENgt`h on page 380

The remote-control command is not valid for multi channel mode.

4.18 Config AICH/AP-AICH - BS Channel Table

Access:

- Select "3GPP FDD > BS > Channel Table > AICH/AP-AICH > DPCCH Sett > Config...".

The screenshot shows a configuration window titled "3GPP FDD A: BS1/AICH7". Inside the window, there are two input fields. The first field is labeled "Signature ACK/NACK Pattern" and contains the text "+000 0000...". The second field is labeled "Access Slot" and contains the value "0". The window has a standard title bar with a minus sign and a close button (X).

The dialog comprises the parameters for configuring the signature pattern and selecting the slot.

Signature ACK/NACK Pattern

Enters the 16-bit pattern for the ACK/NACK field.

This field is used by the base station to acknowledge, refuse or ignore requests of up to 16 user equipment.

""+" = ACK"	The ACK is sent. Transmission was successful and correct.
""- = NACK"	The NACK is sent. Transmission was not correct.
""0" = DTX"	Nothing is sent. Transmission is interrupted (Discontinuous Transmission (DTX)).

Remote command:

[:SOURce<hw>] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:AICH:SAPattern
on page 377

[:SOURce<hw>] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:APAIch:
SAPattern on page 377

Access Slot

Selects the slot in which the burst is transmitted.

Remote command:

[:SOURce<hw>] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:AICH:ASLOt
on page 376

[:SOURce<hw>] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:APAIch:ASLOt
on page 377

4.19 DPCCH Settings - BS Channel Table

The "DPCCH" settings dialog provides the parameters for configuring the fields of the dedicated physical control channel. The selected slot format determines the available settings.

4.19.1 Common Slot Structure (DPCCH)

Access:

1. Select "3GPP FDD > BS > Channel Table > DPCH > DPCCH Settings > Config...".

2. Select "Common".

3GPP FDD A: BS1/DPCCH11

Common	TPC Settings	DPCCH Power Offset	
Data 6	TPC 2	Data 24	Pilot 8
Slot Format			10
TFCI <i>is Not Use</i>			☐
TFCI			0
Pilot Length			8 Bit
Multi Code State			☐

This dialog contains the parameters for configuring the slot format. Whenever you change the "TFCI State" and "Pilot Length" settings, the slot format is adjusted accordingly.

Data 6	TPC 2	Data 28	Pilot 4

The upper section of the dialog shows the structure. It depends on the slot format-selected (see also 3GPP TS 25.211, Table 11: DPDCH and DPCCH fields)

Slot Format (DPCCH)

Displays the slot format.

The slot format displayed changes when a change is made to the TFCI and Pilot control field settings.

Remote command:
n.a.

Use TFCI

Activates TFCI field usage.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:DPCCh:TFCI:STATE` on page 382

The remote-control command is not valid for multi channel mode.

TFCI Value

Enters the value of the TFCI field (Transport Format Combination Indicator) . This value is used to select a combination of 30 bits, which is divided into two groups of 15 successive slots.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:DPCCh:TFCI` on page 382

The remote-control command is not valid for multi channel mode.

Pilot Length

Sets the length of the pilot fields.

The range of values for this parameter depends on the channel type and the symbol rate.

To achieve a constant slot length, the data fields are lengthened or shortened depending on the pilot length, as defined in the standard.

Note: The pilot fields of all active power-controlled DPCHs must be of the same length if [Dynamic Power Control State](#) with external control signal is active.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:DPCCh:PLENgtH` on page 380

The remote-control command is not valid for multi channel mode.

Multicode State (DPCCH)

Activates multicode transmission.

Multicode transmission can be activated for a group of channels destined for the same receiver that is to say, belonging to a radio link. The first channel of this group is used as the master channel.

With multicode transmission, the common components (Pilot, TPC and TCFI) for all the channels are spread using the spreading code of the master channel.

This parameter is only available for the DPCHs.

Note: The remote-control command is not valid for multichannel mode.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:DPCCh:MCODe` on page 380

4.19.2 TPC Settings

Access:

1. Select "3GPP FDD > BS > Channel Table > DPCH > DPCCH Settings > Config...".
2. Select "TPC Settings".

The screenshot shows a configuration window titled "3GPP FDD A: BS1/DPCCH11". It has three tabs: "Common", "TPC Settings" (which is selected and highlighted with an orange border), and "DPCCH Power Offset". The "TPC Settings" tab contains the following fields:

- TPC Source:** A dropdown menu currently set to "Pattern".
- TPC Pattern:** A text field containing "0...".
- Read Out Mode:** A dropdown menu currently set to "Single + Alt. 10".
- TPC For Output Power Control:** A checkbox that is currently unchecked. Below the checkbox is the text "is Not (Mis-)Use".
- Power Step:** A text field containing "0.00 dB".

This tab provides the parameters for configuring the TPC data source and read out mode.

TPC Data Source (DPCCH)

Selects the data source for the TPC field (Transmit Power Control). This field is used to control the transmit power.

The following standard data sources are available:

- "All 0, All 1"
An internally generated sequence containing 0 data or 1 data.
- "Pattern"
An internally generated sequence according to a bit pattern.
Use the "Pattern" box to define the bit pattern.
- "Data List / Select TPC List"
A binary data from a data list, internally or externally generated.
Select "Select TPC List" to access the standard "Select List" dialog.

- Select the "Select Data List > navigate to the list file *.dm_iqd > Select" to select an existing data list.
- Use the standard "File Manager" function to transfer external data lists to the instrument.
- Use the "New" and "Edit" functions to create internally new data list or to edit an existing one.

See also:

- Section "Modulation Data" in the R&S SMW user manual.
- Section "File and Data Management" in the R&S SMW user manual.
- Section "Data List Editor" in the R&S SMW user manual.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:DPCCh:TPC:DATA`
on page 382

`[ :SOURce<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:DPCCh:TPC:DATA:`
`PATtern` on page 384

`[ :SOURce<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:DPCCh:TPC:DATA:`
`DSElect` on page 383

The remote-control command is not valid for multichannel mode.

TPC Read Out Mode (DPCCH)

Defines TPC data usage.

The TPC bits are used to signal the increase or reduction in transmit power to the called station. For all read out modes, 1 bit is taken from the data stream for the TPC field for each slot. The bit is entered into the bitstream several times, depending on the symbol rate. The difference between the modes lies in the usage of the TPC bits.

The different modes can be used to set a specific output power and then let the power oscillate around this value. For example, if the power is the pattern 11111, the power can be varied with "Single + alt. 01" and "Single + alt. 10". Thus, power measurements can be carried out at quasi-constant power.

- "Continuous:"
The TPC bits are used cyclically.
- "Single + All 0"
The TPC bits are used once, and then the TPC sequence is continued with 0 bits.
- "Single + All 1"
The TPC bits are used once, and then the TPC sequence is continued with 1 bit.
- "Single + alt. 01"
The TPC bits are used once and then the TPC sequence is continued with 0 bits and 1 bit alternately. Bits as appended in multiples, depending on the symbol rate, for example, 00001111.
- "Single + alt. 10"
The TPC bits are used once and then the TPC sequence is continued with 1 bit and 0 bits alternately. Bits as appended in multiples, depending on by the symbol rate, for example, 11110000.

Use the parameter "Read Out Mode" together with the option "TPC For Output Power Control (Mis-) Use" to generate various output power profiles.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BStation<st>:CHANnel<ch0>:DPCCh:TPC:READ`
on page 385

The remote-control commands are not valid for multichannel mode.

Misuse TPC for Output Power Control (DPCCH)

Defines "mis-" use of the TPC data.

The TPC bits are used to signal the increase or reduction in transmit power to the called station.

If "(Mis-) use TPC for output power control" is activated, the specified pattern is used to vary the intrinsic transmit power over time. A bit of this pattern is removed for each slot in order to increase (bit = "1") or reduce (bit = "0") the channel power by the specified power step ("Power Step"). The upper limit is 0 dB and the lower limit -60 dB.

The following envelope is produced with the settings:

- Channel power = 0 dB
- Power step = 1.0 dB
- Pattern = "001110100000011"
- "TPC Read Out Mode = Continuous"

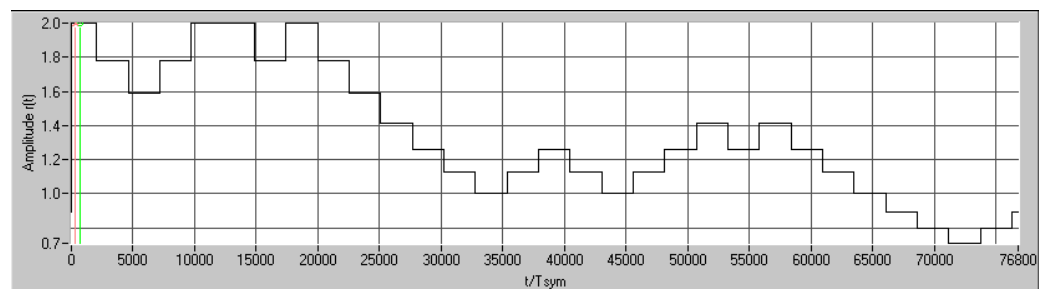


Figure 4-13: Dynamic change of channel power (continuous)

Note: The change in power is always carried out (as stipulated in the standard) at the start of the slot pilot field. Misuse TPC for Output Power Control is not available for enhanced DPCCHs. Power Control via TPC pattern for enhanced channels can be selected for active Dynamic Power Control (see [Chapter 4.16.5, "Dynamic Power Control - Enhanced DPCCHs BS1"](#), on page 133).

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BStation<st>:CHANnel<ch0>:DPCCh:TPC:MISe`
on page 384

The remote-control command is not valid for multichannel mode.

TPC Power Step (DPCCH)

Sets the step width of the power change in dB for "(Mis-) use TPC for output power control".

Note: Misuse TPC for Output Power Control is not available for enhanced DPCCHs. Power Control via TPC pattern for enhanced channels can be selected for active Dynamic Power Control (see [Chapter 4.16.5, "Dynamic Power Control - Enhanced DPCCHs BS1"](#), on page 133).

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BStation<st>:CHANnel<ch0>:DPCCh:TPC:PSTep`
on page 384

The remote-control command is not valid for multichannel mode.

4.19.3 DPCCH Power Offset

Access:

1. Select "3GPP FDD > BS > Channel Table > DPCH > DPCCH Settings > Config...".
2. Select "DPCCH Power Offset".

3GPP FDD A: BS/MC/DPCCH		
Common	TPC Settings	DPCCH Power Offset
Power Offset Pilot		0.00 dB
Power Offset TPC		0.00 dB
Power Offset TFCI		0.00 dB

This tab provides the parameters for configuring power offsets of the control fields to the channel power.

Power Offset Pilot (DPCCH)

Sets the power offset of the pilot field to the channel power in dB.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BStation<st>:CHANnel<ch0>:DPCCh:POFFset:PILot`
on page 381

The remote-control command is not valid for multichannel mode.

Power Offset TPC (DPCCH)

Sets the power offset of the TPC field to the channel power in dB.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPP:BSTation<st>:CHANnel<ch0>:DPCCh:POFFset:`
TPC on page 381

The remote-control command is not valid for multichannel mode.

Power Offset TFCI (DPCCH)

Sets the power offset of the TFCI field to the channel power in dB.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPP:BSTation<st>:CHANnel<ch0>:DPCCh:POFFset:`
TFCI on page 381

The remote-control command is not valid for multichannel mode.

4.20 Config E-AGCH - BS Channel Table

Access:

- Select "3GPP FDD > BS > Channel Table > E-AGCH > DPCCH Settings > Config...".

UEID	Absolute Grant Value Index	Absolute Grant Scope	
0	0	0	All HARQ Processes

The dialog provides the parameter required to configure the HSUPA control channels.

E-AGCH Information Field Coding

Enables/disables the information coding. Disabling this parameter corresponds to a standard operation, i.e. no coding is performed and the data is sent uncoded. Enabling this parameter allows you to configure the way the data is coded.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>[:HSUPa]:EAGCh:IFCoding` on page 409

E-DCH TTI

Switches between 2 ms and 10 ms. The processing duration also influences the number of used slots.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>[:HSUPa]:EAGCh:TTIEdch` on page 411

Number of Configurable TTIs

Sets the number of configurable TTIs.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>[:HSUPa]:EAGCh:TTICount` on page 410

E-AGCH Table

Comprises the parameters provided for an E-AGCH channel.

UEID (A-GCH) ← E-AGCH Table

Sets the UE Id for the selected TTI.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>[:HSUPa]:EAGCh:TTI<di0>:UEID` on page 410

Absolute Grant Value Index ← E-AGCH Table

Sets the Index for the selected TTI. According to the TS 25.212 (4.10.1 A.1), there is a cross-reference between the grant index and the grant value. The TTI configuration of the table is used cyclically. Depending on the selection made for the parameter "E-DCH TTI", each table row corresponds to a 2ms TTI or to a 10ms TTI.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>[:HSUPa]:EAGCh:TTI<di0>:AGVIndex` on page 410

Absolute Grant Scope ← E-AGCH Table

Sets the scope of the selected grant. According to the TS 25.321, the impact of each grant on the UE depends on this parameter.

For E-DCH TTI = 10ms, the "Absolute Grant Scope" is always All HARQ Processes.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>[ :HSUPa ] :EAGCh:TTI<di0>:AGSCope` on page 410

4.21 Config E-RGCH/E-HICH - BS Channel Table

Access:

- Select "3GPP FDD > BS > Channel Table > E-RGCH/E-HICH > DPCCH Settings > Config...".

3GPP FDD A: BS1/E-HICH9	
Type Of Cell	Serving Cell
E-DCH TTI	2 ms
Signature Hopping Pattern Index	0
ACK/NACK Pattern	+...
Tau <DPCH>	0 *256 Chips
Tau <E-HICH>	5 Slots

3GPP FDD A: BS1/E-RGCH9	
Type Of Cell	Serving Cell
E-DCH TTI	2 ms
Signature Hopping Pattern Index	0
Relative Grant Pattern	+...
Tau <DPCH>	0 *256 Chips
Tau <E-RGCH>	5 Slots

The dialogs provide the parameters for configuring the corresponding HSUPA control channels.

Type of Cell

Switches between Serving Cell and Non-Serving Cell. The cell type determines the number of used slots.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>[ :HSUPa ] :ERGCh:CTYPe` on page 413

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>[ :HSUPa ] :EHICH:CTYPe` on page 411

E-DCH TTI

Switches between 2 ms and 10 ms. The processing duration also influences the number of used slots.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>[:HSUPa]:ERGCh:TTIEdch` on page 415

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>[:HSUPa]:EHICH:TTIEdch` on page 413

Signature Hopping Pattern Index – HSUPA BS

Enters a value that identifies the user equipment. The values are defined in TS 25.211.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>[:HSUPa]:ERGCh:SSINdex` on page 414

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>[:HSUPa]:EHICH:SSINdex` on page 413

Relative Grant Pattern

(This feature is available for E-RGCH only.)

Enters a pattern: 0 = Hold, + = Up, - = Down.

Note: Pattern + is entered using the numeric key 1. Pattern - is entered via the numeric key +/-.

For Non-Serving Cell, "1" is not allowed.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>[:HSUPa]:ERGCh:RGPattern` on page 414

ACK/NACK Pattern

(This feature is available for E-HICH only.)

Enters the pattern for the ACK/NACK field.

For Non-Serving Cell, only "+" (ACK) and "0" (no signal) is allowed. For Serving Cells only "+" (ACK) and "-" (NACK) is allowed.

Note: Pattern + is entered using the numeric key 1. Pattern - is entered via the numeric key +/-.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>[:HSUPa]:EHICH:RGPattern` on page 412

Tau DPCH

Enters the offset of the downlink dedicated offset channels.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>[:HSUPa]:EHICH:DTAU` on page 412

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>[:HSUPa]:ERGCh:DTAU` on page 413

Tau E-RGCH/E-HICH

Displays the offset of the P-CCPCH frame boundary.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>[:HSUPa]:EHICH:ETAU?` on page 412

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>[:HSUPa]:ERGCh:ETAU?` on page 414


4.22 Config F-DPCH - BS Channel Table

This section provides the description of the setting parameters for the fractional dedicated physical control channel.

4.22.1 Common Settings

Access:

1. Select "3GPP FDD > BS > Channel Table > F-DPCH > DPCCH Settings > Config...".
2. Select "Common".

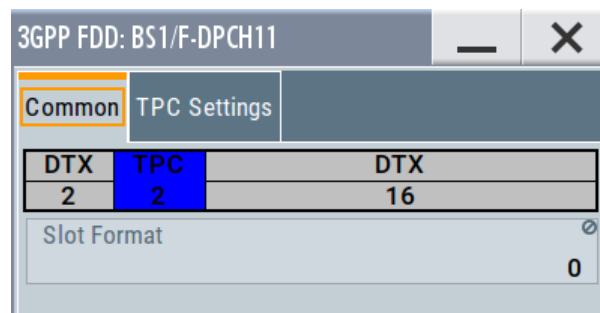

The "Common" tab shows the slot structure and format of the F-DPCH channel.

Slot Format (F-DPCH)

Displays the slot format as selected with the parameter "Slot Format" in the Channel Table.

The corresponding slot structure is displayed above the parameter.

DTX	TPC	DTX
2	2	16

Option: R&S SMW-K83 for slot formats 1 to 9

The difference between the F-DPCH slot formats is the position of the 2 bits TPC field.


Remote command:

n.a.

4.22.2 TPC Settings

Access:

1. Select "3GPP FDD > BS > Channel Table > F-DPCCH > DPCCH Settings > Config...".
2. Select "TPC Settings".

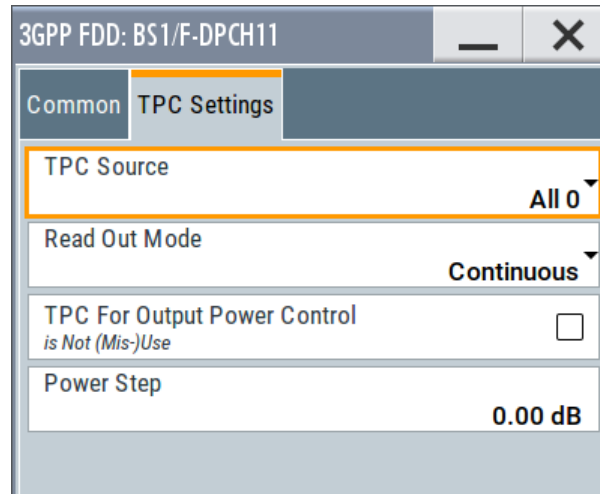

This tab contains the parameters for configuring the TPC data source and read out mode.

TPC Source

Selects the data source for the F-DPCH channel.

The following standard data sources are available:

- "All 0, All 1"
An internally generated sequence containing 0 data or 1 data.
- "PNxx"
An internally generated pseudo-random noise sequence.
- "Pattern"
An internally generated sequence according to a bit pattern.
Use the "Pattern" box to define the bit pattern.
- "Data List/Select DList"
A binary data from a data list, internally or externally generated.
Select "Select DList" to access the standard "Select List" dialog.
 - Select the "Select Data List > navigate to the list file *.dm_iqd > Select" to select an existing data list.
 - Use the "New" and "Edit" functions to create internally new data list or to edit an existing one.
 - Use the standard "File Manager" function to transfer external data lists to the instrument.

See also:

- Section "Modulation Data" in the R&S SMW user manual.
- Section "File and Data Management" in the R&S SMW user manual.

- Section "Data List Editor" in the R&S SMW user manual

Remote command:

[:SOURce<hw>] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:FDPCh:DPCh:
TPC:DATA on page 385

[:SOURce<hw>] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:FDPCh:DPCh:
TPC:DATA:DSElect on page 386

[:SOURce<hw>] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:FDPCh:DPCh:
TPC:DATA:PATtern on page 387

TPC Read Out Mode (F-DPCH)

Defines TPC data usage.

The TPC bits are used to signal the increase or reduction in transmit power to the called station. For all read out modes, 1 bit is taken from the data stream for the TPC field for each slot. The bit is entered into the bitstream several times, depending on the symbol rate. The difference between the modes lies in the usage of the TPC bits.

The different modes can be used to set a specific output power and then let the power oscillate around this value. For example, if the power is the pattern 11111, the power can be varied with "Single + alt. 01" and "Single + alt. 10". Thus, power measurements can be carried out at quasi-constant power.

- "Continuous:"
The TPC bits are used cyclically.
- "Single + All 0"
The TPC bits are used once, and then the TPC sequence is continued with 0 bits.
- "Single + All 1"
The TPC bits are used once, and then the TPC sequence is continued with 1 bit.
- "Single + alt. 01"
The TPC bits are used once and then the TPC sequence is continued with 0 bits and 1 bit alternately. Bits as appended in multiples, depending on the symbol rate, for example, 00001111.
- "Single + alt. 10"
The TPC bits are used once and then the TPC sequence is continued with 1 bit and 0 bits alternately. Bits as appended in multiples, depending on by the symbol rate, for example, 11110000.

Use the parameter "Read Out Mode" together with the option "TPC For Output Power Control (Mis-) Use" to generate various output power profiles.

Remote command:

[:SOURce<hw>] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:FDPCh:DPCh:
TPC:READ on page 388

TPC For Output Power Control (Mis-) Use


Defines "mis-" use of the TPC data.

The TPC bits are used to signal the increase or reduction in transmit power to the called station.

If "(Mis-) use TPC for output power control" is activated, the specified pattern is used to vary the intrinsic transmit power over time. A bit of this pattern is removed for each slot in order to increase (bit = "1") or reduce (bit = "0") the channel power by the specified power step ("Power Step"). The upper limit is 0 dB and the lower limit -60 dB.

The following envelope is produced with the settings:

- Channel power = 0 dB
- Power step = 1.0 dB
- Pattern = "001110100000011"
- "TPC Read Out Mode = Continuous"

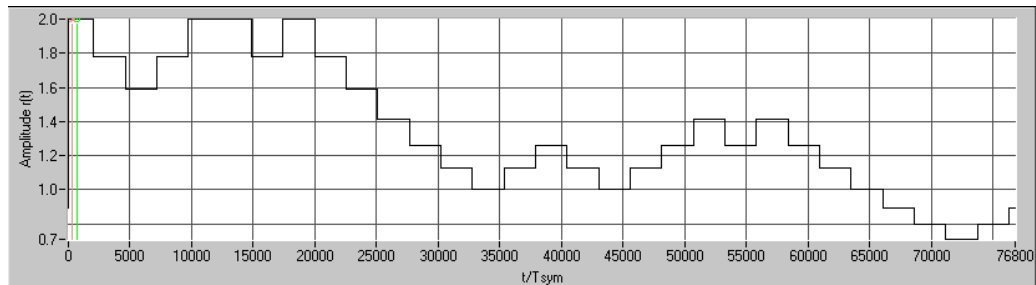

Remote command:

```
[ :SOURce<hw> ] :BB:W3GPp:BStation<st>:CHANnel<ch0>:FDPCh:DPCCh:
TPC:MISe on page 387
```

TPC Power Step (F-DPCH)

Sets the step width of the power change in dB for "(Mis-) use TPC for output power control".

Remote command:

```
[ :SOURce<hw> ] :BB:W3GPp:BStation<st>:CHANnel<ch0>:FDPCh:DPCCh:
TPC:PSTep on page 388
```

4.23 Multi Channel Assistant - BS

Access:

- Select "3GPP FDD > BS > Channel Table > Multi Channel Assistant".

The "Multi Channel Assistant" allows several channels to be set simultaneously and is only available for the channel types DPCH, HS-SCCH, HS QPSK, HS 16QAM and HS 64QAM.

Enhanced state is automatically deactivated. The channel table is only filled with new values when the "Accept" button is pressed.

Start Channel Number

Enters the index for the start channel of the channel range that is set jointly.

Remote command:

n.a.

Stop Channel Number

Enters the index for the stop channel of the channel range that is set jointly.

Remote command:

n.a.

Channel Type

Enters the channel type for the channel range that is set jointly. Available for selection are DPCH, HS-SCCH, HS QPSK, HS 16QAM, or HS 64QAM.

Remote command:

n.a.

Channelization Code

Sets the channelization code for the start channel.

The channel is spread with the specified channelization code (spreading code).

The range of values of the channelization code depends on the symbol rate of the channel.

The range of values runs from 0 to (chip_rate/symbol_rate) - 1

Remote command:

n.a.

Channelization Code Step

Sets the step width for the channelization code from channel to channel.

The valid range of values for the channelization code of an individual channel must not be exceeded. If the range of values is exceeded, the channelization code is limited automatically.

Remote command:

n.a.

Power

Sets the channel power of the start channel in dB.

The power entered is relative to the powers of the other channels and does not initially relate to the "Level" power display. If [Adjust Total Power to 0dB](#) is executed (top level of the 3GPP dialog), all the power data is relative to 0 dB.

Note: The maximum channel power of 0 dB applies to non-blanked channels (duty cycle 100%). With blanked channels, the maximum value can be increased to values greater than 0 dB .

To increase the value, use the parameter "Adjust Total Power" where the maximum value is calculated as $10 \cdot \log_{10}(1/\text{duty\_cycle})$.

The "Power" value is also the starting power of the channel for "Misuse TPC" and "Dynamic Power Control".

Remote command:

n.a.

Power Step

Enters the step width for the change of channel power from channel to channel.

The valid range of values must not be exceeded. If the range of values is exceeded, the power is automatically limited to the permissible of -80 dB to 0 dB.

Remote command:

n.a.

Data Source

Selects data source.

The following standard data sources are available:

- "All 0, All 1"
An internally generated sequence containing 0 data or 1 data.
- "PNxx"
An internally generated pseudo-random noise sequence.
- "Pattern"
An internally generated sequence according to a bit pattern.

Use the "Pattern" box to define the bit pattern.

- "Data List/Select DList"

A binary data from a data list, internally or externally generated.

Select "Select DList" to access the standard "Select List" dialog.

- Select the "Select Data List > navigate to the list file *.dm_iqd > Select" to select an existing data list.
- Use the "New" and "Edit" functions to create internally new data list or to edit an existing one.
- Use the standard "File Manager" function to transfer external data lists to the instrument.

See also:

- Section "Modulation Data" in the R&S SMW user manual.
- Section "File and Data Management" in the R&S SMW user manual.
- Section "Data List Editor" in the R&S SMW user manual

Remote command:

n.a.

Channel State

Activates or deactivates all the channels in the set channel range.

Remote command:

n.a.

Accept

Executes automatic completion of the channel table in accordance with the parameters set.

Remote command:

n.a.

DPCH

Access:

Select "3GPP FDD > BS > Channel Table > Multi Channel Assistant > DPCH"

Slot Format ← DPCH

Enters the slot format.

For DPCH channels, the slot formats are 0 to 16.

A slot format defines the structure of a slot made of data and control fields and includes the symbol rate.

The individual parameters of a slot can later be changed, with the slot format being adjusted, if necessary.

This parameter is not available for high-speed channels.

Note: For the "DPCCH Settings", this value is read-only.

Remote command:
n.a.

Symbol Rate ← DPCH

Sets the symbol rate. The range of values depends on the channel selected.

The symbol rate is determined by the slot format set. A change in the symbol rate leads automatically to an adjustment of the slot format.

Remote command:
n.a.

DPCCH Settings ← DPCH

Accesses the dialog for configuring DPCCH channels, see [Chapter 4.19, "DPCCH Settings - BS Channel Table"](#), on page 141.

Remote command:
n.a.

In contrast to setting a single channel, the remote control commands are not available.

Timing Offset ← DPCH

Sets the timing offset for the start channel.

The timing offset determines the shift of the source symbols before interleaving.

The absolute starting time of the frame (slot 0) is shifted relative to the start of the scrambling code sequence by the `timing offset * 256 chips`. This means that whatever the symbol rate, the resolution of the timing offset is always 256 chips.

This procedure is used to reduce the crest factor. A good way to obtain a lower crest factor is to use an offset of 1 from channel to channel, for example.

Remote command:

n.a.

Timing Offset Step ← DPCH

Sets the step width for the timing offset from channel to channel.

The valid range of values must not be exceeded. If the range of values is exceeded, the timing offset is automatically limited to the permissible range.

Remote command:

n.a.

4.24 User Equipment Configuration (UE)

Access:

1. Select "3GPP FDD > Link Direction > Uplink".
2. Select "3GPP FDD > User Equipment > UE 1/2/3/4".

The "User Equipment" dialog provides the parameters for configuring the general settings of mobile terminal equipment and specific UE-related settings. It also provides a channel table with graphical display of the structure of the currently selected channel.

A user equipment has a maximum of 6 DPDCHs, with parameters largely prescribed by the 3GPP specification TS 25.211. To simplify operation, the settings are grouped into three modes with following main differences:

- With the "DPCCH + DPDCH" mode, the HSDPA channel HS-DPCCH and the HSUPA channels E-DPCCH and E-DPDCH can be activated.
- With the "PRACH only" and "PCPCH only" modes, there is also a choice between "Standard" (all parameters can be set) and "Preamble only" (only the preamble can be set).


The dialog of each particular mode only displays the parameters that are relevant.

The DPCCH and one DPDCH of user equipment 1 are generated in realtime (enhanced mode). Depending on the actual configurations, other channels of user equipment 1 can also be generated in real time. The PRACH and PCPCH channels are not generated in real time.

4.24.1 General Settings

Access:

- Select "General".

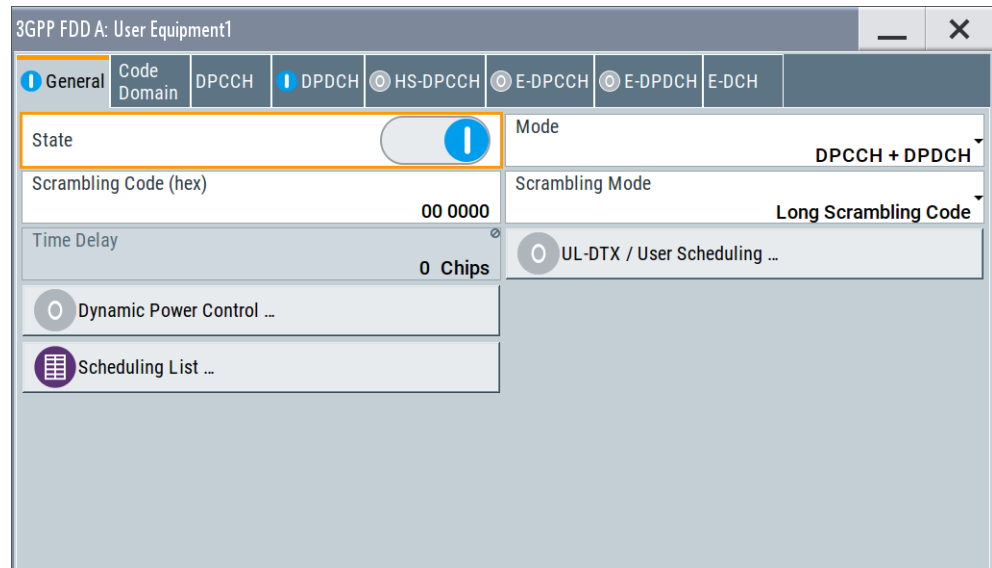

The "General" tab comprises the settings necessary to select the mode, e.g. "PRACH Settings" or "DPCCH Settings".

State

Activates or deactivates the selected user equipment. The number of the selected user equipment is specified in the menu header.

Remote command:

`[ :SOURce<hw> ] :BB:W3GpP:MSTation<st>:STATe` on page 447

Mode

Selects the mode in which the user equipment is to work. The lower part of the menu changes in accordance with the mode. The following modes are available:

"PRACH only - Standard"

In this mode, the instrument generates a single physical random access channel (PRACH). This channel is needed to set up the connection between the user equipment and the base station. All the PRACH parameters can be set in the PRACH Settings section (see [Chapter 4.36, "PRACH Settings - UE"](#), on page 237).

"PRACH only - Preamble only"

In this mode, the instrument only generates the preamble of a physical random access channel (PRACH). Only the PRACH preamble parameters can be set in the PRACH Settings section. This mode is needed for test case 8.8, according to 3GPP TS 25.141.

"PCPCH only - Standard"

In this mode, the instrument generates a single physical common packet channel (PCPCH). This channel is used to transmit packet-oriented services (e.g. SMS). The specific PCPCH parameters can be set in the PCPCH Settings section (see [Chapter 4.37, "PCPCH Settings - UE"](#), on page 248).

"PCPCH only - Preamble only"

In this mode, the instrument only generates the preamble of a physical common packet channel (PCPCH). Only the PRACH preamble parameters can be set in the PCPCH Settings section. This mode is needed for test case 8.9, according to 3GPP TS 25.141.

"DPCCH + DPDCH"

In this mode, the instrument generates a control channel (DPCCH) and up to six data channels (DPDCH). This mode corresponds to the standard mode of user equipment during voice and data transmission.

In addition, the HS-DPCCH, E-DPCCH and E-DPDCH channels can be activated.

Channel-specific parameters can be set in the section of the individual channels.

The DPCCH and one DPDCH of user equipment 1 are generated in realtime (enhanced mode). Depending on the actual configurations, other channels of user equipment 1 can also be generated in realtime.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:MODE` on page 445

Scrambling Code (hex)

Sets the scrambling code.

The scrambling code is used to distinguish the transmitter (UE) by transmitter-dependent scrambling. Hexadecimal values are entered. Long or short scrambling codes can be generated (see also [Chapter 3.3.1, "Scrambling Code Generator"](#), on page 22).

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:SCODE` on page 446

Scrambling Mode

Sets the type of scrambling code.

With scrambling code, a distinction is made between long and short scrambling code (see also Section [Scrambling Code Generator](#)).

"Off" Disables scrambling code for test purposes.

"Long Scrambling Code" Sets the long scrambling code.

"Short Scrambling Code" (only modes "DPCCH + DPDCH" and "PCPCH only")
Sets short scrambling code.
The short scrambling code is only standardized for DPCCH and DPDCH channels. But it can also be generated for the PCPCH channel for test purposes.

Remote command:

[:SOURce<hw>] :BB:W3GPp:MSTation<st>:SCODE:MODE on page 447

Time Delay

Enters the time delay of the signal of the selected user equipment compared to the signal of user equipment 1.

Remote command:

[:SOURce<hw>] :BB:W3GPp:MSTation<st>:TDElay on page 447

UL-DTX .../ User Scheduling

Option: R&S SMW-K83, UE 1 and DPCCH+DPDCH mode

Accesses the dialog for configuring an uplink discontinuous transmission (UL-DTX) or applying user scheduling, see [Chapter 4.25, "UL-DTX/User Scheduling - UE"](#), on page 165.

Remote command:

n.a.

Dynamic Power Control

(for UE 1 and DPCCH+DPDCH mode only)

(R&S SMW-B10 required; not supported in Baseband C/D)

Accesses the dialog for configuring the "Dynamic Power Control" settings, see [Chapter 4.26, "Dynamic Power Control - UE"](#), on page 169.

Remote command:

n.a.


Scheduling List

Accesses the dialog displaying the current scheduling per UE, see [Chapter 4.27, "Scheduling List"](#), on page 174.

4.24.2 Code Domain Graph - UE

Access:

- Select "3GPP FDD > User Equipment > UE > Code Domain".

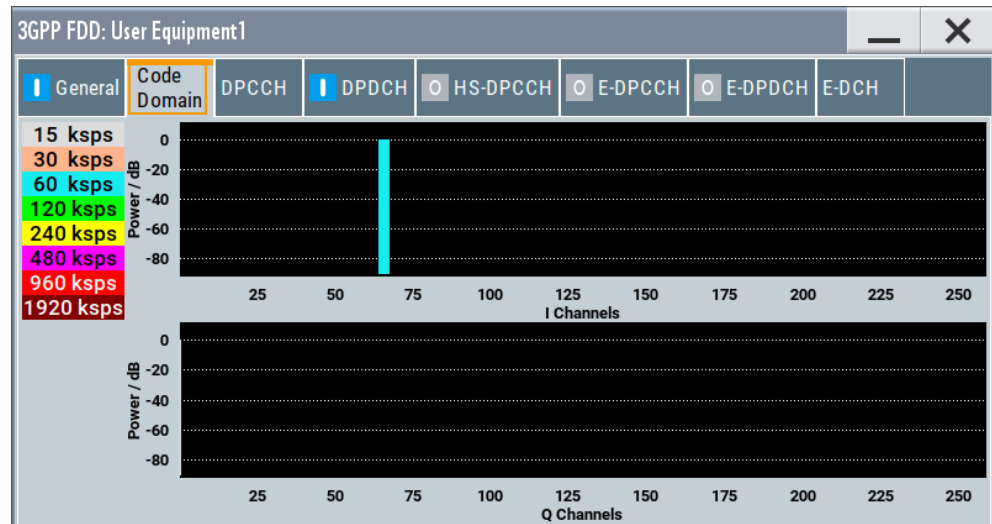

The "Code Domain" dialog enables you to check the uplink signal visually.

Understanding the display information

The "Code Domain" display indicates the assigned code domain. The channelization code is plotted at the X axis; the colored bars indicate coherent code channels. The colors are assigned to fixed symbol rates; the allocation is shown below the graph. The relative power can be taken from the height of the bar. The symbols on so-called I- and Q-branches are spread independently. The channelization codes are fixed for the channels.



Use the code domain graph to evaluate whether there is a code domain conflict or not; a domain conflict arises when the code domains of the active channels intersect. A code domain conflict is indicated by overlapping bars.

A conflict can occur only when the parameter "Force Channelization Code to I/Q" is activated.

4.24.3 Channel Settings

The settings and the dialogs of the individual channels are described in the corresponding sections, see:

- [Chapter 4.28, "DPCCH Settings - UE"](#), on page 175
- [Chapter 4.29, "DPDCH Settings - UE"](#), on page 182
- [Chapter 4.30, "HS-DPCCH Settings - UE"](#), on page 186
- [Chapter 4.31, "E-DPCCH Settings - UE"](#), on page 207

- [Chapter 4.33, "E-DPDCH Settings - UE"](#), on page 221
- [Chapter 4.34, "E-DCH Scheduling - UE"](#), on page 224

4.25 UL-DTX/User Scheduling - UE



Option: R&S SMW-K83.

1. To access the **"UL-DTX"** settings, select "3GPP FDD > Link Direction > Uplink / Reverse > User Equipments > UE".
2. Select "Mode > DPCCH + DPDCH".
3. Select "UL-DTX / User Scheduling..."
4. Select "Mode > UL-DTX".

Scheduling	
E-DCH TTI	2 ms
Offset	0 Subframes
Inactivity Threshold for Cycle 2	16 TTIs
Long Preamble Length	2 Slots

The "UE /UL-DTX" contains the parameters for adjusting the UL-DTX settings and selecting a file containing user scheduling information.

The provided UL-DTX functionality is fully compliant with 3GPP TS 25.214. All dependencies from E-DCH transmissions, HARQ-ACK transmissions or CQI transmissions on the DPCCH are respected.

For UL-DTX, the dialog provides settings to configure the start offset, the threshold time for switching to UE-DTX cycle 2 and the DPCCH activity patterns for UE-DTX cycle 1/2. You can set the frequentness of the DPCCH bursts, the DPCCH bursts length (without pre- and postamble) and configure the length of the longer preamble for the UE-DTX cycle 2.




In this instrument, the signal generation starts with UE-DTX cycle 2. To trigger a switching to a UE-DTX cycle 1, activate the channels E-DPCCH/E-DPDCH and configure the ["E-DCH Scheduling"](#) parameters.

To access the user scheduling settings

The uplink user scheduling is a function that enables you to configure the scheduling of the uplink transmission flexibly.

Access:

1. Select "3GPP FDD > User Equipment > UE1 > Mode > DPCCH + DPDCH".
2. Select "UL-DTX/User Scheduling".
3. In the "UL-DTX/User Scheduling", enable "Mode > User Scheduling".
(R&S SMW-B10 required; not supported in Baseband C/D)

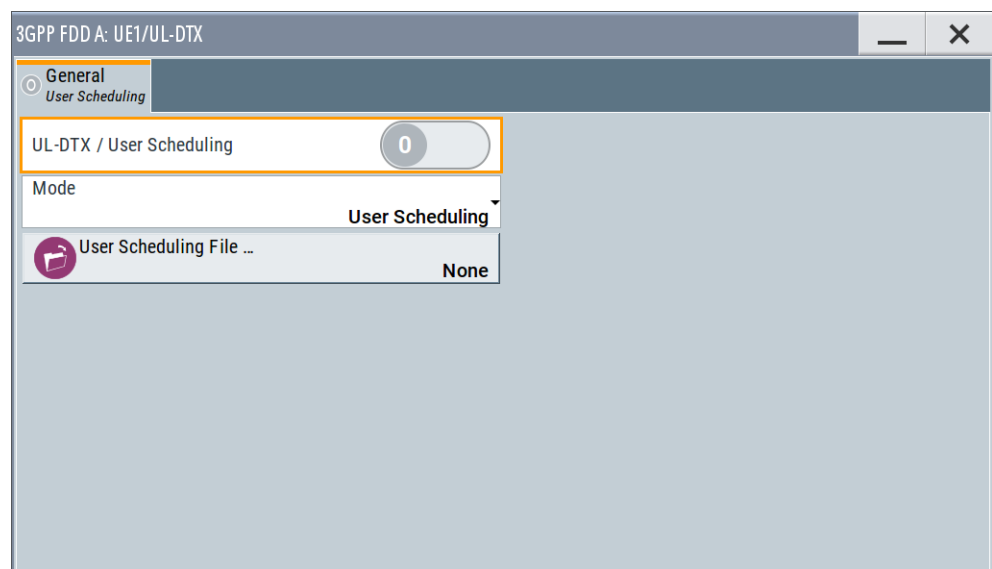

The instrument provides an interface for loading of externally created XML-like files with predefined file structure.



Use the [Scheduling List](#) to display the UL-DTX burst pattern and transmissions of E-DCH and HS-DPCCH, as well as the impact on the UL-DPCCH transmissions or the configured uplink user scheduling.

Detailed information

For detailed information on the provided functions, like explanation of the UL-DTX principle, description of the user scheduling file format, possible interdependencies, refer to:

- [Chapter 3.3.20, "Uplink Discontinuous transmission \(UL DTX\)"](#), on page 48
- [Chapter 3.3.21, "Uplink User Scheduling"](#), on page 50

For an example on how to use these functions, refer to:

- [Chapter 5.3, "Configuring UL-DTX Transmission and Visualizing the Scheduling"](#), on page 269
- [Chapter 5.4, "Configuring and Visualizing the Uplink User Scheduling"](#), on page 272

UL-DTX... / User Scheduling State

Depending on the selected "Mode", enables/disables:

- Uplink discontinuous transmission (UL-DTX), i.e. uplink DPCCH gating
Enabling the UL-DTX deactivates the DPDCH and the HSUPA FRC.
- Using the user scheduling settings defined in the selected file.
Enabling the uplink scheduling deactivates the HSUPA FRC.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation:UDTX:STATE` on page 520

Mode

Selects the UL-DTX or user scheduling function.

In Baseband C/D, the parameter is fixed to "UL-DTX".

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation:UDTX:MODE` on page 520

User Scheduling File

Accesses the standard "File Select" function for selecting of a file containing user scheduling information. To perform standard file handling functions, e.g. to transfer externally created files to the instrument, use the "File Manager".

Files with user scheduling information use the predefined file extension *.3g_sch and follow a predefined file structure, see ["File Structure"](#) on page 51.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation:UDTX:USCH:CATalog?` on page 523

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation:UDTX:USCH:FSElect` on page 524

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation:UDTX:USCH:DElete` on page 523

Scheduling

This section comprises the common settings for both UL-DTX cycles.

E-DCH TTI ← Scheduling

Sets the duration of a E-DCH TTI.

By enabled UL-DTX, the value configured with this parameter sets the value for the parameter ["E-DCH TTI"](#) in the "UE1 > E-DCH Scheduling" dialog.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation:UDTX:TTIEDch` on page 520

Offset ← Scheduling

Sets the parameter UE_DTX_DRX_Offset and determines the start offset in subframes of the first uplink DPCCH burst (after the preamble). The offset is applied only for bursts belonging to the DPCCH burst pattern; HS-DPCCH or E-DCH transmissions are not affected.

The parameter UE_DTX_DRX_Offset is used to calculate the first subframe in each UL DPCCCH burst pattern.

- For DTX cycle 1:
 $(5 \cdot \text{CFN} - \text{UE\_DTX\_DRX\_Offset} + \text{Subframe\#}) \bmod \text{UE\_DTX\_Cycle\_1} = 0$
- For DTX cycle 2:
 $(5 \cdot \text{CFN} - \text{UE\_DTX\_DRX\_Offset} + \text{Subframe\#}) \bmod \text{UE\_DTX\_Cycle\_2} = 0$

The offset is used to shift the DPCCCH burst pattern of the different UEs so that they have the DPCCCH transmission phase in their DTX cycles at different times.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation:UDTX:OFFSet` on page 521

Inactivity Threshold for Cycle 2 ← Scheduling

Defines the number of consecutive E-DCH TTIs without an E-DCH transmission, after which the UE moves immediately from UE-DTX cycle 1 to using UE-DTX cycle 2 (see [Figure 5-2](#)).

Note: In this implementation, the signal generation starts with UE-DTX cycle 2. To trigger a switching to a UE-DTX cycle 1, activate the channels E-DPCCH/E-DPDCH and configure the "E-DCH Scheduling" parameters.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation:UDTX:ITHReshold` on page 521

Long Preamble Length ← Scheduling

Determines the length in slots of the preamble associated with the UE-DTX cycle 2.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation:UDTX:LPLength` on page 521

Cycle 1 / Cycle 2 Configuration

Comprises the settings for configuring the frequentness of the DPCCCH bursts and the DPCCCH bursts length (without pre- and postamble).

3GPP FDD A: UE1/UL-DTX

General | **Cycle 1 Configuration** | Cycle 2 Configuration

DTX Cycle 1: 5 Subframes

DPCCCH Burst Length 1: 1 Subframes

Preamble Length 1: 2 Slots

Preamble Length 1: 2 Slots

DTX Cycle 1 / DTX Cycle 2 ← Cycle 1 / Cycle 2 Configuration

Sets the offset in subframe between two consecutive DPCCH bursts within the corresponding UE-DTX cycle, i.e. determines how often the DPCCH bursts are transmitted (see [Figure 5-2](#)).

The UE-DTX cycle 2 is an integer multiple of the UE-DTX cycle 1, i.e. has less frequent DPCCH transmission instants.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:MSTation:UDTX:CYCLe<ch>` on page 522

DPCCH Burst Length 1 / DPCCH Burst Length 2 ← Cycle 1 / Cycle 2 Configuration

Determines the uplink DPCCH burst length in subframes without the preamble and postamble, when the corresponding UE-DTX cycle is applied.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:MSTation:UDTX:BURSt<ch>` on page 522

Preamble Length 1 / Preamble Length 2 ← Cycle 1 / Cycle 2 Configuration

Displays the preamble length in slots, when the corresponding UE-DTX cycle is applied.

The preamble length is fixed to two slots.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:MSTation:UDTX:PREamble<ch>?` on page 522

Postamble Length 1 / Postamble Length 2 ← Cycle 1 / Cycle 2 Configuration

Displays the postamble length in slots, when the corresponding UE-DTX cycle is applied.

The postamble length is fixed to one slot.


Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:MSTation:UDTX:POSTamble<ch>?` on page 523

4.26 Dynamic Power Control - UE

Access:

- Select "3GPP FDD > User Equipment > UE > Dynamic Power Control".
(R&S SMW-B10 required; not supported in Baseband C/D)

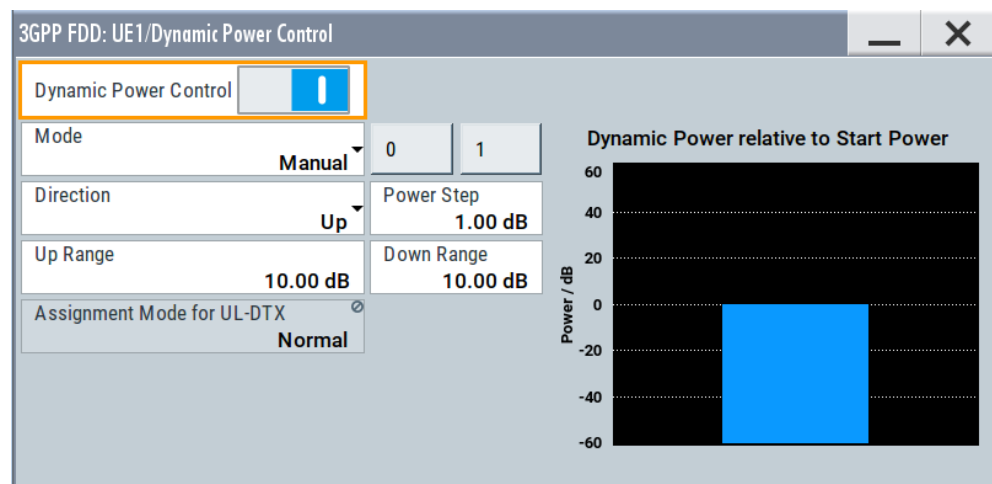

In the "Dynamic Power Control" dialog, the power of the enhanced channels can be changed within the predefined dynamic range. The dynamic range is set as the sum of the parameters "Up Range" and "Down Range". The power is varied with the predefined step size ("Power Step") and with an external, internal or manual control signal.

Dynamic Power Control State

Activates or deactivates the "Dynamic Power Control".

With activated "Dynamic Power Control", the power of the enhanced channels can be increased or decreased within the predefined dynamic range. The dynamic range is set as the sum of the parameters "Up Range" and "Down Range".

The power is varied with the predefined step size ("Power Step") and with an external, internal or manual control signal.

Remote command:

```
[ :SOURce<hw> ] :BB:W3GPp:MSTation[:ENHanced:DPDCh]:DPControl:STAtE
```

on page 527

Mode

Selects the control signal for "Dynamic Power Control".

- "External" An external control signal is used for Dynamic Power Control. Supply the external control signal at the T/M 3 or USER 6 connector, as defined with the parameter "Connector" on page 171.
- "By TPC Pattern" The TPC pattern is used for "Dynamic Power Control". This selection corresponds to selection "(Mis) Use TPC" for not enhanced channels.
- "Manual" The control signal is manually produced by pushing one of the buttons 0 or 1. The channel power is increased or decreased depending on the "Direction" setting by the set power step.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:MSTation [ :ENHanced:DPDCh ] :DPControl:MODE`
on page 526

`[ :SOURce<hw> ] :BB:W3GPp:MSTation [ :ENHanced:DPDCh ] :DPControl:STEP:MANual` on page 527

Connector

Determines the input connector the external control signal is supplied at.

In this firmware version, the "Global" connector is disabled.

See [Chapter 3.4, "Routing and Enabling an External Control Signal"](#), on page 53.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:MSTation [ :ENHanced:DPDCh ] :DPControl:CONNector` on page 526

Direction

Selects the Dynamic Power Control mode.

"Up"	A high level of the control signal leads to an increase of channel power.
"Down"	A high level of the control signal leads to a decrease of channel power.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:MSTation [ :ENHanced:DPDCh ] :DPControl:DIRection` on page 525

Power Step

If "Dynamic Power Control > On", sets the step width by which the channel powers of the enhanced channels in the timeslot grid are changed within the set dynamic range. The dynamic range is set as the sum of "Up Range" and "Down Range".

The start power of the channel is set in the "Channel Power" entry field of the menu.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:MSTation [ :ENHanced:DPDCh ] :DPControl:STEP [ :EXTernal ]` on page 528

Up Range / Down Range

Sets dynamic range by which – with "Dynamic Power Control" switched on – the channel powers of the enhanced channels can be increased. The resulting "Dynamic Power Control" dynamic range ("Up Range" + "Down Range") depends on the selected "Power Step" and is as follow:

- For "Power Step" < 1 dB, the dynamic range ("Up Range" + "Down Range") <= 30 dB
- For "Power Step" => 1 dB, the dynamic range ("Up Range" + "Down Range") <= 60 dB

Remote command:

```
[ :SOURce<hw> ] :BB:W3GPp:MSTation [ :ENHanced:DPDCh ] :DPControl:  
RANGe:UP on page 527
```

```
[ :SOURce<hw> ] :BB:W3GPp:MSTation [ :ENHanced:DPDCh ] :DPControl:  
RANGe:DOWN on page 527
```

Power Control Graph

Indicates the deviation of the channel power (delta POW) from the set power start value of the enhanced channels.

The graph is automatically displayed if "Dynamic Power Control > State > On".

Note: Since a realtime update of the window in the timeslot (= 0.667 ms) is not possible for reasons of speed, an update can be performed in a coarser time interval. Fast channel power changes are not displayed but the settled state of the control loop can be recognized easily.

Remote command:

```
[ :SOURce<hw> ] :BB:W3GPp:MSTation [ :ENHanced:DPDCh ] :DPControl [ :  
POWer ] ? on page 526
```

Assignment Mode for UL-DTX

The parameter is enabled only for activated [UL-DTX... / User Scheduling State](#).

The power control recognizes the UL-DPCCH gaps according to 3GPP TS 25.214. Some of the TPC commands sent to the instrument over the external line or by the TPC pattern are ignored, whereas others are summed up and applied later. The processing of the TPC commands depends only on whether the BS sends the TPC bits on the F-DPCH with slot format 0/ slot format 9 or not. It is not necessary to distinguish between the cases „DL-DPCH“ and „F-DPCH Slot format different than 9 and 0“. In both of these cases, the downlink TPC commands are sent (to a real UE via the air interface) later than in the first 512 chips of the downlink slot. Thus, the treatment of the TPC commands by the UE is identical.

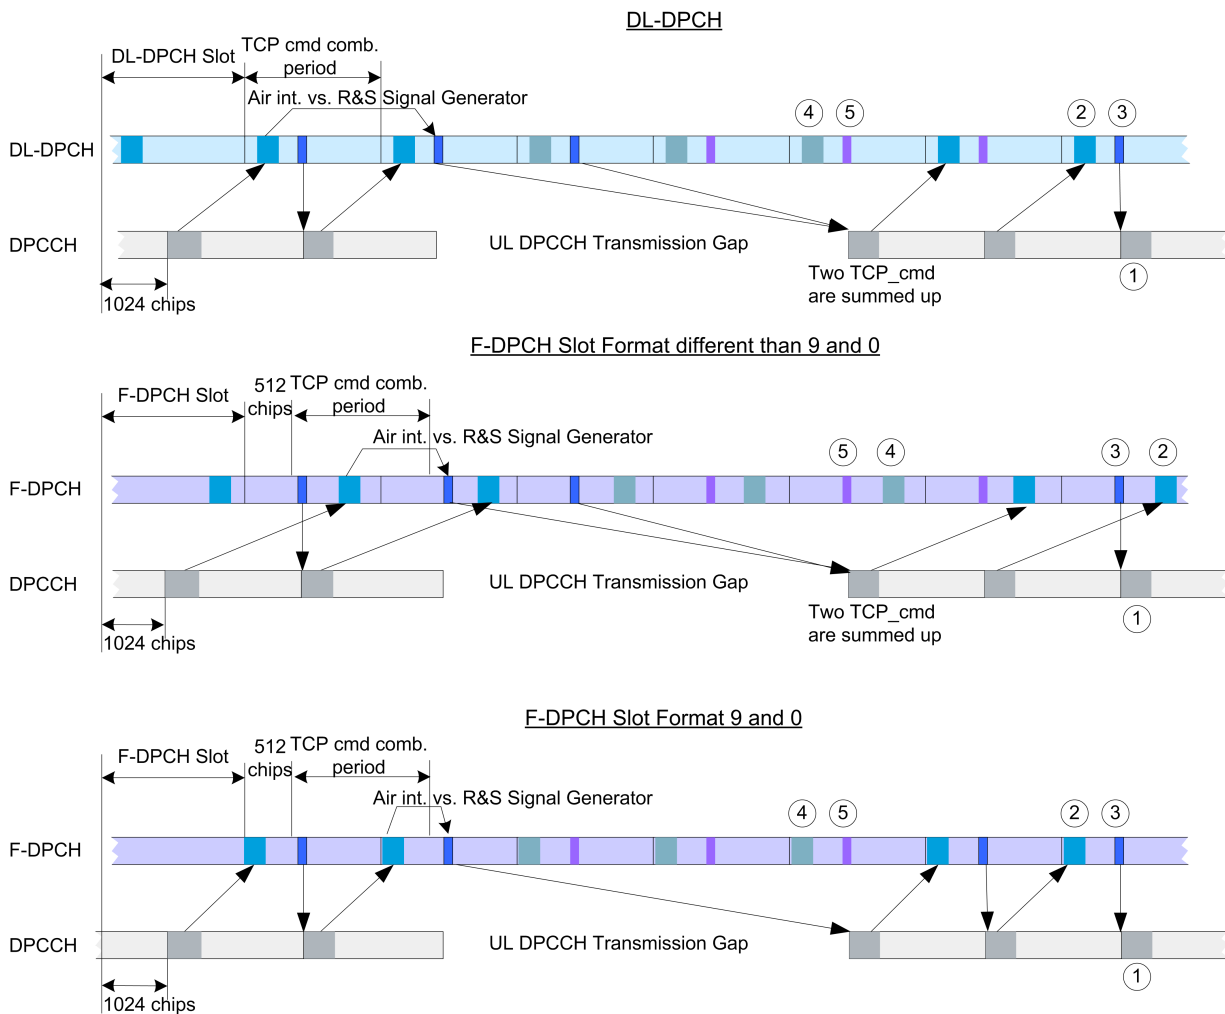


Figure 4-14: Timing diagram - Power Control with UL-DTX

- 1 = Uplink pilot
- 2 = TPC bits via air interface
- 3 = TPC command via binary feedback
- 4 = No need to send TPC bits via air interface; UE ignores any TPC bits
- 5 = No need to send TPC commands via binary feedback line; R&S SMW ignores any TPC commands

The feedback sent to the instrument corresponds to the parameter „TPC_cmd“ defined in the 3GPP standard. It represents the TPC information of the last (already completed) „TPC command combining period“. This is true even if the TPC information of the ongoing „TPC command combining period“ is already known by the BS before the feedback transmission over the binary feedback line.

Note: The provided external binary feedback has to be stable at least between 0.1 ms before and after the UL DPCCH slot boundary.

Remote command:

```
[ :SOURce<hw> ] :BB:W3GPp:MSTation[:ENHanced:DPDCh]:DPControl:
Assignment on page 525
```


- 1 = E-DCH TTI is three slots long, i.e. E-DCH TTI = 2ms
- 2 = DPCCH shows bursts pattern, i.e. UL-DTX is activated
- 3 = HS-DPCCH is active and the scheduled HARQ-ACK and PCI/CQI messages have different patterns
- 4 = E-DPCCH and E-DPDCH are active; both channels have the same E-DCH scheduling
- 5 = ARB Sequence Length = 2 frames

Frame Start

Defines the start frame of the displayed UL scheduling.

Number of Frames

Defines number of frames for that the UL scheduling is displayed.

4.28 DPCCH Settings - UE

The "DPCCH" tab provides the parameters for configuring the dedicated physical control channel.

Access:

1. Select "3GPP FDD > Link Direction > Uplink / Reverse"
2. Select "User Equipment > UE > Mode > DPCCH + DPDCH".
Select "DPCCH".

3GPP FDD A: User Equipment1	
General	Code Domain
DPCCH	DPDCH HS-DPCCH E-DPCCH E-DPDCH E-DCH
Pilot 6 TFCI 2 TPC 2	
Power	0.00 dB
DL-UL Timing Offset	1024 Chips
Slot Format #	0
FBI Mode	Off
TPC Mode	2 Bits
TPC Data Source	Pattern
Channelization Code	Q / 0
TFCI	0
FBI Pattern (bin)	0...
Read Out Mode	Continuous
TPC Pattern (bin)	0...

The dialog displays the channel structure and the available parameters.

In UE1, the DPCCH is generated in real time (enhanced).

About the dedicated physical channels

At the physical level, an uplink DPCH consists of the DPDCH (Dedicated Physical Data Channel) and the DPCCH (Dedicated Physical Control Channel). The channel characteristics are defined by the symbol rate.

The DPDCH transports the user data that is fed directly into the data field. The DPCCH carries the control fields (Pilot field; TPC = Transmit Power Control, FBI (Feedback Information) and TFCI = Transport Format Combination Indicator). DPDCH is grouped with DPCCH I/Q code multiplexing in accordance with 3GPP TS 25.211, see diagram below. The generation of an uplink reference measurement channel is described in [Chapter 4.35, "Global Enhanced Channel Settings - UE1"](#), on page 228.

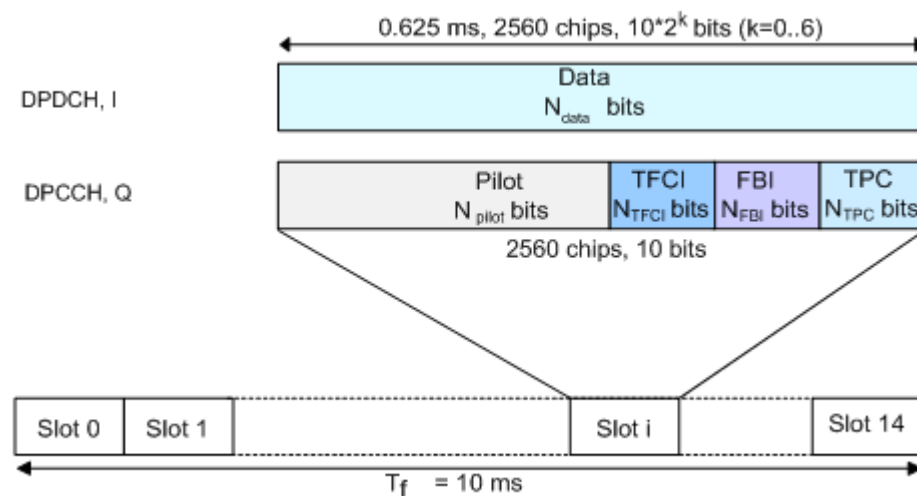


Figure 4-16: Structure of an uplink DPCH in the time domain

Channelization Code

Displays the channelization code and the modulation branch (I or Q) of the DPCCH. The code channel is spread with the set channelization code (spreading code). The standard assigns a fixed channelization code to the DPCCH.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:MSSTation<st>:DPCCh:HS:CCODE?` on page 458

Power

Sets the power of the DPCCH channel.

Test cases defined in the 3GPP standard often use notation "Signaling values for β_c and β_d ". The quantization of the gain parameters is shown in the following table which is taken from 3GPP TS 25.213 (left columns) and supplemented by the instrument-specific values (right column).

Signaling values for β_c and β_d	Quantized amplitude ratios β_c and β_d	Power to be set / dB
15	1.0	0.0
14	14/15	-0.60

Signaling values for β_c and β_d	Quantized amplitude ratios β_c and β_d	Power to be set / dB
13	13/15	-1.24
12	12/15	-1.94
11	11/15	-2.69
10	10/15	-3.52
9	9/15	-4.44
8	8/15	-5.46
7	7/15	-6.62
6	6/15	-7.96
5	5/15	-9.54
4	4/15	-11.48
3	3/15	-13.99
2	2/15	-17.52
1	1/15	-23.52
0	Switch off	Switch channel off or -80 dB

Remote command:

[\[:SOURce<hw>\]:BB:W3GPp:MSTation<st>:DPCCh:POWer](#) on page 451

DL-UL Timing Offset

Sets the timing offset between the downlink and the uplink.

The timing offset determines the time delay in chips between the downlink signal timing and transmission of the uplink signal.

Note: The signals of all UEs have the same uplink slot timing. The parameters "DL-UL Timing Offset" are coupled and by changing this parameter for one of the UEs, the values for the other UEs are automatically adjusted.

"1024 Chips" The uplink signal is generated according to the 3GPP specification. The signal is calculated synchronously to the downlink reference timing, i.e. the first uplink frame starts at chip position 1024 of the simulated signal.

"0 Chips" No timing offset is applied, i.e. there is no timing delay between receipt of the downlink signal and transmission of the uplink signal. See also ["To generate a continuous uplink signal composed of multiple separately generated uplink frames"](#) on page 269.

Remote command:

[\[:SOURce<hw>\]:BB:W3GPp:MSTation<st>:DPCCh:TOFFset](#) on page 453

Slot Format

Selects the slot format.

The slot format defines the structure of the DPCCH slots and the control fields. Depending on the selected slot format, the slot structure is displayed.

Slot formats 0 to 4 are available for the DPCCH channel as defined in the 3GPP Rel. 7 specification TS 25.211.

Note: The former slot formats 4 and 5 according to 3GPP Rel. 4 specification TS 25.211 are not supported.

The slot format selection adjusts the DPCCH slot structure according to the 3GPP specification. However, it is also possible to adjust this structure by configuration of each of the control fields separately.

The table below gives an overview of the cross-reference between the slot format and the structure of the DPCCH slot.

Slot format #	Pilot, bits	NTPC, bits (TPC Mode)	NTFCI, bits (Use TFCI)	NFBI, bits (FBI Mode)
0	6	2	2	0
1	8	2	0	0
2	5	2	2	1
3	7	2	0	1
4	6	4	0	0

"Slot format 0"



"FBI Mode" = Off, i.e. no FBI field

"TFCI Mode" = 2 bits

"Use TFCI" = On, i.e. TFCI field = 2 bits

"Slot format 1"



"FBI Mode" = Off, i.e. no FBI field

"TFCI Mode" = 2 bits

"Use TFCI" = Off, i.e. no TFCI field

"Slot format 2"



"FBI Mode" = 1 bit

"TFCI Mode" = 2 bits

"Use TFCI" = On, i.e. TFCI field = 2 bits

"Slot format 3"



"FBI Mode" = 1 bit

"TFCI Mode" = 2 bits

"Use TFCI" = Off, i.e. no TFCI field

"Slot format 4"



Option: R&S SMW-K83

"FBI Mode" = Off, i.e. no FBI field

"TFCI Mode" = 4 bits

"Use TFCI" = Off, i.e. no TFCI field

Remote command:

[\[:SOURCE<hw>\]:BB:W3GPp:MSTation<st>:DPCCh:SFORmat](#) on page 452

Use TFCI

Activates the TFCI (transport format combination indicator) field.

The status of the TFCI field is determined by the "Slot Format" set. A change leads automatically to an adjustment of the slot format.

Remote command:

[\[:SOURCE<hw>\]:BB:W3GPp:MSTation<st>:DPCCh:TFCI:STATe](#) on page 452

TFCI

Enters the value of the TFCI field (transport format combination indicator) of the DPCCH channel.

Remote command:

[\[:SOURCE<hw>\]:BB:W3GPp:MSTation<st>:DPCCh:TFCI](#) on page 452

FBI Mode

Selects the FBI (feedback information) mode.

The FBI mode is determined by the "Slot Format" set. A change in the FBI mode leads automatically to an adjustment of the slot format.

Note: The former 2-bits long FBI Mode according to 3GPP Rel. 4 specification TS 25.211 is not supported.

"Off" The FBI field is not in use.

"1 Bit" The FBI field with a length of 1 bit is used.

Remote command:

[\[:SOURCE<hw>\]:BB:W3GPp:MSTation<st>:DPCCh:FBI:MODE](#) on page 450

FBI Pattern (bin)

Enters the bit pattern for the FBI field.

The FBI field is filled cyclically with a pattern of up to 32 bits in length.

Remote command:

[\[:SOURCE<hw>\]:BB:W3GPp:MSTation<st>:DPCCh:FBI:PATTern](#) on page 451

TPC Mode

Selects the TPC (Transmit Power Control) mode.

The TPC mode is determined by the "Slot Format" set. A change in the TPC mode leads automatically to an adjustment of the slot format.

"2 Bits" A TPC field with a length of 2 bits is used.

"4 Bits" Option: R&S SMW-K83

A TPC field with a length of 4 bits is used.

A 4 bits long TPC field can be selected, only for Slot Format 4 and disabled FBI and TFCI fields.

Remote command:

[\[:SOURCE<hw>\]:BB:W3GPp:MSTation<st>:DPCCh:TPC:MODE](#) on page 455

TPC Data Source

Defines the data source for the TPC field of the DPCCH channel.

The following standard data sources are available:

- "All 0, All 1"
An internally generated sequence containing 0 data or 1 data.
- "Pattern"
An internally generated sequence according to a bit pattern.
Use the "Pattern" box to define the bit pattern.
- "Data List / Select TPC Data List"
A binary data from a data list, internally or externally generated.
Select "Select TPC Data List" to access the standard "Select List" dialog.
 - Select the "Select Data List > navigate to the list file *.dm_iqd > Select" to select an existing data list.
 - Use the standard "File Manager" function to transfer external data lists to the instrument.
 - Use the "New" and "Edit" functions to create internally new data list or to edit an existing one.

See also:

- Section "Modulation Data" in the R&S SMW user manual.
- Section "File and Data Management" in the R&S SMW user manual.
- Section "Data List Editor" in the R&S SMW user manual.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:MSTation<st>:DPCCh:TPC:DATA` on page 453

`[ :SOURce<hw> ] :BB:W3GPp:MSTation<st>:DPCCh:TPC:DATA:PATtern`
on page 454

`[ :SOURce<hw> ] :BB:W3GPp:MSTation<st>:DPCCh:TPC:DATA:DSElect`
on page 454

TPC Read Out Mode

Defines TPC data usage.

The TPC bits are used to signal the increase or reduction in transmit power to the called station. For all read out modes, 1 bit is taken from the data stream for the TPC field for each slot. The bit is entered into the bitstream several times, depending on the symbol rate. The difference between the modes lies in the usage of the TPC bits.

The different modes can be used to set a specific output power and then let the power oscillate around this value. For example, if the power is the pattern 11111, the power can be varied with "Single + alt. 01" and "Single + alt. 10". Thus, power measurements can be carried out at quasi-constant power.

- "Continuous:"
The TPC bits are used cyclically.
- "Single + All 0"
The TPC bits are used once, and then the TPC sequence is continued with 0 bits.
- "Single + All 1"
The TPC bits are used once, and then the TPC sequence is continued with 1 bit.
- "Single + alt. 01"
The TPC bits are used once and then the TPC sequence is continued with 0 bits and 1 bit alternately. Bits as appended in multiples, depending on the symbol rate, for example, 00001111.

- "Single + alt. 10"

The TPC bits are used once and then the TPC sequence is continued with 1 bit and 0 bits alternately. Bits are appended in multiples, depending on by the symbol rate, for example, 11110000.

Use the parameter "Read Out Mode" together with the option "TPC For Output Power Control (Mis-) Use" to generate various output power profiles.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:DPCCh:TPC:READ` on page 456

Misuse TPC for Output Power Control

(available for UE2, UE3 and UE4 only)

Defines "mis-" use of the TPC data.

The TPC bits are used to signal the increase or reduction in transmit power to the called station.

If "(Mis-) use TPC for output power control" is activated, the specified pattern is used to vary the intrinsic transmit power over time. A bit of this pattern is removed for each slot in order to increase (bit = "1") or reduce (bit = "0") the channel power by the specified power step ("Power Step"). The upper limit is 0 dB and the lower limit -60 dB.

The following envelope is produced with the settings:

- Channel power = 0 dB
- Power step = 1.0 dB
- Pattern = "001110100000011"
- "TPC Read Out Mode = Continuous"

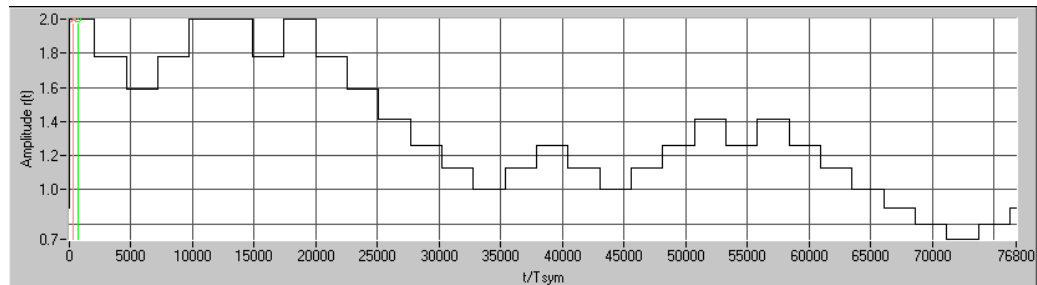


Figure 4-17: Dynamic change of channel power (continuous)

Note: Power control works both on the DPCCH and all the active DPDCHs. The change in power is always carried out (as stipulated in the standard) at the start of the slot pilot field

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:DPCCh:TPC:MISuse` on page 454

TPC Power Step

(available for UE2, UE3 and UE4 only)

Sets the step width of the power change in dB for "(Mis-) use TPC for output power control".

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:DPCCh:TPC:PSTep` on page 455

4.29 DPDCH Settings - UE

Access:

1. Select "3GPP FDD > Link Direction > Uplink / Reverse > User Equipments > UE"
2. Select "DPDCH".

	1	2	3	4	5	6
Channel Type	DPDCH	DPDCH	DPDCH	DPDCH	DPDCH	DPDCH
Symbol Rate / State	60	Off	Off	Off	Off	Off
Channelization Code	1 / 16					
DPDCH Data Source	PN 9					
DPDCH Pattern	0					

The dialog contains the general parameters required for configuring the channel. The channel table allows you to configure the individual parameters.

4.29.1 DPDCH Common Settings

State (DPDCH)

Activates or deactivates all the DPDCH channels.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:MSTation<st>:DPDCh:STATe` on page 478

Channel Power

Sets the channel power in dB.

The power entered is relative to the powers of the other channels and does not initially relate to the "Level" power display. If [Adjust Total Power to 0dB](#) is executed, all the power data is relative to "Level".

Note: The uplink channels are not blanked in this mode (duty cycle 100%).

Test cases defined in the 3GPP standard often use notation "Signaling values for β_c and β_d ". The quantization of the gain parameters is shown in the following table which is taken from 3GPP Spec 25.213 (left columns) and supplemented by the instrument-specific values (right column).

Signaling values for β_c and β_d	Quantized amplitude ratios β_c and β_d	Power to be set / dB
15	1.0	0.0
14	14/15	-0.60
13	13/15	-1.24
12	12/15	-1.94
11	11/15	-2.69
10	10/15	-3.52
9	9/15	-4.44
8	8/15	-5.46
7	7/15	-6.62
6	6/15	-7.96
5	5/15	-9.54
4	4/15	-11.48
3	3/15	-13.99
2	2/15	-17.52
1	1/15	-23.52
0	Switch off	Switch channel off or -80 dB

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:MSTation<st>:DPDCh:POWer` on page 478

Force Channelization Code To I/Q

Sets the channelization code to I/Q.

This mode can only be activated if the "Overall Symbol Rate < 2 x 960 kbps".

It is provided for test purposes. Using an oscilloscope, the data bits of the DPDCH are visible on the I/Q signal for the following settings:

- "Force Channelization Code to I/Q > On"
- "Scrambling Code Mode > Off"
- "DPCCH Channel Power = - 80 dB"

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:MSTation<st>:DPDCh:FCIO` on page 477

Overall Symbol Rate

Sets the overall symbol rate of all the DPDCH channels.

The structure of the DPDCH channel table depends on this parameter. The overall symbol rate determines which DPDCHs are active, which symbol rate they have and which channelization codes they use (see [Table A-2](#)).

DPDCHs that are not active by virtue of the overall rate are also disabled for operation.

Note: Up to an overall rate of 960 ksps, only DPDCH 1 is active, its symbol rate is the same as the overall symbol rate and the channelization code is the same as spreading factor/4 (spreading factor = chip rate / symbol rate).

With an overall symbol rate greater than 960 ksps, all the active DPDCH channels have the symbol rate 960 ksps.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:MSTation<st>:DPDCh:ORATe` on page 478

Global Enhanced Channels

Accesses the dialog for configuring all the enhanced channel settings of user equipment UE1, see [Chapter 4.35, "Global Enhanced Channel Settings - UE1"](#), on page 228.

Remote command:

n.a.

4.29.2 Channel Table

The channel table allows you to configure the individual parameters for the DPDCH channels. The structure of the currently selected channel is displayed graphically in the table header.

The number of active channels depends on the selected overall symbol rate. You can select the data sources for the individual channels. The remaining parameters are only displayed and their values depend also on the overall symbol rate. See also [Table A-2](#).

Channel Number

Displays the channel number.

Remote command:

n.a.

(the channel is selected by the suffix at keyword `CHANnel<n>`)

Channel Type

Displays the channel type.

Remote command:

n.a.

Symbol Rate / State

Displays the symbol rate and the state of the DCDCH channel.

The symbol rate and the state of channel 2 to 6 are dependent on the overall symbol rate set and cannot be modified.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:MSTation<st>:CHANnel<ch>:DPDCh:SRATe?`
on page 477

Channelization Code

Displays the channelization code and the modulation branch (I or Q) of the DPDCH channel.

The channelization code is dependent on the overall symbol rate set and cannot be modified.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:CHANnel<ch>:DPDCh:CCODE?`

on page 475

DPDCH Data Source

For UE2, UE3 and UE4 and UE1 without channel coding, selects the data source for the DPDCH channel.

When channel coding is active, the data source for the DTCH1 component in the transport layer is selected here. In this situation, the display reads "DTCH data Source" and the "DCCH Data" entry field is enabled for selecting the data source of the DCCH channel. The data sources of the other DTCH channels can be set in the "Global Enhanced Channel Settings > Transport Channel" dialog, see [Chapter 4.35, "Global Enhanced Channel Settings - UE1"](#), on page 228.

The following standard data sources are available:

- "All 0, All 1"
An internally generated sequence containing 0 data or 1 data.
- "PNxx"
An internally generated pseudo-random noise sequence.
- "Pattern"
An internally generated sequence according to a bit pattern.
Use the "Pattern" box to define the bit pattern.
- "Data List/Select DList"
A binary data from a data list, internally or externally generated.
Select "Select DList" to access the standard "Select List" dialog.
 - Select the "Select Data List > navigate to the list file *.dm_iqd > Select" to select an existing data list.
 - Use the "New" and "Edit" functions to create internally new data list or to edit an existing one.
 - Use the standard "File Manager" function to transfer external data lists to the instrument.

See also:

- Section "Modulation Data" in the R&S SMW user manual.
- Section "File and Data Management" in the R&S SMW user manual.
- Section "Data List Editor" in the R&S SMW user manual

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:CHANnel<ch>:DPDCh:DATA`

on page 475

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:CHANnel<ch>:DPDCh:DATA:`

`PATtern` on page 476

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>[ :HSUPa ] :CHANnel<ch>:DPDCh:E:DATA:DSElect` on page 501

DCCH Data Source

For UE1 for enhanced channels with active channel coding, selects the data source for the DCCH component.

The following standard data sources are available:

- "All 0, All 1"
An internally generated sequence containing 0 data or 1 data.
- "PNxx"
An internally generated pseudo-random noise sequence.
- "Pattern"
An internally generated sequence according to a bit pattern.
Use the "Pattern" box to define the bit pattern.
- "Data List/Select DList"
A binary data from a data list, internally or externally generated.
Select "Select DList" to access the standard "Select List" dialog.
 - Select the "Select Data List > navigate to the list file *.dm_iqd > Select" to select an existing data list.
 - Use the "New" and "Edit" functions to create internally new data list or to edit an existing one.
 - Use the standard "File Manager" function to transfer external data lists to the instrument.

See also:

- Section "Modulation Data" in the R&S SMW user manual.
- Section "File and Data Management" in the R&S SMW user manual.
- Section "Data List Editor" in the R&S SMW user manual

4.30 HS-DPCCH Settings - UE

Access:

1. Select "3GPP FDD > Link Direction > Uplink / Reverse > User Equipments > UE".
2. Select "HS-DPCCH".

3GPP FDD: User Equipment 1							
General	Code Domain	DPCCH	DPDCH	HS-DPCCH	E-DPCCH	E-DPDCH	E-DCH
HARQ-ACK (Slots) 1		PCI / CQI (Slots) 2					
State		Power 0.00 dB					
Compatibility Mode Release 8 and Later							
Start Delay 101 * 256 Chips		MIMO Mode ☒					
Inter TTI Distance (Interval) 5 Subframes		Secondary Cell Enabled 1					
Channelization Code Q / 64		Secondary Cell Active 0					
Slot Format 0 (15ksps)							

3GPP FDD: User Equipment1

General Code Domain DPCCH DPDCH **HS-DPCCH** E-DPCCH E-DPDCH E-DCH

HARQ - ACK

Number of Rows: 2 HARQ-ACK Repeat After: 4 Intervals

	HARQ-ACK From Interval	HARQ-ACK To Interval	HS-DPCCH 1 HARQ-ACK 1	HS-DPCCH 1 HARQ-ACK 2	HS-DPCCH 2 HARQ-ACK 3	HS-DPCCH 2 HARQ-ACK 4	Pow Offs /dB
0	0	1	AA/D				0.0
1	3	3	NN/NN				0.0

PCI / CQI

Number of Rows: 2 PCI/CQI Repeat After: 4 Intervals

	PCI/CQI From	PCI/CQI To	HS-DPCCH PCI/CQI1 Type	PCI/CQI Content	HS-DPCCH PCI/CQI2 Type	PCI/CQI Content	HS-DPCCH PCI/CQI3 Type	PCI/CQI Content	HS-DPCCH PCI/CQI4 Type	PCI/CQI Content	Pow Offs /dB
0	0	0	DTX								
1	1	1	DTX								

The dialog contains the general parameters required for configuring the channel, and displays the channel structure.



Realtime signal generation


To enable realtime signal generation for UE1:

- Select "3GPP FDD > User Equipment > UE1> HS-DPCCH"
- Select "Compatibility Mode > Up to Release 7"
Or "Compatibility Mode > Release 8 and Later RT"

4.30.1 About HS-DPCCH

HS-DPCCH Structure

The HS-DPCCH carries uplink feedback signaling related to the accuracy and quality of downlink HS-DSCH transmission. Hybrid-ARQ Acknowledgment (HARQ-ACK) is transmitted in the first subframe slot. Channel quality Indication (CQI) and if UE configured in MIMO mode, also precoding control indication (PCI) are transmitted in the second and third subframe slot. Only one HS-DPCCH can be transmitted on each radio link. The HS-DPCCH can only exist together with an uplink DPCCH.

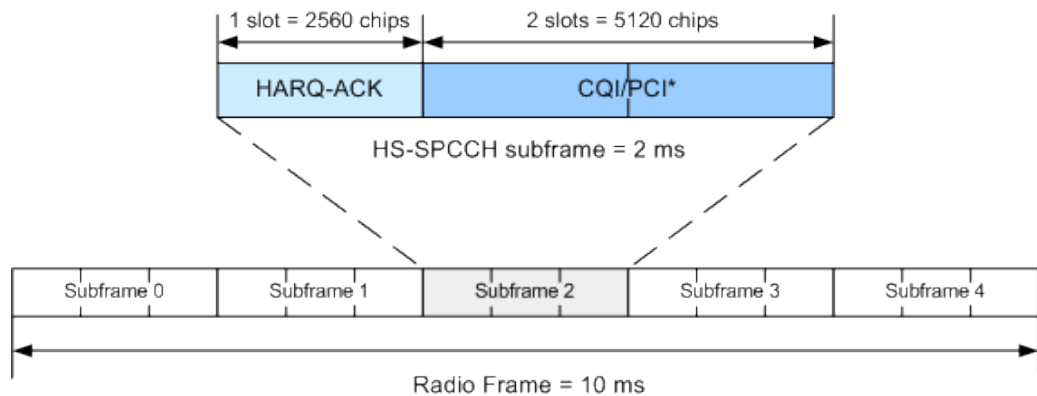

*) PCI for UE configured in MIMO mode only

Figure 4-18: Structure of an uplink HS-DPCCH in the time domain

The HS-DPCCH subframe starts $256 \times m$ chips after the start of an uplink DPCCH slot. The value m is selected such that the subframe transmission starts within the first 0 to 255 chips after 7.5 slots following the end of the received HS-PDSCH subframe.

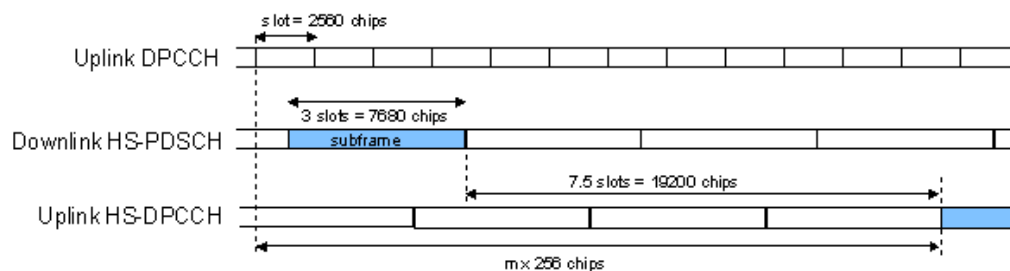


Figure 4-19: Timing offset between the uplink DPCCH, the HS-PDSCH and the HS-DPCCH at the UE

HS-DPCCH Power

According to 3GPP TS 25.214, the uplink HS-DPCCH power is estimated for each HS-DPCCH slot.

In this implementation, the channel power can be set individually for each case of feedback signaling and UE mode. The channel power is set as a combination of the CQI Power (parameter "Power") and the corresponding "Power Offset" (see [Table 4-8](#) and [Table 4-9](#)). Since the feedback signaling can be configured per slot of TTI that carries HS-DPCCH, the channel power is also calculated on a slot basis.

Table 4-8: Calculating of the HARQ-ACK power

Mode	HARQ-ACK	Offset parameter	Resulting power
Compatibility Mode = Up to Release 7			
Normal	ACK/NACK pattern	Power Offset ACK	Power + Power Offset ACK
		Power Offset NACK	Power + Power Offset NACK
	Single ACK	Power Offset ACK	Power + Power Offset ACK

Mode	HARQ-ACK	Offset parameter	Resulting power
	Single NACK	Power Offset NACK	Power + Power Offset NACK
MIMO	TB1: ACK, TB2: ACK	Power Offset ACK/ACK	Power + Power Offset ACK/ACK
	TB1: ACK, TB2: NACK	Power Offset ACK/NACK	Power + Power Offset ACK/NACK
	TB1: NACK, TB2: ACK	Power Offset NACK/ACK	Power + Power Offset NACK/ACK
	TB1: NACK, TB2: NACK	Power Offset NACK/NACK	Power + Power Offset NACK/ NACK
Compatibility Mode = Release 8 and later (RT)			
all	HARQ-ACK	Power Offset HARQ-ACK	Power + Power Offset HARQ-ACK

Table 4-9: Calculating the PCI/CQI power

Mode	CQI	Type	CQI parameter	Offset parameter	Resulting power
Compatibility. Up to Release 7 Mode=					
Normal	-		CQI	-	Power
MIMO	CQI Type A	Single TB	CQIs	Power Offset CQI Type A	Power + Power Offset CQI Type A
		Double TB	CQI1 and CQI2		
Compatibility. Rel. 8 and later (RT) Mode=					
Normal	CQI		CQI	Power Offset PCI/CQI	Power + Power Offset PCI/CQI
DC-HSDPA non-MIMO	Comp. CQI		CQI1 and CQI2		
MIMO	CQI Type A	Single TB	CQIs		
		Double TB	CQI1 and CQI2		

4.30.2 HS-DPCCH Common Settings

The displayed channel structure depends on whether the UE is working in MIMO mode or not.

State (HS-DPCCH)

Activates or deactivates the HS-DPCCH channel.

Remote command:

[:SOURce<hw>] :BB:W3GPp:MSTation<st>:DPCCh:HS:STAtE on page 457

Power (HS-DPCCH)

Sets the power in dB.

- In a "Compatibility Mode > Release 8 and Later" mode, this parameter represents the **reference power** used to calculate:
 - The power used during the HARQ-ACK slot
 - The power used during the PCI/CQI slots
- In a "Compatibility Mode > Up to Release 7" mode, this parameter represents the **CQI power of a UE** that:
 - Is configured in a normal mode
 - Is configured in MIMO mode and sending CQI Type B report.

The CQI Power is the reference power used to calculate:

- The power used during the HARQ-ACK slot
- The power used during the PCI/CQI slots of a UE configured in MIMO mode and sending CQI Type A reports.

The power entered is relative to the powers of the other channels and does not initially relate to the "Level" power display. If [Adjust Total Power to 0dB](#) is executed, all the power data is relative to the "Level" display.

Remote command:

[\[:SOURce<hw>\]:BB:W3GPp:MSTation<st>:DPCCh:HS:POWer](#) on page 457

Compatibility Mode (HS-DPCCH)

Switches between the following modes:

"Up to Release 7"

Switches to the display of the HS-DPCCH settings provided for backwards compatibility.

"Release 8 and Later"

The concept of the graphical user interface for the configuration of HS-DPCCH has been adapted to support simultaneous DC-HSDPA and MIMO operation, as required in 3GPP Release 9 onwards.

This mode is disabled, if [Dynamic Power Control State](#) is On.

"Release 8 and Later RT"

(R&S SMW-B10 required; not supported in Baseband C/D)


Enables generation of the HS-DPCCH in real-time even for Release 8/9 content. Real-time signals are useful for complex HS-DPCCH scheduling and are required while using dynamic power control with the HS-DPCCH.

Remote command:

[\[:SOURce<hw>\]:BB:W3GPp:MSTation<st>:DPCCh:HS:COMPatibility](#) on page 457

Start Delay

Sets the delay between the uplink HS-DPCCH and the frame of uplink DPCH.

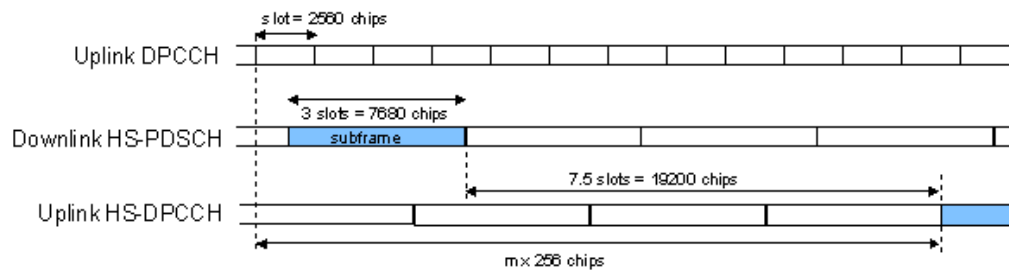

Thus, the channel can be synchronized with the associated downlink HS-PDSCH.

The delay is entered as a multiple m of 256 chips according to TS 25.211 7.7:

$$m = (T_{TX\_diff} / 256) + 101$$

Where T_{TX_diff} is the difference in chips ($T_{TX\_diff} = 0, 256, \dots, 38144$).

The value range of m is 0 to 250 (2 frames + 1024 chips)

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:DPCCh:HS:SDElay` on page 458

Inter TTI Distance (Interval)

Selects the distance between two HSDPA packets. The distance is set in number of subframes (3 slots = 2 ms). An "Inter TTI Distance" of 1 means continuous generation.

Regarding the HS-DPCCH uplink transmission, this parameter determines where HS-DPCCH transmissions are possible in principle.

To have actual HS-DPCCH transmissions, HARQ-ACK and/or PCI/CQI transmissions have to be scheduled as described in:

- [4.30.3](#)
- [4.30.4](#)
- [4.30.5](#)

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:DPCCh:HS:TTIDistance`
on page 458

Channelization Code (HS-DPCCH)

Displays the channelization code and the modulation branch (I or Q) of the HS-DPCCH.

The code channel is spread with the set channelization code (spreading code). The channelization code of the high-speed channel depends on the number of activated DPDCHs, i.e. on the overall symbol rate.

For "Secondary Cell Enabled ≥ 4 ", two HS-DPCCHs, i.e. two channelization codes are used.

Example:

Enable the following settings:

- "DPDCH State = On"
- "DPDCH Overall Symbol Rate = 60 ksps"
- "HS-DPCCH State = On"
- "Secondary Cell Enabled = 0"

The used channelization code is "HS-DPCCH > Channelization Code = $Q / 64$ ".

Open the "User Equipment > Code Domain" dialog
(see Figure 4-20).

- Enable "Secondary Cell Enabled = 4"



Figure 4-20: Impact of "Secondary Cell Enabled ≥ 4 " on the used channelization code

- 1 = The display confirms, that the DPDCH uses a 60 ksps symbol rate and a channelization code on the I channel. The HS-DPCCH is displayed with a symbol rate of 15 ksps (i.e "Slot Format 0") on the Q channel.
- 2 = The "Code Domain" dialog displays the two HS-DPCCHs, one on each of the I and Q channels. The used symbol rate is 30 ksps, i.e the "Slot Format 1" is used.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:MSTation<st>:DPCCh:HS:CCode?` on page 458

Slot Format

Displays the used slot format.

The specified slot format for "Secondary Cell Enabled < 2" is "Slot Format 0 (15 ksps)". With more than 2 secondary cells or with 2 secondary cells and "MIMO Mode = On", the "Slot Format 1 (30 ksps)" is required, i.e. slot format with higher symbol rate.

See also [Figure 4-20](#).

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:MSTation<st>:DPCCh:HS:SFormat?` on page 468

4.30.3 HS-DPCCH Scheduling Table (Release 8 and Later/RT)



These settings are available for "Compatibility Mode > Release 8 and Later/Release 8 and Later RT".

Option: R&S SMW-K83 for MIMO settings and DC-HSDPA/4C-HSDPA/8C-HSDPA.

With the provided settings, you can adjust the HS-DPCCH signal of a UE configured for one of the following operations: normal operation, DC-HSDPA or 4C/8C-HSDPA operation, MIMO mode or for a simultaneous secondary cell + MIMO operation.

The HS-DPCCH structure can be configured with the parameters "Inter TTI Distance", "Number of Table Rows", "From/To" and "Repeat After". The HARQ-ACK and CQI/PCI information can be configured with the parameters of the HS-DPCCH scheduling tables. The scheduling for the HARQ-ACK and PCI/CQI reports can be performed independently; different repetition cycles can be specified.

Example: HS-DPCCH scheduling

The following is a simple example intended to explain the principle. Configured is an HS-DPCCH scheduling in "MIMO Mode = Off" and with "Secondary Cell Enabled = 0".

Parameter	Value
Start Delay	101 * 256 Chips
Compatibility Mode (HS-DPCCH)	Release 8 and later (RT)
Inter TTI Distance (Interval)	5 Subframes
HARQ-ACK scheduling	
Number of Rows	2
HARQ-ACK Repeat After	4 intervals
Row#0	
HARQ-ACK From Interval/ HARQ-ACK To Interval	from HARQ-ACK interval 0 to 1
HS-DPCCH 1/2, HARQ-ACK 1/2/3/4	A
Row#1	
HARQ-ACK From Interval/ HARQ-ACK To Interval	from HARQ-ACK interval 3 to 3
HS-DPCCH 1/2, HARQ-ACK 1/2/3/4	N
PCI/CQI scheduling	

Parameter	Value
Number of Rows	2
PCI/CQI Repeat After	3 intervals
Row#0	
PCI-CQI From Interval/ PCI-CQI To Interval	from PCI/CQI interval 0 to 0
HS-DPCCH 1/2, PCI/CQI 1/2/3/4 Type	DTX
Row#1	
PCI-CQI From Interval/ PCI-CQI To Interval	from PCI/CQI interval 1 to 1
HS-DPCCH 1/2, PCI/CQI 1/2/3/4 Type	CQI
CQI/CQI ₅ /CQI ₁ /CQI ₂	5



Use the [Scheduling List](#) to display the configured scheduling.

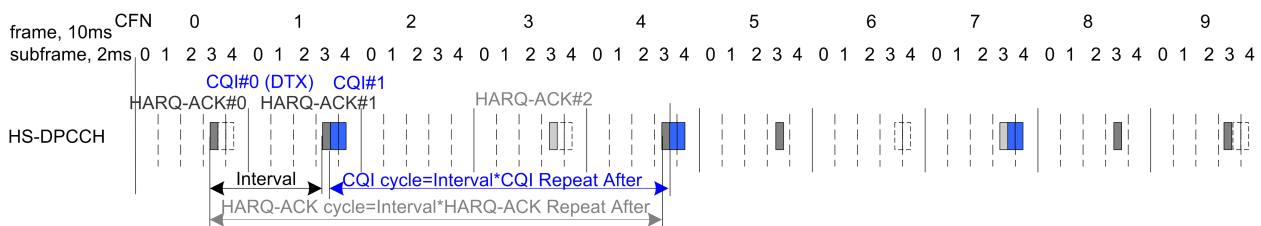


Figure 4-21: Example of HS-DPCCH Scheduling

"Inter TTI Distance (Interval)" = Five subframes

"HARQ-ACK Cycle" = "Inter TTI Distance (Interval)" * "HARQ-ACK Repeat After" = 5 * 4 = 20 Intervals

"CQI Cycle" = "Inter TTI Distance (Interval)" * "CQI Repeat After" = 5 * 3 = 15 Intervals

MIMO Mode

Enables/disables working in MIMO mode for the selected UE.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:DPCCh:HS:MMODE` on page 468

Secondary Cell Enabled

Enables the selected number of secondary cells for the selected UE. Secondary cells are used for working in DC-/4C/8C-HSDPA mode.

See also [Chapter 3.3.16, "Dual Cell HSDPA \(DC-HSDPA\)"](#), on page 43, [Chapter 3.3.17, "HS-DPCCH Extension for 4C-HSDPA and 8C-HSDPA"](#), on page 47 and [Chapter 5.5, "How to Configure the HS-DPCCH Settings for 4C-HSDPA Tests"](#), on page 274.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:DPCCh:HS:SC:ENABLEd` on page 469

Secondary Cell Active

Sets the number of active secondary cells for the selected UE.

See also [Chapter 3.3.16, "Dual Cell HSDPA \(DC-HSDPA\)"](#), on page 43, [Chapter 3.3.17, "HS-DPCCH Extension for 4C-HSDPA and 8C-HSDPA"](#), on page 47 and [Chapter 5.5, "How to Configure the HS-DPCCH Settings for 4C-HSDPA Tests"](#), on page 274.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:DPCCh:HS:SC:ACTive` on page 469

HARQ-ACK

Comprises the parameters provided for the independent configuration of the HARQ-ACK scheduling.

Number of Rows ← HARQ-ACK

Determines the number of the rows in the HARQ-ACK scheduling table.

Each row represents one TTI interval, as configured with the parameter [Inter TTI Distance \(Interval\)](#). The parameters set in the table are read out cyclically.

See also [Figure 4-21](#).

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:DPCCh:HS:HACK:ROWS` on page 469

HARQ-ACK Repeat After ← HARQ-ACK

Defines the cycle length after that the information in the HS-DPCCH scheduling table is read out again from the beginning.

The parameter together with the parameter [Inter TTI Distance \(Interval\)](#) defines the repetition cycle of the HARQ-ACK pattern:

HARQ-ACK cycle = [Inter TTI Distance \(Interval\)](#) * "HARQ-ACK Repeat After"

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:DPCCh:HS:HACK:REPeat`
on page 474

HARQ-ACK From Interval/ HARQ-ACK To Interval ← HARQ-ACK

Defines the beginning/end of the HARQ-ACK transmissions inside the HARQ-ACK cycle (specified by [HARQ-ACK Repeat After](#)). The range is specified in multiples of intervals, determined by [Inter TTI Distance \(Interval\)](#).

See also [Figure 4-21](#).

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:DPCCh:HS:ROW<ch0>:HACK:FROM`
on page 470

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:DPCCh:HS:ROW<ch0>:HACK:TO`
on page 470

HS-DPCCH 1/2, HARQ-ACK 1/2/3/4 ← HARQ-ACK

Per HS-DPCCHs, sets the information transmitted during the HARQ-ACK slots of the TTIs during the corresponding specified "HARQ-ACK From/To" range.

Two HS-DPCCHs are transmitted, if "Secondary Cell Enabled > 3".

The number of enabled HARQ-ACKs depends on the combination of enabled and active secondary cells. In this implementation, the activated cells are mapped from left to right.

The processing of HS-DPCCH is defined for four different main cases (see [Table 4-10](#)).

Table 4-10: HS-DPCCH processing

Mode	"MIMO Mode"	"Secondary Cell Enabled"	"Secondary Cell Active"	Comment
Normal operation	Off	0	0	-
MIMO only	On	0	0	see Chapter 3.3.15.5, "MIMO uplink control channel Support" , on page 41
DC-HSDPA only 4C/8C-HSDPA only	Off	1 2 to 7	0, 1 2 to 7	see Chapter 3.3.16.1, "DC-HSDPA Data Acknowledgement (non-MIMO mode)" , on page 44 see Chapter 3.3.17, "HS-DPCCH Extension for 4C-HSDPA and 8C-HSDPA" , on page 47
DC-HSDPA +MIMO 4C/8C-HSDPA +MIMO	On	1 2 to 7	1 2 to 7	see Chapter 3.3.16.2, "DC-HSDPA + MIMO" , on page 46 see Chapter 3.3.17, "HS-DPCCH Extension for 4C-HSDPA and 8C-HSDPA" , on page 47

Meaning of the used abbreviations:

- **A** indicates an ACK response; **N** - an NACK
- **D** means no transmission (DTX), i.e. no transport block was sent on the corresponding HS-DSCH downlink transmission.
- Single letter, e.g. an **A** indicates a response to a single scheduled transport block (TB)
- A letter's couple, e.g. an **AA** indicates two MIMO streams, i.e. the response on two TBs
- **/** is a separation mark between the response to the serving and secondary cells, where the feedback related to the serving HS-DSCH cell is the one before the divider sign.

Example: Understanding the syntax

For better representation of the principle, the sending of ACK only messages is assumed.

HARQ-ACK value	Description
A/A/A	"MIMO Mode = Off" (single letters only) Three active cells, one serving and two secondary serving cells; one single TB transmission per cell
AA/A	"MIMO Mode = On" Two active cells, one serving with two MIMO streams and one secondary serving cell with single TB transmission
AA/AA	"MIMO Mode = On" Two active cells, each transmitting two MIMO streams

HARQ-ACK value	Description
AA/AA, AA/D	"MIMO Mode = On" Three active cells, each transmitting two MIMO streams
AA/AA, AA/AA	"MIMO Mode = On" Four active cells, each transmitting two MIMO streams

"DTX" No HARQ-ACK feedback information is sent.

"A, N" Selects an ACK or NACK response to a single scheduled transport block.

"AA, AN, NA, NN" ("MIMO Mode > On", "Secondary Cell Enabled/Active = 0")
Selects the response to two scheduled transport blocks, i.e. feedback on the primary and secondary stream in a dual stream transmission.

"A/D, N/A, ... (different combinations possible)" ("MIMO Mode > Off", "Secondary Cell Enabled < 2")
Selects the response to a single scheduled transport block on each of the serving and secondary serving HS-DSCH cells.

"A/D/D, N/D/D, ... (different combinations possible)" ("MIMO Mode > Off", "Secondary Cell Enabled = 2")
Selects the response to a single scheduled transport block on each of the serving and the two secondary serving HS-DSCH cells.

"AN/NN, D/AA, ... (different combinations possible)" ("MIMO Mode > On", "Secondary Cell Active = On")
Selects the response to two scheduled transport blocks on each of the serving and secondary serving HS-DSCH cells.

"PRE, POST" PRE or POST is sent in the HARQ-ACK slots of the corresponding TTI.

Remote command:

[:SOURCE<hw>] :BB:W3GPp:MSTation<st>:DPCCh:HS:ROW<ch0>:HACK<di>
on page 470

Power Offset HARQ-ACK ← HARQ-ACK

Sets the power offset of an HARQ-ACK response relative to the "Power".

The power used during all HARQ-ACK slots during the corresponding specified "HARQ-ACK From/To" range is calculated as:

$$P_{\text{HARQ-ACK}} = \text{Power} + P_{\text{off\_HARQ-ACK}}$$

The value range is -10 dB to 10 dB.

The parameter is enabled for HARQ-ACK different than DTX.

While generating the HS-DPCCH signal in real time, the HARQ-ACK power offsets of all configured HARQ-ACK responses are set to the same value.

Remote command:

[:SOURCE<hw>] :BB:W3GPp:MSTation<st>:DPCCh:HS:ROW<ch0>:POHACK
on page 471

PCI / CQI

Comprises the parameters provided for the independent configuration of the PCI/CQI reports scheduling.

Number of Rows ← PCI / CQI

This parameter determines the number of the rows in the PCI / CQI scheduling table. Each row represents one TTI interval, as configured with the parameter [Inter TTI Distance \(Interval\)](#). The parameters set in the table are read out cyclically.

See also [Figure 4-21](#).

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:DPCCh:HS:PCQI:ROWS` on page 469

PCI/CQI Repeat After ← PCI / CQI

Defines the cycle length after that the information in the HS-DPCCH scheduling table is read out again from the beginning.

The parameter together with the parameter [Inter TTI Distance \(Interval\)](#) defines the repetition cycle of the PCI/CQI pattern:

PCI/CQI cycle = [Inter TTI Distance \(Interval\)](#) * "PCI/CQI Repeat After"

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:DPCCh:HS:PCQI:REPEAT`
on page 474

PCI-CQI From Interval/ PCI-CQI To Interval ← PCI / CQI

Defines the beginning/ end of the PCI/CQI transmissions inside the PCI/CQI cycle (specified by [PCI/CQI Repeat After](#)). The range is specified in multiples of intervals, defined by [Inter TTI Distance \(Interval\)](#).

See also [Figure 4-21](#).

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:DPCCh:HS:ROW<ch0>:PCQI:FROM`
on page 472
`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:DPCCh:HS:ROW<ch0>:PCQI:TO`
on page 472

HS-DPCCH 1/2, PCI/CQI 1/2/3/4 Type ← PCI / CQI

Per HS-DPCCH, selects the type of the PCI/CQI report (see [CQI Reports: Type A and Type B](#) and [CQI Reports: CQI1 and CQI2](#)).

Two HS-DPCCHs are required, if "Secondary Cell Enabled > 3".

The number of enabled PCI/CQIs depends on the number of required HS-DPCCHs and the "Slot Format". In this implementation, the activated cells are mapped from left to right.

The available values depend on the state of the parameters "MIMO Mode", "Secondary Cell Enabled" and "Secondary Cell Active".

"DTX" No PCI/CQI feedback information is sent.

"CQI" Selects CQI report for the normal operation.

"Type A Single TB"

(MIMO Mode On)

Selects CQI Type A report with information that one transport block is preferred.

"Type A Double TB"

(MIMO Mode On)

Selects CQI Type A report with information that two transport blocks are preferred.

"Type B"

(MIMO Mode On)

Selects CQI Type B report.

"Composite CQI"

(MIMO Mode Off, "Secondary Cell Enabled = Secondary Cell Active ≤ 2")

Selects a composite CQI, constructed from the two individual reports CQI1 and CQI2 of the serving and secondary serving HS-DSCH cell.

Remote command:

```
[ :SOURce<hw> ] :BB:W3GPp:MSTation<st>:DPCCh:HS:ROW<ch0>:PCQI<di>:
TYPE on page 472
```

Power Offset PCI/CQI ← PCI / CQISets the power offset $P_{\text{off\_PCI/CQI}}$ of all PCI/CQI slots during the corresponding specified PCI/CQI From/To range relative to the [Power](#).The power $P_{\text{PCI/CQI}}$ used during the PCI/CQI slots is calculated as:

$$P_{\text{PCI/CQI}} = \text{Power} + P_{\text{off\_PCI/CQI}}$$

The value range is -10 dB to 10 dB.

While generating the HS-DPCCH signal in real time, the PCI/CQI power offsets of all configured PCI/CQI slots are set to the same value.

Remote command:

```
[ :SOURce<hw> ] :BB:W3GPp:MSTation<st>:DPCCh:HS:ROW<ch0>:POPCqi
on page 473
```

PCI/CQI 1/2/3/4 Content ← PCI / CQI

Accesses a dialog for configuring the PCI and CQI report. The provided settings depend on the selected "PCI/CQI Type".

CQI/CQI_s/CQI₁/CQI₂ ← PCI/CQI 1/2/3/4 Content ← PCI / CQI

Sets the CQI report transmitted during the PCI/CQI slots of the TTIs during the corresponding specified PCI/CQI From/To range (see [Chapter 3.3.15.6, "CQI Reports: Type A and Type B"](#), on page 42 and ["CQI Reports: CQI1 and CQI2"](#) on page 46).

- "CQI" Sets the CQI value for CQI Type B report and the CQI in normal operation.
- "CQI_s" Sets the CQI value in case a CQI Type A report when one transport block is preferred.
- "CQI₁" Sets the CQI₁ value of CQI Type A report when two transport blocks are preferred or the CQI₁ value of a composite CQI report of a dual cell only operation.
- "CQI₂" Sets the CQI₂ value of CQI Type A report when two transport blocks are preferred or the CQI₂ value of a composite CQI report of a dual cell only operation.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:DPCCh:HS:ROW<ch0>:PCQI<di>:CQI<us>` on page 473

PCI ← PCI/CQI 1/2/3/4 Content ← PCI / CQI

Selects the PCI value transmitted during the PCI/CQI slots of the TTIs during the corresponding specified PCI/CQI From/To range (see [PCI Reports](#)).

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:DPCCh:HS:ROW<ch0>:PCQI<di>:PCI` on page 473

Suggested / Current ARB Seq. Length (HS-DPCCH)

Displays the suggested and current ARB sequence length, in case the signal is not generated in real time.

The "Suggested ARB Sequence Length" is the calculated minimum length that depends on the [Inter TTI Distance \(Interval\)](#), the [Number of Rows/Number of Rows](#), the [HARQ-ACK Repeat After](#) and the [PCI/CQI Repeat After](#). The current ARB sequence length is adjusted by pressing the button "Adjust ARB Sequence Length".

Example: Effect of the ARB sequence length

- Preset the instruments and adjust the settings as described in [Example "HS-DPCCH scheduling"](#) on page 193.
Use the [Scheduling List](#) to show the HS-DPCCH scheduling (see also [Figure 4-21](#)).
- Change the [Compatibility Mode \(HS-DPCCH\)](#) to "Release 8 and Later" and compare the displayed HS-DPCCH scheduling in the "Scheduling List".

Real-time signal generation

3GPP FDD A: UE1/Scheduling List

Frame Start: 0 Number Of Frames: 10

!: The channel is inactive in the slot.
 X: The channel is active in the slot.
 -: The channel is inactive in the symbol.
 H: HARQ-ACK information is transmitted in the symbol.
 C: PCI/QI information is transmitted in the symbol.

Frame Number	Slot Number	DPCCH Slots	DPDCH Slots	HS-DPCCH Symbols
0	0	X	X	-----
	1	X	X	-----
	2	X	X	-----
	3	X	X	-----
	4	X	X	-----
	5	X	X	-----
	6	X	X	-----
	7	X	X	-----
	8	X	X	-----
	9	X	X	-----
	10	X	X	-----
	11	X	X	-----
	12	X	X	-----
	13	X	X	-----
	14	X	X	-----
1	0	X	X	-----
	1	X	X	-----
	2	X	X	-----
	3	X	X	-----
	4	X	X	-----
	5	X	X	-----
	6	X	X	-----
	7	X	X	-----
	8	X	X	-----
	9	X	X	-----
	10	X	X	-----
	11	X	X	-----
	12	X	X	-----
	13	X	X	-----
	14	X	X	-----

ARB signal generation with "Current ARB Seq. Length" < "Suggested ARB Seq. Length"

3GPP FDD A: UE1/Scheduling List

Frame Start: 0 Number Of Frames: 10

!: The channel is inactive in the slot.
 X: The channel is active in the slot.
 -: The channel is inactive in the symbol.
 H: HARQ-ACK information is transmitted in the symbol.
 C: PCI/QI information is transmitted in the symbol.

! The channel restarts because of the ARB sequence length.

Frame Number	Slot Number	DPCCH Slots	DPDCH Slots	HS-DPCCH Symbols
0	0	X	X	-----
	1	X	X	-----
	2	X	X	-----
	3	X	X	-----
	4	X	X	-----
	5	X	X	-----
	6	X	X	-----
	7	X	X	-----
	8	X	X	-----
	9	X	X	-----
	10	X	X	-----
	11	X	X	-----
	12	X	X	-----
	13	X	X	-----
	14	X	X	-----
1	0	X	X	-----
	1	X	X	-----
	2	X	X	-----
	3	X	X	-----
	4	X	X	-----
	5	X	X	-----
	6	X	X	-----
	7	X	X	-----
	8	X	X	-----
	9	X	X	-----
	10	X	X	-----
	11	X	X	-----
	12	X	X	-----
	13	X	X	-----

The channel restarts after 1 frame ("Current ARB Seq. Length = 1 Frame")

- The "Suggested / Current ARB Sequence Length" is 12 / 1. Press the [Adjust ARB Sequence Length \(HS-DPCCH\)](#).
The "Current ARB Seq. Length" is adjusted, the channel restarts after 12 frames and the "Scheduling List" shows the HS-DPCCH scheduling in all frames as in the real-time mode.

Tip: To ensure a long enough ARB sequence, select "3GPP FDD > Filter/Clipping/ARB Settings" and adjust the [Sequence Length ARB](#) so that the ARB sequence length is multiple or equal the scheduling repetition.

Remote command:

[:SOURce<hw>] :BB:W3GPp:MSTation<st>:DPCCh:HS:SEnGth? on page 474

Adjust ARB Sequence Length (HS-DPCCH)

Sets the current ARB sequence length to the suggested value (see also [Example "Effect of the ARB sequence length"](#) on page 201).

Remote command:

[:SOURCE<hw>] :BB:W3GPP:MSTation<st>:DPCCh:HS:SLENgth:ADJust
on page 474

4.30.4 HS-DPCCH Settings for Normal Operation (Up to Release 7)

The R&S SMW supports also the parameters for backward compatibility.

Access:

1. Select "3GPP FDD > Link Direction > Uplink / Reverse > User Equipments > UE"
2. Select "HS-DPCCH".
3. Select "Compatibility Mode > Up to Release 7".

3GPP FDD A: User Equipment1	
General	Code Domain
DPCCH	DPDCH
HS-DPCCH	E-DPCCH
E-DPDCH	E-DCH
HARQ-ACK (Slots) 1 CQI (Slots) 2	
State	0
Compatibility Mode	Up to Release 7
Start Delay	101 *256 Chips
Inter TTI Distance	5 Subframes
Channelization Code	Q / 64
ACK/NACK Pattern (bin)	1...
CQI Pattern Length	10
Power	0.00 dB
Power Offset ACK	0.0 dB
Power Offset NACK	0.0 dB
MIMO Mode	☐

The dialog contains the parameters that were available up to the selected release.

Power Offset ACK

Sets the power offset $P_{\text{off\_ACK}}$ of an ACK response to a single scheduled transport block relative to the CQI Power P_{CQI} .

The power PACK used during the HARQ-ACK slot is calculated as:

$$P_{\text{ACK}} = P_{\text{CQI}} + P_{\text{off\_ACK}}$$

The value range is -10 dB to 10 dB.

Remote command:

[:SOURCE<hw>] :BB:W3GPP:MSTation<st>:DPCCh:HS:POACK on page 459

Power Offset NACK

Sets the power offset $P_{\text{off\_NACK}}$ of a NACK response to a single scheduled transport block relative to the CQI Power P_{CQI} .

The power P_{NACK} used during the HARQ-ACK slot is calculated as:

$$P_{\text{NACK}} = P_{\text{CQI}} + P_{\text{off\_NACK}}$$

The value range is -10 dB to 10 dB.

Remote command:

[\[:SOURce<hw>\]:BB:W3GPp:MSTation<st>:DPCCh:HS:PONAck](#) on page 459

ACK/NACK Pattern

(for "MIMO Mode > Off")

Enters the pattern for the HARQ-ACK field (Hybrid-ARQ Acknowledgment).

After receiving a transmission packet, the user equipment returns feedback information in the HARQ-ACK field that is related to the accuracy of downlink HS-DSCH transmission.

1 bit is used per HS-DPCCH packet. The maximum length of the pattern is 32 bits.

""1" = ACK" The HARQ ACK is sent. Transmission was successful and correct.

""0" = NACK" The NACK is sent. Transmission was not correct. With an NACK, the UE requests retransmission of the incorrect data.

""-" = DTX" Nothing is sent. Transmission is interrupted (discontinuous transmission (DTX)).

Remote command:

[\[:SOURce<hw>\]:BB:W3GPp:MSTation<st>:DPCCh:HS:HAPattern](#) on page 460

CQI Pattern Length

(for "MIMO Mode > Off")

Sets the length of the CQI sequence. The values of the CQI sequence are entered in input fields "CQI Values". The pattern is generated cyclically.

With the CQI (channel quality indicator), the user equipment informs the base station about the receive quality of the downlink HS-PDSCH.

Thus, the base station can adapt the modulation and coding scheme to improve the signal quality. The instrument supports the control of the base station HS-PDSCH by CQI sequences with a length of 1 to 10 values.

Remote command:

[\[:SOURce<hw>\]:BB:W3GPp:MSTation<st>:DPCCh:HS:CQI:PLENgtH](#)
on page 460

CQI Values

(for "MIMO Mode > Off")

Enters the values of the CQI sequence. Value -1 means that no CQI is sent (DTX).

The length of the CQI sequence is set at input field CQI Length. The pattern is generated cyclically.

With the CQI, the user equipment informs the base station about the receive quality of the downlink HS-PDSCH. Thus, the base station can adapt the modulation and coding scheme to improve the signal quality. The instrument supports the control of the base station HS-PDSCH by CQI sequences with a length of 1 to 10 values.

Remote command:

[:SOURce<hw>] :BB:W3GPp:MSTation<st>:DPCCh:HS:CQI<ch> [:VALues]
on page 461

MIMO Mode (Up to Release 7)

Option: R&S SMW-K83

Enables/disables working in MIMO mode for the selected UE.

When MIMO mode is enabled, the parameters ACK/NACK pattern, CQI pattern length and CQI values are not available. Several MIMO-specific parameters are enabled for configuration (see [Chapter 4.30.5, "MIMO Settings HS-DPCCH \(Up to Release 7\)"](#), on page 204s).

Remote command:

[:SOURce<hw>] :BB:W3GPp:MSTation<st>:DPCCh:HS:MIMO [:MODE]
on page 461

4.30.5 MIMO Settings HS-DPCCH (Up to Release 7)



Option: R&S SMW-K83 and "MIMO Mode > On" for MIMO settings.

Access:

1. Select "3GPP FDD > Link Direction > Uplink / Reverse > User Equipments > UE"
2. Select "HS-DPCCH".
3. Select "Compatibility Mode > Up to Release 7".
4. Select "MIMO Mode > On".

3GPP FDD A: User Equipment1	
General	Code Domain
DPCCH	DPDCH
HS-DPCCH	E-DPCCH
E-DPDCH	E-DCH
HARQ-ACK (Slots) 1 PCI / CQI (Slots) 2	
State	0
Compatibility Mode	Up to Release 7
Start Delay	101 * 256 Chips
Inter TTI Distance	5 Subframes
Channelization Code	Q / 64
MIMO Settings	
Power Offset ACK/ACK	0.0 dB
Power Offset NACK/ACK	0.0 dB
Power Offset ACK/NACK	0.0 dB
Power Offset NACK/NACK	0.0 dB

The available settings allow you to adjust the HS-DPCCH configuration for UE configured in MIMO mode.

The HS-DPCCH structure can be configured with the parameters [Inter TTI Distance](#) and [Number of TTIs](#). The HS-DPCCH structure can also be configured by changing the HARQ-ACK and CQI/PCI information per TTI by means of the parameters of the HS-DPCCH scheduling table. Any combination of single or dual transport block [HARQ-ACK](#), [PCI value](#), [CQI Type](#) and corresponding [CQI value\(s\)](#), as well as channel power can be configured.

Power Offset ACK/ACK

Sets the power offset $P_{\text{off\_ACK/ACK}}$ of an ACK/ACK response to two scheduled transport blocks relative to the CQI [Power](#) P_{CQI} .

The power $P_{\text{ACK/ACK}}$ used during the HARQ-ACK slots is calculated as:

$$P_{\text{ACK/ACK}} = P_{\text{CQI}} + P_{\text{off\_ACK/ACK}}$$

The value range is -10 dB to 10 dB.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:DPCCh:HS:MIMO:POAAck`
on page 461

Power Offset ACK/NACK

Sets the power offset $P_{\text{off\_ACK/NACK}}$ of an ACK/NACK response to two scheduled transport blocks relative to the CQI [Power](#) P_{CQI} .

The power $P_{\text{ACK/NACK}}$ used during the HARQ-ACK slots is calculated as:

$$P_{\text{ACK/NACK}} = P_{\text{CQI}} + P_{\text{off\_ACK/NACK}}$$

The value range is -10 dB to 10 dB.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:DPCCh:HS:MIMO:POANack`
on page 462

Power Offset NACK/ACK

Sets the power offset $P_{\text{off\_NACK/ACK}}$ of an NACK/ACK response to two scheduled transport blocks relative to the CQI [Power](#) P_{CQI} .

The power $P_{\text{NACK/ACK}}$ used during the HARQ-ACK slots is calculated as:

$$P_{\text{NACK/ACK}} = P_{\text{CQI}} + P_{\text{off\_NACK/ACK}}$$

The value range is -10 dB to 10 dB.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:DPCCh:HS:MIMO:PONack`
on page 463

Power Offset NACK/NACK

Sets the power offset $P_{\text{off\_NACK/NACK}}$ of an NACK/NACK response to two scheduled transport blocks relative to the CQI [Power](#) P_{CQI} .

The power $P_{\text{NACK/NACK}}$ used during the HARQ-ACK slots is calculated as:

$$P_{\text{NACK/NACK}} = P_{\text{CQI}} + P_{\text{off\_NACK/NACK}}$$

The value range is -10 dB to 10 dB.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:DPCCh:HS:MIMO:PONNack`
on page 463

Power Offset CQI Type A

Sets the power offset $P_{\text{off\_CQI Type A}}$ of the PCI/CQI slots in case a CQI Type A report is sent relative to the CQI Power P_{CQI} .

The power $P_{\text{CQI Type A}}$ used during the PCI/CQI slots is calculated as:

$$P_{\text{CQI Type A}} = P_{\text{CQI}} + P_{\text{off\_CQI Type A}}$$

Since the CQI Type B reports are used in a single stream transmission (see [Chapter 3.3.15.6, "CQI Reports: Type A and Type B"](#), on page 42), the power $P_{\text{CQI Type B}} = P_{\text{CQI}}$.

The value range is -10 dB to 10 dB.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:DPCCh:HS:MIMO:POCA` on page 464

Number of TTIs (Up to Release 7)

Selects the number of configurable TTIs.

This parameter determines the number of the rows in the HS-DPCCH scheduling table. Each row represents one TTI. The parameters set in the table are read out cyclically.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:DPCCh:HS:MIMO:TTICount`
on page 464

MIMO Settings Table

Comprises the parameters provided for active MIMO Mode.

HARQ-ACK (Up to Release 7) ← MIMO Settings Table

Selects the information transmitted during the HARQ-ACK slot of the corresponding TTI (see [Chapter 3.3.15.5, "MIMO uplink control channel Support"](#), on page 41).

"DTX" Selects discontinuous transmission (DTX) for the corresponding TTI. During that TTI, no feedback information is sent, i.e. all other parameters in the feedback signaling table are disabled.

"Single TB: ACK/Single TB: NACK" Selects an ACK or NACK response to a single scheduled transport block.

"TB1:ACK,TB2:ACK / TB1:ACK,TB2:NACK / TB1:NACK,TB2:ACK / TB1:NACK,TB2:NACK" Selects the response to two scheduled transport blocks.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:DPCCh:HS:MIMO:TTI<ch0>:HACK`
on page 465

PCI (Up to Release 7) ← MIMO Settings Table

Selects the PCI value transmitted during the PCI/CQI slots of the corresponding TTI (see [Chapter 3.3.15.7, "PCI Reports"](#), on page 42).

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:DPCCh:HS:MIMO:TTI<ch0>:PCI`
on page 465

CQI Type (Up to Release 7) ← MIMO Settings Table

Selects the type of the CQI report (see [Chapter 3.3.15.6, "CQI Reports: Type A and Type B"](#), on page 42).

"Type A Single TB"

Selects CQI Type A report with information that one transport block is preferred.

"Type A Double TB"

Selects CQI Type A report with information that two transport blocks are preferred.

"Type B"

Selects CQI Type B report.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:DPCCh:HS:MIMO:TTI<ch0>:CQIType`
on page 465

CQI/CQI_s/CQI₁/CQI₂ (Up to Release 7) ← MIMO Settings Table

Selects the CQI report transmitted during the PCI/CQI slots of the corresponding TTI (see [Chapter 3.3.15.6, "CQI Reports: Type A and Type B"](#), on page 42).

"CQI" Sets the CQI value for CQI Type B report.

"CQI_s" Sets the CQI value in case a CQI Type A report when one transport block is preferred.

"CQI₁" Sets the CQI₁ value of CQI Type A report when two transport blocks are preferred.

"CQI₂" Sets the CQI₂ value of CQI Type A report when two transport blocks are preferred.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:DPCCh:HS:MIMO:TTI<ch0>:CQI<di>`
on page 466

4.31 E-DPCCH Settings - UE

Access:

1. Select "3GPP FDD > Link Direction > Uplink / Reverse > User Equipments > UE".
2. Select "Mode > DPCCH + DPDCH".

3. Select "E-DPCCH".

3GPP FDD A: User Equipment1

General Code Domain DPCCH DPDCH HS-DPCCH **E-DPCCH** E-DPDCH E-DCH

Happy Bit 1 Retrans Sequence Number 2 E-TFCI Information 7

State 0 Power 0.00 dB

Retransmission Sequence Number 0 Channelization Code 1 / 1

E-TFCI Information 0 Happy Bit ☐

HSUPA FRC ...

The dialog displays the channel structure and the available parameters.

State (E-DPCCH)

Activates or deactivates the E-DPCCH channel.

If an FRC is set for the channel, this field is activated automatically.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st> [ :HSUPa ] :DPCCh:E:STATe`
on page 515

Power

Sets the power of the E-DPCCH channel.

The value range is -80 dB to 0 dB.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st> [ :HSUPa ] :DPCCh:E:POWer`
on page 514

Retransmission Sequence Number

Sets the retransmission sequence number.

The value range is 0 to 3.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st> [ :HSUPa ] :DPCCh:E:RSNumber`
on page 515

Channelization Code

Displays the channelization code and the modulation branch (always I) of the E-DPCCH. The code channel is spread with the set channelization code (spreading code). The standard assigns a fixed channelization code to the E-DPCCH.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st> [ :HSUPa ] :DPCCh:E:CCODE?`
on page 514

E-TFCI Information

Sets the value for the TFCI (Transport Format Combination Indicator) field.

The value range is 0 to 127.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st> [ :HSUPa ] :DPCCh:E:TFCI`
on page 515

Happy Bit

Activating the happy bit. This bit is indicating whether the UE could use more resources (Not Happy/deactivated) or not (Happy/activated).

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st> [ :HSUPa ] :DPCCh:E:HBIT`
on page 514

HSUPA FRC...

For UE1, accesses the dialog for configuring the FRC (Fixed Reference Channel), see [Chapter 4.32, "HSUPA FRC Settings - UE"](#), on page 209.

Remote command:

n.a.

4.32 HSUPA FRC Settings - UE

The "UE HSUPA FRC" dialog provides the parameters for configuring the fixed reference channel (FRC) and the settings for the HARQ simulation.


For more information, see also [Chapter 3.3.12, "HARQ Feedback"](#), on page 33 and [Chapter 3.3.14.4, "16QAM Fixed Reference Channel: FRC 8"](#), on page 37.

4.32.1 FRC General Settings

Access:

1. Select "3GPP FDD > Link Direction > Uplink / Reverse > User Equipments > UE"

2. Select "E-DPCCH > HSUPA FRC..."

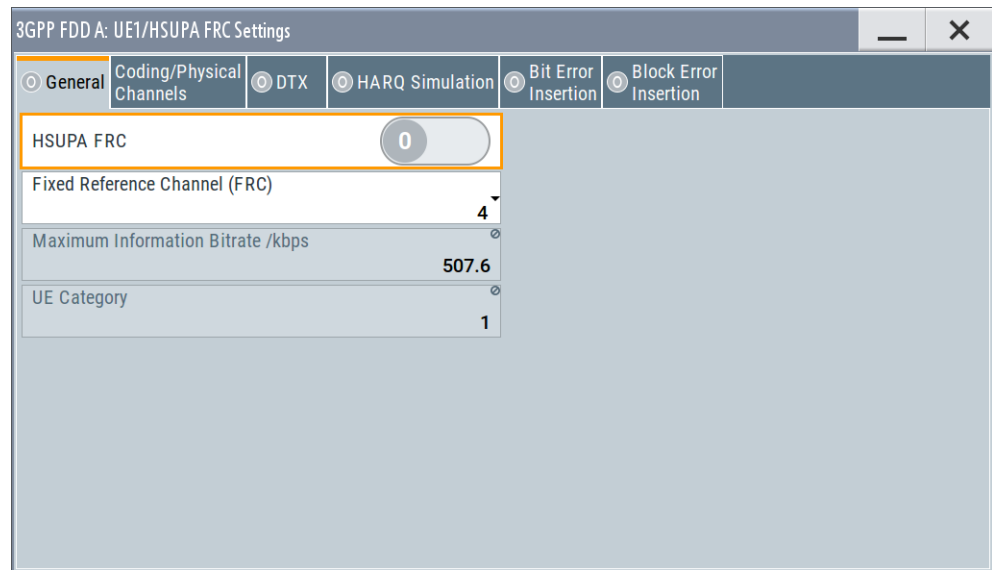

The dialog comprises the common settings for the fixed reference channel (FRC).

State (HSUPA FRC)

Activates or deactivates the FRC state for the E-DCH channels.

If FRC is activated, the channels E-DPCCH and E-DPDCH are automatically activated.

The following parameters of these channels are set automatically, depending on the configured FRC:

- For E-DPCCH:
 - "Retransmission Sequence Number" is set to 0
 - "E-TFCI"
- For E-DPDCH:
 - **Overall Symbol Rate** is set according to the correspondent parameter of FRC. The "Modulation" is set according to the "Modulation" used for the selected FRC. The **E-DPDCH Data Source** is set according to the **Data Source (E-DCH)** used for the selected FRC.
- For E-DCH scheduling:
 - **E-DCH TTI** is set according to the **E-DCH TTI** of the selected FRC

If the "HARQ Simulation" is disabled and the state in the DTX mode section is activated, the "E-DCH Scheduling Table" is configured according to the **"DTX Pattern"** specified.

By enabled "HARQ Simulation", the settings in the "E-DCH Scheduling Table" are configured to ensure a continuous E-DCH transmission.

Note: HSUPA FRCs are disabled, if **UL-DTX... / User Scheduling State** or **Dynamic Power Control State** are activated.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:MSTation<st> [:HSUPa] :DPCCh:E:FRC:STATe`

on page 512

Fixed Reference Channel (FRC)

Selects the FRC according to TS 25.141, annex A.10.

Additionally, user defined FRC can be configured.

Option: R&S SMW-K83 for RFC8

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:MSTation<st> [ :HSUPa ] :DPCCh:E:FRC:CHANnel`
on page 503

Maximum Information Bitrate/kbps

Displays the maximum information bit rate.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:MSTation<st> [ :HSUPa ] :DPCCh:E:FRC:MIBRate?`
on page 510

UE Category

Displays the UE category that is minimum required for the selected FRC (see also [Chapter 3.3.19.2, "UL 16QAM UE Capabilities"](#), on page 48).

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:MSTation<st> [ :HSUPa ] :DPCCh:E:FRC:UECategory?` on page 514

4.32.2 Coding and Physical Channels Settings

Access:

1. Select "3GPP FDD > Link Direction > Uplink / Reverse > User Equipments > UE"
2. Select "E-DPCCH > HSUPA FRC...> Coding/Physical Channels"

3GPP FDD A: UE1/HSUPA FRC Settings	
☒ General	☒ Coding/Physical Channels
☐ DTX	☐ HARQ Simulation
☐ Bit Error Insertion	☐ Block Error Insertion
Data Source (E-DCH)	Pattern
Overall Symbol Rate	Modulation
E-DCH TTI	Binary Channel Bits / TTI (Nbin)
Number Of HARQ Processes	Transport Block Size Index (E-TFCI)
Transport Block Size Table	Coding Rate (Ninf Nbin)
Information Bit Payload (Ninf)	

Pattern	0...
960 kbps	BPSK
10 ms	
4	9 600
Table 1 (10ms)	41
5 076	0.529

This dialog comprises the parameters required for configuring the physical channel settings and coding.

Data Source (E-DCH)

Selects the data source for the E-DCH channels, i.e. this parameter affects the corresponding parameter of the E-DPDCH.

The following standard data sources are available:

- "All 0, All 1"
An internally generated sequence containing 0 data or 1 data.
- "PNxx"
An internally generated pseudo-random noise sequence.
- "Pattern"
An internally generated sequence according to a bit pattern.
Use the "Pattern" box to define the bit pattern.
- "Data List/Select DList"
A binary data from a data list, internally or externally generated.
Select "Select DList" to access the standard "Select List" dialog.
 - Select the "Select Data List > navigate to the list file *.dm_iqd > Select" to select an existing data list.
 - Use the "New" and "Edit" functions to create internally new data list or to edit an existing one.
 - Use the standard "File Manager" function to transfer external data lists to the instrument.

See also:

- Section "Modulation Data" in the R&S SMW user manual.
- Section "File and Data Management" in the R&S SMW user manual.
- Section "Data List Editor" in the R&S SMW user manual

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:MSTation<st> [ :HSUPa ] :DPCCh:E:FRC:DATA`
on page 503

`[ :SOURce<hw> ] :BB:W3GPp:MSTation<st> [ :HSUPa ] :DPCCh:E:FRC:DATA: PATtern` on page 504

`[ :SOURce<hw> ] :BB:W3GPp:MSTation<st> [ :HSUPa ] :DPCCh:E:FRC:DATA: DSElect` on page 504

Overall Symbol Rate

Sets the overall symbol rate for the E-DCH channels, i.e. this parameter affects the corresponding parameter of the E-DPDCH.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:MSTation<st> [ :HSUPa ] :DPCCh:E:FRC:ORATe`
on page 511

Modulation

Sets the modulation of the FRC, i.e. this parameter affects the corresponding parameter of the E-DPDCH.

There are two possible modulation schemes specified, BPSK and 4PAM (4 Pulse Amplitude Modulation). The latter one is available only for the following [Overall Symbol Rates](#):

- 2x960 ksps
- 2x1920 ksps
- 2x960 + 2x1920 ksps.

Note: Option: R&S SMW-K83 for 4PAM

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st> [ :HSUPa ] :DPCCh:E:FRC:MODulation` on page 511

E-DCH TTI

Sets the size of the TTI (Transmission Time Interval) for the E-DCH channels, i.e. this parameter affects the corresponding parameter of the E-DCH scheduling configuration.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st> [ :HSUPa ] :DPCCh:E:FRC:TTIEdch` on page 513

Number Of HARQ Processes

Displays the number of HARQ (Hybrid-ARQ acknowledgement) processes. This value determines the distribution of the payload in the subframes.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st> [ :HSUPa ] :DPCCh:E:FRC:HPROcesses?` on page 510

Binary Channel Bits / TTI (Nbin)

Displays the number of binary bits per TTI.

Transport Block Size Table

Selects the transport block size table from 3GPP TS 25.321, annex B according to that the transport block size is configured.

The transport block size is determined also by the parameter "Transport Block Size Index".

The allowed values of this parameter depend on the selected "E-DCH TTI" and "Modulation" scheme.

E-DCH TTI	Modulation	Transport block size table	Transport block size index (E-TFCI)
2 ms	BPSK	Table 0	0 .. 127
		Table 1	0 .. 125
	4PAM	Table 2	0 .. 127
		Table 3	0 .. 124
10 ms	-	Table 0	0 .. 127
		Table 1	0 .. 120

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st> [ :HSUPa ] :DPCCh:E:FRC:TBS:TABLE` on page 512

Transport Block Size Index (E-TFCI)

Selects the transport block size index (E-TFCI) for the corresponding table, as described in 3GPP TS 25.321, annex B.

The value range of this parameter depends on the selected "Transport Block Size Table".

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st> [ :HSUPa ] :DPCCh:E:FRC:TBS:INDEX` on page 512

Information Bit Payload (Ninf)

Displays the payload of the information bit. This value determines the number of transport layer bits sent in each HARQ process.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st> [ :HSUPa ] :DPCCh:E:FRC:PAYBits?` on page 511

Coding Rate (Ninf/Nbin)

Displays the relation between the information bits to binary channel bits.

Remote command:


`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st> [ :HSUPa ] :DPCCh:E:FRC:CRATe?` on page 503

4.32.3 DTX Mode Settings

Access:

1. Select "3GPP FDD > Link Direction > Uplink / Reverse > User Equipments > UE"

2. Select "E-DPCCH > HSUPA FRC... > DTX"

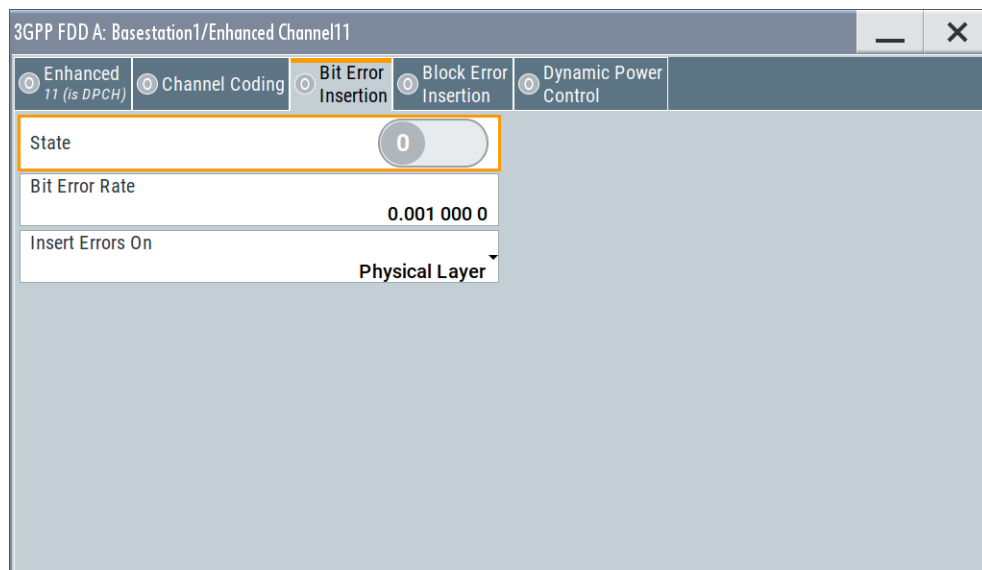

This dialog comprises the parameters required for enabling and defining user data.

State (DTX)

Activates or deactivates the DTX (discontinuous transmission) mode.

Note: If activated, the "E-DCH Scheduling Table" in the "E-DPCCH Settings" dialog is configured according to the "DTX Pattern" specified.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st> [ :HSUPa ] :DPCCh:E:FRC:DTX: STATE` on page 507

User Data (DTX Pattern)

Sets the user-definable the bit pattern for the DTX. The maximum length is 64 bits.

The following values are allowed:

- 1: Data transmission
- -: DTX

Note: If activated, this setting overwrites the "E-DCH Scheduling Table" in the "E-DPCCH Settings" dialog.

Example:

"User Data (DTX Pattern) = 1-11-" sets the "E-DCH Scheduling" settings as follow:

E-DCH TTI		E-DCH From TTI	E-DCH To TTI
0	10 ms	0	0
1	3	2	2
2	5 TTIs	3	3

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st> [ :HSUPa ] :DPCCh:E:FRC:DTX: PATTERN` on page 506

4.32.4 HARQ Simulation Settings



This section describes the HARQ settings. The provided settings depend on the selected "HARQ Simulation > Mode".

Access:

1. Select "3GPP FDD > Link Direction > Uplink / Reverse > User Equipments > UE".
2. Select "E-DPCCH > HSUPA FRC... > HARQ Simulation".
3. Select "Mode > Virtual HARQ".
Select "HARQ Simulation > Virtual HARQ".

Always Use Redundancy Version 0		Common
HARQ1: ACK/NACK	1...	HARQ2: ACK/NACK 1...
HARQ3: ACK/NACK	1...	HARQ4: ACK/NACK 1...

4. Select "Mode > HARQ Feedback".

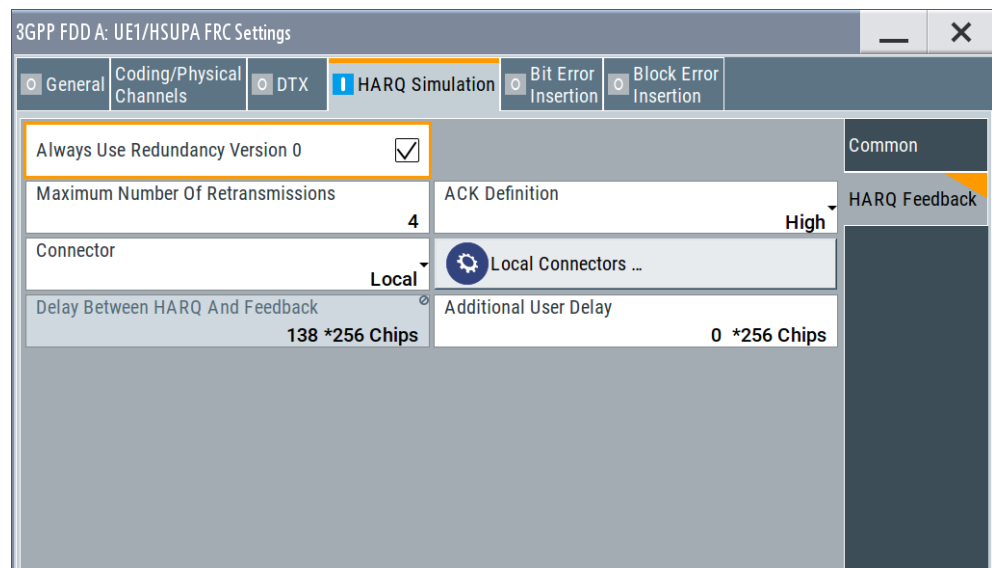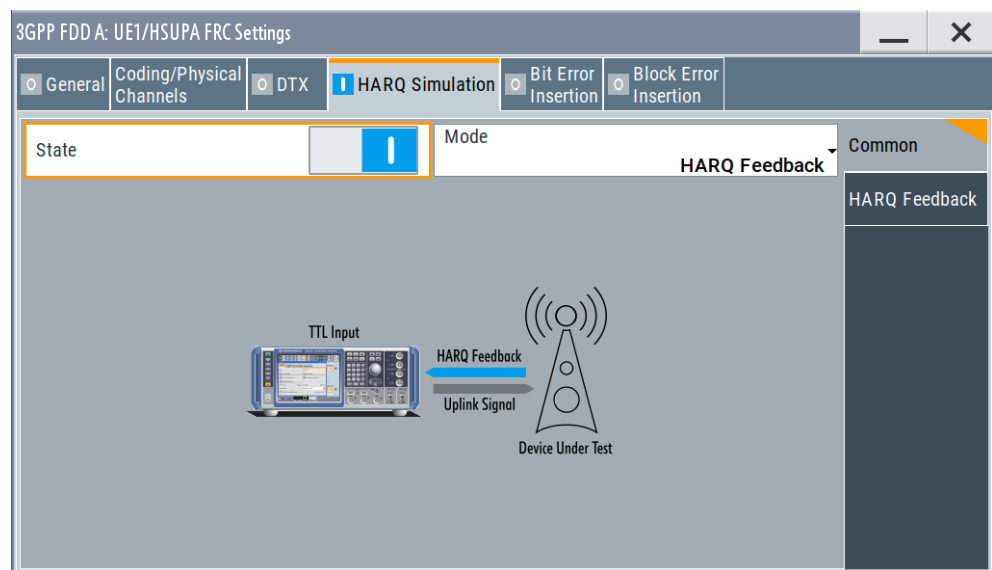

For background information, refer to [Chapter 3.3.12, "HARQ Feedback"](#), on page 33.

State (HARQ)

Activates or deactivates the HARQ simulation mode.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st> [ :HSUPa ] :DPCCh:E:FRC:HARQ:SIMulation [ :STATe ]` on page 509

Mode (HARQ)

Selects the HARQ simulation mode.

"Virtual HARQ" This mode simulates base station feedback. For every HARQ process (either 4 or 8), a bit pattern can be defined to simulate ACKs and NACKs.

"HARQ Feed-back" (R&S SMW-B10 required; not supported in Baseband C/D)
 This mode allows you to control the transmission of the HSUPA fixed reference channels dynamically. An "ACK" from the base station leads to the transmission of a new packet. A "NACK" forces the instrument to retransmit the packet with a new channel coding configuration (i.e. new "redundancy version") of the concerned HARQ process.
 For further information, see [Chapter 3.3.12, "HARQ Feedback"](#), on page 33.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st> [ :HSUPa ] :DPCCh:E:FRC:HARQ:SIMulation:MODE` on page 508

Virtual HARQ Mode

Simulates a base station feedback with the following settings:

Always Use Redundancy Version 0 (HARQ) ← Virtual HARQ Mode

If activated, the same redundancy version is sent, that is, the redundancy version is not adjusted for the next retransmission in case of a received NACK.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st> [ :HSUPa ] :DPCCh:E:FRC:HARQ:SIMulation:RVZero` on page 509

HARQ1..8: ACK/NACK ← Virtual HARQ Mode

("HARQ Mode > Virtual HARQ")

Enters the pattern for the HARQ (Hybrid-ARQ acknowledgement).

The maximum length of the pattern is 32 bits.

""1" = ACK" New data is transmitted and the RSN (retransmission sequences number) is set to 0.

""0" = NACK" The data is retransmitted and the RSN is increased with 1.
 The maximum value of RSN is 3, i.e. even if more than three retransmissions are configured, the RSN remains 3.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st> [ :HSUPa ] :DPCCh:E:FRC:HARQ [ :SIMulation ] :PATtern<ch>` on page 510

HARQ mode HARQ Feedback

(R&S SMW-B10 required; not supported in Baseband C/D)

Dynamically control the transmission of the HSUPA fixed reference channels with the following settings:

Always Use Redundancy Version 0 (HARQ) ← HARQ mode HARQ Feedback

If activated, the same redundancy version is sent, that is, the redundancy version is not adjusted for the next retransmission in case of a received NACK.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st> [ :HSUPa ] :DPCCh:E:FRC:HARQ:SIMulation:RVZero` on page 509

Maximum Number Of Retransmissions (HARQ) ← HARQ mode HARQ Feedback

Sets the maximum number of retransmissions. After the expiration of this value, the next packet is sent, regardless of the received feedback.

Remote command:

```
[ :SOURce<hw> ] :BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:HARQ:
SIMulation:MRETranmissions on page 509
```

ACK Definition (HARQ) ← HARQ mode HARQ Feedback

Selects whether a high level (TTL) is interpreted as an ACK or a low level.

Remote command:

```
[ :SOURce<hw> ] :BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:HARQ:
SIMulation:ADEfinition on page 507
```

Connector (HARQ) ← HARQ mode HARQ Feedback

Selects the connector used by the HARQ Feedback line.

Tip: Assign different connectors to the two basebands to enable two HARQ feedback lines with different configuration.

In this firmware version, the "Global" connector is disabled.

See [Chapter 3.4, "Routing and Enabling an External Control Signal"](#), on page 53.

Remote command:

```
[ :SOURce<hw> ] :BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:HARQ:
SIMulation:CONNector on page 507
```

Delay Between HARQ And Feedback (HARQ) ← HARQ mode HARQ Feedback

Displays the time between the start of the HARQ process and the start of the related feedback.

For further information, see [Chapter 3.3.12, "HARQ Feedback"](#), on page 33.

Remote command:

```
[ :SOURce<hw> ] :BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:HARQ:
SIMulation:DElay:FEEDback? on page 508
```

Additional User Delay ← HARQ mode HARQ Feedback

Sets an additional delay to adjust the delay between the HARQ and the feedback.

For further information, see [Chapter 3.3.12, "HARQ Feedback"](#), on page 33.

Remote command:


```
[ :SOURce<hw> ] :BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:HARQ:
SIMulation:DElay:AUSer on page 508
```

4.32.5 Bit and Block Error Insertion Settings

Access:

1. Select "3GPP FDD > Link Direction > Uplink / Reverse > User Equipments > UE"

2. Select "E-DPCCH > HSUPA FRC... > Bit/Block Error Insertion".

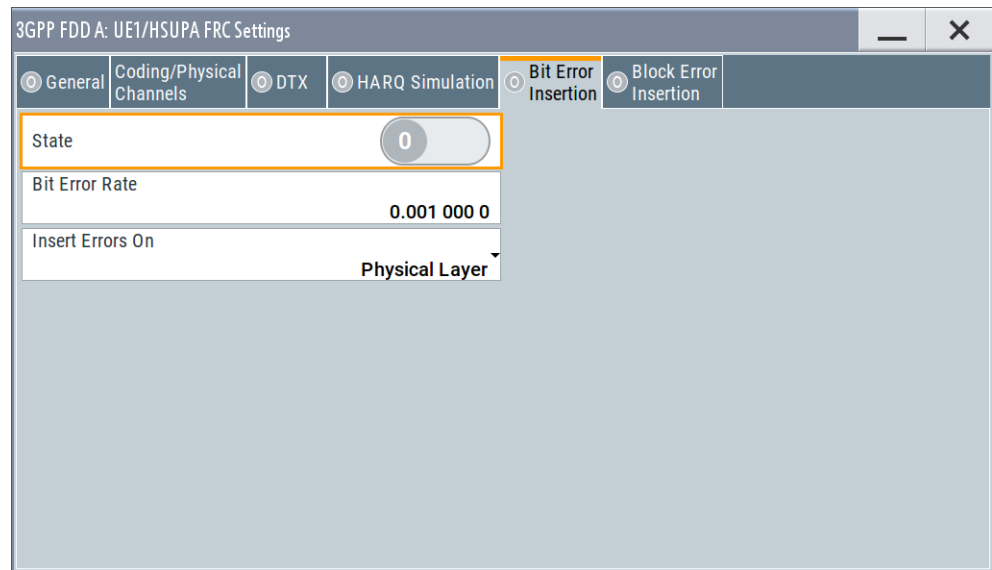

The dialogs provide the parameters for inserting errors into the data source and into the CRC checksum.

Bit Error State

Activates or deactivates bit error generation.

Bit errors are inserted into the data fields of the enhanced channels. It is possible to select the layer in which the errors are inserted (physical or transport layer).

When the data source is read out, bits are deliberately inverted at random points in the data bitstream at the specified error rate so that an invalid signal is simulated.

Remote command:

```
[ :SOURce<hw> ] :BB:W3GPp:MSTation<st> [ :HSUPa ] :DPCCh:E:FRC:DERRor:
BIT:STATE on page 505
```

Bit Error Rate

Sets the bit error rate. The value range is 10E-1 to 10E-7.

Remote command:

```
[ :SOURce<hw> ] :BB:W3GPp:MSTation<st> [ :HSUPa ] :DPCCh:E:FRC:DERRor:
BIT:RATE on page 505
```

Insert Errors On

Selects the layer in the coding process at which bit errors are inserted.

"Transport layer"

Bit errors are inserted in the transport layer.

"Physical layer"

Bit errors are inserted in the physical layer.

Remote command:

```
[ :SOURce<hw> ] :BB:W3GPp:MSTation<st> [ :HSUPa ] :DPCCh:E:FRC:DERRor:
BIT:LAYer on page 505
```


Block Error State

Activates or deactivates block error generation.

The CRC checksum is determined and then the last bit is inverted at the specified error probability in order to simulate an invalid signal.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st> [ :HSUPa ] :DPCCh:E:FRC:DERRor:BLOCK:STATE` on page 506

Block Error Rate

Sets block error rate.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st> [ :HSUPa ] :DPCCh:E:FRC:DERRor:BLOCK:RATE` on page 506

4.33 E-DPDCH Settings - UE

Access:

1. Select "3GPP FDD > Link Direction > Uplink / Reverse > User Equipments > UE".
2. Select "Mode > DPCCH + DPDCH".
3. Select "E-DPDCH".

	1	2	3	4
Channel Type	E-DPDCH	E-DPDCH	E-DPDCH	E-DPDCH
Symbol Rate / State	60	Off	Off	Off
Channelization Code	Q / 32			
Channel Power /dB	0.00			
E-DPDCH Data Source	DM 0			

The dialog displays the channel structure and the available parameters.

4.33.1 E-DPDCH Common Settings

State (E-DPDCH)

Activates or deactivates all the E-DPDCH channels.

If an FRC is set for the channel, this field is activated automatically.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>[:HSUPa]:DPDCh:E:STATE`
on page 517

Force Channelization Code To I/Q

Sets the channelization code to I/Q.

This mode can only be activated if the overall symbol rate is less than 2 x 960 kbps.

It is provided for test purposes. Using an oscilloscope, the data bits of the E-DPDCH are visible on the I/Q signal if:

- "Force Channelization Code to I/Q > On"
- "Scrambling Code Mode > Off"
- "DPDCH Power = - 80 dB"

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>[:HSUPa]:DPDCh:E:FCIO`
on page 516

Overall Symbol Rate

Sets the overall symbol rate of all the E-DPDCH channels.

The structure of the E-DPDCH channel table depends on this parameter. The overall symbol rate determines which E-DPDCHs are active, which symbol rate they have and which channelization codes they use.

E-DPDCHs that are not active by virtue of the overall rate are also disabled for operation.

If an FRC is set for the channel, this field is read-only.

Note: If the [Dynamic Power Control State](#) and/or the [UL-DTX... / User Scheduling State](#) is enabled, the E-DPDCH is generated in real time. Then only the overall symbol rates with one E-DPDCH channel or those that restrict the E-DPDCHs to the I or Q branch are enabled for configuration.

To send simultaneously multiple physical E-DPDCH, set the Overall Rate to one of the predefined two-channel configurations. For some special applications, it is necessary to split up the generation of these channels to two baseband blocks. The instrument provides also special non-standard overall symbol rates, that enable the instrument to generate only the E-DPDCH channels of the I branch or of the Q branch per baseband block.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>[:HSUPa]:DPDCh:E:ORATE`
on page 516

Modulation

Sets the modulation of the E-DPDCH.

There are two possible modulation schemes specified for this channel, BPSK and 4PAM (4 Pulse-Amplitude Modulation). The latter one is available only for [Overall Symbol Rates](#) using two channels, e.g 2x960 ksps and/or 2x1920 ksps.

Note: Option: R&S SMW-K83 for 4PAM

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st> [ :HSUPa ] :DPDCh:E:MODulation`
on page 516

4.33.2 Channel Table

The channel table allows you to configure the individual parameters for the E-DPDCH channels. The structure of the currently selected channel is displayed graphically in the table header.

The number of active channels depends on the selected overall symbol rate. You can select the data sources for the individual channels. The remaining parameters are only displayed and their values depend also on the overall symbol rate. See also [Table A-3](#) and [Table A-4](#).

Channel Number

Displays the channel number.

Remote command:

n.a.

(the channel is selected by the suffix at keyword `CHANnel<n>`)

Channel Type

Displays the channel type.

Remote command:

n.a.

Symbol Rate / State

Displays the symbol rate and the state of the E-DPDCH channel.

The symbol rate and the state of the channels depend on the overall symbol rate and cannot be modified.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st> [ :HSUPa ] :CHANnel<ch>:DPDCh:E:SRATe?` on page 502

Channelization Code

Displays the channelization code and the modulation branch (I or Q) of the DPDCH channel.

The channelization code depends on the overall symbol rate and cannot be modified.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st> [ :HSUPa ] :CHANnel<ch>:DPDCh:E:CCODE?` on page 500

Channel Power / dB

Sets the power of the selected E-DPDCH channel.

The power entered is relative to the powers of the other channels and does not initially relate to the "Level" power display. If [Adjust Total Power to 0dB](#) is executed, all the power data is relative to "Level"

Remote command:

```
[ :SOURce<hw> ] :BB:W3GPp:MSTation<st> [ :HSUPa ] :CHANnel<ch>:DPDCh:E:
POWer on page 502
```

E-DPDCH Data Source

Selects the data source for the E-DPDCH channel.

The data source for the DPDCH is also entered here for the enhanced channels of UE1 without channel coding.

The following standard data sources are available:

- "All 0, All 1"
An internally generated sequence containing 0 data or 1 data.
- "PNxx"
An internally generated pseudo-random noise sequence.
- "Pattern"
An internally generated sequence according to a bit pattern.
Use the "Pattern" box to define the bit pattern.
- "Data List/Select DList"
A binary data from a data list, internally or externally generated.
Select "Select DList" to access the standard "Select List" dialog.
 - Select the "Select Data List > navigate to the list file *.dm_iqd > Select" to select an existing data list.
 - Use the "New" and "Edit" functions to create internally new data list or to edit an existing one.
 - Use the standard "File Manager" function to transfer external data lists to the instrument.

See also:

- Section "Modulation Data" in the R&S SMW user manual.
- Section "File and Data Management" in the R&S SMW user manual.
- Section "Data List Editor" in the R&S SMW user manual

Remote command:

```
[ :SOURce<hw> ] :BB:W3GPp:MSTation<st> [ :HSUPa ] :CHANnel<ch>:DPDCh:E:
DATA on page 501
```

```
[ :SOURce<hw> ] :BB:W3GPp:MSTation<st> [ :HSUPa ] :CHANnel<ch>:DPDCh:E:
DATA: PATTern on page 502
```

```
[ :SOURce<hw> ] :BB:W3GPp:MSTation<st> [ :HSUPa ] :CHANnel<ch>:DPDCh:E:
DATA: DSElect on page 501
```

4.34 E-DCH Scheduling - UE

Option: R&S SMW-K83

Access:

1. Select "3GPP FDD > User Equipment > link Direction > Uplink / Reverse > User Equipments > UE"
2. Select "E-DCH".

3GPP FDD A: User Equipment1

General Code Domain DPCCH **DPDCH** HS-DPCCH E-DPCCH E-DPDCH **E-DCH**

E-DCH TTI: 2 ms

Number Of Table Rows: 1

E-DCH Schedule Repeats After: 1 TTIs

E-DCH From TTI: 0

E-DCH To TTI: 0

This dialog comprises the settings necessary to configure the common time schedule of the E-DPDCH and E-DPCCH. The settings enable you to configure single E-DCH packets or "bursts" of variable length consisting of several successive E-DCH packets and to decide upon the E-DCH packets distribution.

Use the [Scheduling List](#) to display and verify the configured uplink scheduling for every UE.



Real time vs. ARB signal generation

The E-DCH channels are generated in real time or as an ARB signal.

- If the E-DCH channels are generated as ARB signal, the ARB sequence length has to be long enough and a multiple or equal the scheduling repetition.
- The instrument generates the channels in real time if [UL-DTX... / User Scheduling State](#) and/or [Dynamic Power Control State](#) is activated.
 - During generation of E-DCH channels in real-time, channel coding (i.e. activation of FRCs) is disabled. Use pre-channel-coded data list as "Data Source" if channel coded data on the E-DCH is required.
 - The E-DPDCH can be generated in realtime only for overall symbol rates with one E-DPDCH channel or those that restrict the E-DPDCHs to the I or Q branch.

Example: E-DCH Scheduling

To configure an E-DCH transmission in TTIs 3-6, 128-156, 1003-1006, 1128-1156, etc. perform the settings listed in [Table 4-11](#).

Table 4-11: E-DCH scheduling example

Parameter	Value	Comment
Select "3GPP FDD > Filter/Clipping/ARB Settings" and adjust the Sequence Length ARB	200 frames	If the E-DCH channels are generated as ARB signal, the ARB sequence length has to be long enough and a multiple or equal the scheduling repetition.
E-DCH TTI	2 ms	
Number of Table Rows	2	two scheduled E-DCH bursts
E-DCH Schedule Repeats After	1000 TTIs	each E-DCH burst is repeated every 1000 TTIs
Row#0		E-DCH burst (4 E-DCH packets)
" E-DCH TTI From "	3	
" E-DCH TTI To "	6	
Row#1		E-DCH burst (29 E-DCH packets)
" E-DCH TTI From "	128	
" E-DCH TTI To "	156	
E-DPCCH State	On	Enables E-DPCCH
E-DPDCH State	On	Enables E-DPDCH

Open the [Scheduling List](#) to display the E-DCH scheduling.

3GPP FDD: UE1/Scheduling List

Frame Start

0

Number Of Frames

10

|: The channel is inactive in the slot.
X: The channel is active in the slot.
__: The channel restarts because of the ARB sequence length.

Frame Number:	Slot Number:	DPCCH Slots:	DPDCH Slots:	E-DCH TTI Number:	E-DPCCH Slots:	E-DPDCH Slots:
0	0	X	X	0		
	1	X	X			
	2	X	X			
	3	X	X	1		
	4	X	X			
	5	X	X			
	6	X	X	2		
	7	X	X			
	8	X	X			
	9	X	X	3	X	X
	10	X	X		X	X
	11	X	X		X	X
	12	X	X	4	X	X
	13	X	X		X	X
	14	X	X		X	X
1	0	X	X	5	X	X
	1	X	X		X	X
	2	X	X		X	X
	3	X	X	6	X	X
	4	X	X		X	X
	5	X	X		X	X
	6	X	X	7		
	7	X	X			
	8	X	X			
	9	X	X	8		
	10	X	X			
	11	X	X			
	12	X	X	9		
	13	X	X			
	14	X	X			

E-DCH TTI

Sets the size for the TTI (Transmission Time Interval).

If an **FRC** is set for the E-DPCCH or **UL-DTX...** / **User Scheduling State** is enabled, this field is read-only.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>[:HSUPa]:EDCH:TTIEdch`

on page 517

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>[:HSUPa]:DPDCh:E:TTIEdch`

on page 517

Number of Table Rows

Sets the number of the rows in the scheduling table, i.e. determines the number of the E-DCH "bursts" enabled for configuration. An E-DCH "burst" is built of several successive E-DCH packets.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>[:HSUPa]:EDCH:ROWCount`

on page 518

E-DCH Schedule Repeats After

Determine the number of TTIs after that the E-DCH scheduling is repeated.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st> [ :HSUPa ] :EDCH:REPeat`
on page 518

E-DCH Scheduling Table

Enables flexible configuration of single E-DCH packets or E-DCH "bursts" of variable length consisting of several successive E-DCH packets

E-DCH TTI From ← E-DCH Scheduling Table

Determines the start TTI of the corresponding E-DCH burst.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st> [ :HSUPa ] :EDCH:ROW<ch0>:FROM`
on page 518

E-DCH TTI To ← E-DCH Scheduling Table

Determines the end TTI of the corresponding E-DCH burst.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st> [ :HSUPa ] :EDCH:ROW<ch0>:TO`
on page 518

4.35 Global Enhanced Channel Settings - UE1



The "Global Enhanced Channel" settings are only available for user equipment 1 (UE1).


Access:

1. Select "3GPP FDD > Link Direction > Uplink / Reverse > User Equipments > UE 1".
2. Select "DPDCH Settings > Global Enhanced Channels..."

4.35.1 Enhanced Channels State

Access:

- Select "Enhanced".

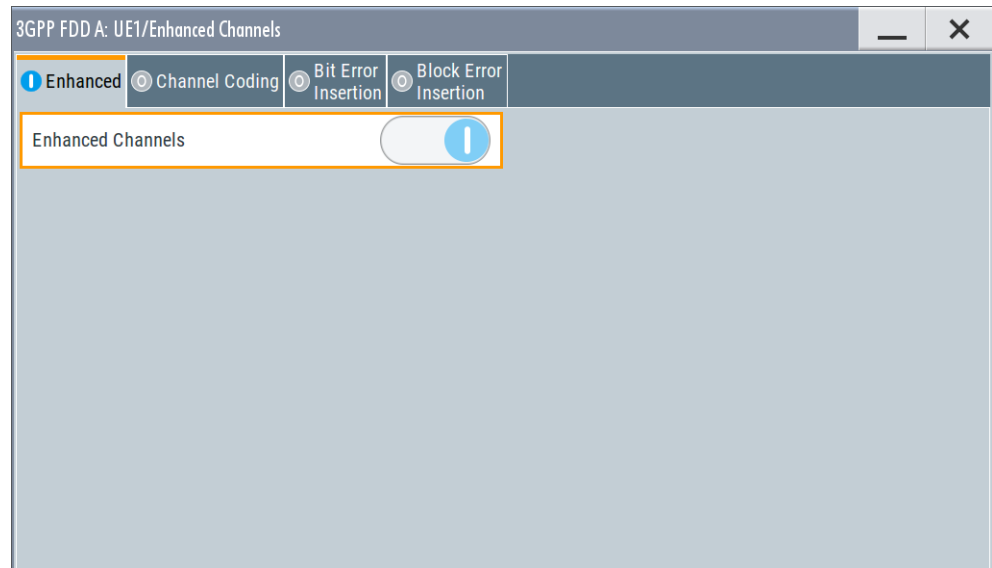

In this tab, you can activate the global enhanced settings.

Enhanced Channels State

Displays the enhanced state of the station. As at least the DPCCH of UE1 is always calculated in real time, the enhanced state is always on for UE1.

The DPCCH and one DPDCH of user equipment 1 are generated in real time. Depending on the actual configurations, other channels of user equipment 1 can also be generated in real time.

It is possible to activate channel coding and simulate bit and block errors. Data lists, for example with user data for the transport layer, can be used as the data source.

Remote command:


`[ :SOURce<hw> ] :BB:W3GPp:MSTation:ENHanced:DPDCh:STAtE` on page 535

4.35.2 Channel Coding

Access:

1. Select "3GPP FDD > Link Direction > Uplink / Reverse > User Equipments > UE 1".
2. Select "DPDCH Settings > Global Enhanced Channels..."

3. Select "Channel Coding"

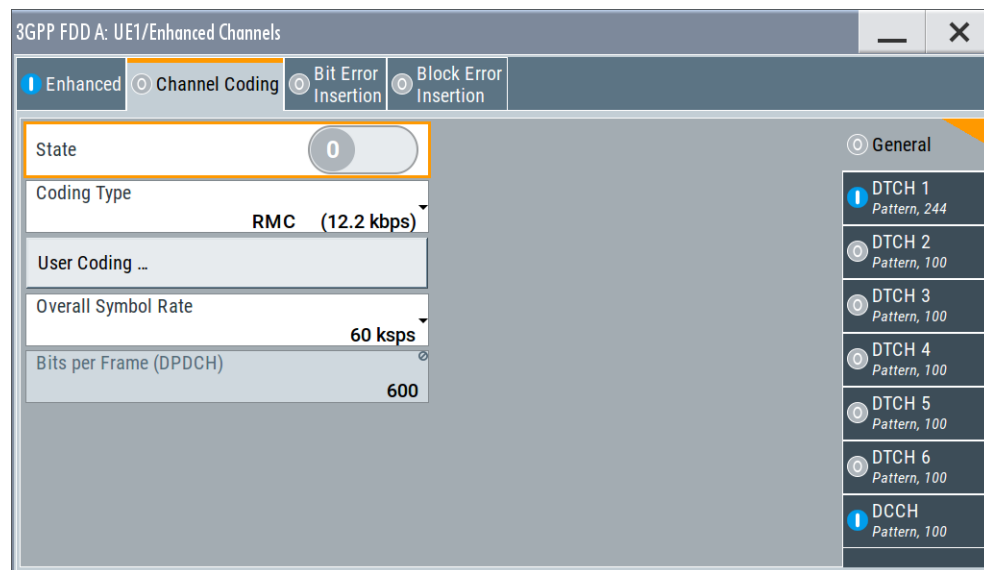

The "Channel Coding > General" tab comprises the settings for enabling and configuring the channel coding. The provided settings are divided into general settings and several subtabs, one per transport channel.

To access the channel coding settings of a transport channel, select the corresponding side tab, for example "DTCH1". Refer to [Chapter 4.35.3, "Transport Channel"](#), on page 233 for description of the provided settings.

According to 3GPP TS 25.141, an uplink reference measurement channel is generated when the transport channels DTCH and DCCH are mapped to a DPDCH with a different data rate. The mapping is performed after channel coding and multiplexing. [Figure 4-22](#) illustrates the generation of a 12.2 kbps reference measurement channel from the DTCH and DCCH transport channels.

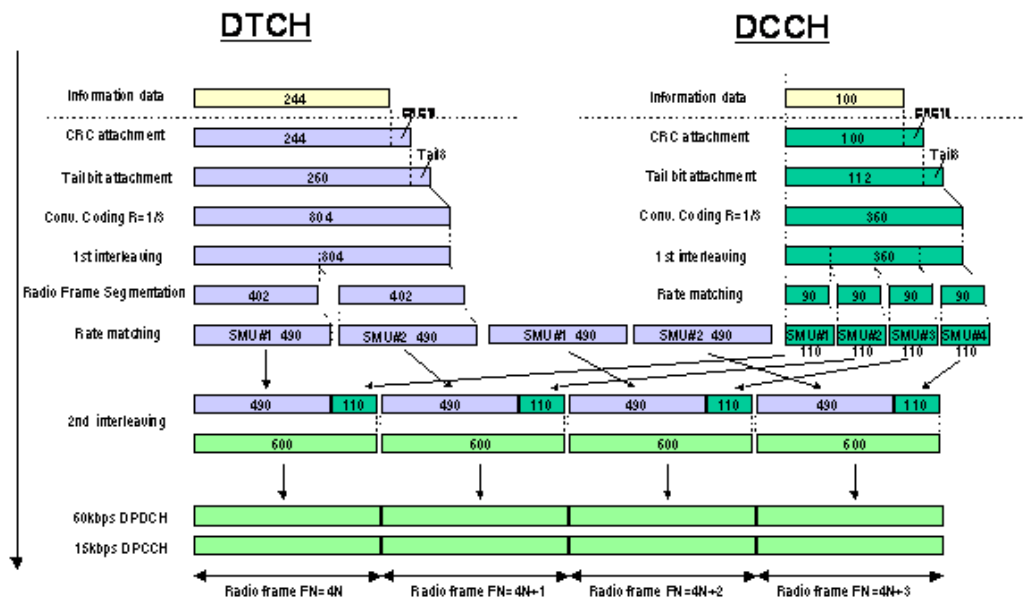


Figure 4-22: Channel coding of the 12.2 kbps reference measurement channels (uplink) [3GPP TS 25.141]

Channel Coding State

Activates or deactivates channel coding.

Note: Annex A.1, 3GPP TS 25.141, lists the recommended DPCCH-settings.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPP:MSTation:ENHanced:DPDCh:CCODing:STAt`

on page 530

Coding Type

Selects channel coding.

The 3GPP specification defines 4 reference measurement channel coding types, which differ in the input data bit rate bit to be processed (12.2, 64, 144 and 384 kbps). The additional AMR CODER coding scheme generates the coding of a voice channel.

"User" coding can be defined as required in the detailed coding settings menu section revealed with button "Show Details". They can be stored and loaded in the "User Coding" submenu. Selection "User" is indicated as soon as a coding parameter is modified after selecting a predefined coding type.

The input data bits are taken from the data source specified for the "Transport Channels" for channel coding. The bits are available with a higher rate at the channel coding output. The allocations between the measurement input data bit rate and the output symbol rate are fixed, that is to say, the overall symbol rate is adjusted automatically.

The following are available for selection:

"RMC 12.2 12.2 kbps measurement channel
kbps"

"RMC 64 kbps" 64 kbps measurement channel

"RMC 144 144 kbps measurement channel
kbps"
"RMC 384 384 kbps measurement channel
kbps"
"AMR 12.2 Channel coding for the AMR coder
kbps"

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation:ENHanced:DPDCh:CCODing:TYPE`
on page 530

User Coding ...

Accesses files with user codings and the standard "File Select" function.

User codings of UE1 are stored as files with the predefined file extension
*.3g_ccod_ul. The filename and the directory they are stored in are user-definable;
the file extension is assigned automatically.

The complete channel coding settings are saved and recalled.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation:ENHanced:DPDCh:CCODing:USER:`
`CATalog?` on page 531

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation:ENHanced:DPDCh:CCODing:USER:`
`DELeTe` on page 531

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation:ENHanced:DPDCh:CCODing:USER:LOAD`
on page 532

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation:ENHanced:DPDCh:CCODing:USER:`
`STORe` on page 532

Overall Symbol Rate

Sets the overall symbol rate of the DPDCH.

The structure of the DPDCH channel table depends on this parameter. The overall
symbol rate determines which DPDCHs are active, which symbol rate they have and
which channelization codes they use.

DPDCHs that are not active by virtue of the overall rate, are also disabled for opera-
tion.

Note: Up to an overall rate of 960 ksps, only DPDCH 1 is active. Its symbol rate is the
same as the overall rate and the channelization code is the same as spreading factor/4
(spreading factor = chip rate / symbol rate).

With an overall symbol rate greater than 960 ksps, all the active DPDCHs have the
symbol rate 960 ksps.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation:ENHanced:DPDCh:ORATe` on page 535

Bits per Frame (DPDCH)

Displays the data bits in the DPDCH component of the frame at physical level. The
value depends on the overall symbol rate.

Remote command:

[:SOURCE<hw>] :BB:W3GPp:MSTation:ENHanced:DPDCh:BPFRame?
on page 529

4.35.3 Transport Channel

Access:

1. Select "3GPP FDD > Link Direction > Uplink / Reverse > User Equipments > UE 1".
2. Select "DPDCH Settings > Global Enhanced Channels... > Channel Coding".
3. Select the corresponding side tab, for example "DTCH1".

3GPP FDD A: UE1/Enhanced Channels			
Enhanced Channel Coding Bit Error Insertion Block Error Insertion			
State ☒		General DTCH 1 Pattern, 244 DTCH 2 Pattern, 100 DTCH 3 Pattern, 100 DTCH 4 Pattern, 100 DTCH 5 Pattern, 100 DTCH 6 Pattern, 100 DCCH Pattern, 100	
Data Source	Pattern	Data Pattern	0...
Transport Time Interval	20 ms	Transport Blocks	1
Transport Block Size	244	Size Of CRC	16
Rate Matching Attribute	1	Error Protection	Conv 1/3
Interleaver 1 State	☒	Interleaver 2 State	☒

The dialog provides access to the settings of up to seven transport channels (TCHs), the DTCHs (DTCH1 to 6) and the DCCH.

Transport Channel State

Activates or deactivates the transport channel.

Remote command:

[:SOURCE<hw>] :BB:W3GPp:MSTation:ENHanced:DPDCh:TChannel<di0> :
STATE on page 536

In case of remote control, DCCH corresponds to :TChannel10, DTCH1 to :TChannel11, etc.

Data Source

Selects the data source for the transport channel.

The data source for the DCCH and DTCH1 can also be selected in the main dialog in the channel table.

The following standard data sources are available:

- "All 0, All 1"
An internally generated sequence containing 0 data or 1 data.
- "PNxx"
An internally generated pseudo-random noise sequence.
- "Pattern"
An internally generated sequence according to a bit pattern.
Use the "Pattern" box to define the bit pattern.
- "Data List/Select DList"
A binary data from a data list, internally or externally generated.
Select "Select DList" to access the standard "Select List" dialog.
 - Select the "Select Data List > navigate to the list file *.dm_iqd > Select" to select an existing data list.
 - Use the "New" and "Edit" functions to create internally new data list or to edit an existing one.
 - Use the standard "File Manager" function to transfer external data lists to the instrument.

See also:

- Section "Modulation Data" in the R&S SMW user manual.
- Section "File and Data Management" in the R&S SMW user manual.
- Section "Data List Editor" in the R&S SMW user manual

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:MSTation:ENHanced:DPDCh:TCHannel<di0>:`
DATA on page 537

`[ :SOURce<hw> ] :BB:W3GPp:MSTation:ENHanced:DPDCh:TCHannel<di0>:`
DATA: PATtern on page 538

`[ :SOURce<hw> ] :BB:W3GPp:MSTation:ENHanced:DPDCh:TCHannel<di0>:`
DATA: DSElect on page 538

Transport Time Interval

Sets the number of frames into which a TCH is divided. This setting also defines the interleaver depth.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:MSTation:ENHanced:DPDCh:TCHannel<di0>:`
TTInterval on page 536

Number of Transport Blocks

Sets the number of transport blocks for the TCH.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:MSTation:ENHanced:DPDCh:TCHannel<di0>:`
TBCount on page 536

Transport Block Size

Sets the size of the transport block at the channel coding input.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:MSTation:ENHanced:DPDCh:TCHannel<di0>:`
TBSize on page 536

Size of CRC

Defines the type (length) of the CRC. Checksum determination can also be deactivated (setting "None").

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPP:MSTation:ENHanced:DPDCh:TCHannel<di0>:CRCSize` on page 537

Rate Matching Attribute

Sets data rate matching.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPP:MSTation:ENHanced:DPDCh:TCHannel<di0>:RMATtribute` on page 535

Error Protection

Selects error protection.

"None" No error protection

"Turbo 1/3" Turbo coder of rate 1/3 in accordance with the 3GPP specifications.

"Conv 1/2 | 1/3" Convolution coder of rate 1/2 or 1/3 with generator polynomials defined by 3GPP.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPP:MSTation:ENHanced:DPDCh:TCHannel<di0>:EPRotectio` on page 538

Interleaver 1 State

Activates or deactivates channel coding interleaver state 1 of the transport channel. Interleaver state 1 can be set independently in each TCH. Activation does not change the symbol rate.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPP:MSTation:ENHanced:DPDCh:TCHannel<di0>:INTerleaver` on page 539

Interleaver 2 State

Activates or deactivates channel coding interleaver state 2 of all the transport channels. Interleaver state 2 can only be set for all the TCHs together. Activation does not change the symbol rate.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPP:MSTation:ENHanced:DPDCh:INTerleaver2` on page 534

4.35.4 Error Insertion

Access:

1. Select "3GPP FDD > Link Direction > Uplink / Reverse > User Equipments > UE 1".
2. Select "DPDCH Settings > Global Enhanced Channels...".
3. Select "Bit Error Insertion / Block Error Insertion".

3GPP FDD A: UE1/Enhanced Channels

Enhanced Channel Coding Bit Error Insertion Block Error Insertion

State 0

Bit Error Rate 0.001 000 0

Insert Errors On Physical Layer

3GPP FDD A: UE1/Enhanced Channels

Enhanced Channel Coding Bit Error Insertion Block Error Insertion

State 0

Block Error Rate 0.100 0

The dialogs provide the parameters for inserting errors into the data source and into the CRC checksum, for example, to check the bit and block error rate testers.

Bit Error State

Activates or deactivates bit error generation.

Bit errors are inserted into the data fields of the enhanced channels. When channel coding is active, it is possible to select the layer in which the errors are inserted (physical or transport layer).

When the data source is read out, individual bits are deliberately inverted at random points in the data bitstream at the specified error rate so that invalid signal is simulated.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation:ENHanced:DPDCh:DERRor:BIT:STATE`
on page 533

Bit Error Rate TCH1

Sets the bit error rate.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation:ENHanced:DPDCh:DERRor:BIT:RATE`
on page 533

Insert Errors On

Selects the layer at which bit errors are inserted.

"Transport layer" Bit errors are inserted in the transport layer.
This layer is only available when channel coding is active.

"Physical layer" Bit errors are inserted in the physical layer.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation:ENHanced:DPDCh:DERRor:BIT:LAYer`
on page 532

Block Error State

Activates or deactivates block error generation.

The CRC checksum is determined and then the last bit is inverted at the specified error probability in order to simulate an invalid signal.

Block error generation is only available when channel coding is active.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation:ENHanced:DPDCh:DERRor:BIT:STATe`
on page 533

Block Error Rate

Sets the block error rate.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation:ENHanced:DPDCh:DERRor:BLOCK:RATE`
on page 534

4.36 PRACH Settings - UE

Access:


1. Select "3GPP FDD > Link Direction > Uplink / Reverse > User Equipments > UE 1".
2. Select "Mode > PRACH Standard/PRACH Preamble Only".

The PRACH settings are available in two modes:

- In "Standard" mode, the instrument generates a single physical random access channel (PRACH). This channel is used during the connection set up between the user equipment and the base station.

The screenshot shows the configuration window for '3GPP FDD A: User Equipment1'. The 'PRACH Structure' tab is selected. The 'Mode' dropdown menu is open, showing 'PRACH Standard' as the selected option. Other visible settings include 'Scrambling Code (hex)' set to '00 0000', 'Scrambling Mode' set to 'Long Scrambling Code', and 'Time Delay' set to '0 Chips'.

- In "Preamble only" mode, the instrument only generates the preamble of a physical random access channel (PRACH). This mode is required for test case 8.8, according to 3GPP TS 25.141.

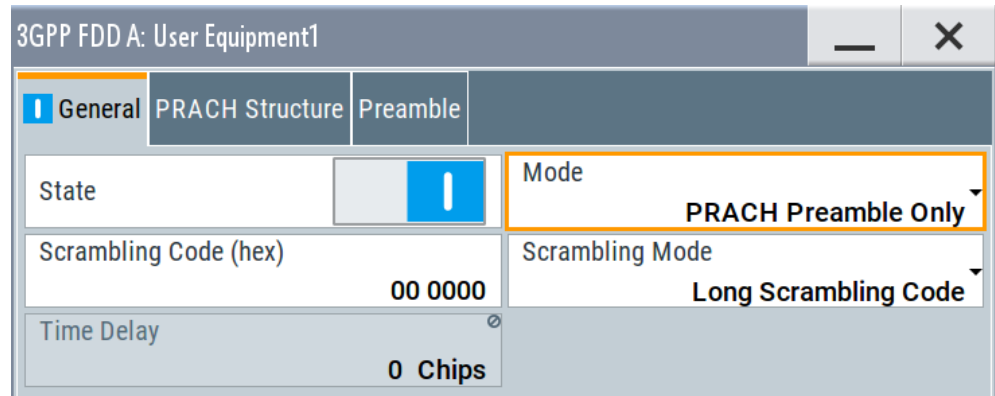

In this mode, only the preamble parameters are available.

3. Select "PRACH Structure".

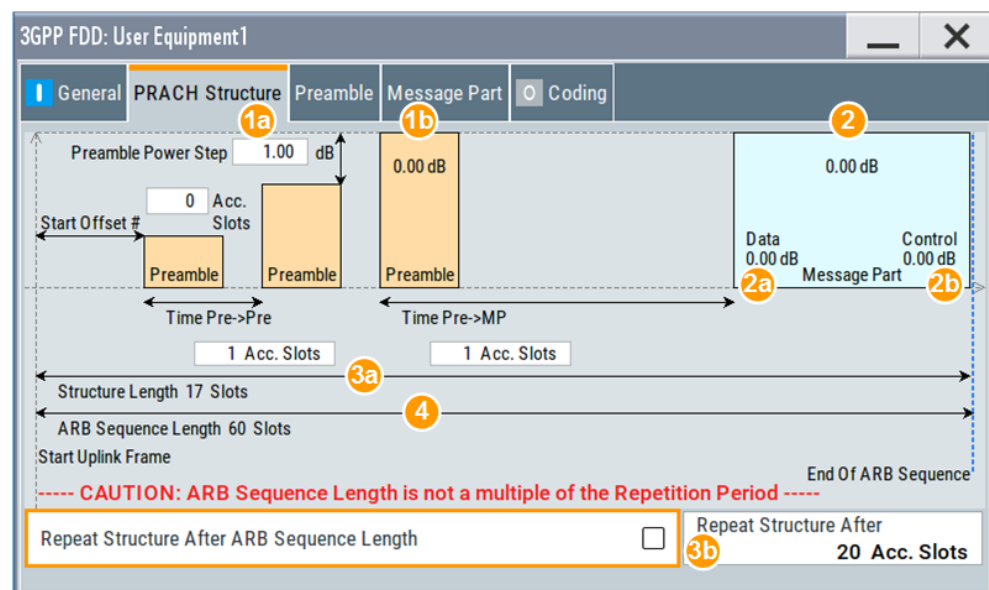


Figure 4-23: Standard PRACH Structure: Understanding the displayed information

- 1a = "Preamble Power Step"; subtract this value from 1b to calculate the power of the other preambles
- 1b = "Delta Power (Preamble)", i.e. correction value for the last preamble before the message part
- 2 = "Delta Power (Message Part)", i.e. correction value for the message part overall
- 2a, 2b = Correction values for the data and control part of the message part
- 3a = Current "Structure Length"
- 3b = User-defined repetition of the PRACH structure, i.e. the same structure is repeated three times within the current ARB sequence length
- 4 = Current ARB sequence length (in slots); set with the parameter [Sequence Length ARB](#)

The dialog comprises a graphical representation of the PRACH structure, including the timing parameters, the "Preamble Settings" and "Message Part" sections. The last sections comprise the preamble settings for the parameters of the data part of the channel. Some settings are made directly in the input fields of the graphical display.

In the "Channel Coding" section, channel coding can be activated.

Power settings and power calculation

- Calculating the power of the preamble
The correction value for the last preamble before the message part (indication in the preamble block) is indicated in the graphical display of the PRACH structure. The power of the other preambles is calculated by subtracting the selected "Preamble Power Step".
- Calculating the power of the message part
The correction values for the message part overall and separately for data and control part (indications in the message part block) are also indicated. For one active UE and if the "Level Reference" is set to "RMS Power", the RF power of the message part is calculated as:
"Message Part Power" = "RF Level" + "Delta Power Message Part"

Example: Calculating the power of the message part

- "3GPP > User Equipment > Level Reference > RMS Power"
- "Level = 5 dBm"
- "Delta Power Message Part = 5.79 dB"

The resulting "Message Part Power" = 5 + 5.79 = 10.79 dBm

4.36.1 Graphical Display

The graphical display shows either the complete PRACH including the message part or only the preamble depending on the selected mode.

PRACH standard

1. To access these settings, select "3GPP FDD > Link Direction > Uplink / Reverse > User Equipments > UE 1".
2. Select "Mode > PRACH Standard".
3. Select "PRACH Structure".
See [Figure 4-23](#)

PRACH Preamble Only

1. In the "General" tab, select "Mode > PRACH Preamble Only"

2. Select "PRACH Structure".

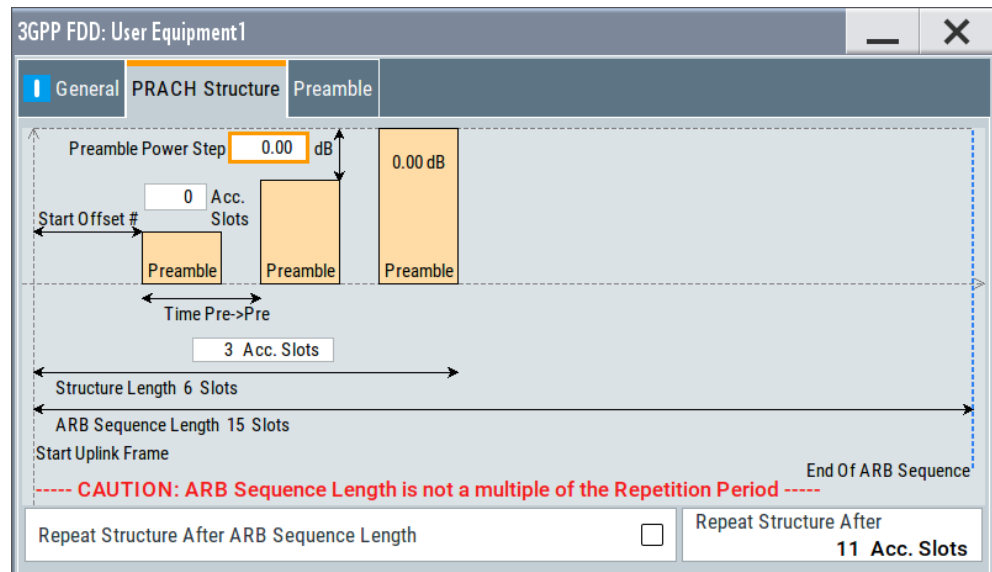


Figure 4-24: PRACH mode Preamble Only

Some of the parameter values can be input directly in the input fields of the graphical display. The indicated structure length and the power correction values match the real settings; the number of preambles, however, is shown as an example, to explain the parameter function.

Use the power correction values to calculate the correct settings for the desired RF level, see ["Power settings and power calculation"](#) on page 239.

Delta Power (Preamble)

Indicates the level correction value for the last preamble before the message part.

The level of the other preambles can be calculated by subtracting the set "Preamble Power Step".

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:MSTation<st>:PRACH:TIMing:DPOwer:PREamble?` on page 497

Delta Power (Message Part)

Indicates the level correction value for the message part, together with the power offsets of the data and control part.

The indication of the total value is important for measurements where just the envelope of the signal is of interest whereas the separate indication is useful for receiver tests.

See also ["Power settings and power calculation"](#) on page 239.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:PRACH:TIMing:DPOWER:MPART?`
on page 496

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:PRACH:TIMing:DPOWER:MPART:DATA?` on page 497

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:PRACH:TIMing:DPOWER:MPART:CONTrol?` on page 497

Start Offset

Enters the start offset of the PRACH in access slots or slots.

The starting time delay in timeslots is then equal to $2 \times \text{"Start Offset \#"}^*$

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:PRACH:TIMing:SOFFset`
on page 498

Time Pre->Pre

Enters the time difference between two successive preambles in access slots.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:PRACH:TIMing:TIME:PREPre`
on page 499

Time Pre->MP

Enters the time difference between the last preamble and the message part in access slots.

Two modes are defined in the standard. In mode 0, the preamble to message part difference is 3 access slots, in mode 1 it is 4 access slots.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:PRACH:TIMing:TIME:PREMp`
on page 498

Structure Length

Indicates the structure length:

- In "PRACH only - Preamble" mode, the structure length is defined as:
"Structure Length" = "Start Offset (Slots)" + "Preamble Repetition" * "Time Pre->Pre"

Example: Calculating the structure length in PRACH preamble only mode

"Start Offset # = 1 Access Slots", i.e. two slots

"Preamble Repetition = 2"

"Time Pre->Pre = 2 Access Slots", i.e. four slots

"Structure Length" = 2 Slots + 2 x 4 Slots = 10 Slots

- In "PRACH only - Standard" mode, the structure length is defined as:
"Structure Length" = "Start Offset (Slots)" + "Preamble Repetition" * "Time Pre->Pre" + "Time Pre->MP" + 15 * "Message Part Length (Frames)"

Example: Calculating the structure length in PRACH Standard mode

"Start Offset # = 2 Access Slots", i.e. four slots

"Preamble Repetition = 3"

"Time Pre->Pre = Time Pre->MP = 3 Access Slots", i.e. six slots

"Message Part Length = 2 Frames"

"Structure Length" = 4 Slots + 2 x 6 Slots + 6 Slots + 15 x 2 = 52 Slots

See also "[Repeat Structure After ARB Sequence Length](#)" on page 242.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:PRACH:TIMing:SPERiod?`
on page 498

ARB Sequence Length

Indicates the ARB sequence length.

Note: A caution message is displayed, if the structure length is longer than the selected ARB sequence length.

To change the ARB sequence length, use the parameter [Sequence Length ARB](#).

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:SLENgth` on page 354

Repeat Structure After ARB Sequence Length

Enables/disables repeating the selected PRACH structure during one ARB sequence.

"On"

Within one ARB sequence, the selected PRACH structure is repeated once.

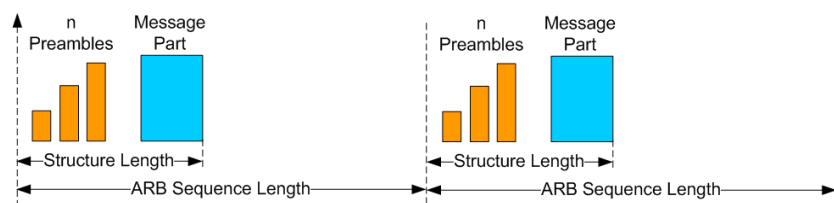


Figure 4-25: "Repeat Structure after ARB sequence length = On"

"Off"

The selected PRACH structure can be repeated several times, depending on the structure length and the [Repeat Structure After \(x Acc. Slots\)](#).

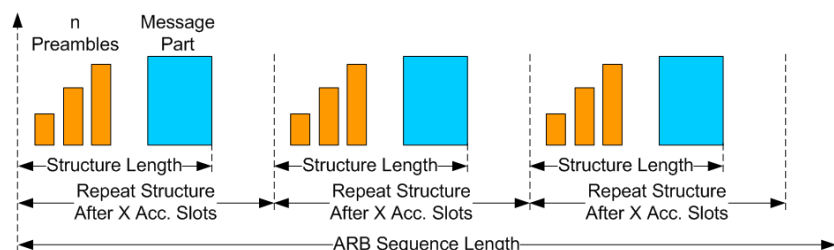


Figure 4-26: "Repeat Structure after ARB sequence length = Off"

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:PRACH:RARb` on page 494

Repeat Structure After (x Acc. Slots)

If "Repeat Structure After ARB Sequence Length > Off", sets the number of access slots after that the selected PRACH structure is repeated, see [Figure 4-26](#).

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:PRACH:RAFTer` on page 494

4.36.2 Preamble Settings

1. To access these settings, select "3GPP FDD > Link Direction > Uplink / Reverse > User Equipments > UE 1".
2. Select "Mode > PRACH Standard/PRACH Preamble Only".
3. Select "Preamble".

3GPP FDD A: User Equipment1				
General	PRACH Structure	Preamble	Message Part	Coding
Preamble Power		Preamble Power Step		
0.00 dB		0.00 dB		
Preamble Repetition		Signature		
1		0		

The dialog comprises the parameters for configuring the PRACH preamble.

Preamble Power

Sets the power of the preamble component of the PRACH channel.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:PRACH:PPower` on page 493

Preamble Power Step

Sets the power by which the preamble is increased from repetition to repetition. The power set with the parameter [Preamble Power](#) is the "target power", used during the last repetition of the preamble.

Example:

"Preamble Power = 0 dB"

"Preamble Repetition = 3"

"Preamble Power Step = 3 dB"




Figure 4-27: Generated power sequence

Remote command:

[\[:SOURce<hw>\]:BB:W3GPp:MSTation<st>:PRACH:PPower:STEP](#) on page 493

Preamble Repetition

Sets the preamble count.

Remote command:

[\[:SOURce<hw>\]:BB:W3GPp:MSTation<st>:PRACH:PREpetition](#) on page 494

Signature

Selects the signature to be used for the PRACH channel.

The signature defines the code domain for the channelization code being used. 16 fixed bit patterns are defined.

Remote command:

[\[:SOURce<hw>\]:BB:W3GPp:MSTation<st>:PRACH:SIGNature](#) on page 495

4.36.3 Message Part Settings

Access:

1. Select "3GPP FDD > Link Direction > Uplink / Reverse > User Equipments > UE 1".
2. Select "Mode > PRACH Standard".

3. Select "Message Part".

The screenshot shows the 'Message Part' tab of the '3GPP FDD A: User Equipment1' configuration window. The window has a title bar with a minus sign and a close button. Below the title bar is a tabbed interface with five tabs: 'General' (selected), 'PRACH Structure', 'Preamble', 'Message Part', and 'Coding'. The 'Message Part' tab is active and contains a table of settings. The table has two columns. The first column lists settings: 'Data Power', 'Message Length', 'Symbol Rate', and 'Data Source'. The second column lists settings: 'Control Power', 'Slot Format #', 'TFCI', and 'Data Pattern (bin)'. The values for these settings are: 'Data Power' is '0.00 dB', 'Control Power' is '0.00 dB', 'Message Length' is '1 Frames', 'Slot Format #' is '1', 'Symbol Rate' is '30 ksp/s', 'TFCI' is '0', 'Data Source' is 'Pattern', and 'Data Pattern (bin)' is '0...'. The 'Data Power' and 'Control Power' fields are highlighted with an orange border.

Setting	Value
Data Power	0.00 dB
Control Power	0.00 dB
Message Length	1 Frames
Slot Format #	1
Symbol Rate	30 ksp/s
TFCI	0
Data Source	Pattern
Data Pattern (bin)	0...

The tab comprises the settings for the data part of the PRACH.

Data Power

Sets the power of the data component of the PRACH channel.

Remote command:

[\[:SOURCE<hw>\]:BB:W3GPp:MSTation<st>:PRACH:DPOWER](#) on page 492

Control Power

Sets the power of the control component of the PRACH channel.

Remote command:

[\[:SOURCE<hw>\]:BB:W3GPp:MSTation<st>:PRACH:CPOWER](#) on page 491

Message Length

Sets the length of the message component of the PRACH channel in frames.

Remote command:

[\[:SOURCE<hw>\]:BB:W3GPp:MSTation<st>:PRACH:MLENGTH](#) on page 493

Slot Format

Selects the slot format.

Slot formats 0 to 3 are available for the PRACH channel. The slot format defines the symbol rate of the message component.

Remote command:

[\[:SOURCE<hw>\]:BB:W3GPp:MSTation<st>:PRACH:SFORMAT](#) on page 495

Symbol Rate

Sets the symbol rate of the PRACH channel.

The symbol rate is determined by the slot format set. A change in the symbol rate leads automatically to an adjustment of the slot format.

Remote command:

[:SOURce<hw>] :BB:W3GPp:MSTation<st>:PRACH:SRATe on page 495

TFCI

Enters the value of the TFCI field (transport format combination indicator) in the control component of the PRACH channel.

Remote command:

[:SOURce<hw>] :BB:W3GPp:MSTation<st>:PRACH:TFCI on page 496

Data Source

Selects the data source for the data component of the PRACH channel.

The following standard data sources are available:

- "All 0, All 1"
An internally generated sequence containing 0 data or 1 data.
- "PNxx"
An internally generated pseudo-random noise sequence.
- "Pattern"
An internally generated sequence according to a bit pattern.
Use the "Pattern" box to define the bit pattern.
- "Data List/Select DList"
A binary data from a data list, internally or externally generated.
Select "Select DList" to access the standard "Select List" dialog.
 - Select the "Select Data List > navigate to the list file *.dm_iqd > Select" to select an existing data list.
 - Use the "New" and "Edit" functions to create internally new data list or to edit an existing one.
 - Use the standard "File Manager" function to transfer external data lists to the instrument.

See also:

- Section "Modulation Data" in the R&S SMW user manual.
- Section "File and Data Management" in the R&S SMW user manual.
- Section "Data List Editor" in the R&S SMW user manual

Remote command:

[:SOURce<hw>] :BB:W3GPp:MSTation<st>:PRACH:DATA on page 491

[:SOURce<hw>] :BB:W3GPp:MSTation<st>:PRACH:DATA:PATtern on page 492

[:SOURce<hw>] :BB:W3GPp:MSTation<st>:PRACH:DATA:DSElect on page 492

4.36.4 Channel Coding State

Channel coding of PRACH is possible for all UEs.

1. To access these settings, select "3GPP FDD > Link Direction > Uplink / Reverse > User Equipments > UE 1".
2. Select "Mode > PRACH Standard".

3. Select "Coding".

3GPP FDD A: User Equipment1

General PRACH Structure Preamble Message Part **Coding**

Coding State ☒ Coding Type RACH RMC (TB size 168 bit)

Transport Channel

RACH 168
PN 9
☒ On

Transport Block Size 168 Transport Blocks 1

Transport Time Interval 20 ms

Size Of CRC 16 Error Protection Conv 1/2

Interleaver 1 State On Interleaver 2 State On

The tab comprises the parameters defining the coding type and activating the PRACH channel. The fixed settings for the channel coding parameters are displayed.

Coding State

Activates or deactivates channel coding for the PRACH channel.

If enabled, the "Message Part Length" automatically is set to 2. It cannot be changed.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:ENHanced:PRACH:CCODing:STAtE`
on page 540

Coding Type

Selects the predefined reference measurement channel coding types for the PRACH channel.

"RACH RMC (TB size 168 bit)"

Reference Measurements Channel Coding with transport block size of 168 bit.

"RACH RMC (TB size 360 bit)"

Reference Measurements Channel Coding with transport block size of 360 bit.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:ENHanced:PRACH:CCODing:TYPE`
on page 540

Show Coding

Calls the menu for displaying the channel coding settings. The reference measurement channel parameters are set to fixed values.

The following parameters are displayed:

"Data Source"	The data source is displayed in the transport channel graphical display.
"Transport Block Size"	Size of the transport block at the channel coding input.
"Transport Block"	Transport block count.
"Transport Time Interval"	Number of frames into which a TCH is divided.
"Size of CRC"	CRC type (length).
"Error Protection"	Error protection.
"Interleaver 1 / 2 State"	Channel coding interleaver state
Remote command:	n.a.


4.37 PCPCH Settings - UE

Access:

1. Select "3GPP FDD > Link Direction > Uplink / Reverse > User Equipments > UE 1".
2. Select "Mode > PCPCH Standard/PCPCH Preamble Only".

The PCPCH settings are available in two modes:

- In "PCPCH Standard" mode, the instrument generates a single physical common packet channel (PCPCH). This channel is used to transmit packet-oriented services (e.g. SMS).

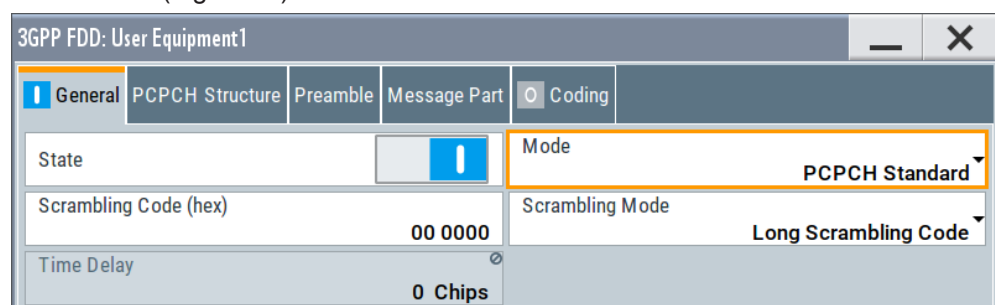

- In "PCPCH Preamble only" mode, the instrument only generates the preamble of a physical common packet channel (PCPCH). This mode is needed for test case 8.9, according to 3GPP TS 25.141.

3GPP FDD: User Equipment 1

General | PCPCH Structure | Preamble

State: ☐ ☒ Mode: PCPCH Preamble Only

Scrambling Code (hex): 00 0000 Scrambling Mode: Long Scrambling Code

Time Delay: 0 Chips

In this mode, only the preamble parameters are available.

3. Select "PCPCH Structure".

3GPP FDD: User Equipment 1

General | PCPCH Structure | Preamble | Message Part | Coding

Preamble Power Step: 1.00 dB (1c)

Start Offset #: 0 Acc. Slots

AICH Preamble (1b), AICH Preamble (1c), AICH Preamble (1b), CD Preamble (1a), PC Preamble, Data (2a), Control (2b), Message Part (2)

Time Pre->Pre, Time Pre->MP

1 Acc. Slots

Structure Length 27 Slots (3a)

ARB Sequence Length 60 Slots (4)

Start Uplink Frame

End Of ARB Sequence

CAUTION: ARB Sequence Length is not a multiple of the Repetition Period

Repeat Structure After ARB Sequence Length ☐ Repeat Structure After 20 Acc. Slots (3b)

Figure 4-28: Standard PCPCH Structure: Understanding the displayed information

- 1a, 1b = "Delta Power (Preamble)", i.e. correction values for the last AICH preamble before the message part and the CD Preamble
- 1c = "Preamble Power Step"; subtract this value from 1b to calculate the power of the other preambles
- 2 = "Delta Power (Message Part)", i.e. correction value for the message part overall
- 2a, 2b = Correction values for the data and control part of the message part
- 3a = Current "Structure Length"
- 3b = User-defined repetition of the PCPCH structure, i.e. the same structure is repeated three times within the current ARB sequence length
- 4 = Current ARB sequence length (in slots); set with the parameter [Sequence Length ARB](#)

The dialog comprises a graphical display of the PCPCH structure including the timing parameters, the "Preamble Settings" and "Message Part" sections. The last sections comprise the preamble settings and the parameters for the data part of the channel. Some settings are made directly in the input fields of the graphical display.

The "Channel Coding" settings for activating channel coding are available for UE1.

Power settings and power calculation

- Calculating the power of the preamble
The graphical display of the PCPCH structure indicates:
 - The correction value for the last AICH preamble before the message part
 - The CD Preamble (indication in the AICH and CD Preamble block)
 The power of the other preambles is calculated by subtracting the selected "Preamble Power Step".
- Calculating the power of the message part
The power correction value of the message part is indicated in the message part settings.
For one active UE, the RF power of the message part is calculated as:
"Message Part Power" = "RF Level" + "Delta Power Message Part"
For PCPCH, the parameter "Level Reference" is always "RMS Power".

Example: Calculating the power of the message part

- "Level = 5 dBm"
- "Delta Power Message Part = 5.58 dB"

The resulting "Message Part Power" = 5 + 5.58 = 10.58 dBm

4.37.1 Graphical Display

The graphical display shows either the complete PCPCH including the message part or only the preamble depending on the selected mode.

PCPCH Standard

1. To access these settings, select "3GPP FDD > Link Direction > Uplink / Reverse > User Equipments > UE 1".
2. Select "Mode > PCPCH Standard"
3. Select "PCPCH Structure".
See [Figure 4-28](#)

PCPCH preamble-only

1. In the "General" tab, select "Mode > PCPCH Preamble Only"

2. Select "PCPCH Structure".

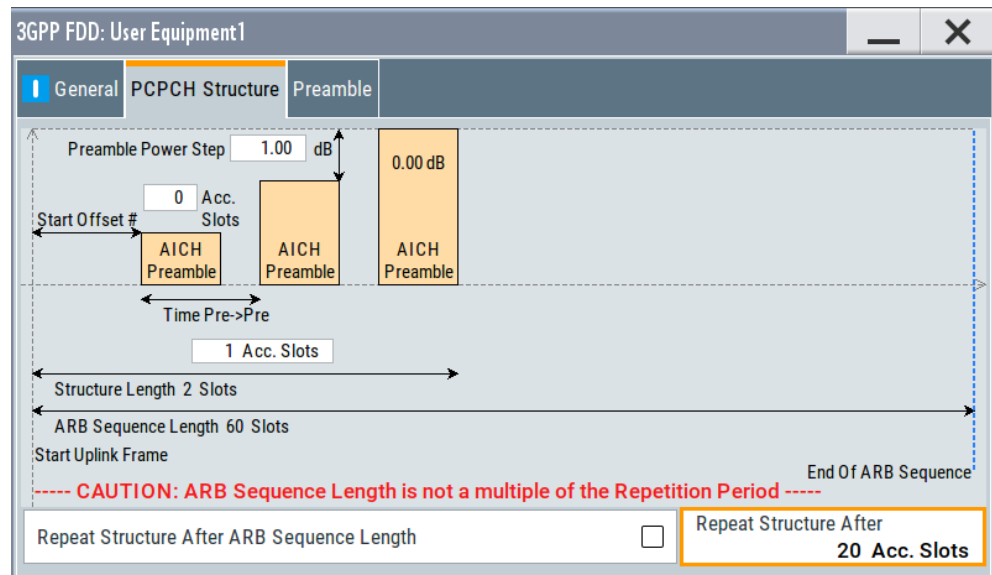


Figure 4-29: PCPCH Structure in "Mode > PCPCH preamble-only"

Some of the parameter values can be input directly in the input fields of the graphical display. The indicated structure length and the power correction values match the real settings; the number of preambles, however, is shown as an example, to explain the parameter function.

Use the power correction values to calculate the correct settings for the desired RF level (see ["Power settings and power calculation"](#) on page 250).

Delta Power (Preamble)

Indication of the level correction value for the last AICH preamble before the message part. This value is identical to the correction value for the CD preamble.

The level of the other preambles can be calculated by subtracting the set "Preamble Power Step".

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:MSTation<st>:PCPCh:TIMing:DPOWER:PREamble?` on page 486

Delta Power (Message Part)

Indicates the level correction value for the message part, together with the power offsets of the data and control part.

See also [Example "Calculating the power of the message part"](#) on page 250.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:MSTation<st>:PCPCh:TIMing:DPOWER:MPART?` on page 486

Start Offset

Enters the start offset of the PCPCH in access slots.

Note: The PCPCH only transmitted once, at the start of the sequence.

The starting time delay in timeslots is calculated according to TS 25 211, chapter 7.3 PCPCH/AICH timing relation and is $2 \times \text{"Start Offset \#"}.$

Remote command:

```
[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:PCPCh:TIMing:SOFFset
```

on page 487

Transmission Timing (Preamble)

Enters the time difference between two successive preambles in access slots.

Remote command:

```
[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:PCPCh:TIMing:TIME:PREPre
```

on page 488

Transmission Timing (Message Part)

Enters the time difference between the last preamble and the message part in access slots.

Two modes are defined in the standard. In mode AICH transmission timing 0, the preamble to message part difference is three access slots. In mode AICH transmission timing 1, it is four access slots.

Remote command:

```
[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:PCPCh:TIMing:TIME:PREMp
```

on page 487

Structure Length

Indicates the structure length:

- In "PCPCH only - Preamble" mode, the structure length is defined as:
"Structure Length" = "Start Offset (Slots)" + "Preamble Repetition" * "Time Pre->Pre"

Example: Calculating the structure length in PCPCH preamble-only mode

"Start Offset # = 2 access slots", i.e. = 4 slots

"Preamble Repetition = 2"

"Time Pre->Pre = 2 access slots", i.e. = 4 slots

"Structure Length" = 4 slots + 2 x 4 slots = 12 slots

- In "PCPCH only - Standard" mode, the structure length is defined as:
"Structure Length" = "Start Offset (Slots)" + "Preamble Repetition" * "Time Pre->Pre" + "Time Pre->MP" + "Power Control Preamble Length" + 15 * "Message Part Length (Frames)"
In PCPCH mode, the CD preamble has to be accounted. Therefore, preamble repetition instead of (preamble repetition - 1) is used.

Example: Calculating the structure length in PCPCH Standard mode

"Start Offset = 2 access slots", i.e. four slots

"Preamble Repetition = 3"

"Time Pre - Pre = Time Pre - MP = 3 access slots", i.e. six slots

"Power Control Preamble Length = 8 slots"

"Message Part Length = 2 frames"

"Structure Length" = 4 slots + 3 x 6 slots + 6 slots + 8 + 15 x 2 = 66 slots

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:PCPCh:TIMing:SPERiod?`
on page 487

ARB Sequence Length

Indication of the ARB sequence length.

Note: A caution message is displayed, if the structure length is longer than the selected ARB sequence length.

The change the ARB sequence length, use the parameter [Sequence Length ARB](#).

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:SLENgth` on page 354

Repeat Structure After ARB Sequence Length

Enables/disables repeating the selected PCPCH structure during one ARB sequence.

"On" Within one ARB sequence, the selected PCPCH structure is repeated once.

See [Figure 4-25](#) for illustration of the principle.

"Off" The selected PCPCH structure can be repeated several times, depending on the structure length and the [Repeat Structure After \(x Acc. Slots\)](#).

See [Figure 4-26](#) for illustration of the principle.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:PCPCh:RARB` on page 484

Repeat Structure After (x Acc. Slots)

If "Repeat Structure After ARB Sequence Length > Off", sets the number of access slots after that the selected PCPCH structure is repeated, see [Figure 4-26](#).

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:PCPCh:RAFTer` on page 484

4.37.2 Preamble Settings

1. To access these settings, select "3GPP FDD > Link Direction > Uplink / Reverse > User Equipments > UE 1".
2. Select "Mode > PCPCH Standard/PCPCH Preamble Only".

3. Select "Preamble".

3GPP FDD A: User Equipment1	
General	PCPCH Structure
Preamble	Message Part
Coding	
Preamble Power	0.00 dB
Preamble Repetition	1
Signature	0
Preamble Power Step	0.00 dB
Power Control Preamble Length	8 Slots

The dialog comprises the parameters for configuring the PCPCH preamble.

Preamble Power

Sets the power of the preamble component of the PCPCH channel.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:PCPCh:PPower` on page 483

Preamble Repetition

Sets the preamble count.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:PCPCh:PREpetition` on page 484

Preamble Power Step

Sets the power by which the preamble is increased from repetition to repetition. The power set under Preamble Power is the "target power", used during the last repetition of the preamble.

Example:

"Preamble Power" = 0 dB

"Preamble Repetition" = 3

"Preamble Power Step" = 3 dB




Figure 4-30: Generated power sequence

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation<st>:PCPCh:PPower:STEP` on page 483

Power Control Preamble Length

Sets the length of the power control preamble in slots.

Remote command:

[\[:SOURce<hw>\]:BB:W3GPp:MSTation<st>:PCPCh:PLENgtH](#) on page 483

Signature

Selects the signature to be used for the PCPCH channel. The signature defines the code domain for the channelization code being used.

Remote command:

[\[:SOURce<hw>\]:BB:W3GPp:MSTation<st>:PCPCh:SIGNature](#) on page 485

4.37.3 Message Part Settings

Access:

1. Select "3GPP FDD > Link Direction > Uplink / Reverse > User Equipments > UE 1".
2. Select "Mode > PCPCH Standard".
3. Select "Message Part".

The screenshot shows the 'Message Part' tab of the '3GPP FDD A: User Equipment1' settings window. The window has a title bar with a minus sign and a close button. Below the title bar is a tabbed interface with 'General', 'PCPCH Structure', 'Preamble', 'Message Part' (selected), and 'Coding'. The 'Message Part' tab contains a table of settings:

Data Power	0.00 dB	Control Power	0.00 dB
Message Length	1 Frames	Slot Format Control Part #	0
FBI Mode	Off	FBI Pattern (bin)	0...
Symbol Rate	30 ksps		
Data Source	Pattern	Data Pattern (bin)	0...
TFCI	0		
TPC Data Source	Pattern	TPC Pattern (bin)	0...
Read Out Mode	Continuous		

The tab comprises the settings for the data part of the PCPCH.

Data Power

Sets the power of the data component of the PCPCH channel.

Remote command:

[\[:SOURce<hw>\]:BB:W3GPp:MSTation<st>:PCPCh:DPOWer](#) on page 481

Control Power

Sets the power of the control component of the PCPCH channel.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:MSTation<st>:PCPCh:CPOWer` on page 479

Message Length

Sets the length of the message component of the PCPCH channel in frames.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:MSTation<st>:PCPCh:MLENgtH` on page 482

Slot Format

Selects the slot format of the control component of the PCPCH channel.

Slot formats 0 to 2 are available for the PCPCH channel. The slot format defines the structure of the control component, the FBI mode.

When channel coding is active, the FBI mode and the slot format are prescribed.

"Slot format 0" No FBI field

"Slot format 1" 1 FBI field

"Slot format 2" 2 FBI fields

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:MSTation<st>:PCPCh:CPSFormat` on page 480

FBI Mode

Selects the FBI (feedback information) mode.

The FBI mode is determined by the slot format set. A change in the FBI mode leads automatically to an adjustment of the slot format.

"FBI Off" The FBI field is not in use.

"FBI On 1 Bit" The FBI field is used with a length of 1 bit.

"FBI On 2 Bits" The FBI field is used with a length of 2 bits.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:MSTation<st>:PCPCh:FBI:MODE` on page 482

FBI Pattern

Enters the bit pattern for the FBI field in the control part (of the message part) of the PCPCH.

The FBI field is filled cyclically with a pattern of up to 32 bits in length.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:MSTation<st>:PCPCh:FBI:PATtern` on page 482

Symbol Rate

Sets the symbol rate of the PCPCH channel.

The symbol rate is determined by the slot format set. A change in the symbol rate leads automatically to an adjustment of the slot format.

When channel coding is active, the symbol rate is prescribed.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:MSTation<st>:PCPCh:SRATe` on page 485

Data Source

Selects the data source for the data component of the PCPCH channel.

The following standard data sources are available:

- "All 0, All 1"
An internally generated sequence containing 0 data or 1 data.
- "PNxx"
An internally generated pseudo-random noise sequence.
- "Pattern"
An internally generated sequence according to a bit pattern.
Use the "Pattern" box to define the bit pattern.
- "Data List/Select DList"
A binary data from a data list, internally or externally generated.
Select "Select DList" to access the standard "Select List" dialog.
 - Select the "Select Data List > navigate to the list file *.dm_iqd > Select" to select an existing data list.
 - Use the "New" and "Edit" functions to create internally new data list or to edit an existing one.
 - Use the standard "File Manager" function to transfer external data lists to the instrument.

See also:

- Section "Modulation Data" in the R&S SMW user manual.
- Section "File and Data Management" in the R&S SMW user manual.
- Section "Data List Editor" in the R&S SMW user manual

Remote command:

[\[:SOURce<hw>\]:BB:W3GPp:MSTation<st>:PCPCh:DATA](#) on page 480

[\[:SOURce<hw>\]:BB:W3GPp:MSTation<st>:PCPCh:DATA:PATtern](#) on page 481

[\[:SOURce<hw>\]:BB:W3GPp:MSTation<st>:PCPCh:DATA:DSElect](#) on page 481

TFCI

Enters the value of the TFCI field (transport format combination indicator) in the control component of the PCPCH channel.

Remote command:

[\[:SOURce<hw>\]:BB:W3GPp:MSTation<st>:PCPCh:TFCI](#) on page 486

TPC Data Source

Defines the data source for the TPC field of the PCPCH channel.

The following standard data sources are available:

- "All 0, All 1"
An internally generated sequence containing 0 data or 1 data.
- "Pattern"
An internally generated sequence according to a bit pattern.
Use the "Pattern" box to define the bit pattern.
- "Data List/Select TPC Data List"
A binary data from a data list, internally or externally generated.
Select "Select DList" to access the standard "Select List" dialog.
 - Select the "Select Data List > navigate to the list file *.dm_iqd > Select" to select an existing data list.

- Use the "New" and "Edit" functions to create internally new data list or to edit an existing one.
- Use the standard "File Manager" function to transfer external data lists to the instrument.

See also:

- Section "Modulation Data" in the R&S SMW user manual.
- Section "File and Data Management" in the R&S SMW user manual.
- Section "Data List Editor" in the R&S SMW user manual.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:MSTation<st>:PCPCh:TPC:DATA` on page 488

`[ :SOURce<hw> ] :BB:W3GPp:MSTation<st>:PCPCh:TPC:DATA:DSElect`
on page 488

`[ :SOURce<hw> ] :BB:W3GPp:MSTation<st>:PCPCh:TPC:DATA:PATtern`
on page 489

Read Out Mode

Defines TPC data usage.

The TPC bits are used to signal the increase or reduction in transmit power to the called station. For all read out modes, 1 bit is taken from the data stream for the TPC field for each slot. The bit is entered into the bitstream several times, depending on the symbol rate. The difference between the modes lies in the usage of the TPC bits.

The different modes can be used to set a specific output power and then let the power oscillate around this value. For example, if the power is the pattern 11111, the power can be varied with "Single + alt. 01" and "Single + alt. 10". Thus, power measurements can be carried out at quasi-constant power.

- "Continuous:"
The TPC bits are used cyclically.
- "Single + All 0"
The TPC bits are used once, and then the TPC sequence is continued with 0 bits.
- "Single + All 1"
The TPC bits are used once, and then the TPC sequence is continued with 1 bit.
- "Single + alt. 01"
The TPC bits are used once and then the TPC sequence is continued with 0 bits and 1 bit alternately. Bits as appended in multiples, depending on the symbol rate, for example, 00001111.
- "Single + alt. 10"
The TPC bits are used once and then the TPC sequence is continued with 1 bit and 0 bits alternately. Bits as appended in multiples, depending on by the symbol rate, for example, 11110000.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:MSTation<st>:PCPCh:TPC:READ` on page 489

4.37.4 Channel Coding Settings

Access:

1. Select "3GPP FDD > Link Direction > Uplink / Reverse > User Equipments > UE 1".
2. Select "Mode > PCPCH Standard".
3. Select "Coding".

3GPP FDD A: User Equipment1

General PCPCH Structure Preamble Message Part **Coding**

Coding State ☐ Coding Type CPCH RMC (TB size 168 bit)

Transport Channel

CPCH
168
PN 9
☒ On

Transport Block Size	168	Transport Blocks	1
Transport Time Interval	20 ms		
Size Of CRC	16	Error Protection	Conv 1/2
Interleaver 1 State	On	Interleaver 2 State	On

The tab comprises the parameters defining the coding type and activating the PCPCH channel. The fixed settings for the channel coding parameters are displayed.

Channel Coding State

Activates or deactivates channel coding for the PCPCH channel.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MStation:ENHanced:PCPCh:CCODing:STATe`
on page 539

Channel Coding Type

Selects the predefined reference measurement channel coding types for the PCPCH channel.

"CPCH RMC (TB size 168 bit)"

Reference Measurements Channel Coding with transport block size of 168 bit.

"CPCH RMC (TB size 360 bit)"

Reference Measurements Channel Coding with transport block size of 360 bit.

Remote command:

`[ :SOURCE<hw> ] :BB:W3GPp:MSTation:ENHanced:PCPCh:CCODing:TYPE`
on page 540

Show Coding

Calls the menu for displaying channel coding. The reference measurement channel parameters are set to fixed values.

The following parameters are displayed:

"Data Source" The data source is displayed in the transport channel graphical display.

"Transport Block Size"
Size of the transport block at the channel coding input.

"Transport Block"
Transport blocks count.

"Transport Time Interval"
Number of frames into which a TCH is divided.

"Size of CRC" CRC type (length).

"Error Protection"
Error protection.

"Interleaver 1 / 2 State"
Channel coding interleaver state

Remote command:

n.a.

4.38 Filtering, Clipping, ARB Settings

Access:

- Select "3GPP FDD > General > Filter/Clipping/ARB Settings".

The dialog comprises the settings, necessary to configure the baseband filter, to enable clipping and adjust the sequence length of the arbitrary waveform component.

4.38.1 Filter Settings

3GPP FDD A: Filter/Clipping/ARB Settings

Filter
Root Cosine

Clipping ARB

Filter Root Cosine

Roll Off Factor 0.22

Chip Rate Variation 3.840 000 000 Mcps

Settings:

Filter

Selects the baseband filter.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:FILTer:TYPE` on page 362

Roll Off Factor or BxT

Sets the filter parameter.

The filter parameter offered ("Roll Off Factor" or "BxT") depends on the currently selected filter type. This parameter is preset to the default for each of the predefined filters.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:FILTer:PARAMeter:APCO25` on page 360

`[ :SOURce<hw> ] :BB:W3GPp:FILTer:PARAMeter:COSine` on page 360

`[ :SOURce<hw> ] :BB:W3GPp:FILTer:PARAMeter:GAUSS` on page 360

`[ :SOURce<hw> ] :BB:W3GPp:FILTer:PARAMeter:RCOSine` on page 361

`[ :SOURce<hw> ] :BB:W3GPp:FILTer:PARAMeter:SPHase` on page 362

Cut Off Frequency Factor

Sets the value for the cut-off frequency factor. The cut-off frequency of the filter can be adjusted to reach spectrum mask requirements.

Remote command:

[\[:SOURce<hw>\]:BB:W3GPp:FILTer:PARAmeter:LPASs](#) on page 361

[\[:SOURce<hw>\]:BB:W3GPp:FILTer:PARAmeter:LPASSEVM](#) on page 361


Chip Rate Variation

Enters the chip rate. The default settings for the chip rate are 3.84 Mcps.

The chip rate entry changes the output clock and the modulation bandwidth, as well as the synchronization signals that are output. It does not affect the calculated chip sequence.

Remote command:

[\[:SOURce<hw>\]:BB:W3GPp:CRATe:VARiation](#) on page 360

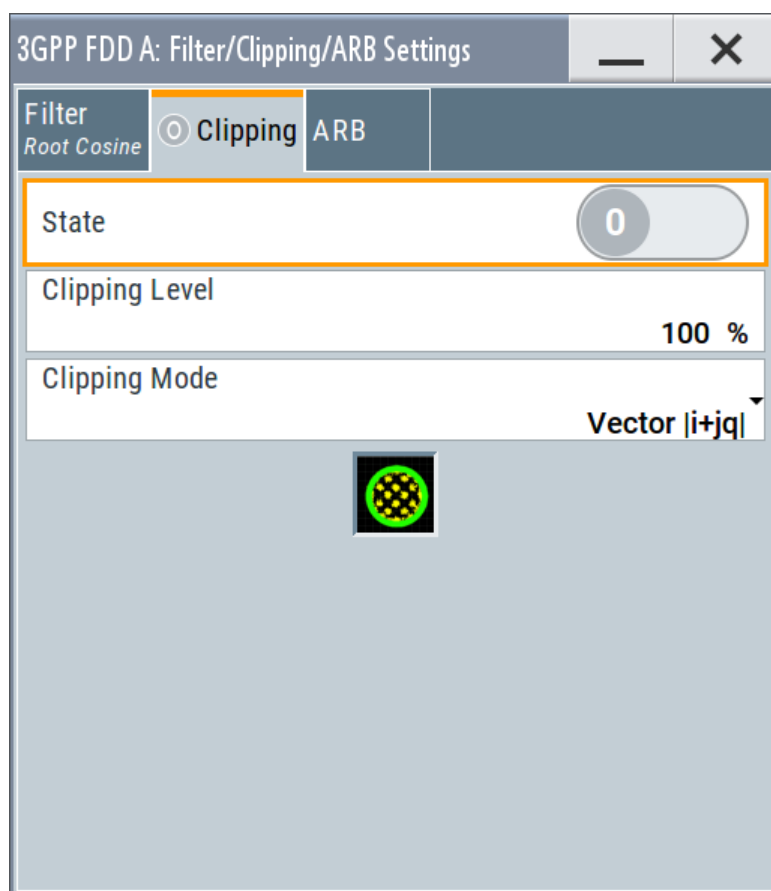4.38.2 Clipping Settings

Provided are the following settings:

Clipping State

Switches baseband clipping on and off.

Baseband clipping is a simple and effective way of reducing the crest factor of the WCDMA signal.

WCDMA signals can have high crest factors particularly with many channels and unfavorable timing offsets. High crest factors entail two basic problems:

- The nonlinearity of the power amplifier (compression) causes intermodulation which expands the spectrum (spectral regrowth).
- Since the level in the D/A converter is relative to the maximum value, the average value is converted with a relatively low resolution. This results in a high quantization noise.

Both effects increase the adjacent-channel power.

With baseband clipping, all the levels are limited to a settable value ("Clipping Level"). This level is specified as a percentage of the highest peak value. Since clipping is done before filtering, the procedure does not influence the spectrum. The EVM however increases.

Since clipping the signal not only changes the peak value but also the average value, the effect on the crest factor is unpredictable. The following example shows the effect of the "Clipping" on the crest factor for typical scenarios.

Example: Clipping effect on the crest factor

The [Table 4-12](#) shows changing the crest factor by clipping (vector mode $|I+q|$) for signal configurations with different output crest factors.

100% clipping levels mean that clipping does not take place.


Table 4-12: Crest factor values as function of the vector clipping

Clipping level	Downlink: 10 DPCCHs "Minimum Crest" 30 ksps	Downlink: 10 DPCCHs "Worst Crest" 30 ksps	Downlink: 10 DPCCHs "Average Crest" 30 ksps	Downlink: 128 DPCCHs "Average Crest" 30 ksps
100%	9.89 dB	14.7 dB	10.9 dB	21.7 dB
80%	8.86 dB	12.9 dB	9.39 dB	20.2 dB
50%	7.50 dB	10.1 dB	8.29 dB	16.9 dB
20%	5.50 dB	6.47 dB	6.23 dB	12.5 dB
10%	5.34 dB	6.06 dB	5.80 dB	9.57 dB
5%	5.34 dB	6.06 dB	5.80 dB	8.17 dB


The pictures in the following table demonstrate the effect of clipping with vector mode ($|I+q|$), using a signal configuration with 4 DPCH as an example.

The arrows and the circle in the upper illustration show how the levels are mapped during subsequent clipping in vector mode ($|I+q|$).

Constellation diagram of the signal without clipping, shows the level mapping for vector mode

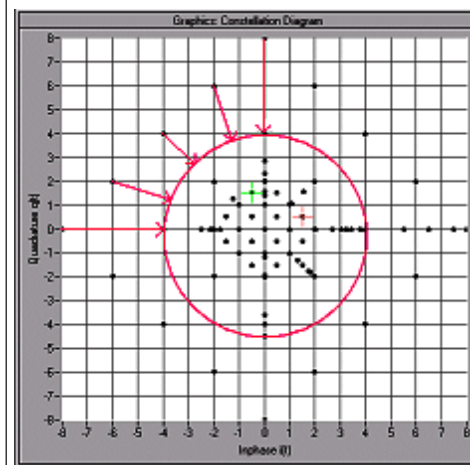

Constellation diagram with clipping level 50 %, vector mode ($|I+Q|$)

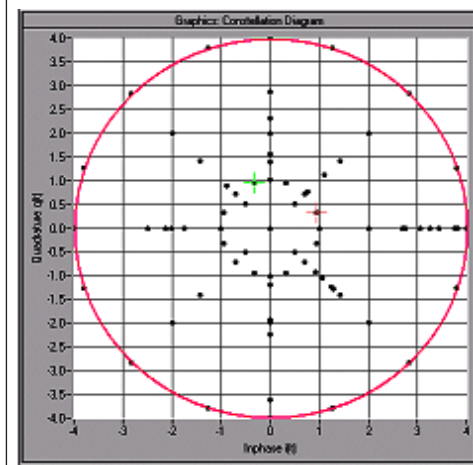

Remote command:

[\[:SOURce<hw>\]:BB:W3GPp:CLIPping:STATE](#) on page 359

Clipping Level

Sets the limit for clipping.

This value indicates at what point the signal is clipped. It is specified as a percentage, relative to the highest level. 100% indicates that clipping does not take place.

Remote command:

[\[:SOURce<hw>\]:BB:W3GPp:CLIPping:LEVel](#) on page 358

Clipping Mode


Selects the clipping method. The dialog displays a graphical illustration on how this two methods work.

- "Vector $|i + jq|$ "
The limit is related to the amplitude $|i + q|$. The I and Q components are mapped together, the angle is retained.
- "Scalar $|i|, |q|$ "
The limit is related to the absolute maximum of all the I and Q values $|i| + |q|$. The I and Q components are mapped separately, the angle changes.

Remote command:

[\[:SOURce<hw>\]:BB:W3GPp:CLIPping:MODE](#) on page 359

4.38.3 ARB Settings

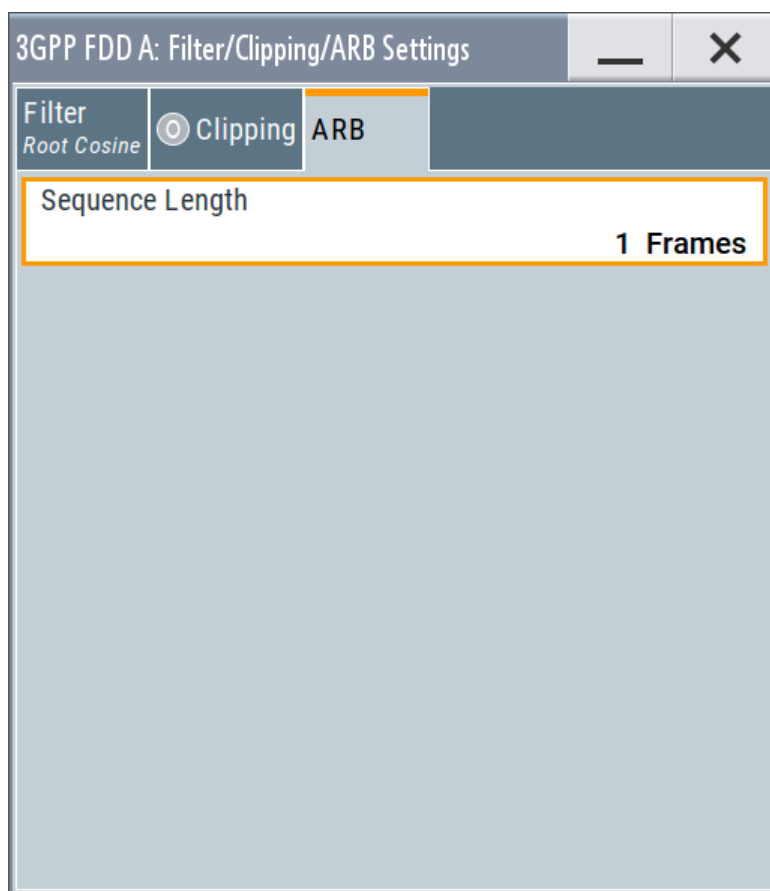

Provided are the following settings:

Sequence Length ARB

Changes the sequence length of the arbitrary waveform component of the signal. This component is calculated in advance and output in the arbitrary waveform generator. It is added to the realtime signal components.

The maximum number of frames is calculated as follows:

Max. No. of Frames = Arbitrary waveform memory size/(3.84 Mcps x 10 ms).

Tip: In pure amplifier tests with several channels and no enhanced channels, it is possible to improve the statistical properties of the signal by increasing the sequence length.

Remote command:

`[ :SOURce<hw> ] :BB:W3GPp:SENgth` on page 354

5 How to Work with the 3GPP FDD Option

The following step-by-step instructions demonstrate how to perform some signal generation tasks with the 3GPP FDD option.

5.1 Resolving Domain Conflicts

To resolve code domain conflicts

1. To recognize a downlink domain conflict, use one of the following methods:

- a) Select "3GPP FDD > Base Station > Channel Table"

A conflict (warning) symbol in the tab name and in the channel table indicates a domain conflict.

The term domain conflict describes that channels overlap.

3GPP FDD: Basestation1

Common

 Channel Table

Channel Graph

Code Domain

 Multi Channel Assistant ...

 Reset All Channels

 Preset To HSDPA H-Set


AI Symbols
16

DTX Symbols
4

	Channel Type	Enh/HSDPA Settings	Slot Fmt	Sym Rate /kps	Chan Code	Power /dB	Data	DList Patt	T Offs	DPCCH Settings	State	Dom Conf
7	AICH			15	0	0.00				Config...	Off	
8	AP-AICH			15	0	0.00				Config...	Off	
9	PDSCH		4	240	0	0.00	PN 9				On	
10	DL-DPCCH		0	7.5	0	0.00				Config...	On	
11	DPCH	Config...	15	480	0	0.00	PN 9		0	Config...	On	
12	HS-SCCH	Config...		30	5	0.00	PN 9				On	
13	HS-PDS.QPSK	Config...		240	2	0.00	PN 9				On	
14	DPCH		8	30	48	0.00	PN 9		9	Config...	On	

- b) Select "3GPP FDD > Base Station > Code Domain"

A code domain conflict is indicated by overlapping bars.

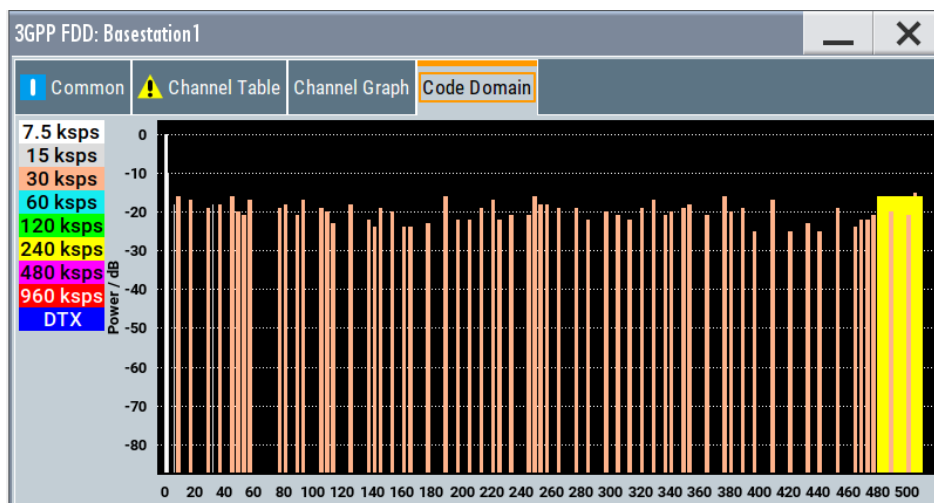

2. The instrument helps you to resolve code domain conflicts by automatically adapting the channelization code of the channels involved.
To access the required function, in the "3GPP FDD > Base Station > Channel Table" select the conflict symbol and trigger "Resolve Domain Conflicts".



Note: The HSUPA control channels E-RGCH and E-HICH use the same channelization code as long as they use different signature sequence hopping index that identifies the user equipment. The F-DPCH channels also use the same channelization code as long as they use a different timing offset or slot format.

The code domain conflict is resolved by changing the channelization codes of the affected channels.

3GPP FDD: Basestation1


Common Channel Table Channel Graph Code Domain

Multi Channel Assistant ... Reset All Channels Preset To HSDPA H-Set

Data 39

	Channel Type	Enh/HSDPA Settings	Slot Fmt	Sym Rate /ksp	Chan Code	Power /dB	Data	DList Patt	T Offs	DPCCH Settings	State	Dom Conf
7	AICH			15	0	0.00				Config...	Off	
8	AP-AICH			15	0	0.00				Config...	Off	
9	PDSCH		4	240	1	0.00	PN 9				On	
10	DL-DPCCH		0	7.5	8	0.00				Config...	On	
11	DPCH	Config...	15	480	1	0.00	PN 9		0	Config...	On	
12	HS-SCCH	Config...		30	3	0.00	PN 9				On	
13	HS-PDS.QPSK	Config...		240	4	0.00	PN 9				On	
14	DPCH		8	30	4	0.00	PN 9		9	Config...	On	

The graphs immediately display the change

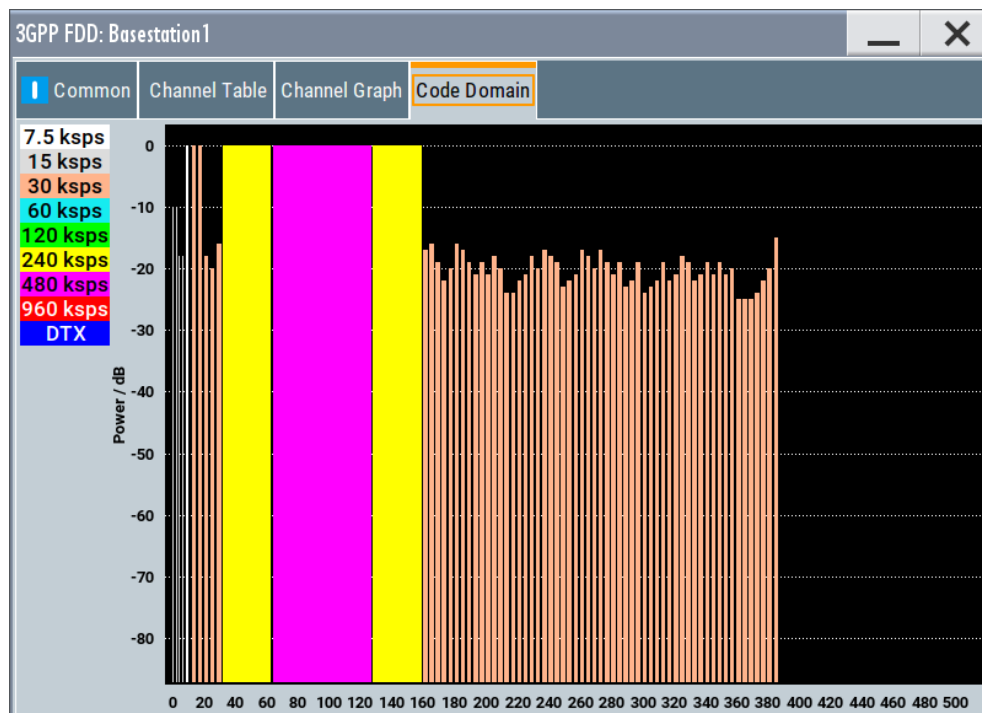

5.2 Using the DL-UL Timing Offset Settings

To generate a continuous uplink signal composed of multiple separately generated uplink frames

1. Adjust the uplink settings as required and set "User Equipment > UE > DPCCH > DL-UL Timing Offset = 0 Chips".
2. Enable generation of the 3GPP FDD signal, i.e "3GPP FDD > State > On"
3. Use the [Generate Waveform](#) function to save the current signal as an ARB signal in a waveform file.
4. Reconfigure the uplink settings
5. Save the signal as an ARB file.
6. Use the "Baseband > ARB > Multi Segment" function to assemble a common signal from the several uplink signals.
7. If necessary, readjust the "Marker" settings.
Use for example a sequence list to configure the order the waveforms are processed or to set how many times each of them is repeated.

5.3 Configuring UL-DTX Transmission and Visualizing the Scheduling

To configure the instrument to generate an UL DPCCH DTX signal

1. Enable "Baseband > 3GPP FDD > Transmission Direction > Uplink".
2. Select "User Equipment > UE1 > UL-DTX".
3. Enable "Mode > UL-DTX". Configure the following settings:

Table 5-1: UL-DTX Settings

Parameter	Value
E-DCH TTI	2 ms
Offset	2 Subframes
Inactivity Threshold for Cycle 2	8 TTIs
Long Preamble Length	4 Slots
DTX Cycle 1 / DTX Cycle 2	4 Subframes and 8 Subframes respectively
DPCCH Burst Length 1 / DPCCH Burst Length 2	1 Subframe (3 Slots)
UL-DTX... / User Scheduling State	On

Configuring UL-DTX Transmission and Visualizing the Scheduling

The figure below shows the generated UL DPCCH DTX bursts pattern.

4. Use the [Scheduling List](#) to display the configured bust pattern.

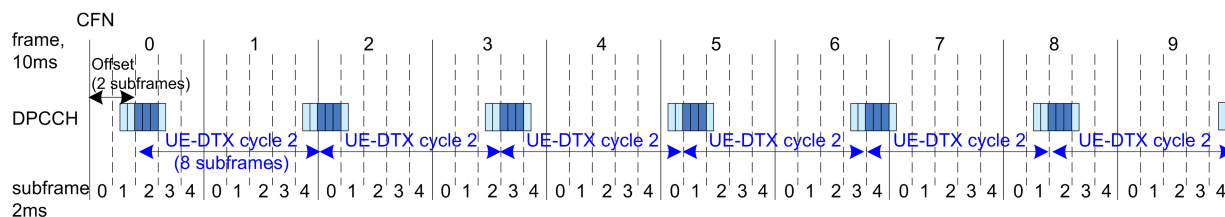


Figure 5-1: Example for UL DPCCH DTX burst pattern as generated by the R&S SMW (E-DCH TTI=2ms, beginning at CFN0, UE DTX DRX Offset=2, DTX Cycle 2=8 subframes)

Note: In this implementation, the signal generation starts with UE-DTX cycle 2. The UL DPCCCH DTX burst pattern is offset with two subframes. The burst is six slots long (2 slots Preamble + 3 slots DPCCCH Burst Length 2 + 1 slot postamble). They are generated every eight subframes.

5. Select "User Equipment > UE1 > E-DCH Scheduling Settings" .
6. Configure the settings as follows:

Table 5-2: E-DCH scheduling settings

Parameter	Value
Number of Table Rows	1
E-DCH Schedule Repeats After	24 TTIs
E-DCH TTI From	10
E-DCH TTI To	10

7. Select "UE1 > E-DPDCH Settings > State > On" to enable the generation of E-DPDCH.

The "UE1 > Scheduling List" shows the updated UL DPCCH DTX bursts pattern (see also [Figure 5-2](#)).

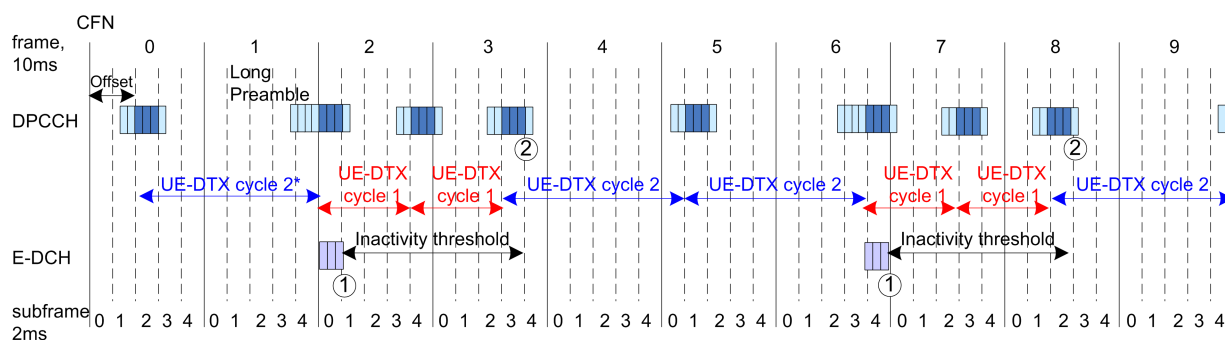


Figure 5-2: Example for UL DPCCH DTX burst pattern in case of E-DCH transmission

1 = Cycle 2 to Cycle 1 switch after E-DCH transmission

2 = Cycle 1 to Cycle 2 switch when the inactivity timer expires

*) = In the R&S SMW, the signal generation starts with UE-DTX cycle 2.

8. Configure the "UE1 > HS-DPCCH Settings" as follows:

Table 5-3: HS-DPCCH Settings

Parameter	Value
Compatibility Mode (HS-DPCCH)	"Release 8 and Later RT"
Inter TTI Distance (Interval)	1 subframe
Number of Rows	1
HARQ-ACK Repeat After	40 intervals
HARQ-ACK From Interval/ HARQ-ACK To Interval	20 / 20
HS-DPCCH 1/2, HARQ-ACK 1/2/3/4	A
Number of Rows	1
PCI/CQI Repeat After	40 intervals
PCI-CQI From Interval/ PCI-CQI To Interval	2 / 2
HS-DPCCH 1/2, PCI/CQI 1/2/3/4 Type	CQI
CQI/CQI _S /CQI _I /CQI _L	5

9. Select "UE1 > HS-DPCCH Settings > State > On" to enable the transmission of control signaling.

Figure 5-3 shows the generated UL DPCCH DTX bursts pattern.

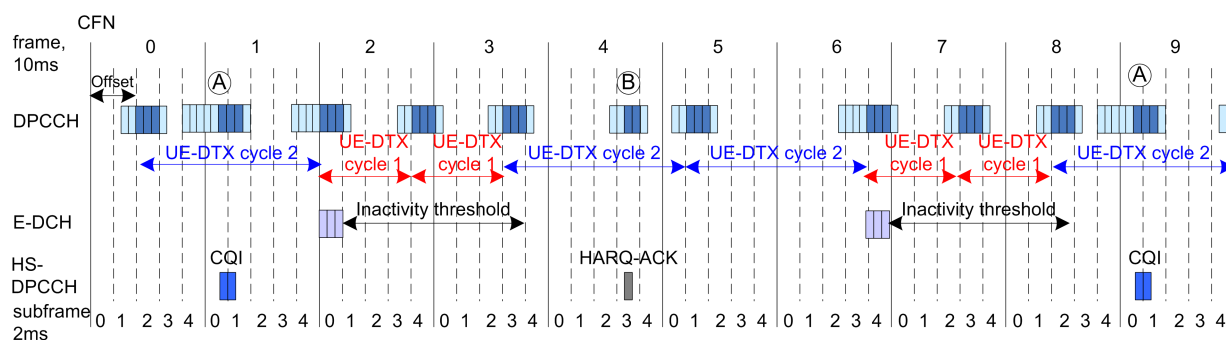


Figure 5-3: Example for UL DPCCH DTX burst pattern in case of E-DCH and HS-DPCCH transmissions

A = DPCCH burst caused by the transmission of a CQI report

B = DPCCH burst caused by the transmission of an HARQ-ACK message

Although there is an HS-DPCCH transmission, the UE does not switch from UE-DTX cycle 2 to UE-DTX cycle 1.

5.4 Configuring and Visualizing the Uplink User Scheduling

To configure an uplink user scheduling

Consider the exemplary scheduling file. The file content is suitable as a basis for further customization.

1. Enable "Baseband > 3GPP FDD > Transmission Direction > Uplink".
2. Select "User Equipment > UE1".
Enable the channels DPDCH and E-DCH.
3. Enable "Dynamic Power Control".
4. Select "User Equipment > UE1 > UL-DTX/User Scheduling"
5. Enable "Mode > User Scheduling".
6. Use the example scheduling file to generate a user scheduling according to your testing needs.
7. Open the "UE1 > Scheduling List".
The "Scheduling List" visualizes the configured transmission.

3GPP FDD: UE1/Scheduling List

Frame Start

0

Number Of Frames

10

|: The channel is inactive in the slot.
X: The channel is active in the slot.

Frame Number:	Slot Number:	DPCCH Slots:	DPDCH Slots:	E-DCH TTI Number:	E-DPCCH Slots:	E-DPDCH Slots:
0	0	X	X	0		
	1	X	X			
	2	X	X			
	3	X	X			
	4	X	X			
	5	X	X			
	6	X	X			
	7	X	X			
	8	X	X			
	9	X	X			
	10	X	X			
	11	X	X			
	12	X	X			
	13	X	X			
	14	X	X			
1	0	X	X	1		
	1	X	X			
	2	X	X			
	3	X	X			
	4	X	X			
	5	X	X			
	6	X	X			
	7	X	X			
	8	X	X			
	9	X	X			
	10	X	X			
	11	X	X			
	12	X	X			
	13	X	X			
	14	X	X			

Figure 5-4: Example: Scheduling list display of the user scheduling configuration

```

<?xml version="1.0"?>
<SMxScheduling>
  <head type="3GPP FDD" subtype="Uplink User Scheduling" version="1" />
  <command slot="0" action="DPCCH_OFF" />
  <command slot="0" action="DPDCH_OFF" />
  <command slot="0" action="EDCH_OFF" />
  <command slot="0" action="DYNPC_OFF" />

  <command slot="15" action="DPCCH_ON" />
  <command slot="15" action="EDCH_ON" />
  <command slot="15" action="EDCH_TTIS" ttis="2" />
  <command slot="15" action="EDCH_ETFCI" etfci="5" />
  <command slot="15" action="DPCCH_OFF" />
  <command slot="15" action="EDCH_OFF" />

  <command slot="45" action="DYNPC_ON" />
  <command slot="45" action="DPCCH_ON" />
  <command slot="45" action="DPDCH_ON" />
  <command slot="45" action="EDCH_ON" />
  <command slot="45" action="EDCH_TTIS" ttis="10" />

```

How to Configure the HS-DPCCH Settings for 4C-HSDPA Tests

```

<command slot="45" action="EDCH_ETFCI" etfci="20" />
<command slot="60" action="DPCCH_OFF" />
<command slot="60" action="DPDCH_OFF" />
<command slot="60" action="EDCH_OFF" />
<command slot="60" action="DYNPC_OFF" />

<command slot="150" action="REPEAT" />
</SMxScheduling>

```

Interpretation of the scheduling

- The instrument transmits the following channels:
 - DPCCH and E-DCH during the second frame (frame # 1, from slot # 15 to slot # 29).
A TTI size of 2 ms and an E-TFCI of 5 is used for the E-DCH
 - DPCCH, DPDCH and E-DCH during the fourth frame (frame # 3, from slot # 45 to slot # 59).
A TTI size of 10 ms and an E-TFCI of 20 is used for the E-DCH.
- External dynamic power control commands are considered during the second transmission block of the example. The instrument ignores any power control commands during the first transmission block and during all prior signal gaps, between and after the two transmission blocks.
- The scheduling is looped at slot 150, i.e a transmission of DPCCH and E-DCH starts from slot 165 on, a (power controlled) transmission of DPCCH/DPDCH/E-DCH starts from slot 195 on.

The displayed information in the "Scheduling List" confirms the expected scheduling of the channels as well as the changes in the E-DCH E-TFCI and TTI size. Refer to [Chapter 4.27, "Scheduling List"](#), on page 174 for detailed explanation on how to understand the displayed information.

5.5 How to Configure the HS-DPCCH Settings for 4C-HSDPA Tests

The following is an example on how to use the provided settings to configure the instrument to send ACK only messages. This transmission is required in the ACK mis-detection test for 4C-HSDPA, according to 3GPP TS 25.141, section 8.11A.3 and 8.11A.4.

The example is based on the test configuration specified in 3GPP TS 25.141, annex A.9A.

Table 5-4: Required test configurations (excerpt)

Test Configuration	4/4/4	4/2/2	3/3/3	3/2/1	3/3/0
HS-DPCCH spreading factor	128	128	128	128	256
Secondary cell enabled	3	3	2	2	2

Test Configuration	4/4/4	4/2/2	3/3/3	3/2/1	3/3/0
Secondary cell active	3	1	2	1	2
Number of MIMO carriers	4	2	3	1	0

To configure the 4C-HSDPA HS-DPCCH Reference Measurement Channel

The example lists only the related setting and is based on Test Configuration = 3/3/3, see [Table 5-4](#).

1. Enable "Baseband > 3GPP FDD > Link Direction > Uplink".
2. For "User Equipment > UE1", enable "HS-DPCCH > State > On".
3. Select "HS-DPCCH > MIMO Mode > On".
4. Select "HS-DPCCH > Secondary Cell Enabled > 2".
5. Select "HS-DPCCH > Secondary Cell Active > 2".
6. Use the default values "HS-DPCCH > HARQ-ACK Scheduling > Number of Rows > 1" and "HS-DPCCH > HARQ-ACK Scheduling > HARQ-ACK Repeat After > 1".
7. Select "HS-DPCCH > HARQ-ACK Scheduling > HS-DPCCH 1 HARQ-ACK 1 > AA/AA".
8. Select "HS-DPCCH > HARQ-ACK Scheduling > HS-DPCCH 1 HARQ-ACK 2 > AA/D".

3GPP FDD: User Equipment 1

General Code Domain DPCCH DPDCCH **HS-DPCCH** E-DPCCH E-DPDCH E-DCH

Compatibility Mode: Release 8 and Later

Start Delay: 101 * 256 Chips

Inter TTI Distance (Interval): 5 Subframes

Channelization Code: Q / 32

Slot Format: 1 (30ksps)

MIMO Mode: ☒

Secondary Cell Enabled: 2

Secondary Cell Active: 2

HARQ - ACK

Number of Rows: 1

HARQ-ACK Repeat After: 1 Intervals

	HARQ-ACK From Interval	HARQ-ACK To Interval	HS-DPCCH 1 HARQ-ACK 1	HS-DPCCH 1 HARQ-ACK 2	HS-DPCCH 2 HARQ-ACK 3	HS-DPCCH 2 HARQ-ACK 4	Pow Offs /dB
0	0	0	AA/AA	AA/D			0.0

6 Application Sheets

Application sheets describe short application examples for selected issues and provide related background information.

6.1 Uplink Dual Cell HSDPA Test Signal Generation

The R&S SMW supports the generation of feedback messages for HSDPA data acknowledgment and channel quality indication as defined in the 3GPP TS 25.212 release 8 and release 9.

This application sheet describes how to configure the instrument to generate an uplink test signal for basic tests on Dual Cell HSDPA (DC-HSDPA) operation.

6.1.1 Options and Equipment Required

The following equipment is required:

- Vector Signal Generator R&S SMW, equipped with:
 - Latest firmware version recommended
 - One of the baseband options, e.g. R&S SMW-B10
 - One of the frequency options, e.g. R&S SMW-B103
- Option R&S SMW-K42, "Digital Standard 3GPP FDD"
- Option R&S SMW-K83, "3GPP FDD enhanced incl. MS/BS tests, HSPA, HSPA+"

6.1.2 Test Setup

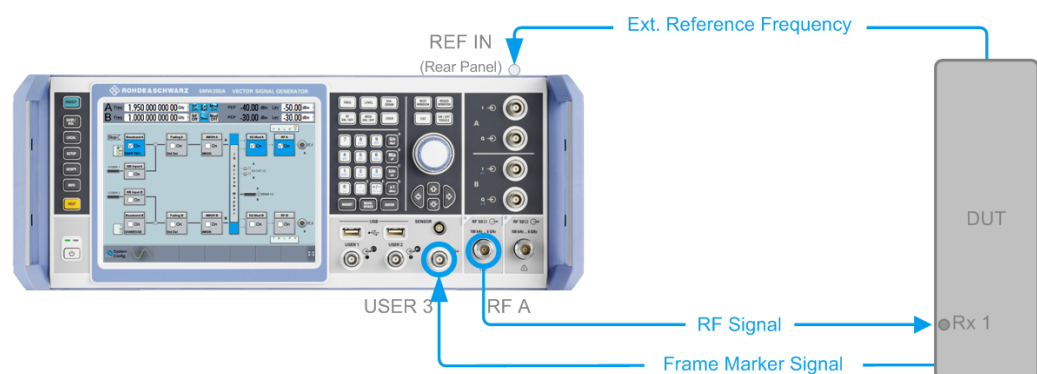


Figure 6-1: Test Setup

6.1.3 Generating an uplink DC-HSDPA Test Signal (Non-MIMO Mode)

To generate an uplink test signal corresponding to the signal of a UE configured to work in DC-HSDPA non-MIMO mode, configure the uplink HS-DPCCH as follows:

1. Preset the instrument to ensure a defined instrument state.
2. Open the 3GPP FDD dialog (e.g. "Baseband Block > 3GPP FDD").
Select "Link Direction > Uplink".
3. In the "3GPP FDD" dialog, select "User Equipment > UE1".
4. Set the "Scrambling Code" as required.
5. In the "User Equipment" dialog, select the "HS-DPCCH" tab. Perform the following:
 - a) Set the "Compatibility Mode" to "Release 8 and Later".
 - b) Select the "Secondary Cell Enabled = 1" and "Secondary Cell Active = 1" to configure dual cell HSDPA mode for the selected UE.

General	Code Domain	DPCCH	DPDCH	HS-DPCCH	E-DPCCH	E-DPDCH	E-DCH
		HARQ-ACK (Slots) 1		CQI (Slots) 2			
State		☒		Power 0.00 dB			
Compatibility Mode		Release 8 and Later					
Start Delay		101 *256 Chips		MIMO Mode ☐			
Inter TTI Distance (Interval)		5 Subframes		Secondary Cell Enabled 0			
Channelization Code		Q / 64		Secondary Cell Active 0			
Slot Format		0 (15kps)					

- c) Configure the HS-DPCCH structure with the parameters "Inter TTI Distance" and "Number of HARQ-ACK or PCI/CQI Rows". Configure the HARQ-ACK and CQI/PCI information per interval by means of the parameters in the table.
- d) Set the parameter "HS-DPCCH 1 HARQ-ACK 1" as required to adjust the information transmitted during the HARQ-ACK slot of the corresponding TTI.
For example, an A/N feedback means that an ACK is sent to the serving cell and a NACK to the secondary serving cell.
- e) To include composite CQI messages in the signal as specified in 3GPP TS 25.212:
 - Select "HS-DPCCH 1 PCI/CQI Type > Composite CQI"
 - Select "PCI/CQI 1 Content > Config".
Set the values of the parameters "CQI1" and "CQI2"
- f) Adjust the power settings as required.
- g) Execute "Adjust ARB Sequence Length".
- h) Set the "HS-DPCCH > State > On".
- i) Close the dialog.

Uplink Dual Cell HSDPA Test Signal Generation

3GPP FDD A: User Equipment1

General Code Domain DPCCH DPDCH **HS-DPCCH** E-DPCCH E-DPDCH E-DCH

HARQ - ACK

Number of Rows: 1 HARQ-ACK Repeat After: 1 Intervals

	HARQ-ACK From Interval	HARQ-ACK To Interval	HS-DPCCH 1 HARQ-ACK 1	HS-DPCCH 1 HARQ-ACK 2	HS-DPCCH 2 HARQ-ACK 3	HS-DPCCH 2 HARQ-ACK 4	Pow Offs /dB
0	0	0	DTX				

PCI / CQI

Number of Rows: 1 PCI/CQI Repeat After: 1 Intervals

	PCI/CQI From Interval	PCI/CQI To Interval	HS-DPCCH 1 PCI/CQI 1 Type	PCI/CQI 1 Content	HS-DPCCH 1 PCI/CQI 2 Type	PCI/CQI 2 Content	HS-DPCCH 2 PCI/CQI 3 Type	PCI/CQI 3 Content	HS-DPCCH 2 PCI/CQI 4 Type	PCI/CQI 4 Content	Pow Offs /dB
0	0	0	DTX								

Suggested / Current ARB Seq. Length: 1 / 1 Frames  Adjust ARB Sequence Length

6. In the "3GPP FDD" dialog, select "Trigger". Adjust the settings as required.
For example, to synchronize the R&S SMW to the frame timing of the DUT:
 - a) Feed the frame marker signal of the DUT to the USER3 connector of the instrument
 - b) Enable "Trigger > Mode > Armed Auto"
 - c) Select "Trigger > Source > External Global Trigger 1"
 - d) Select "Trigger > Global Trigger Settings"
 - e) Confirm the following settings for the global connector "USER3": "Direction > Input" and "Signal > Global Trigger 1".
7. In the "3GPP FDD" dialog, set the "State > On" to enable the generation of the 3GPP FDD uplink (UL) signal.
8. In the "RF > RF Frequency > Reference Frequency" dialog, adjust the settings as required.
For example, if you use a common reference signal or if the DUT provides the reference frequency, connect the reference signal source to the instrument.
Select "Source External".
Adjust the "External Reference Frequency".
9. Press the [FREQ] key. Enter the required RF frequency, e.g. 1950 MHz.
10. Adjust the output signal level as required.
Press the [RF ON/OFF] key to activate the RF output.

6.1.4 Generating an Uplink Test Signal for Simultaneous Dual Cell and MIMO Operation

- ▶ Perform the steps described above.
Enable the parameter "3GPP FDD > UE1 > HS-DPCCH Settings > MIMO Mode".
You are enabled to configure the HARQ-ACK feedback messages for up to four simultaneously transmitted downlink transport blocks.



For background information about the dual cell operation and processing of HARQ-ACK feedback messages, refer to [Chapter 3.3.16, "Dual Cell HSDPA \(DC-HSDPA\)"](#), on page 43.

7 Performing Base Stations Tests According to TS 25.141

This section describes the "Test Case Wizard", provided for tests on Base Stations in Conformance with the 3G Standard 3GPP FDD.

7.1 Introduction

The "Test Case Wizard" supports tests on base stations in conformance with the standard 3GPP-FDD. It offers a selection of predefined settings according to test cases in TS 25.141.

Required options

The basic equipment layout for the test is the same as for the 3GPP FDD signal generation. It includes the following options:

- Standard or wideband baseband generator (R&S SMW-B10/-B9)
- Baseband main module (R&S SMW-B13) or wideband baseband main module (R&S SMW-B13XT)
- Frequency option (R&S SMW-B1003/-B1006)
- Digital standard 3GPP FDD R&S SMW-K42
- Some of the tests require further options, like for example Additive White Gaussian Noise AWGN (R&S SMW-K62).

For an overview of the available test cases, see ["Test Case"](#) on page 284.

Scope

The "Test Case Wizard" affects frequency and level settings, link direction, trigger, baseband clock source, marker settings and base station or user equipment configuration. Besides the 3GPP settings, also interfering signals (AWGN, CW interferer, co-located modulation signals) or fading profiles are set.


The degree of freedom in setting the parameters can be determined. The "According to Standard" edit mode allows only settings in compliance with TS 25.141. The "User Definable" edit mode allows a wider range of settings.

Access:

1. Select "Baseband > 3GPP FDD".

2. Select "General > Test Case Wizard"

3GPP FDD: Test Case Wizard (TS 25.141)

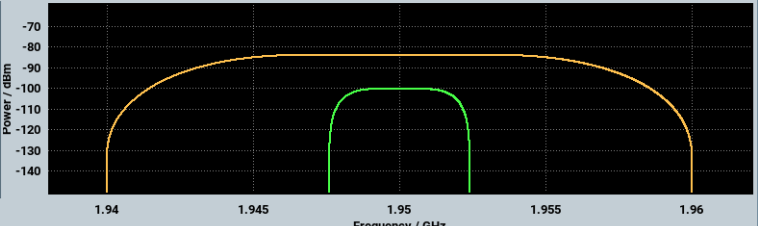

General Base Station ☒ Wanted Signal ☒ AWGN ☒ Fading

Test Case: 8.2.1 Demodulation of DCH in Static Propagation Conditions

Edit Mode: According to Standard Marker Configuration: Auto

Trigger Configuration: Auto (Ext. Trigger 1) Diversity: Off

Baseband A Signal: Route to Path and RF Port A

8.2.1 Demodulation of DCH in Static Propagation Conditions Apply

General Base Station ☒ Wanted Signal ☒ AWGN ☒ Fading

Scrambling Code (hex): 00 0000

Scrambling Mode: Long Scrambling Code

Power Class: Wide Area BS

General Base Station ☒ Wanted Signal ☒ AWGN ☒ Fading

State: ☒ Reference Measurement Channel: RMC 12.2 kbps

RF Frequency: 1.950 000 000 00 GHz Power Level: -89.28 dBm

General Base Station ☒ Wanted Signal ☒ AWGN ☒ Fading

State: ☒ Required BLER: < 0.01

Power Level (within 3.84 MHz BW): -84.00 dBm Eb/N0: 19.70 dB

General Base Station ☒ Wanted Signal ☒ AWGN ☒ Fading

State: ☒

This dialog comprises the settings necessary to select and configure a test case.

The "Test Wizard" dialog is divided into several sections:

- At the top of the panel, the test case is selected. In the "General Settings" section, the edit mode and the general signal generator parameters are set.
- The base station parameters are input in the "Base Station" section.
- The graph in the right upper section symbolizes the interference scenario defined by power level and frequency offset.
- The middle section depends on the selected test case. It displays the input/output parameters of the wanted and the interfering signals and further configuration entries besides the default settings.
- Button "Apply" activates the preset settings for the selected test case. Further modification of the generator settings is still possible. Signal generation starts with the first trigger event.

General workflow for creating complex test scenarios

With the "Test Case Wizard", you can create highly complex test scenarios with just a few keystrokes, see the following example:

1. Preset the signal generator
2. Open the "Baseband > 3GPP FDD > Test Case Wizard" dialog
3. Select one of the provided test cases
4. Enter the specific settings for the selected test case , e.g. frequency, level, ...
5. Execute "Apply Settings" to activate the selected configuration
6. Enable the RF output. Refine the generator settings if necessary
7. Start signal generation by a trigger from the base station at connector USER 3 (default configuration).

7.1.1 General Considerations

Test Frequencies

For 3GPP-FDD, several paired frequency bands are used. The following table shows start and stop frequencies of both uplink (UE transmit, node B receive) and downlink (node B transmit, UE receive) frequency bands according to 3GPP.

Operating band	Uplink frequencies UE transmits, NB receives	Downlink frequencies UE receives, NB transmits
I	1920 MHz to 1980 MHz	2110 MHz to 2170 MHz
II	1850 MHz to 1910 MHz	1930 MHz to 1990 MHz
III	1710 MHz to 1785 MHz	1805 MHz to 1880 MHz
IV	1710 MHz to 1755 MHz	2110 MHz to 2155 MHz

Operating band	Uplink frequencies UE transmits, NB receives	Downlink frequencies UE receives, NB transmits
V	824 MHz to 849MHz	869 MHz to 894MHz
VI	830 MHz to 840 MHz	875 MHz to 885 MHz

The measurements that have to be performed according to 3GPP apply to appropriate frequencies in the bottom, middle and top of the operating frequency band of the base station (BS). These frequencies are denoted as RF channels B (bottom), M (middle) and T (top).

Reference Frequency

When building up the measurement setups according to TS 25.141, it is useful that all the instruments share a common reference clock. However, after "Preset" the signal generator uses its internal clock reference. In order to feed in the clock of an external clock, the RF module configuration should be switched to external reference frequency.

In the external reference mode, an external signal with selectable frequency and defined level must be input at the REF IN connector. This signal is output at the REF OUT connector. For good reference sources of high spectral purity, a wideband setting is provided.

The reference frequency setting is effective for both paths.

Trigger Signal

For test cases with channel coded signal, e.g. an activated RMC, the base station that triggers the signal generation must emit an 'SFN (system frame number) mod 4' periodic trigger. A simple SFN periodic trigger probably disturbs the channel coding scheme.

Baseband Clock

The clock source is automatically switched to internal when the test case settings are activated.

Improvement of signal quality

Improvement of signal quality is possible via several settings:

- Use the "I/Q Mod > I/Q Modulator > Internal Baseband > Baseband Gain > 2dB" parameter to select an improved ACLR performance.
- In the "Automatic Level Control Settings" dialog, the RF output level can be recalibrated with "Search Once" in "Sample&Hold" mode. This is recommended if in CW mode the signal/intermodulation ratio is to be improved for multitransmitter measurements. With setting "Auto", the level control is automatically adapted to the operating conditions, it can cause increased intermodulations, however.
- In the "User Correction" dialog, a list of correction values can be created and subsequently activated. Thus, the frequency response of the test setup can be considered.

- In order to compensate cable loss and additionally inserted attenuators, the RF level can directly be adjusted in the "Level" input field.

7.1.2 General Settings

In the "General Settings" section, the edit mode and the general signal generator parameters are set.

Test Case

Selects the test case.

The following table gives an overview of the available test cases, the type of signal transmitted by the signal generator and the required additional options besides the basic configuration. An equipment layout as required for 3GPP FDD signal generation for one-path instruments is assumed to be the basic configuration.

Table 7-1: Transmitter tests

TS 25.141 chapter	Test case	Generator Signal	Additional options
6.4.2	Power control steps: Output power dynamics	Uplink	-
6.6	Transmit intermodulation	Interferer (downlink)	-

Table 7-2: Receiver tests

TS 24.141 chapter	Test case	Generator Signal	Additional signal generator options
7.2	Reference sensitivity level	Uplink	-
7.3	Dynamic range	Uplink, AWGN	R&S SMW-K62
7.4	Adjacent Channel Selectivity (ACS)	Uplink, Interferer	R&S SMW-B20x R&S SMW-B13T 2xR&S SMW-B10 2xR&S SMW-K42
7.5	Blocking characteristics	Uplink, Interferer	R&S SMW-B20x R&S SMW-B13T 2xR&S SMW-B10 2xR&S SMW-K42
7.6	Intermodulation characteristics	Uplink, 2 x interferer	R&S SMW-B20x R&S SMW-B13T 2xR&S SMW-B10 2xR&S SMW-K42 R&S SMW-K62
7.8	Verification of the internal BER calculation	Uplink	-

TS 24.141 chapter	Test case	Generator Signal	Additional signal generator options
8.2.1	Performance requirement - Demodulation in static propagation conditions: Demodulation of DCH	Uplink, AWGN	R&S SMW-B20x R&S SMW-B13T 2xR&S SMW-K62
8.3.1	Performance requirement - Demodulation of DCH in multipath fading conditions: Multipath fading case 1	Uplink, AWGN Fading	R&S SMW-B20x R&S SMW-B13T 2xR&S SMW-K62 R&S SMW-B14/K71
8.3.2	Performance requirement - Demodulation of DCH in multipath fading conditions: Multipath fading case 2	Uplink, AWGN Fading	R&S SMW-B20x R&S SMW-B13T 2xR&S SMW-K62 R&S SMW-B14/K71
8.3.3	Performance requirement - Demodulation of DCH in multipath fading conditions: Multipath fading case 3	Uplink AWGN Fading	R&S SMW-B20x R&S SMW-B13T 2xR&S SMW-K62 R&S SMW-B14/K71
8.3.4	Performance requirement - Demodulation of DCH in multipath fading conditions: Multipath fading case 4	Uplink AWGN Fading	R&S SMW-B20x R&S SMW-B13T 2xR&S SMW-K62 R&S SMW-B14/K71
8.4	Demodulation of DCH in moving propagation conditions	Uplink AWGN Fading	R&S SMW-B20x R&S SMW-B13T 2xR&S SMW-K62 R&S SMW-B14/K71
8.5	Demodulation of DCH in birth/death propagation conditions	Uplink AWGN Fading	R&S SMW-B20x R&S SMW-B13T 2xR&S SMW-K62 R&S SMW-B14/K71
8.6	Verification of the internal BLER calculation	Uplink	R&S SMW-B20x R&S SMW-B13T
8.8.1	RACH performance: RACH preamble detection in static propagation conditions	Uplink AWGN	R&S SMW-B20x R&S SMW-B13T 2xR&S SMW-K62

TS 24.141 chapter	Test case	Generator Signal	Additional signal generator options
8.8.2	RACH performance: RACH preamble detection in multipath fading case 3	Uplink AWGN Fading	R&S SMW-B20x R&S SMW-B13T 2xR&S SMW-K62 R&S SMW-B14/K71
8.8.3	RACH performance: Demodulation of RACH message in static propagation conditions	Uplink AWGN	R&S SMW-B20x R&S SMW-B13T 2xR&S SMW-K62
8.8.4	RACH performance: Demodulation of RACH message in multipath fading case 3	Uplink AWGN Fading	R&S SMW-B20x R&S SMW-B13T 2xR&S SMW-K62 R&S SMW-B14/K71
8.9.1	CPCH performance: CPCH access preamble and collision detection, preamble detection in static propagation conditions	Uplink AWGN	R&S SMW-B20x R&S SMW-B13T 2xR&S SMW-K62
8.9.2	CPCH performance: CPCH access preamble and collision detection, preamble detection in multipath fading case 3	Uplink AWGN Fading	R&S SMW-B20x R&S SMW-B13T 2xR&S SMW-K62 R&S SMW-B14/K71
8.9.3	CPCH performance: Demodulation of CPCH message in static propagation conditions	Uplink AWGN	R&S SMW-B20x R&S SMW-B13T 2xR&S SMW-K62
8.9.4	CPCH performance: Demodulation of CPCH message in multipath fading case 3	Uplink AWGN Fading	R&S SMW-B20x R&S SMW-B13T 2xR&S SMW-K62 R&S SMW-B14/K71

Remote command:

[:SOURce] :BB:W3GPp:TS25141:TCASe on page 553

Edit Mode

Selects the edit mode.

"According to Standard"

Only settings in compliance with TS 25.141 are possible in the wizard panel.

"User Definable"

A wider range of settings is possible in the wizard panel.

Remote command:

[:SOURce] :BB:W3GPp:TS25141:EMODE on page 546

Trigger Configuration

Selects the trigger configuration. The trigger is used to synchronize the signal generator to the other equipment.

- "Auto" The trigger settings are customized for the selected test case. In most cases, trigger setting "Armed Auto" with external trigger source "External Trigger 1" is used. Unless otherwise noted, the trigger delay is set equal to zero. Thus, the base station frame timing is able to synchronize the signal generator by an SFN (system frame number) periodic trigger. If the signal generator offers a channel coded signal (as all the reference measurements channels require) the base station must emit a 'SFN mod 4' periodic trigger.
- "Unchanged" The current trigger settings of the signal generator are retained unchanged.

Remote command:

[\[:SOURce\]:BB:W3GPp:TS25141:TRIGger](#) on page 554

Marker Configuration

Selects the marker configuration. The marker can be used to synchronize the measuring equipment to the signal generator.

- "Auto" The marker settings are customized for the selected test case. In most cases "Radio Frame" markers are output. Unless otherwise noted, the marker delays are set equal to zero.
- "Unchanged" The current marker settings of the signal generator are retained unchanged.

Remote command:

[\[:SOURce\]:BB:W3GPp:TS25141:TRIGger:OUTPut](#) on page 555

Diversity

Selects the signal routing according to the base station's diversity processing capability.

- "ON" The test signal is routed to both RF outputs.
- "Off" The test signal is routed to the selected RF output.

Remote command:

[\[:SOURce\]:BB:W3GPp:TS25141:RXDiversity](#) on page 552

Baseband A Signal Routing

Selects the signal routing for baseband A signal. This signal represents in the most test cases the wanted signal (exception test case 6.6).

- "A" The baseband signal A is routed to RF output A.
- "B" The baseband signal A is routed to RF output B.

Remote command:

[\[:SOURce\]:BB:W3GPp:TS25141:ROUTE](#) on page 552

7.1.3 Base Station Configuration

The base station parameters are input in the "Base Station" section.

Scrambling Code (hex)

Enters the scrambling code.

Remote command:

[\[:SOURce\]:BB:W3GPp:TS25141:SCODE](#) on page 553

Scrambling Mode

Sets the type of scrambling code.

With scrambling code, a distinction is made between "Long" and "Short Scrambling Code" for uplink signals. For downlink signals (test case 6.6), the scrambling code generator can be switched on and off.

- "On " (downlink only)
Enables scrambling code generator.
- "Off" Disables scrambling code generator for test purposes.
- "Long Scrambling Code"
(uplink only)
Sets the long scrambling code.
- "Short Scrambling Code"
(uplink only)
Sets short scrambling code.

Remote command:

[\[:SOURce\]:BB:W3GPp:TS25141:SCODE:MODE](#) on page 553

Power Class

Enters the base station power class. The selected power class determines the output level of the signal generator. The output level is indicated in the "Wanted Signal" section of the Wizard panel.

For edit mode "User Definable", the output level can be set in the "Wanted Signal" section of the Wizard panel.

- "Wide Area BS"
Enables power class wider area BS
- "Medium Range BS"
Enables power class medium range BS
- "Local Area BS"
Enables power class local area BS

Remote command:

[\[:SOURce\]:BB:W3GPp:TS25141:BSPClass](#) on page 545

7.1.4 Apply

Apply

Activates the current settings of the test case wizard.

Initialization of the signal generator with the test case settings is performed by a partial reset that includes only the required settings. Affected are the baseband, fading and AWGN module and the RF frequency and RF level settings. Other settings of the signal generator are not altered.

Before triggering the signal generator, these other settings still can be changed. This is useful when compensating for cable loss and additionally inserted attenuators by adjusting the RF power levels is required.

Signal generation is started at the first trigger received by the generator. The RF output is not activated /deactivated by the test case wizard. At the beginning of the measurement, activate the RF output.

Note: For safety reasons, the RF is not active unless the button RF ON has been pressed.

Remote command:

`[ :SOURce ] :BB:W3GPp:TS25141:TCASe:EXECute` on page 554

7.2 Receiver Tests

7.2.1 Overview

7.2.1.1 Basic Configuration

The test cases for receiver tests require at least the following equipment layout for the signal generator:

- Digital Standard 3GPP FDD (R&S SMW-K42)
- Arbitrary Waveform Generator (R&S SMW-B10),
- Baseband Main module (R&S SMW-B13),
- Frequency option (R&S SMW-B10x).

If the test case requires further options, they are listed together with the description of the test case.

Receiver test can be performed with the signal generator only, i.e. without additional measuring equipment.

7.2.1.2 Test Setups - Receiver Tests

The tests can be performed using the standard test setup according to TS 25.141. Test setups beside the two standard test setups described below are specified at the Test Case description.

Standard Test Setup - One Path

In case of two-path instruments, signal routing to path A is assumed. RF port A outputs the wanted signal (with or without fading and/or interference) and is connected to the Rx port of the base station. The signal generator starts signal generation at the first received BS frame trigger.

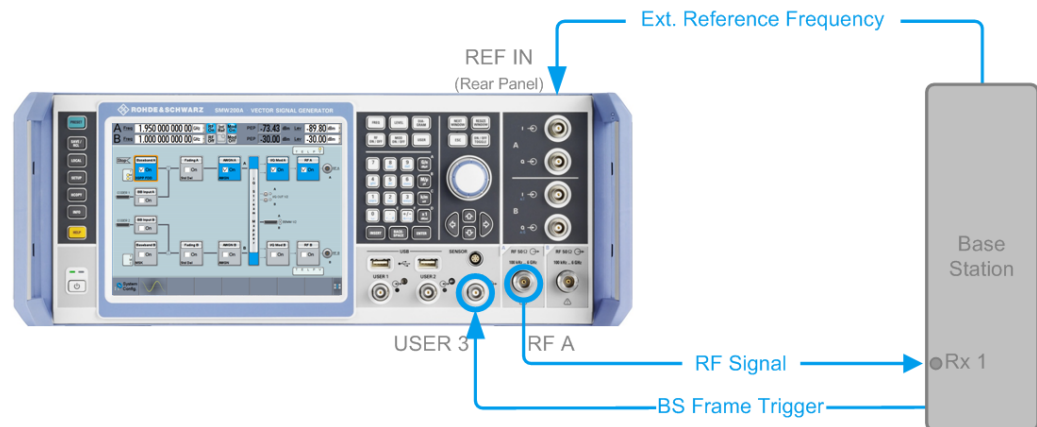


Figure 7-1: Standard Test Setup (One Path)

For two-path instruments, it is also possible to route baseband signal A to RF output B and connect RF output B to the Rx port of the base station.

Standard Test Setup - Two Paths

R&S SMWFor two-paths measurements, the test cases always require option second RF path, an option Baseband Main Module (-B13T) and at least one option to generate the interfering signal in addition to the basic configuration. The signal routing can be selected, the wanted signal can be provided either at output RF A or at output RF B.

The signal generator outputs the reference measurement channel signal (= wanted signal) at output RF A and the interfering signals at output RF B. After combining the two(three) signals, the sum signal is fed into the base station Rx port. The signal generator starts signal generation at the first received BS frame trigger.

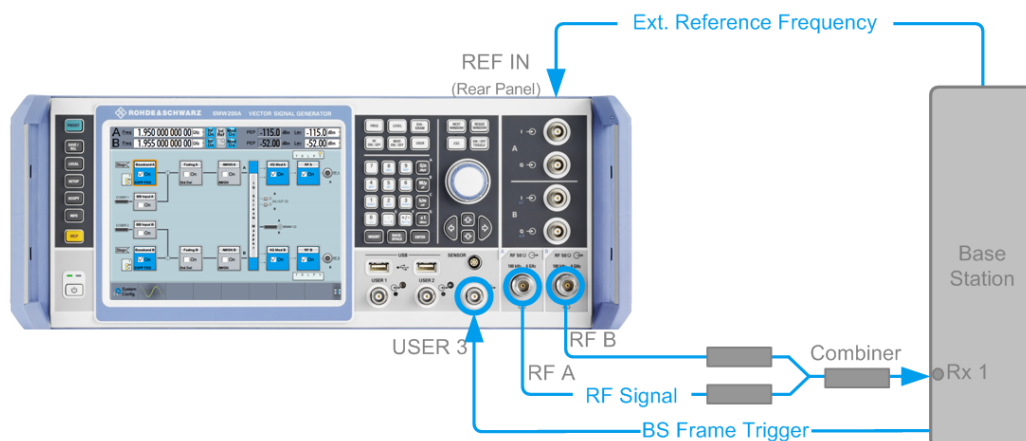


Figure 7-2: Standard Test Setup (Two Paths)

Standard Test Setup - Diversity Measurements

For **diversity measurements**, the test cases always require at option R&S SMW-B20x and R&S SMW-B13T in addition to the basic configuration. The signal routing is fixed.

RF output A and RF output B transmit the corrupted reference measurement channel signal (wanted signal) and are connected to the Rx ports of the base station for diversity reception. The signal generator starts signal generation at the first received BS frame trigger.

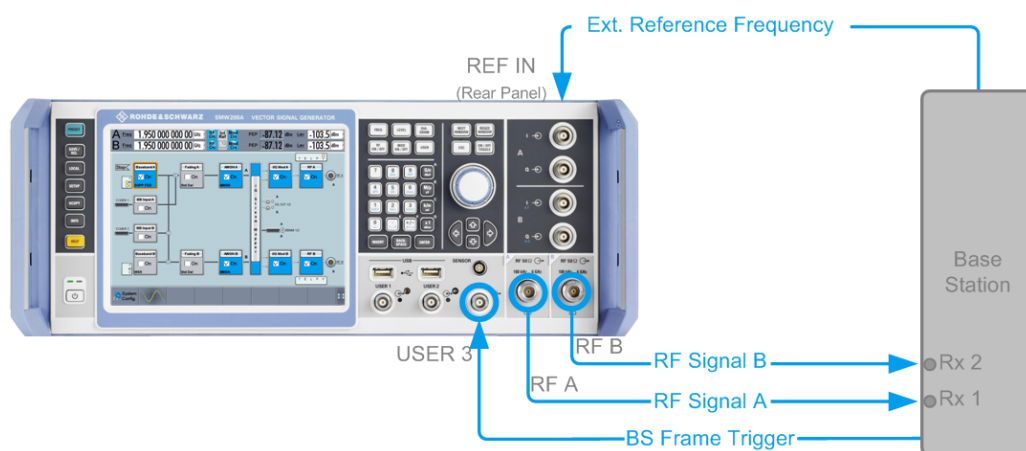


Figure 7-3: Standard Test Setup (Diversity Measurements)



As signal routing takes place at the output of the baseband block, the interference settings of the two paths are identical for diversity measurements.

7.2.1.3 Carrying Out a Receiver Test Measurement

The following instruction lists the general steps for performing a receiver test. Specific requirements are described together with the individual test case.

1. Set the base station to the basic state
 - a) Initialize the base station,
 - b) Set the scrambling scheme,
 - c) Set the frequency
 - d) Set the base station to receive the Reference Measurement Channel (for most test cases),
2. Set the signal generator to the basic state
 - a) Reset the signal generator.
3. Set the test case wizard
 - a) Open the 3GPP FDD dialog in the baseband block
 - b) Open the "Test Case Wizard". Select "Test Case".
Preset the "General Settings" parameters according to TS 25.141
 - c) Enter scrambling code and scrambling mode according to the base station scrambling scheme.
 - d) Enter additional required parameters, e.g. power class of base station.
 - e) Enter the test frequency (e.g. M). It must be the same as the base station has been set to.
 - f) Activate the settings with the "Apply Settings" button.
The signal generator is now ready to start signal generation
4. Switch on RF output
5. If necessary, make additional settings (e.g. in the "I/Q Mod" or "RF" block) or change test case settings (e.g. in the "Fading" block)
6. Start the measurement
 - a) Send a start trigger impulse (e.g. SFN modulo 4) from the base station to the signal generator.
The signal generator starts signal generation.
7. Calculate the result
The base station internally calculates the BER, BLER or Pd depending on the test case. Compare this value to the required value.

7.2.1.4 General Wanted Signal Parameters

The following parameters are available for all receiver tests. Specific parameters are listed together with the Test Case description.

Wanted Signal State - Receiver Tests

Enables/disables the signal generation of the wanted 3GPP signal.

In edit mode "According to Standard", the state is fixed to "On".

Remote command:

`[ :SOURce ] :BB:W3GPp:TS25141:WSIGnal:STATe` on page 562

RMC - Receiver Tests

Sets the reference measurement channel.

In edit mode "According to Standard", the selection of the reference measurement channel is restricted.

In edit mode "User definable", all following reference measurement channels are available for selection:

"RMC 12.2 kbps"

12.2 kbps measurement channel

"RMC 64 kbps" 64 kbps measurement channel

"RMC 144 kbps"

144 kbps measurement channel

"RMC 384 kbps"

384 kbps measurement channel

"AMR 12.2 kbps"

Channel coding for the AMR coder

Remote command:

[\[:SOURce\]:BB:W3GPp:TS25141:WSIGnal:DPDCh:CCODing:TYPE](#) on page 559

Wanted Signal Frequency - Receiver Tests

Sets the RF frequency of the wanted signal.

Remote command:

[\[:SOURce\]:BB:W3GPp:TS25141:WSIGnal:FREQuency](#) on page 560

Wanted Signal Level - Receiver Tests

Sets the RF level in edit mode "User Definable".

In edit mode "According to Standard", the RF level is determined by the selected "Power Class".

Remote command:

[\[:SOURce\]:BB:W3GPp:TS25141:WSIGnal:POWer](#) on page 561

7.2.2 Receiver Characteristics**7.2.2.1 Test Case 7.2 - Reference Sensitivity Level**

The test case requires the basic configuration and is performed using the standard test setup for one path. The signal generator outputs a reference measurement channel signal.

Table 7-3: The following table lists the settings on the base station:

Parameter	Value
Frequency	B, M and T
RMC	12.2 kbps

Parameter	Value
Scrambling code	Any
TPC function	Off

Test Purpose and Test Settings - Test Case 7.2


The test case verifies that a BS receiver can demodulate the signal sent by the signal generator at the specified (low) reference sensitivity power level correctly.

The test is passed when the resulting BER (calculated internally by the BS) is below a 0.001 at the test frequencies B, M, and T. Note TS 25.141 annex C, where test conditions in terms of test methods and test conditions are defined.

Quotation from TS 25.141:

The reference sensitivity level is the minimum mean power received at the antenna connector at which the BER shall not exceed the specific value indicated in subclause 7.2.2. The test is set up according to Figure B.7 and performed without interfering signal power applied to the BS antenna connector. For duplex operation, the measurement configuration principle is indicated for one duplex branch in Figure B.7. For internal BER calculation, an example of the test connection is as shown in figure B.7. The reference point for signal power is at the input of the receiver (antenna connector).

The measurement must be made at the three frequencies B, M and T.

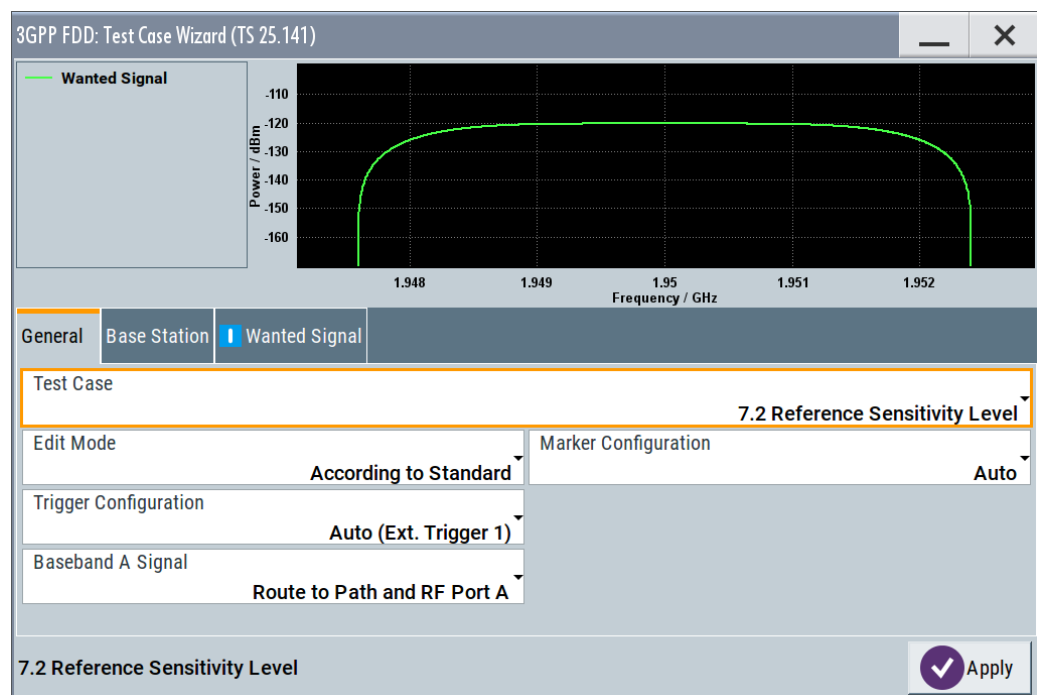

General	Base Station	Wanted Signal
Scrambling Code (hex) 00 0000		
Scrambling Mode Long Scrambling Code		
Power Class Wide Area BS		

General	Base Station	Wanted Signal
State I		Reference Measurement Channel RMC 12.2 kbps
RF Frequency 1.950 000 000 00 GHz		Power Level -120.3 dBm

The settings of the wanted signal are described in [Chapter 7.2.1.4, "General Wanted Signal Parameters"](#), on page 292.

7.2.2.2 Test Case 7.3 - Dynamic Range

The test case is performed using the standard test setup for one path.

It requires option AWGN (R&S SMW-K62) in addition to the basic configuration.

The signal generator outputs a reference measurement channel signal disturbed by an interfering AWGN signal.

The following table lists the settings on the base station:

Parameter	Value
Frequency	B, M and T
RMC	12.2 kbps
Scrambling code	Any

Test Purpose and Test Settings - Test Case 7.3

The test case verifies that a BS receiver can demodulate the wanted signal sent by the signal generator even when it is superimposed by a heavy AWGN signal.

The test is passed when the resulting BER (calculated internally by the BS) is below 0.001 at the test frequencies B, M, and T. Note TS 25.141 annex C, where test conditions in terms of test methods and test conditions are defined.

Quotation from TS 25.141

Receiver dynamic range is the receiver ability to handle a rise of interference in the reception frequency channel. The receiver shall fulfil a specified BER requirement for a specified sensitivity degradation of the wanted signal in the presence of an interfering AWGN signal in the same reception frequency channel.



General | Base Station | ☒ Wanted Signal | ☒ AWGN

Scrambling Code (hex): 00 0000

Scrambling Mode: Long Scrambling Code

Power Class: Wide Area BS

General | Base Station | ☒ Wanted Signal | ☒ AWGN

State: ☒ Reference Measurement Channel: RMC 12.2 kbps

RF Frequency: 1.950 000 000 00 GHz | Power Level: -89.80 dBm

General | Base Station | ☒ Wanted Signal | ☒ AWGN

State: ☒ C/N: -16.80 dB | Power Level (within 3.84 MHz BW): -73.00 dBm

Besides the settings described for all receiver tests, AWGN configuration is possible in edit mode "User Definable". In edit mode "According to Standard" the AWGN settings are preset:

AWGN State - Test Case 7.3

Enables/disables the generation of the AWGN signal.

In edit mode "According to Standard", the state is fixed to "On".

C/N - Test Case 7.3

Sets the carrier/noise ratio.

In edit mode "According to Standard", the state is fixed to -16.8 dB.

Remote command:

`[ :SOURce ] :BB:W3GPp:TS25141:AWGN:CNRatio` on page 542

Power Level - Test Case 7.3

Sets the AWGN level in edit mode "User Definable".

In edit mode "According to Standard", the AWGN level is determined by the selected "Power Class".

- -73 dB for Wide Area BS
- -63 dB for Medium Range BS
- -59 dB for Local Area BS

Remote command:

`[ :SOURce ] :BB:W3GPp:TS25141:AWGN:POWer:NOISe` on page 543

7.2.2.3 Test Case 7.4 - Adjacent Channel Selectivity (ACS)

In addition to the standard configuration, this test case requires:

- Option R&S SMW-B20x
- Option R&S SMW-B13T
- Option R&S SMW-K42

It is performed using the standard test setup for two paths.

The signal generator outputs the reference measurement channel signal (= wanted signal) at output RF A(B) and the adjacent channel interfering signal at output RF B(A). After combining the two signals, the sum signal is fed into the base station Rx port. The signal generator starts signal generation at the first received BS frame trigger.

The measurement must be made at the three frequencies B, M and T.

The following table lists the settings on the base station:

Parameter	Value
Frequency	B, M and T
RMC	12.2 kbps
Scrambling code	Any

Test Purpose and Test Settings - Test Case 7.4


The test case verifies that a BS receiver can demodulate a signal that is sent by the signal generator but superimposed by a heavy WCDMA signal in the adjacent channel.

The test is passed when the resulting BER (calculated internally by the BS) is below 0.001 at the test frequencies B, M, and T. Note TS 25.141 annex C, where test conditions in terms of test methods and test conditions are defined.

Quotation from TS 25.141:

Adjacent channel selectivity (ACS) is a measure of the receiver ability to receive a wanted signal at its assigned channel frequency. ACS is measured in the presence of an adjacent channel signal at a given frequency offset from the center frequency of the assigned channel. ACS is the ratio of the receiver filter attenuation on the assigned channel frequency to the receive filter attenuation on the adjacent channels.

The interference signal is offset from the wanted signal by the frequency offset. The interference signal shall be a WCDMA signal as specified in annex I.

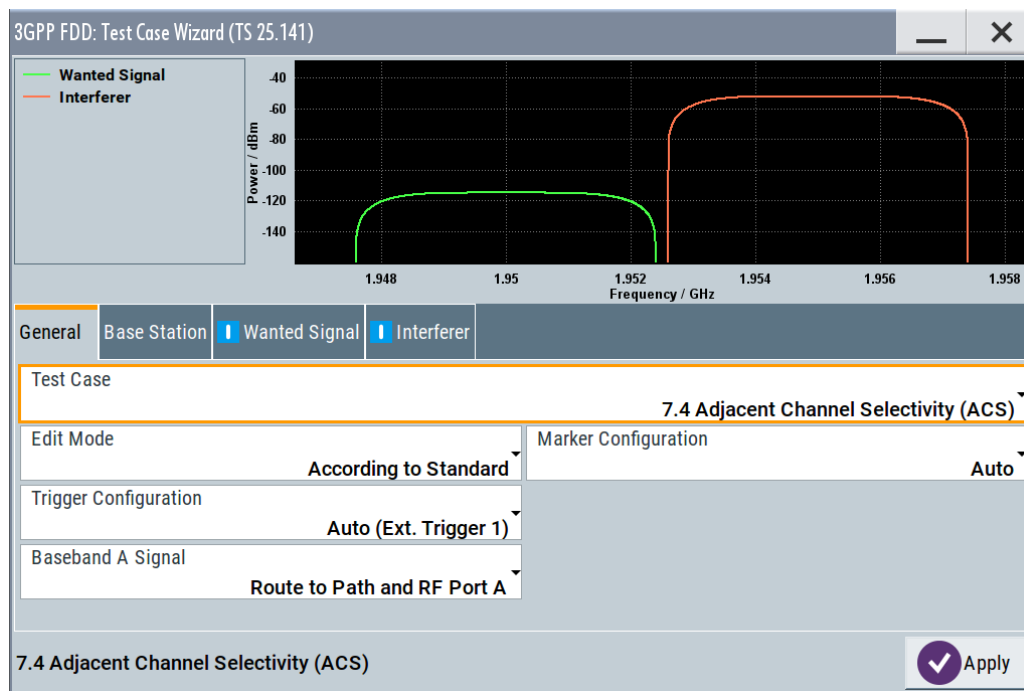

General Base Station ☒ Wanted Signal ☒ Interferer

Scrambling Code (hex): 00 0000

Scrambling Mode: Long Scrambling Code

Power Class: Wide Area BS

General Base Station ☒ Wanted Signal ☒ Interferer

State: ☒ Reference Measurement Channel: RMC 12.2 kbps

RF Frequency: 1.950 000 000 00 GHz Power Level: -115.0 dBm

General	Base Station	Wanted Signal	Interferer
State		☒	
Frequency Offset		C/I	
+5 MHz		-63.00 dB	
Modulation			
W-CDMA (3GPP FDD)			

Besides the settings described for all receiver test, interferer configuration is possible in edit mode "User Definable". In edit mode "According to Standard" the settings are preset.

Interferer State - Test Case 7.4

Enables/disables the signal generation of the interfering uplink signal in the second path.

In edit mode "According to Standard", the state is fixed to "On".

Remote command:

`[ :SOURce ] :BB:W3GPp:TS25141:IFSignal:STATe` on page 551

Frequency Offset - Test Case 7.4

Enters the frequency offset of the interfering signal versus the wanted signal.

In edit mode "According to Standard", the choice is limited to +/- 5 MHz.

Remote command:

`[ :SOURce ] :BB:W3GPp:TS25141:IFSignal:FOFFset` on page 548

C to I - Test Case 7.4

Enters the ratio of wanted signal level to interfering signal level.

In edit mode "According to Standard", the value is fixed to - 63 dB:

Remote command:

`[ :SOURce ] :BB:W3GPp:TS25141:IFSignal:CNRatio` on page 547

Interferer Modulation - Test Case 7.4

Selects the type of modulation for the interfering uplink signal in the second path.

In edit mode "According to Standard", the modulation is fixed to "WCDMA (3GPP FDD)".

"W-CDMA (3GPP FDD)"

A 3GPP FDD uplink signal with the following characteristic is generated for path B.

- DPCCH + DPDCH mode
- DPDCH with 240 kbps, 0 dB relative power, PRBS23 data source
- DPCCH with -5.46 dB relative power and slot format 2
- Same scrambling code as the wanted signal

("3GPP FDD" dialog)

"QPSK (3.84 MHz, Root Cosine 0.22)"

A QPSK signal (3.84 MHz bandwidth, root cosine filter 0.22, PRBS9 data source) is generated for path B ("Custom Dig Mod" dialog).

Remote command:

[:SOURce] :BB:W3GPp:TS25141:IFSignal:TYPE on page 552

7.2.2.4 Test Case 7.5 - Blocking Characteristics

In addition to the standard configuration, this test case requires:

- Option R&S SMW-B20x
- Option R&S SMW-B10
- Option R&S SMW-B13T
- Option R&S SMW-K42

It is performed using the standard test setup for two paths.

The signal generator provides the reference measurement channel signal (= wanted signal) at output RF A and the interfering signal with a selectable frequency offset at output RF B. After combining the two signals, the sum signal is fed into the base station Rx port. The signal generator starts signal generation at the first received BS frame trigger sent.

The measurement must be made at the frequency M.

The following table lists the settings on the base station:

Parameter	Value
Frequency	M
RMC	12.2 kbps
Scrambling code	Any



In comparison with test case 7.4, this test case requires large offset frequencies for the interfering signal. Therefore, a second RF output is always required. Due to the maximum frequency range of 6 GHz (option B106), the test case cannot be performed at all frequency offsets required by the standard (1 MHz to 12.75 GHz).

Test Purpose and Test Settings - Test Case 7.5


The test case verifies that a BS receiver can demodulate a signal that is sent by the signal generator but superimposed by a heavy interfering signal in the not adjacent channel.

The test is passed when the resulting BER (calculated internally by the BS) is below 0.001 at the test frequency M. Note TS 25.141 annex C, where test conditions in terms of test methods and test conditions are defined.

Quotation from TS 25.141:

The blocking characteristics is a measure of the receiver ability to receive a wanted signal at its assigned channel frequency in the presence of an unwanted interferer on frequencies other than those of the adjacent channels. The blocking performance requirement applies as specified in tables 7.4A to 7.4J.

The requirements shall apply to the indicated base station class, depending on which frequency band is used. The requirements in Tables 7.4D to 7.4J can be applied for the protection of FDD BS receivers when GSM900, DCS1800, PCS1900, GSM850 and/or FDD BS operating in Bands I to VI are co-located with a UTRA FDD BS.

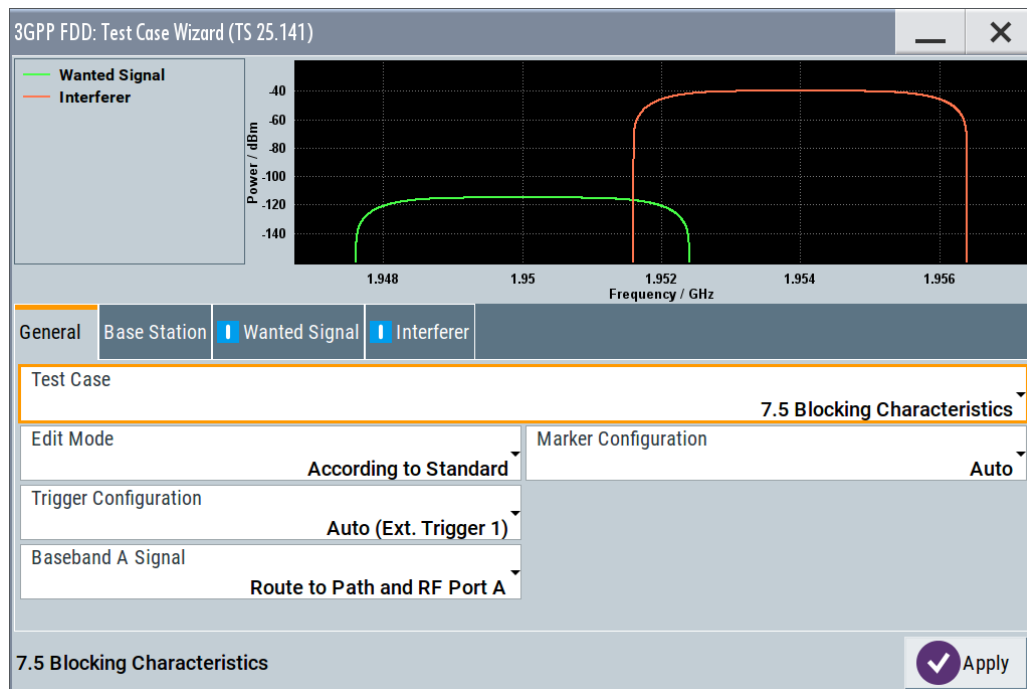

General | Base Station | ☒ Wanted Signal | ☒ Interferer

Scrambling Code (hex): 00 0000

Scrambling Mode: Long Scrambling Code

Power Class: Wide Area BS

General | Base Station | ☒ Wanted Signal | ☒ Interferer

State: ☒ Blocking Scenario: Wideband Blocking

Reference Measurement Channel: RMC 12.2 kbps
 Operating Band: I: (1920 - 1980 MHz)

RF Frequency: 1.950 000 000 00 GHz
 Power Level: -115.0 dBm

General | Base Station | ☒ Wanted Signal | ☒ Interferer

State: ☒ Frequency Offset: 4 MHz
 Power Level: -40.00 dBm

Modulation: W-CDMA (3GPP FDD)

Besides the settings described for all receiver test, the following settings are possible in edit mode "User Definable". In edit mode "According to Standard" most settings are preset.

Additional settings in the "Wanted Signal" section:

Blocking Scenario - Test Case 7.5

Selects the type of blocking scenario in edit mode "According to Standard".

The type of blocking scenario presets the selected "Interferer Modulation" and the "Power Level".

"Wideband Blocking"

The interferer signal for wideband blocking depends on the set "Operating Band" and "RF Frequency":

- As long as the interferer "RF frequency" lies within or close to the selected "Operating Band", a "3GPP FDD" uplink signal with a defined power level is generated for path B.
The power level depends on the selected Power Class and RMC.
- When the interferer "RF Frequency" lies outside the selected "Operating Band", a "CW carrier" interfering signal with a defined power level is generated for path B.
The power level depends on the selected Power Class and RMC.

"Collocated BS Blocking"

A CW carrier interfering signal with a defined power level (depending on the selected Power Class and RMC) is generated for path B ("RF" block)

"Narrowband Blocking"

A GMSK (270.833 kHz) interfering signal with a defined power level (depending on the selected Power Class and RMC) is generated for path B ("Custom Dig Mod" dialog).

Remote command:

`[ :SOURce ] :BB:W3GPp:TS25141:WSIGnal:BTYPe` on page 555

Operating Band - Test Case 7.5

Selects the operating band of the base station for "Wideband Blocking". The operating band is required for the calculation of power levels and interferer modulation.

- Operating band I: (1920 – 1980 MHz)
- Operating band II: (1850 – 1910 MHz)
- Operating band III: (1710 – 1785 MHz)
- Operating band IV: (1710 – 1755 MHz)
- Operating band V: (824 – 849 MHz)
- Operating band VI: (830 – 840 MHz)

Remote command:

`[ :SOURce ] :BB:W3GPp:TS25141:WSIGnal:OBAND` on page 560

Interferer Signal

Settings in the "Interferer Signal" section:

Interferer State - Test Case 7.5

Enables/disables the signal generation of the interfering signal in the second path.

In edit mode "According to Standard", the state is fixed to "On".

Remote command:

`[ :SOURce ] :BB:W3GPp:TS25141:IFSignal:STATe` on page 551

Frequency Offset - Test Case 7.5

Enters the frequency offset of the interfering signal versus the wanted signal.

Remote command:

`[ :SOURce ] :BB:W3GPp:TS25141:IFSignal:FOFFset` on page 548

Power Level - Test Case 7.5

Enters the level of the interfering signal.

In edit mode "According to Standard", the value is fixed to a value determined by the selected "Blocking Scenario", the "RF frequency" and "Frequency Offset" and the base station "Power Class".

For blocking scenario "Colocated BS Blocking", several power settings are permitted by the standard. The following table shows the blocking requirements for Medium Range and Local Area BS when co-located with BS in other bands.

For blocking performance requirement tables, see "[Blocking Performance Requirements](#)" on page 304.

Remote command:

`[ :SOURce ] :BB:W3GPp:TS25141:IFSignal:POWer` on page 551

Interferer Modulation - Test Case 7.5

Selects the type of modulation for the adjacent channel interfering signal at output RF B.

In edit mode "According to Standard", the modulation is determined by the selected "Blocking Scenario".

"W-CDMA (3GPP FDD)"

A 3GPP FDD uplink signal with the following characteristic is generated for path B.

- DPCCH + DPDCH mode
- DPDCH with 240 ksps, 0 dB relative power, PRBS23 data source
- DPCCH with -5.46 dB relative power and slot format 2
- Same scrambling code as the wanted signal ("3GPP FDD" dialog)

"QPSK (3.84 MHz, Root Cosine 0.22)"

A QPSK signal (3.84 MHz bandwidth, root cosine filter 0.22, PRBS9 data source) is generated for path B ("Custom Dig Mod" dialog).

"CW Carrier"

A carrier-only signal is generated for path B; the frequency and level of the CW signal are determined by the parameters "Frequency Offset" and "Power Level".

"GMSK (270.833 kHz)"

A GMSK signal (270.833 kHz bandwidth, PRBS9 data source) is generated for path B ("Custom Dig Mod" dialog).

Remote command:

[:SOURce] :BB:W3GPp:TS25141:IFSignal:TYPE on page 552

Blocking Performance Requirements

The following tables are taken from TS25141 (V6.6.0), chapter 7.5.5.

Blocking Performance Requirement for Medium Range BS When Co-Located with BS in Other Bands

Co-located BS type	Center Frequency of Interfering Signal	Interfering Signal mean power
Micro GSM850	869 MHz - 894 MHz	-3 dBm
MR UTRA-FDD Band V	869 MHz - 894 MHz	+8 dBm
MR UTRA-FDD Band III	1805 MHz - 1880 MHz	+8 dBm
Micro DCS1800	1805 MHz - 1880 MHz	+5 dBm
Micro PCS1900	1930 MHz - 1990 MHz	+5 dBm
MR UTRA-FDD Band II	1930 MHz - 1990 MHz	+8 dBm

Blocking Performance Requirement for Local Area BS When Co-Located with BS in Other Bands

Co-located BS type	Center Frequency of Interfering Signal	Interfering Signal mean power
LA UTRA-FDD Band V	869 MHz to 894 MHz	-6 dBm
Pico GSM850	869 MHz to 894 MHz	-7 dBm
LA UTRA-FDD Band III	1805 MHz to 1880 MHz	-6 dBm
Pico DCS1800	1805 MHz to 1880 MHz	-4 dBm
LA UTRA-FDD Band II	1930 MHz to 1990 MHz	-6 dBm
Pico PCS1900	1930 MHz to 1990 MHz	-4 dBm

Blocking characteristics for Wide Area BS

Operating Band	Center Frequency of Interfering Signal	Interfering Signal mean power	Wanted Signal mean power	Minimum Offset of Interfering Signal	Type of Interfering Signal
I	1920 MHz to 1980 MHz	-40 dBm	-115 dBm	10 MHz	WCDMA signal *
	1900 MHz to 1920 MHz 1980 MHz to 2000 MHz	-40 dBm	-115 dBm	10 MHz	WCDMA signal *
	1 MHz to 1900 MHz 2000 MHz to 12750 MHz	-15 dBm	-115 dBm		CW carrier

Operating Band	Center Frequency of Interfering Signal	Interfering Signal mean power	Wanted Signal mean power	Minimum Offset of Interfering Signal	Type of Interfering Signal
II	1850 MHz to 1910 MHz	-40 dBm	-115 dBm	10 MHz	WCDMA signal *
	1830 MHz to 1850 MHz 1910 MHz to 1930 MHz	-40 dBm	-115 dBm	10 MHz	WCDMA signal *
	1 MHz to 1830 MHz 1930 MHz to 12750 MHz	-15 dBm	-115 dBm		CW carrier
III	1710 MHz to 1785 MHz	-40 dBm	-115 dBm	10 MHz	WCDMA signal *
	1690 MHz to 1710 MHz 1785 MHz to 1805 MHz	-40 dBm	-115 dBm	10 MHz	WCDMA signal *
	1 MHz to 1690 MHz 1805 MHz to 12750 MHz	-15 dBm	-115 dBm		CW carrier
IV	1710 MHz to 1755 MHz	-40 dBm	-115 dBm	10 MHz	WCDMA signal *
	1690 MHz to 1710 MHz 1755 MHz to 1775 MHz	-40 dBm	-115 dBm	10 MHz	WCDMA signal *
	1 MHz to 1690 MHz 1775 MHz to 12750 MHz	-15 dBm	-115 dBm		CW carrier
V	824 MHz to 849 MHz	-40 dBm	-115 dBm	10 MHz	WCDMA signal *
	804 MHz to 824 MHz 849 MHz to 869 MHz	-40 dBm	-115 dBm	10 MHz	WCDMA signal *
	1 MHz to 804 MHz 869 MHz to 12750 MHz	-15 dBm	-115 dBm		CW carrier
VI	810 MHz to 830 MHz 840 MHz to 860 MHz	-40 dBm	-115 dBm	10 MHz	WCDMA signal *
	1 MHz to 810 MHz 860 MHz to 12750 MHz	-15 dBm	-115 dBm		CW carrier

*: The characteristics of the WCDMA interference signal are specified in TS 25.141, annex I.

Blocking Performance Requirement for Wide Area BS When Co-Located with BS in Other Bands

Co-located BS type	Center Frequency of Interfering Signal	Interfering Signal mean power	Wanted Signal mean power	Type of Interfering Signal
Macro GSM900	921 MHz to 960 MHz	+16 dBm	-115 dBm	CW carrier
Macro DCS1800	1805 MHz to 1880 MHz	+16 dBm	-115 dBm	CW carrier

Co-located BS type	Center Frequency of Interfering Signal	Interfering Signal mean power	Wanted Signal mean power	Type of Interfering Signal
Macro PCS1900	1930 MHz to 1990 MHz	+16 dBm	-115 dBm	CW carrier
Macro GSM850	869 MHz to 894 MHz	+16 dBm	-115 dBm	CW carrier
WA UTRA-FDD Band I	2110 MHz to 2170 MHz	+16 dBm	-115 dBm	CW carrier
WA UTRA-FDD Band II	1930 MHz to 1990 MHz	+16 dBm	-115 dBm	CW carrier
WA UTRA-FDD Band III	1805 MHz to 1880 MHz	+16 dBm	-115 dBm	CW carrier
WA UTRA-FDD Band IV	2110 MHz to 2155 MHz	+16 dBm	-115 dBm	CW carrier
WA UTRA-FDD Band V	869 MHz to 894 MHz	+16 dBm	-115 dBm	CW carrier
WA UTRA-FDD Band VI	875 MHz to 885 MHz	+16 dBm	-115 dBm	CW carrier

Blocking Performance Requirement for Medium Range BS When Co-Located with BS in Other Bands.

Co-located BS type	Center Frequency of Interfering Signal	Interfering Signal mean power	Wanted Signal mean power	Type of Interfering Signal
Micro GSM900	921 MHz to 960 MHz	-3 dBm	-105 dBm	CW carrier
Micro DCS1800	1805 MHz to 1880 MHz	+5 dBm	-105 dBm	CW carrier
Micro PCS1900	1930 MHz to 1990 MHz	+5 dBm	-105 dBm	CW carrier
Micro GSM850	869 MHz to 894 MHz	-3 dBm	-105 dBm	CW carrier
MR UTRA-FDD Band I	2110 MHz to 2170 MHz	+8 dBm	-105 dBm	CW carrier
MR UTRA-FDD Band II	1930 MHz to 1990 MHz	+8 dBm	-105 dBm	CW carrier
MR UTRA-FDD Band III	1805 MHz to 1880 MHz	+8 dBm	-105 dBm	CW carrier
MR UTRA-FDD Band IV	2110 MHz to 2155 MHz	+8 dBm	-105 dBm	CW carrier
MR UTRA-FDD Band V	869 MHz to 894 MHz	+8 dBm	-105 dBm	CW carrier
MR UTRA-FDD Band VI	875 MHz to 885 MHz	+8 dBm	-105 dBm	CW carrier

Blocking Performance Requirement for Local Area BS When Co-Located with BS in Other Bands.

Co-located BS type	Center Frequency of Interfering Signal	Interfering Signal mean power	Wanted Signal mean power	Type of Interfering Signal
Pico GSM900	921 MHz to 960 MHz	-7 dBm	-101 dBm	CW carrier
Pico DCS1800	1805 MHz to 1880 MHz	-4 dBm	-101 dBm	CW carrier
Pico PCS1900	1930 MHz to 1990 MHz	-4 dBm	-101 dBm	CW carrier
Pico GSM850	869 MHz to 894 MHz	-7 dBm	-101 dBm	CW carrier
LA UTRA-FDD Band I	2110 MHz to 2170 MHz	-6 dBm	-101 dBm	CW carrier
LA UTRA-FDD Band II	1930 MHz to 1990 MHz	-6 dBm	-101 dBm	CW carrier
LA UTRA-FDD Band III	1805 MHz to 1880 MHz	-6 dBm	-101 dBm	CW carrier
LA UTRA-FDD Band IV	2110 MHz to 2155 MHz	-6 dBm	-101 dBm	CW carrier
LA UTRA-FDD Band V	869 MHz to 894 MHz	-6 dBm	-101 dBm	CW carrier
LA UTRA-FDD Band VI	875 MHz to 885 MHz	-6 dBm	-101 dBm	CW carrier

Blocking Performance Requirement (narrowband) for Wide Area BS

Operating Band	Center Frequency of Interfering Signal	Interfering Signal mean power	Wanted Signal mean power	Minimum Offset of Interfering Signal	Type of Interfering Signal
II	1850 MHz to 1910 MHz	- 47 dBm	-115 dBm	2.7 MHz	GMSK modulated*
III	1710 MHz to 1785 MHz	- 47 dBm	-115 dBm	2.8 MHz	GMSK modulated*
IV	1710 MHz to 1755 MHz	- 47 dBm	-115 dBm	2.7 MHz	GMSK modulated*
V	824 MHz to 849 MHz	- 47 dBm	-115 dBm	2.7 MHz	GMSK modulated*

* GMSK modulation as defined in TS 45.004.

Blocking Performance Requirement (narrowband) for Medium Range BS

Operating Band	Center Frequency of Interfering Signal	Interfering Signal mean power	Wanted Signal mean power	Minimum Offset of Interfering Signal	Type of Interfering Signal
II	1850 MHz to 1910 MHz	- 42 dBm	-105 dBm	2.7 MHz	GMSK modulated*
III	1710 MHz to 1785 MHz	- 42 dBm	-105 dBm	2.8 MHz	GMSK modulated*
IV	1710 MHz to 1755 MHz	- 42 dBm	-105 dBm	2.7 MHz	GMSK modulated*
V	824 MHz to 849 MHz	- 42 dBm	-105 dBm	2.7 MHz	GMSK modulated*

* GMSK modulation as defined in TS 45.004 [12]

Blocking Performance Requirement (narrowband) for Local Area BS

Operating Band	Center Frequency of Interfering Signal	Interfering Signal mean power	Wanted Signal mean power	Minimum Offset of Interfering Signal	Type of Interfering Signal
II	1850 MHz to 1910 MHz	- 37 dBm	-101 dBm	2.7 MHz	GMSK modulated*
III	1710 MHz to 1785 MHz	- 37 dBm	-101 dBm	2.8 MHz	GMSK modulated*
IV	1710 MHz to 1755 MHz	- 37 dBm	-101 dBm	2.7 MHz	GMSK modulated*
V	824 MHz to 849 MHz	- 37 dBm	-101 dBm	2.7 MHz	GMSK modulated*

* GMSK modulation as defined in TS 45.004.

7.2.2.5 Test Case 7.6 - Intermodulation Characteristics

In addition to the standard configuration, this test case requires:

- Option R&S SMW-B20x
- Option R&S SMW-B10
- Option R&S SMW-B13T
- Option R&S SMW-K62
- Option R&S SMW-K42

It is performed using the standard test setup for two paths.

The signal generator outputs the reference measurement channel signal (= wanted signal) at output RF A and both interfering signals (CW interferer and the WCDMA or GMSK modulated interferer) at output RF B. After combining the signals, the sum signal is fed into the base station Rx port. The signal generator starts signal generation at the first received BS frame trigger.

The measurement must be made at frequency M.



In order to generate both interfering signals with the desired frequency offset, a frequency offset is introduced for baseband B. Add this baseband frequency offset to the FR frequency B.

The following table lists the settings on the base station:

Parameter	Value
Frequency	M
RMC	12.2 kbps
Scrambling code	Any


Test Purpose and Test Settings - Test Case 7.6

The test case verifies that a BS receiver can demodulate a signal that is sent by the signal generator but superimposed by two heavy interfering signals in the adjacent channels, where the receiver intermodulation products disturb the wanted signal.

The test is passed when the resulting BER (calculated internally by the BS) is below 0.001 at the test frequency M. Note TS 25.141 annex C, where test conditions in terms of test methods and test conditions are defined.

Quotation from TS 25.141:

Third and higher order mixing of the two interfering RF signals can produce an interfering signal in the band of the desired channel. Intermodulation response rejection is a measure of the capability of the receiver to receive a wanted signal on its assigned channel frequency in the presence of two or more interfering signals which have a specific frequency relationship to the wanted signal.

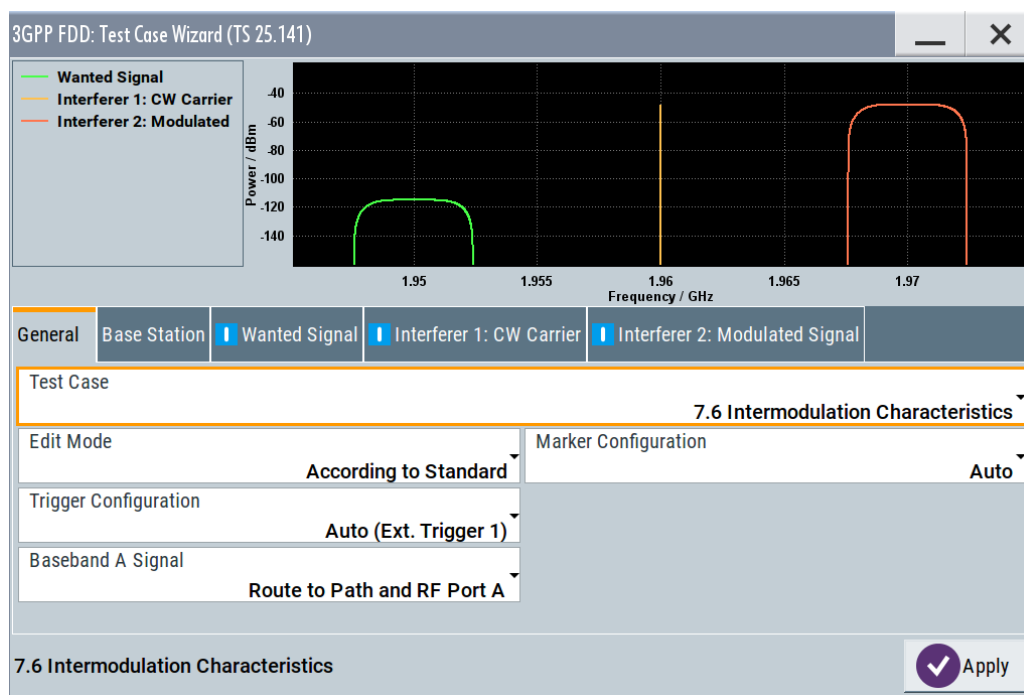

General Base Station ☒ Wanted Signal ☒ Interferer 1: CW Carrier ☒ Interferer 2: Modulated Signal

Scrambling Code (hex) 00 0000

Scrambling Mode Long Scrambling Code

Power Class Wide Area BS

General Base Station ☒ Wanted Signal ☒ Interferer 1: CW Carrier ☒ Interferer 2: Modulated Signal

State ☒ Reference Measurement Channel RMC 12.2 kbps

RF Frequency 1.950 000 000 00 GHz Power Level -115.0 dBm

General Base Station ☒ Wanted Signal ☒ Interferer 1: CW Carrier ☒ Interferer 2: Modulated Signal

State ☒

Bandwidth Type Wideband

Frequency Offset 10.000 000 00 MHz Power Level -48.00 dBm

General	Base Station	Wanted Signal	Interferer 1: CW Carrier	Interferer 2: Modulated Signal
State				
Bandwidth Type		Modulation		
Wideband		W-CDMA (3GPP FDD)		
Frequency Offset		Power Level		
20.000 000 00 MHz		-48.00 dBm		

Besides the settings described for all receiver tests, interferer 1 and 2 configurations are possible in edit mode "User Definable". In edit mode "According to Standard", most of the settings are preset.

Interferer Bandwidth Type - Test Case 7.6

Selects the interferer scenario.

- "Wideband" A 3GPP FDD uplink interfering signal with the following characteristic is generated for path B.
- DPCCH + DPDCH mode
 - DPDCH with 240 ksps, 0 dB relative power, PRBS23 data source
 - DPCCH with -5.46 dB relative power and slot format 2
 - Same scrambling code as the wanted signal ("3GPP FDD" dialog)
- The 3GPP FDD uplink interfering signal is superimposed by a CW interfering signal with a frequency of 10 MHz and a level of -48 dBm ("AWGN" dialog).
- "Narrowband" GMSK interfering signal (270.833 kHz bandwidth, PRBS9 data source) is generated for path B ("Custom Dig Mod" dialog). The GMSK interfering signal is superimposed by a CW interfering signal with a frequency of 3.5 MHz and a level of -47 dBm ("AWGN" dialog).

Remote command:

[\[:SOURce\]:BB:W3GPp:TS25141:IFSignal:BWIDth](#) on page 546

Interferer 1 and 2 State - Test Case 7.6

Enables/disables the signal generation of the CW and modulation interfering signal in the second path.

In edit mode "According to Standard", both states are fixed to "On".

Remote command:

[\[:SOURce\]:BB:W3GPp:TS25141:IFSignal:CW:STATe](#) on page 548

[\[:SOURce\]:BB:W3GPp:TS25141:IFSignal:MODulated:STATe](#) on page 550

Interferer 1 and 2 Frequency Offset - Test Case 7.6

Enters the frequency offset of the interfering signals versus the wanted signal.

In edit mode "According to Standard", the value is fixed to a value determined by the selected "Interferer Bandwidth".

Remote command:

[\[:SOURce\]:BB:W3GPp:TS25141:IFSignal:CW:FOFFset](#) on page 547

[\[:SOURce\]:BB:W3GPp:TS25141:IFSignal:MODulated:FOFFset](#) on page 549

Interferer 1 and 2 Power Level - Test Case 7.6

Enters the level of the interfering signals.

In edit mode "According to Standard", the value is fixed to a value determined by the selected "Interferer Bandwidth Type".

Remote command:

`[ :SOURce ] :BB:W3GPp:TS25141:IFSignal:CW:POWer` on page 547

`[ :SOURce ] :BB:W3GPp:TS25141:IFSignal:MODulated:POWer` on page 549

Interferer 2 Modulation - Test Case 7.6

Selects the type of modulation for the interfering modulation signal in the second path. In edit mode "According to Standard", the value is fixed to a value determined by the selected "Interferer Bandwidth".

"W-CDMA (3GPP FDD)"

A 3GPP FDD uplink signal with the following characteristic is generated for path B.

- DPCCH + DPDCH mode
- DPDCH with 240 kbps, 0 dB relative power, PRBS23 data source
- DPCCH with -5.46 dB relative power and slot format 2
- Same scrambling code as the wanted signal ("3GPP FDD" dialog)

"GMSK (270833 kHz)"

A GMSK signal (270.833 kHz bandwidth, PRBS9 data source) is generated for path B ("Custom Dig Mod" dialog).

"QPSK (3.84 MHz, Root Cosine 0.22)"

A QPSK signal (3.84 MHz bandwidth, root cosine filter 0.22, PRBS9 data source) is generated for path B ("Custom Dig Mod" dialog).

Remote command:

`[ :SOURce ] :BB:W3GPp:TS25141:IFSignal:MODulated:TYPE` on page 550

7.2.2.6 Test Case 7.8 - Verification of Internal BER

The test case requires the basic configuration and is performed using the standard test setup for one path.

The signal generator outputs a corrupted reference measurement channel signal (= wanted signal) at output RF A. The signal is fed into the base station Rx port.

The signal generator starts signal generation at the first received BS frame trigger.

The measurement must be made at the three frequencies B, M and T.

The following table lists the settings on the base station:

Parameter	Value
Frequency	B, M and T
RMC	12.2 kbps
Scrambling code	Any



Test Purpose and Test Settings - Test Case 7.8

The test case verifies that a BS receiver can calculate the BER of a signal where erroneous bits are inserted in the data stream by the signal generator.

The test is passed when the calculated BER is within $\pm 10\%$ of the BER simulated by the signal generator the test frequencies B, M and T. Note TS 25.141, annex C where test conditions in terms of test methods and test conditions are defined.

Quotation from TS 25.141:

Base Station System with internal BER calculation can synchronize its receiver to known pseudo-random data sequence and calculates bit error ratio from the received data. This test is performed only if Base Station System has this kind of feature. This test is performed by feeding measurement signal with known BER to the input of the receiver. Locations of the erroneous bits shall be randomly distributed within a frame. Erroneous bits shall be inserted to the data bitstream as shown in the following figure.

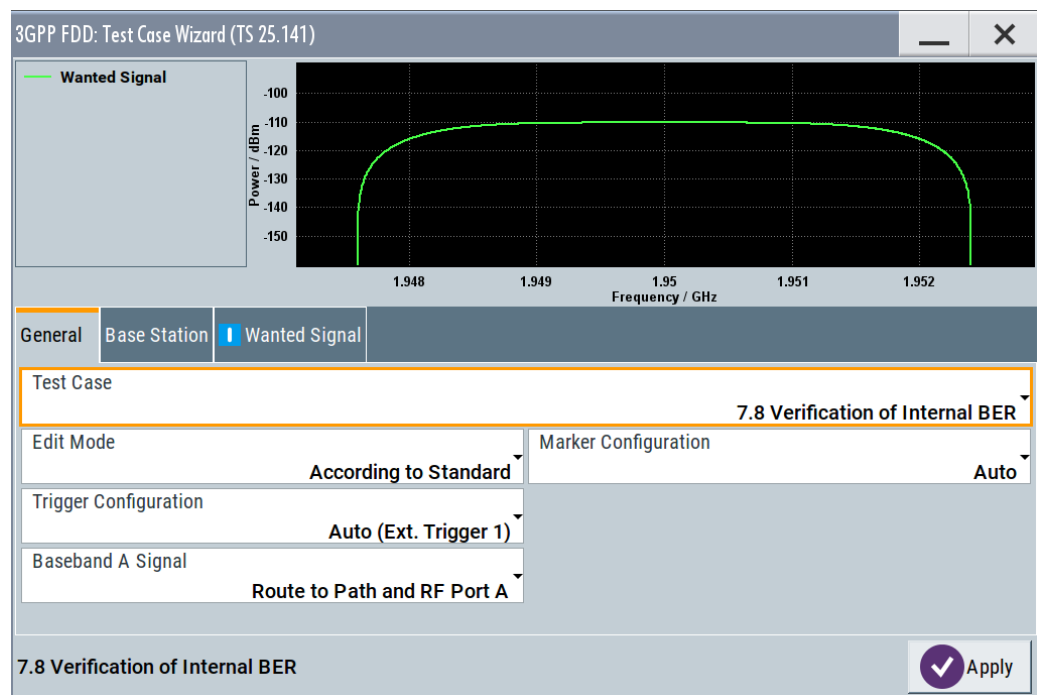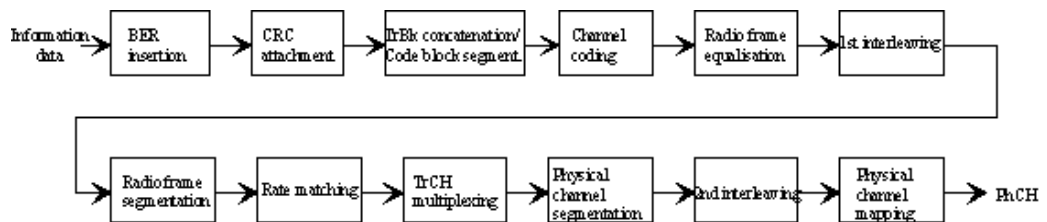

General	Base Station	Wanted Signal
Scrambling Code (hex) 00 0000		
Scrambling Mode Long Scrambling Code		
Power Class Wide Area BS		

General	Base Station	Wanted Signal
State		Reference Measurement Channel RMC 12.2 kbps
RF Frequency	1.950 000 000 00 GHz	Power Level -110.3 dBm
Bit Error Rate	0.00	

Besides the settings described for all receiver test, Bit Error Rate and Block Error Rate selection is possible in edit mode "User Definable". In edit mode "According to Standard" only the Bit Error Rate setting is possible.

Bit Error Rate - Test Case 7.8

Sets the bit error rate. In edit mode "According to Standard", only values 0.00 (no bit errors are inserted) and 0.01 (1 percent bit errors are inserted) are available.

Remote command:

`[ :SOURce ] :BB:W3GPp:TS25141:WSIGnal:DPDCh:DERRor:BIT:RATE`
on page 559

Block Error Rate - Test Case 7.8

Sets the block error rate in edit mode "User Definable".

Remote command:

`[ :SOURce ] :BB:W3GPp:TS25141:WSIGnal:DPDCh:DERRor:BLOCK:RATE`
on page 560

7.2.3 Performance Requirements

7.2.3.1 Test Case 8.2.1 - Demodulation of DCH in Static Propagation Conditions

For **non-diversity measurements**, the test case requires option AWGN (R&S SMW-K62) in addition to the basic configuration.

The measurement is performed using the standard test setup for one path.

The signal generator outputs a reference measurement channel signal (= wanted signal) that is superimposed by an AWGN signal at output RF A. The signal is fed into the base station Rx port.

The signal generator starts signal generation at the first received BS frame trigger.

The measurement must be made at the three frequencies B, M and T. The RMC data rates are 12.2 kbps, 64 kbps, 144 kbps and 384 kbps.

For **diversity measurements**, in addition to the standard configuration, this test case requires:

- Option R&S SMW-B20x
- Option R&S SMW-B10
- Option R&S SMW-B13T
- Option R&S SMW-K62
- Option R&S SMW-K42

It is performed using the standard test setup for diversity measurement.

The signal generator outputs the reference measurement channel signal (= wanted signal) at output RF A and output RF B. The wanted signal is superimposed by an AWGN signal. The signals are fed into the base station Rx ports.

The signal generator starts signal generation at the first BS frame trigger sent to the trigger input.

The measurement must be made at the three frequencies B, M and T. The RMC data rates are 12.2 kbps, 64 kbps, 144 kbps and 384 kbps.

Table 7-4: The following table lists the settings on the base station:

Parameter	Values
Frequency	B, M and T
RMC	12.2 kbps, 64 kbps, 144 kbps, 384 kbps
Scrambling code	Any

Test Purpose and Test Settings - Test Case 8.2.1

The test case verifies that a BS receiver can demodulate a signal that is sent by the signal generator and is superimposed by a heavy AWGN signal.

The test is passed when the resulting BLER (calculated internally by the BS) does not exceed the required BLER settings. Note TS 25.141 annex C, where test conditions in terms of test methods and test conditions are defined.

Quotation from TS 25.141:

The performance requirement of DCH in static propagation conditions is determined by the maximum Block Error Ratio (BLER) allowed when the receiver input signal is at a specified E_b/N_0 limit. The BLER is calculated for each of the measurement channels supported by the base station.

3GPP FDD: Test Case Wizard (TS 25.141)

☒ Wanted Signal
☒ AWGN
☐ Fading

General Base Station ☒ Wanted Signal ☒ AWGN ☐ Fading

Test Case: 8.2.1 Demodulation of DCH in Static Propagation Conditions

Edit Mode: According to Standard Marker Configuration: Auto

Trigger Configuration: Auto (Ext. Trigger 1) Diversity: Off

Baseband A Signal: Route to Path and RF Port A

8.2.1 Demodulation of DCH in Static Propagation Conditions ☒ Apply

General Base Station ☒ Wanted Signal ☒ AWGN ☐ Fading

Scrambling Code (hex): 00 0000

Scrambling Mode: Long Scrambling Code

Power Class: Wide Area BS

General Base Station ☒ Wanted Signal ☒ AWGN ☐ Fading

State: ☒ Reference Measurement Channel: RMC 12.2 kbps

RF Frequency: 1.950 000 000 00 GHz Power Level: -100.3 dBm

General Base Station ☒ Wanted Signal ☒ AWGN ☐ Fading

State: ☒ Required BLER: < 0.01

Power Level (within 3.84 MHz BW): -84.00 dBm Eb/N0: 8.70 dB

General Base Station ☒ Wanted Signal ☒ AWGN ☐ Fading

State: 0

Besides the settings described for all receiver test, AWGN Configuration is possible in edit mode "User Definable". In edit mode "According to Standard" only the Required BLER setting is possible. Fading is always off.

AWGN State - Test Case 8.x

Enables/disables the generation of the AWGN signal.

In edit mode "According to Standard", the state is fixed to "On".

Remote command:

[\[:SOURce\]:BB:W3GPp:TS25141:AWGN:STATe](#) on page 544

Required BLER - Test Case 8.x

Sets the required Block Error Rate in edit mode "According to Standard".

Remote command:

[\[:SOURce\]:BB:W3GPp:TS25141:AWGN:RBLock:RATE](#) on page 544

Power Level - Test Case 8.x

Sets the AWGN level in edit mode "User Definable".

In edit mode "According to Standard", the AWGN level is determined by the selected "Power Class".

- "-84 dBm" for "Wide Area BS"
- "-74 dBm" for "Medium Range BS"
- "-70 dBm" for "Local Area BS"

Remote command:

[\[:SOURce\]:BB:W3GPp:TS25141:AWGN:POWer:NOISe](#) on page 543

 E_b to N_0 - Test Case 8.x

Sets the ratio of bit energy to noise power density.

In edit mode "According to Standard", the value depends on the E_b/N_0 test requirements (see [Table 7-5](#)).

Table 7-5: E_b/N_0 test requirements in AWGN channel

Measurement channel	Received E_b to N_0 for BS with Rx diversity	Received E_b to N_0 for BS without Rx diversity	Required BLER
12.2 kbps	n.a. (5.5 dB)	n.a. (8.7 dB)	$< 10^{-1}$
	5.5 dB	8.7 dB	$< 10^{-2}$
64 kbps	1.9 dB	5.1 dB	$< 10^{-1}$
	2.1 dB	5.2 dB	$< 10^{-2}$
144 kbps	1.2 dB	4.2 dB	$< 10^{-1}$
	1.3 dB	4.4 dB	$< 10^{-2}$
384 kbps	1.3 dB	4.4 dB	$< 10^{-1}$
	1.4 dB	4.5 dB	$< 10^{-2}$

Remote command:

[\[:SOURce\]:BB:W3GPp:TS25141:AWGN:ENRatio](#) on page 543

Fading State - Test Case 8.2.1

Indicates the state of the Fader.

The state is fixed to 'Off'.

Remote command:

`[ :SOURce ] :BB:W3GPp:TS25141:FSIMulator:STAtE` on page 546

7.2.3.2 Test Case 8.3.1 - Demodulation of DCH in Multipath Fading Case 1 Conditions

For **non-diversity measurements**, in addition to the standard configuration, this test case requires:

- Option R&S SMW-K62
- Option R&S SMW-B14/K71

The measurement is performed using the standard test setup for one path.

The signal generator outputs a reference measurement channel signal (= wanted signal) that is disturbed by an AWGN signal and multipath fading effects at output RF A(B). The signal is fed into the base station Rx port.

The signal generator starts signal generation at the first received BS frame trigger.

The measurement must be made at the three frequencies B, M and T. The RMC data rates are 12.2 kbps, 64 kbps, 144 kbps and 384 kbps.

For **diversity measurements**, in addition to the standard configuration, this test case requires:

- Option R&S SMW-B20x
- Option R&S SMW-B13T
- Option R&S SMW-K62
- Option R&S SMW-B14/K71

It is performed using the standard test setup for diversity measurement.

The signal generator outputs the reference measurement channel signal (= wanted signal) that is disturbed by an AWGN signal and multipath fading effects at output RF A and output RF B. The signals are fed into the base station Rx ports.

The signal generator starts signal generation at the first received BS frame trigger.

The measurement must be made at the three frequencies B, M and T. The RMC data rates are 12.2 kbps, 64 kbps, 144 kbps and 384 kbps.

The following table lists the settings on the base station:

Parameter	Values
Frequency	B, M and T
RMC	12.2 kbps, 64 kbps, 144 kbps, 384 kbps
Scrambling code	Any

Test Purpose and Test Settings - Test Case 8.3.1

The test case verifies that a BS receiver can demodulate a signal that is sent by the signal generator but superimposed by a heavy AWGN signal and disturbed by multi-path fading effects.

The test is passed when the resulting BLER (calculated internally by the BS) does not exceed the required BLER settings. Note TS 25.141 annex C, where test conditions in terms of test methods and test conditions are defined.

3GPP FDD: Test Case Wizard (TS 25.141)

Legend: Wanted Signal (green), AWGN (orange), Fading (blue)

General Base Station ☒ Wanted Signal ☒ AWGN ☒ Fading ☒

Test Case: 8.2.1 Demodulation of DCH in Static Propagation Conditions

Edit Mode: According to Standard

Marker Configuration: Auto

Trigger Configuration: Auto (Ext. Trigger 1)

Diversity: Off

Baseband A Signal: Route to Path and RF Port A

8.2.1 Demodulation of DCH in Static Propagation Conditions ☒ Apply

General Base Station ☒ Wanted Signal ☒ AWGN ☒ Fading ☒

Scrambling Code (hex): 00 0000

Scrambling Mode: Long Scrambling Code

Power Class: Wide Area BS

General Base Station ☒ Wanted Signal ☒ AWGN ☒ Fading ☒

State: ☒

Reference Measurement Channel: RMC 12.2 kbps

RF Frequency: 1.950 000 000 00 GHz

Power Level: -89.28 dBm


General Base Station ☒ Wanted Signal ☒ AWGN ☒ Fading ☒

State: ☒

Required BLER: < 0.01

Power Level (within 3.84 MHz BW): -84.00 dBm

Eb/N0: 19.70 dB

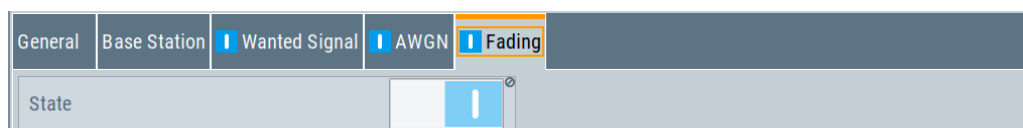

These test case settings are identical to test case 8.2.1 except from the channel simulation that is set to "Multipath Fading Case 1" ("Fading > Standard > 3GPP Case 1 UE/BS") and the specific E_b/N_0 test requirements (see [Table 7-6](#)).

Table 7-6: E_b/N_0 Test requirements in multipath Case 1 channel

Measurement channel	Received E_b/N_0 for BS with Rx diver- sity	Received E_b/N_0 for BS without Rx diversity	Required BLER
12.2 kbps	n.a. (12.5 dB)	n.a. (19.7 dB)	$< 10^{-1}$
	12.5 dB	19.7 dB	$< 10^{-2}$
64 kbps	6.8 dB	12.2 dB	$< 10^{-1}$
	9.8 dB	16.5 dB	$< 10^{-2}$
144 kbps	6.0 dB	11.4 dB	$< 10^{-1}$
	9.0 dB	15.6 dB	$< 10^{-2}$
384 kbps	6.4 dB	11.8 dB	$< 10^{-1}$
	9.4 dB	16.1 dB	$< 10^{-2}$

Fading State - Test Case 8.x

Indicates the state of the Fader.

The state is fixed to "On". The "Fading" dialog is preset with the required settings for the test case.

Remote command:

`[ :SOURce ] :BB:W3GPp:TS25141:FSIMulator:STATe` on page 546

7.2.3.3 Test Case 8.3.2 - Demodulation of DCH in Multipath Fading Case 2 Conditions

This test case is identical to test case 8.3.1 except from the channel simulation that is set to "Multipath Fading Case 2" ("Fading" dialog: Standard = 3GPP Case 2 UE/BS) and the E_b/N_0 test requirements (see [Table 7-7](#)).

Table 7-7: E_b/N_0 Test requirements in Multipath Case 2 channel

Measurement channel	Received E_b to N_0 for BS with Rx diversity	Received E_b to N_0 for BS with- out Rx diver- sity	Required BLER
12.2 kbps	n.a. (9.6 dB)	n.a. (15.6 dB)	$< 10^{-1}$
	9.6 dB	15.6 dB	$< 10^{-2}$
64 kbps	4.9 dB	9.8 dB	$< 10^{-1}$

Measurement channel	Received E_b to N_0 for BS with Rx diversity	Received E_b to N_0 for BS without Rx diversity	Required BLER
	7.0 dB	12.9 dB	$< 10^{-2}$
144 kbps	4.3 dB	8.8 dB	$< 10^{-1}$
	6.2 dB	12.1 dB	$< 10^{-2}$
384 kbps	4.7 dB	9.3 dB	$< 10^{-1}$
	6.7 dB	12.7 dB	$< 10^{-2}$

7.2.3.4 Test Case 8.3.3 - Demodulation of DCH in Multipath Fading Case 3 Conditions

This test case is identical to test case 8.3.1 except from the channel simulation that is set to 'Multipath Fading Case 3' ("> 3GPP Case 3 UE/BS") and the E_b/N_0 test requirements (see [Table 7-8](#)).

Table 7-8: E_b/N_0 Test requirements in multipath Case 3 channel

Measurement channel	Received E_b to N_0 for BS with Rx diversity	Received E_b to N_0 for BS without Rx diversity	Required BLER
12.2 kbps	n.a. (7.8 dB)	n.a. (11.4 dB)	$< 10^{-1}$
	7.8 dB	11.4 dB	$< 10^{-2}$
	8.6 dB	12.3 dB	$< 10^{-3}$
64 kbps	4.0 dB	7.7 dB	$< 10^{-1}$
	4.4 dB	8.3 dB	$< 10^{-2}$
	4.7 dB	9.1 dB	$< 10^{-3}$
144 kbps	3.4 dB	6.6 dB	$< 10^{-1}$
	3.8 dB	7.3 dB	$< 10^{-2}$
	4.2 dB	7.8 dB	$< 10^{-3}$
384 kbps	3.8 dB	7.1 dB	$< 10^{-1}$
	4.2 dB	7.8 dB	$< 10^{-2}$
	4.8 dB	8.5 dB	$< 10^{-3}$

7.2.3.5 Test Case 8.3.4 - Demodulation of DCH in Multipath Fading Case 4 Conditions

This test case is identical to test case 8.3.1 except from the channel simulation that is set to "Multipath Fading Case 4" ("Fading > Standard > 3GPP Case 4 UE") and the E_b/N_0 test requirements (see following table).

Table 7-9: E_b/N_0 Test requirements in multipath Case 4 channel

Measurement channel	Received E_b to N_0 for BS with Rx diversity	Received E_b to N_0 for BS without Rx diversity	Required BLER
12.2 kbps	n.a. (10.8 dB)	n.a. (14.4 dB)	$< 10^{-1}$
	10.8 dB	14.4 dB	$< 10^{-2}$
	11.6 dB	15.3 dB	$< 10^{-3}$
64 kbps	7.0 dB	10.7 dB	$< 10^{-1}$
	7.4 dB	11.3 dB	$< 10^{-2}$
	7.7 dB	12.1 dB	$< 10^{-3}$
144 kbps	6.4 dB	9.6 dB	$< 10^{-1}$
	6.8 dB	10.3 dB	$< 10^{-2}$
	7.2 dB	10.8 dB	$< 10^{-3}$
384 kbps	6.8 dB	10.1 dB	$< 10^{-1}$
	7.2 dB	10.8 dB	$< 10^{-2}$
	7.8 dB	11.5 dB	$< 10^{-3}$

Table 7-10: E_b/N_0 Test requirements in multipath Case 4 channel

Measurement channel	Received E_b to N_0 for BS with Rx diversity	Received E_b to N_0 for BS without Rx diversity	Required BLER
12.2 kbps	n.a. (10.8 dB)	n.a. (14.4 dB)	$< 10^{-1}$
	10.8 dB	14.4 dB	$< 10^{-2}$
	11.6 dB	15.3 dB	$< 10^{-3}$
64 kbps	7.0 dB	10.7 dB	$< 10^{-1}$
	7.4 dB	11.3 dB	$< 10^{-2}$
	7.7 dB	12.1 dB	$< 10^{-3}$
144 kbps	6.4 dB	9.6 dB	$< 10^{-1}$
	6.8 dB	10.3 dB	$< 10^{-2}$
	7.2 dB	10.8 dB	$< 10^{-3}$
384 kbps	6.8 dB	10.1 dB	$< 10^{-1}$
	7.2 dB	10.8 dB	$< 10^{-2}$
	7.8 dB	11.5 dB	$< 10^{-3}$

Table 7-11: E_b/N_0 Test requirements in multipath Case 4 channel

Measurement channel	Received E_b to N_0 for BS with Rx diversity	Received E_b to N_0 for BS without Rx diversity	Required BLER
12.2 kbps	n.a. (10.8 dB)	n.a. (14.4 dB)	$< 10^{-1}$
	10.8 dB	14.4 dB	$< 10^{-2}$
	11.6 dB	15.3 dB	$< 10^{-3}$
64 kbps	7.0 dB	10.7 dB	$< 10^{-1}$
	7.4 dB	11.3 dB	$< 10^{-2}$
	7.7 dB	12.1 dB	$< 10^{-3}$
144 kbps	6.4 dB	9.6 dB	$< 10^{-1}$
	6.8 dB	10.3 dB	$< 10^{-2}$
	7.2 dB	10.8 dB	$< 10^{-3}$
384 kbps	6.8 dB	10.1 dB	
	7.2 dB	10.8 dB	$< 10^{-2}$
	7.8 dB	11.5 dB	$< 10^{-3}$

7.2.3.6 Test Case 8.4 - Demodulation of DCH in Moving Propagation Conditions

This test case is identical to test case 8.3.1 except from the channel simulation that is set to "Moving Propagation" ("Fading > Standard > Moving Propagation") and the E_b/N_0 test requirements.

Table 7-12: E_b/N_0 Test requirements in moving channel

Measurement channel	Received E_b to N_0 for BS with Rx diversity	Received E_b to N_0 for BS without Rx diversity	Required BLER
12.2 kbps	n.a. (6.3 dB)	n.a. (9.3 dB)	$< 10^{-1}$
	6.3 dB	9.3 dB	$< 10^{-2}$
64 kbps	2.7 dB	5.9 dB	$< 10^{-1}$
	2.8 dB	6.1 dB	$< 10^{-2}$

7.2.3.7 Test Case 8.5 - Demodulation of DCH in Birth/Death Propagation Conditions

This test case is identical to test case 8.3.1 except from the channel simulation that is set to "Birth/Death Propagation" ("Fading > Standard > Birth/Death Propagation") and the E_b/N_0 test requirements.

Measurement channel	Received E_b to N_0 for BS with Rx diversity	Received E_b to N_0 for BS without Rx diversity	Required BLER
12.2 kbps	n.a. (8.3 dB)	n.a. (11.4 dB)	$< 10^{-1}$
	8.3 dB	11.4 dB	$< 10^{-2}$
64 kbps	4.7 dB	8.0 dB	$< 10^{-1}$
	4.8 dB	8.1 dB	$< 10^{-2}$

7.2.3.8 Test Case 8.6 - Verification of Internal BLER

For **non-diversity measurements**, the test case requires the basic configuration and is performed using the standard test setup for one path.

The signal generator outputs a corrupted reference measurement channel signal (= wanted signal) at output RF A. The signal is fed into the base station Rx port.

The signal generator starts signal generation at the first received BS frame trigger.

The measurement must be made at the three frequencies B, M and T. The RMC data rates are 12.2 kbps, 64 kbps, 144 kbps and 384 kbps.

For **diversity measurements**, the test case requires option Second RF path (B20x) and a second option Baseband Main Module (B13) in addition to the basic configuration.

For **diversity measurements**, in addition to the standard configuration, this test case requires:

- Option R&S SMW-B20x
- Option R&S SMW-B13T

It is performed using the standard test setup for diversity measurement.

The signal generator outputs the corrupted reference measurement channel signal (= wanted signal) at output RF A and output RF B. The signals are fed into the base station Rx ports.

The signal generator starts signal generation at the first received BS frame trigger.

The measurement must be made at the three frequencies B, M and T. The RMC data rates are 12.2 kbps, 64 kbps, 144 kbps and 384 kbps.

The following table lists the settings on the base station

Parameter	Value
Frequency	B, M and T
RMC	12.2 kbps, 64 kbps, 144 kbps, 384 kbps
Scrambling code	Any



Test Purpose and Test Settings - Test Case 8.6

The test case verifies that a BS receiver can calculate the BLER of a signal where erroneous blocks are inserted in the data stream by the signal generator.

The test is passed when the calculated BLER is within $\pm 10\%$ of the BLER simulated by the signal generator the test frequencies B, M and T. Note TS 25.141 annex C, where test conditions in terms of test methods and test conditions are defined.

Quotation from TS 25.141:

Base Station System with internal BLER calculates block error rate from the CRC blocks of the received. This test is performed only if Base Station System has this kind of feature. All data rates which are used in clause 8 Performance requirement testing shall be used in verification testing. This test is performed by feeding measurement signal with known BLER to the input of the receiver. Locations of the erroneous blocks shall be randomly distributed within a frame. Erroneous blocks shall be inserted into the UL signal as shown in the following figure.

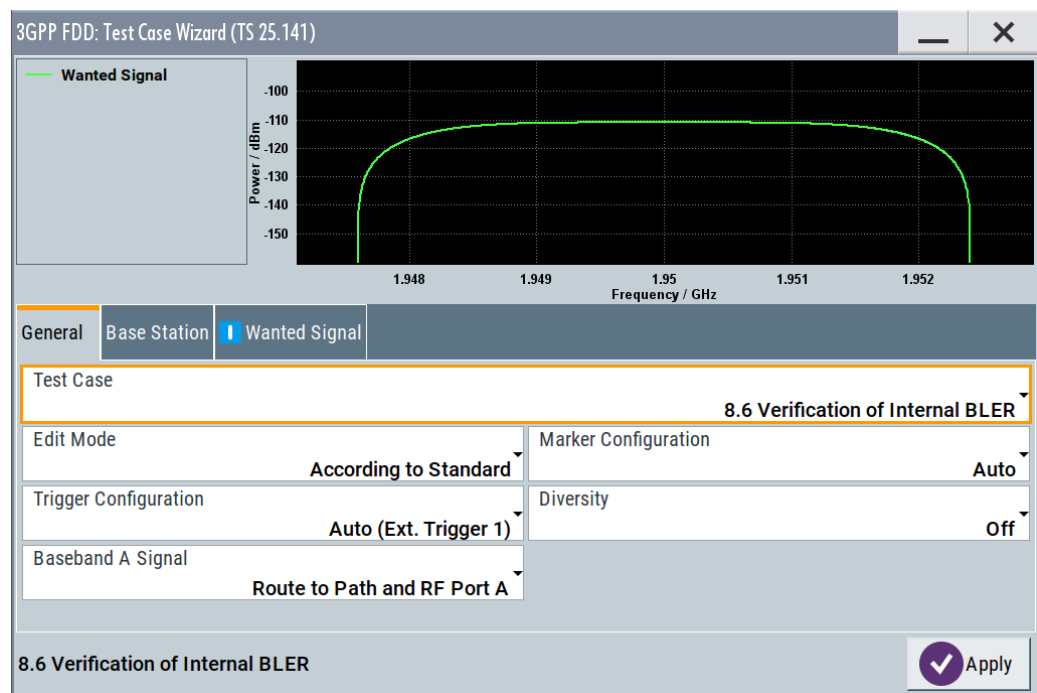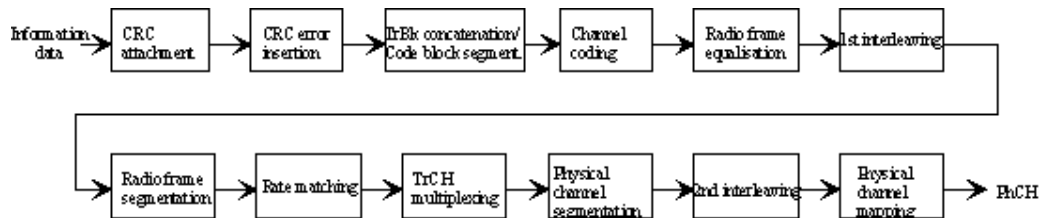

General	Base Station	Wanted Signal
Scrambling Code (hex) 00 0000		
Scrambling Mode Long Scrambling Code		
Power Class Wide Area BS		

General	Base Station	Wanted Signal
State		Reference Measurement Channel RMC 12.2 kbps
RF Frequency 1.950 000 000 00 GHz		Power Level -111.0 dBm
Block Error Rate 0.00		

Besides the settings described for all receiver test, Bit Error Rate and Block Error Rate selection is possible in edit mode "User Definable". In edit mode, "According to Standard" only the Block Error Rate setting is possible.

Table 7-13: UL signal levels for different data rates

Data rate	Signal level for wide area BS	Signal level for medium range BS	Signal level for local area BS	Unit
12.2 kbps	-111	-101	-97	dBm/3.84 MHz
64 kbps	-107	-97	-93	dBm/3.84 MHz
144 kbps	-104	-94	-90	dBm/3.84 MHz
384 kbps	-100	-90	-86	dBm/3.84 MHz

Block Error Rate - Test Case 8.6

Sets the block error rate. In edit mode "According to Standard", only values 0.00 (no block errors are inserted) and 0.01 (1 percent block errors are inserted) are available.

Remote command:

`[ :SOURce] :BB:W3GPp:TS25141:WSIGnal:DPDCh:DERRor:BLOCK:RATE`

on page 560

Bit Error Rate - Test Case 8.6

Sets the bit error rate in edit mode "User Definable".

Remote command:

`[ :SOURce] :BB:W3GPp:TS25141:WSIGnal:DPDCh:DERRor:BIT:RATE`

on page 559

7.2.3.9 Test Case 8.8.1 - RACH Preamble Detection in Static Propagation Conditions

For **non-diversity measurements**, the test case requires option AWGN (R&S SMW-K62) in addition to the basic configuration.

The measurement is performed using the standard test setup for one path.

The signal generator outputs a continuous sequence of preambles (wanted signal) that is superimposed by an AWGN signal at output RF A(B). The signal is fed into the base station Rx port.

The signal generator starts signal generation at the first BS frame trigger sent to input "Trigger 1".

The measurement must be made at the three frequencies B, M and T.

For **diversity measurements**, in addition to the standard configuration, this test case requires:

- Option R&S SMW-B20x
- Option R&S SMW-B13T
- 2x option R&S SMW-K62

It is performed using the standard test setup for diversity measurement.

The signal generator outputs a continuous sequence of preambles (wanted signal) that is superimposed by an AWGN signal at output RF A and output RF B. The signals are fed into the base station Rx ports.

The signal generator starts signal generation at the first received BS frame trigger.

The measurement must be made at the three frequencies B, M and T.

The following table lists the settings on the base station:

Parameter	Values
Frequency	B, M and T
RMC	RACH
Scrambling code	Any

Test Purpose and Test Settings - Test Case 8.8.1

The test case verifies that a BS receiver can detect the RACH preamble that is sent by the signal generator and is superimposed by a heavy AWGN signal.


The test is passed when internally calculated Pd is equal or above the required Pd settings at the test frequencies B, M and T. Note TS 25.141 annex C, where test conditions in terms of test methods and test conditions are defined.

Quotation from TS 25.141:

The performance requirement of RACH for preamble detection in static propagation conditions is determined by the two parameters probability of false detection of the preamble (P_{fa}) and the probability of detection of preamble (Pd). The performance is measured by the required at probability of detection, Pd of 0.99 and 0.999. P_{fa} is defined as a conditional probability of erroneous detection of the preamble when input is only noise (+interference). Pd is defined as conditional probability of detection of the preamble when the signal is present. P_{fa} shall be 10^{-3} or less. Only one signature is used and it is known by the receiver.



The Probability of false detection of the preamble (Pfa) test is not supported.

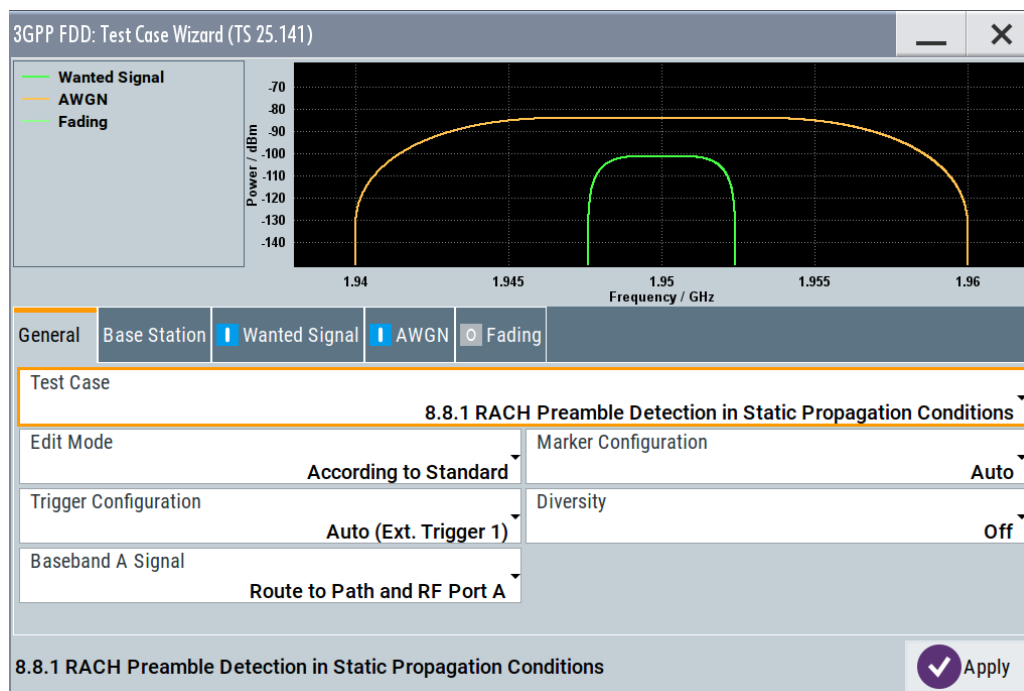

General | Base Station | ☒ Wanted Signal | ☒ AWGN | ☐ Fading

Scrambling Code (hex): 00 0000

Scrambling Mode: Long Scrambling Code

Power Class: Wide Area BS

General | Base Station | ☒ Wanted Signal | ☒ AWGN | ☐ Fading

State: ☐ ☒

RF Frequency: 1.950 000 000 00 GHz

Power Level: -101.2 dBm

General | Base Station | ☒ Wanted Signal | ☒ AWGN | ☐ Fading

State: ☐ ☒

Required Pd: ≥ 0.99

Power Level (within 3.84 MHz BW): -84.00 dBm

Ec/N0: -17.20 dB

General | Base Station | ☒ Wanted Signal | ☒ AWGN | ☐ Fading

State: 0

Besides the settings described for all receiver test, AWGN and Fading Configuration is possible in edit mode "User Definable". In edit mode "According to Standard", only the "Required Pd" setting is possible.

AWGN State - Test Case 8.x

Enables/disables the generation of the AWGN signal.

In edit mode "According to Standard", the state is fixed to "On".

Remote command:

[:SOURce] :BB:W3GPp:TS25141:AWGN:STATE on page 544

Required Pd - Test Case 8.x

Sets the Required Probability of Detection of Preamble (Required Pd) in edit mode "According to Standard":

- ≥ 0.99
- ≥ 0.999

This figure determines the ratio E_c/N_0 according to the following table of E_c/N_0 test requirements.

Table 7-14: Preamble detection test requirements in AWGN channel

	E_c/N_0 for required Pd (0.99	E_c/N_0 for required Pd (0.999
"BS with Rx Diversity"	-20.1 dB	-19.7 dB
"BS without Rx Diversity"	-17.2 dB	-16.4 dB

Remote command:

[:SOURce] :BB:W3GPp:TS25141:AWGN:RPDetection:RATE on page 544

Power Level - Test Case 8.x

Sets the AWGN level in edit mode "User Definable".

In edit mode "According to Standard", the AWGN level is determined by the selected "Power Class".

- "-84 dBm" for "Wide Area BS"
- "-74 dBm" for "Medium Range BS"
- "-70 dBm" for "Local Area BS"

Remote command:

[:SOURce] :BB:W3GPp:TS25141:AWGN:POWER:NOISE on page 543

E_b/N_0 - Test Case 8.x

Sets the ratio of bit energy to noise power density.

In edit mode "According to Standard", the value depends on the selected "Required Pd".

Remote command:

[:SOURce] :BB:W3GPp:TS25141:AWGN:ENRatio on page 543

Fading State - Test Case 8.x.1

Indicates the state of the Fader.

The state is fixed to "Off".

Remote command:

[:SOURce] :BB:W3GPp:TS25141:FSIMulator:STaTe on page 546

7.2.3.10 Test Case 8.8.2 - RACH Preamble Detection in Multipath Fading Case 3 Conditions

For **non-diversity measurements**, in addition to the standard configuration, this test case requires:

- Option R&S SMW-K62
- Option R&S SMW-B14/K71

The measurement is performed using the standard test setup for one path.

The signal generator outputs a continuous sequence of preambles (= wanted signal) that is disturbed by an AWGN signal and multipath fading effects at output RF A(B). The signal is fed into the base station Rx port.

The signal generator starts signal generation at the first BS frame trigger sent to input "Trigger 1".

The measurement must be made at the three frequencies B, M and T. The RMC data rates are 12.2 kbps, 64 kbps, 144 kbps and 384 kbps.

For **diversity measurements**, in addition to the standard configuration, this test case requires:

- Option R&S SMW-B20x
- Option R&S SMW-B13T
- Option R&S SMW-K62
- Option R&S SMW-B14/K71

It is performed using the standard test setup for diversity measurement.

The signal generator outputs a continuous sequence of preambles (= wanted signal) that is disturbed by an AWGN signal and multipath fading effects at output RF A and output RF B. The signals are fed into the base station Rx ports.

The signal generator starts signal generation at the first received BS frame trigger.

The measurement must be made at the three frequencies B, M and T. The RMC data rates are 12.2 kbps, 64 kbps, 144 kbps and 384 kbps.


The following table lists the settings on the base station:

Parameter	Values
Frequency	B, M and T
RMC	12.2 kbps, 64 kbps, 144 kbps, 384 kbps
Scrambling code	Any

Test Purpose and Test Settings - Test Case 8.8.2

The test case verifies that a BS receiver can detect the RACH preamble that is superimposed by a heavy AWGN signal and disturbed by multipath fading effects.

The test is passed when internally calculated Pd is equal or above the required Pd settings at the test frequencies B, M and T. Note TS 25.141 annex C, where test conditions in terms of test methods and test conditions are defined.

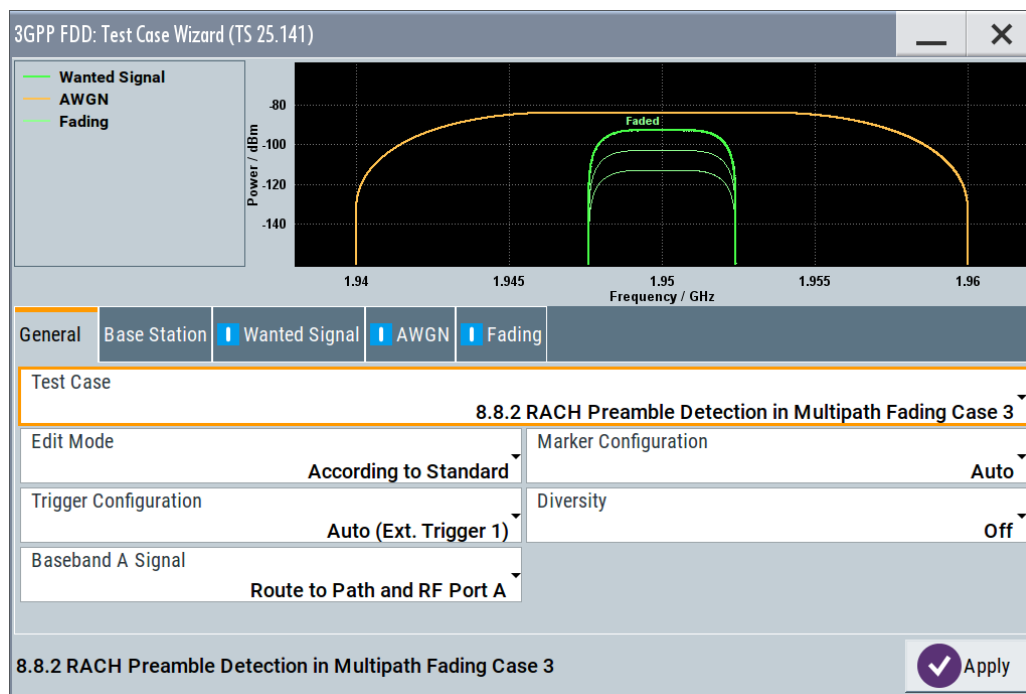

General Base Station ☒ Wanted Signal ☒ AWGN ☒ Fading

Scrambling Code (hex): 00 0000

Scrambling Mode: Long Scrambling Code

Power Class: Wide Area BS

General Base Station ☒ Wanted Signal ☒ AWGN ☒ Fading

State: ☒

RF Frequency: 1.950 000 000 00 GHz

Power Level: -92.80 dBm

General Base Station ☒ Wanted Signal ☒ AWGN ☒ Fading

State: ☒

Power Level (within 3.84 MHz BW): -84.00 dBm

Required Pd: ≥ 0.99

Ec/N0: -8.80 dB

General Base Station ☒ Wanted Signal ☒ AWGN ☒ Fading

State: ☒

This test case is identical to test case 8.8.1 except from the channel simulation that is set to "Multipath Fading Case 3" ("Fading > Standard = 3GPP Case 3 UE/BS") by default. The specific E_c/N_0 ratio requirements are listed in the following table.

	E_c/N_0 for required Pd (0.99	E_c/N_0 for required Pd (0.999
"BS with Rx Diversity"	-14.9 dB	-12.8 dB
"BS without Rx Diversity"	-8.8 dB	-5.8 dB

Fading State - Test Case 8.x

Indicates the state of the fader.

The state is fixed to "On". The "Fading" dialog is preset with the required settings for the test case.

Remote command:

`[ :SOURce ] :BB:W3GPp:TS25141:FSIMulator:STATe` on page 546

7.2.3.11 Test Case 8.8.3 - RACH Demodulation of Message Part in Static Propagation Conditions

For **non-diversity** measurements, the test case requires the AWGN option R&S SMW-K62 in addition to the basic configuration.

The measurement is performed using the standard test setup for one path.

The signal generator outputs a RACH message signal (= wanted signal) that is superimposed by an AWGN signal at output RF A(B). The signal is fed into the base station Rx port.

The signal generator starts signal generation at the first BS frame trigger sent to input "Trigger 1".

The measurement must be made at the three frequencies B, M and T. The transport block sizes are 168 bits and 360 bits.

For **diversity measurements**, in addition to the standard configuration, this test case requires:

- Option R&S SMW-B20x
- Option R&S SMW-B13T
- 2x option R&S SMW-K62

It is performed using the standard test setup for diversity measurement.

The signal generator outputs the RACH message signal (= wanted signal) that is superimposed by an AWGN signal at output RF A and output RF B. The signals are fed into the base station Rx ports.

The signal generator starts signal generation at the first received BS frame trigger.

The measurement must be made at the three frequencies B, M and T. The transport block sizes are 168 bits and 360 bits.

The following table lists the settings on the base station:

Parameter	Values
Frequency	B, M and T
Transport block size	168 bits, 360 bits
RMC	RACH
Scrambling code	Any

Test Purpose and Test Settings - Test Case 8.8.3


The test case verifies that a BS receiver can demodulate the RACH message sent by the signal generator but superimposed by AWGN.

The test is passed when the resulting BLER (calculated internally by the BS) does not exceed the required BLER settings. Note TS 25.141 annex C, where test conditions in terms of test methods and test conditions are defined.

Quotation from TS 25.141:

The performance requirement of RACH in static propagation conditions is determined by the maximum Block Error Ratio (BLER) allowed when the receiver input signal is at a specified E_b/N_0 limit. The BLER is calculated for each of the measurement channels supported by the base station.

The preamble threshold factor is chosen to fulfil the requirements on Pfa and Pd in subclauses 8.8.1 and 8.8.2. Only one signature is used and it is known by the receiver.

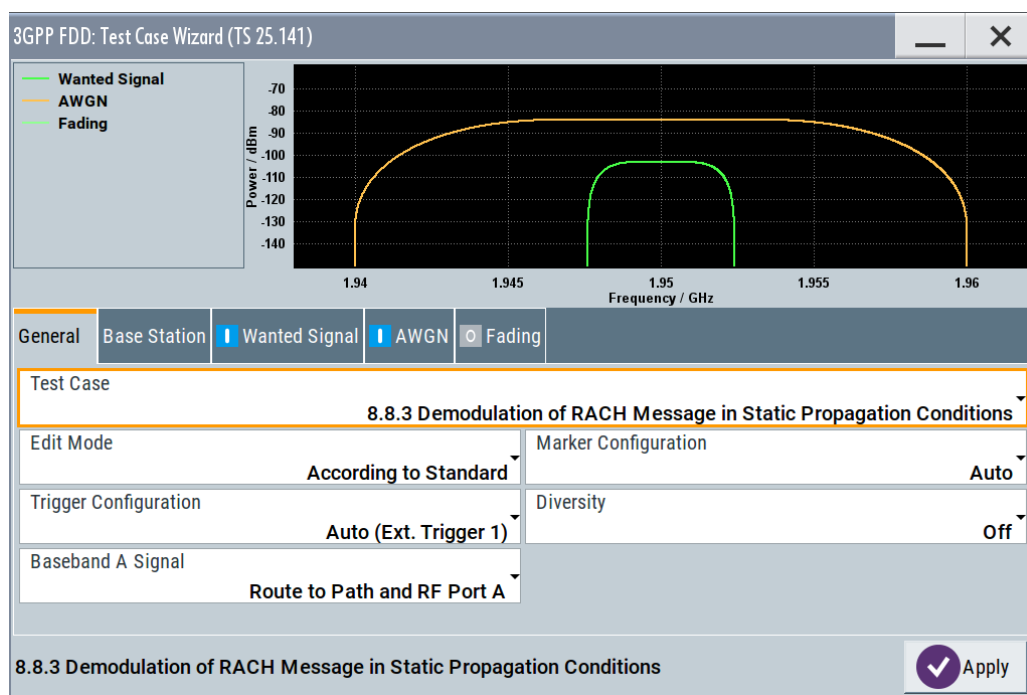

General	Base Station	☒ Wanted Signal	☒ AWGN	☐ Fading
Scrambling Code (hex)		00 0000		
Scrambling Mode		Long Scrambling Code		
Power Class		Wide Area BS		

General	Base Station	☒ Wanted Signal	☒ AWGN	☐ Fading
State		☒		
Transport Block Size		168 bits		
RF Frequency		1.950 000 000 00 GHz		
Power Level		-103.0 dBm		

General	Base Station	☒ Wanted Signal	☒ AWGN	☐ Fading
State		☒		
Required BLER		<0.1		
Power Level (within 3.84 MHz BW)		-84.00 dBm		
Eb/N0		7.60 dB		

General	Base Station	☒ Wanted Signal	☒ AWGN	☐ Fading
State		0		

Besides the settings described for all receiver test, selection of "Transport Block Size" of the wanted signal and AWGN Configuration is possible in edit mode "According to Standard".

Transport Block Size - Test Case 8.8.x

Sets the Transport Block Size:

- 168 bits
- 360 bits

Remote command:

[\[:SOURce\]:BB:W3GPp:TS25141:WSIGnal:PRACH:CCODing:TYPE](#) on page 561

AWGN State - Test Case 8.8.3

Enables/disables the generation of the AWGN signal.

In edit mode "According to Standard" the state is fixed to "On".

Remote command:

[\[:SOURce\]:BB:W3GPp:TS25141:AWGN:STATE](#) on page 544

Required BLER - Test Case 8.x

Sets the required Block Error Rate in edit mode "According to Standard".

- < 0.1
- < 0.01

This figure determines the ratio E_b/N_0 according to the list of E_b/N_0 test requirements (see following table).

E_b/N_0 requirements in AWGN channel

Table 7-15: Transport Block size TB and TTI in frames: 168 bits, TTI = 20 ms / 360 bits, TTI = 20 ms

	E_b/N_0 for required BLER < 10^{-1}	E_b/N_0 for required BLER < 10^{-2}	E_b/N_0 for required BLER < 10^{-1}	E_b/N_0 for required BLER < 10^{-2}
"BS with Rx Diversity"	4.5 dB	5.4 dB	4.3 dB	5.2 dB
"BS without Rx Diversity"	7.6 dB	8.5 dB	7.3 dB	8.2 dB

Remote command:

[\[:SOURce\]:BB:W3GPp:TS25141:AWGN:RBLock:RATE](#) on page 544

Power Level - Test Case 8.8.3

Sets the AWGN level in edit mode "User Definable".

In edit mode "According to Standard", the AWGN level is determined by the selected "Power Class".

"-84 dBm" for "Wide Area BS"

"-74 dBm" for "Medium Range BS"

"-70 dBm" for "Local Area BS"

Remote command:

[\[:SOURce\]:BB:W3GPp:TS25141:AWGN:POWer:NOISe](#) on page 543

E_b/N_0 - Test Case 8.8.3

Sets the ratio of bit energy to noise power density.

In edit mode "According to Standard", the value depends on the selected "Required BLER".

Remote command:

[\[:SOURce\]:BB:W3GPp:TS25141:AWGN:ENRatio](#) on page 543

Fading State - Test Case 8.8.3

Indicates the state of the Fader.

The state is fixed to "Off".

Remote command:

[\[:SOURce\]:BB:W3GPp:TS25141:FSIMulator:STATE](#) on page 546

7.2.3.12 Test Case 8.8.4 - RACH Demodulation of Message Part in Multipath Fading Case 3

For **non-diversity measurements**, in addition to the standard configuration, this test case requires:

- Option R&S SMW-K62
- Option R&S SMW-B14/K71

The measurement is performed using the standard test setup for one path.

The signal generator outputs a RACH message signal (= wanted signal) that is disturbed by an AWGN signal and multipath fading effects at output RF A. The signal is fed into the base station Rx port.

The signal generator starts signal generation at the first BS frame trigger sent to input "Trigger 1".

The measurement must be made at the three frequencies B, M and T. The Transport Block Sizes are 168 bits and 360 bits.

For **diversity measurements**, in addition to the standard configuration, this test case requires:

- Option R&S SMW-B20x
- Option R&S SMW-B13T
- Option R&S SMW-K62
- Option R&S SMW-B14/K71

It is performed using the standard test setup for diversity measurement.

The signal generator outputs a RACH message signal (= wanted signal) that is disturbed by an AWGN signal and multipath fading effects at output RF A and output RF B. The signals are fed into the base station Rx ports.


The signal generator starts signal generation at the first received BS frame trigger.

The measurement must be made at the three frequencies B, M and T. The Transport Block Sizes are 168 bits and 360 bits.

Test Purpose and Test Settings - Test Case 8.8.4

The test case verifies that a BS receiver can demodulate the RACH message sent by the signal generator but superimposed by AWGN and disturbed by multipath fading effects.

The test is passed when the resulting BLER (calculated internally by the BS) does not exceed the required BLER settings. Note TS 25.141 annex C, where test conditions in terms of test methods and test conditions are defined.

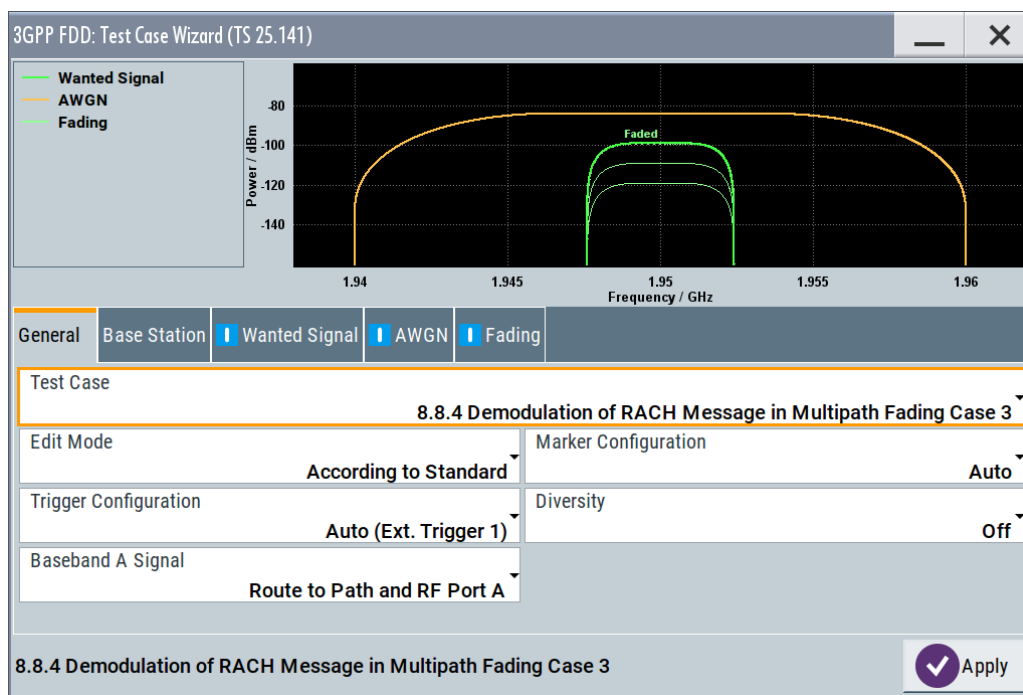

General | Base Station | ☒ Wanted Signal | ☒ AWGN | ☒ Fading

Scrambling Code (hex): 00 0000

Scrambling Mode: Long Scrambling Code

Power Class: Wide Area BS

General | Base Station | ☒ Wanted Signal | ☒ AWGN | ☒ Fading

State: ☒

Transport Block Size: 168 bits

RF Frequency: 1.950 000 000 00 GHz

Power Level: -98.90 dBm

General | Base Station | ☒ Wanted Signal | ☒ AWGN | ☒ Fading

State: ☒

Required BLER: <0.1

Power Level (within 3.84 MHz BW): -84.00 dBm

Eb/N0: 11.70 dB

General | Base Station | ☒ Wanted Signal | ☒ AWGN | ☒ Fading

State: ☒

This test case is identical to test case 8.8.3 except from the channel simulation that is set to "Multipath Fading Case 3" ("Fading > Standard > 3GPP Case 3 UE/BS") and the specific E_b/N_0 ratio requirements.

E_b/N_0 test requirements in fading case 3 channel

Transport Block size TB and TTI in frames: 168 bits, TTI = 20 ms / 360 bits, TTI = 20 ms

	E_b/N_0 for required BLER < 10^{-1}	E_b/N_0 for required BLER < 10^{-2}	E_b/N_0 for required BLER < 10^{-1}	E_b/N_0 for required BLER < 10^{-2}
"BS with Rx Diversity"	8.0 dB	9.1 dB	7.9 dB	8.9 dB
"BS without Rx Diversity"	11.7 dB	13.0 dB	11.6 dB	12.7 dB

7.2.3.13 Test Case 8.9.1 - CPCH Access Preamble and Collision Detection in Static Propagation Conditions

This test case is identical to test case 8.8.1 except that the CPCH Preamble is used instead of the RACH preamble.

7.2.3.14 Test Case 8.9.2 - CPCH Access Preamble and Collision Detection in Multipath Fading Case 3

This test case is identical to test case 8.8.2 except that the CPCH Preamble is used instead of the RACH preamble.

7.2.3.15 Test Case 8.9.3 - Demodulation of CPCH Message in Static Propagation Conditions

This test case is identical to test case 8.8.3 except from differing E_b/N_0 ratio requirements and the demodulation of CPCH Message instead of the RACH Message.

Test requirements in AWGN channel

Transport Block size TB and TTI in frames: 168 bits, TTI = 20 ms / 360 bits, TTI = 20 ms

	E_b/N_0 for required BLER < 10^{-1}	E_b/N_0 for required BLER < 10^{-2}	E_b/N_0 for required BLER < 10^{-1}	E_b/N_0 for required BLER < 10^{-2}
"BS with Rx Diversity"	4.5 dB	5.4 dB	4.3 dB	5.2 dB
"BS without Rx Diversity"	7.5 dB	8.4 dB	7.3 dB	8.2 dB

Transport Block Size (TB) - Test Case 8.9.3

Sets the Transport Block Size:

168 bits

360 bits

Remote command:

[:SOURce] :BB:W3GPP:TS25141:WSIGnal:PCPCh:CCODing:TYPE on page 561

7.2.3.16 Test Case 8.9.4 - Demodulation of CPCH Message in Multipath Fading Case 3 Conditions

This test case is identical to test case 8.8.4 except from differing E_b/N_0 ratio requirements and the demodulation of the CPCH Message instead of the RACH Message.

Test requirements in fading case 3 channel

Transport Block size TB and TTI in frames: 168 bits, TTI = 20 ms / 360 bits, TTI = 20 ms

	E_b/N_0 for required BLER < 10^{-1}	E_b/N_0 for required BLER < 10^{-2}	E_b/N_0 for required BLER < 10^{-1}	E_b/N_0 for required BLER < 10^{-2}
"BS with Rx Diversity"	8.1 dB	9.1 dB	7.9 dB	8.7 dB
"BS without Rx Diversity"	11.4 dB	12.6 dB	11.3 dB	12.3 dB

7.3 Transmitter Tests

7.3.1 Basic Configuration

The test cases for transmitter tests require at least the following equipment layout for the signal generator:

- Digital Standard 3GPP FDD (R&S SMW-K42)
- Arbitrary Waveform Generator (R&S SMW-B10),
- Baseband Main module (R&S SMW-B13),
- Frequency option (R&S SMWB10x).

Transmitter tests always require a separate measuring equipment to perform the tests, e.g. the R&S FSQ.

Test cases where the signal generator hardware equipment is not sufficient are shown in gray color but are not selectable. RF power and frequency limitations of the hardware equipment restrict the setting ranges.

7.3.2 Test Case 6.4.2 - Power Control Steps

The test case requires the basic configuration.

It can be performed using the standard test setup according to TS 25.141. A vector signal analyzer is required, e.g. the R&S FSQ.


For the signal generator, in case of two-path instruments signal routing to path A is assumed.

Output RF A of the signal generator is connected to the Rx port of the base station. The Tx signal of the base station is connected to the RF input of the analyzer via an attenuator.

The signal generator starts signal generation at the first received BS frame trigger. The analyzer is triggered by a marker signal ("Marker 1") of the generator.

The signal generator provides an uplink link signal with a precisely defined TPC bit sequence. The base station responds to the TPC bits by controlling the transmitted power of the data channel which is checked by the analyzer.

The analyzer measures the base station transmit power in the code domain to verify the transmitter power control step tolerance and aggregated power control step range.

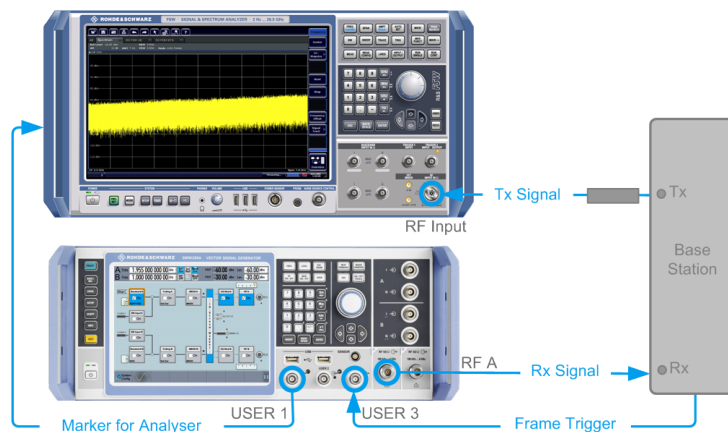


7.3.2.1 Test Purpose and Test Settings - Test Case 6.4.2

The test case verifies that a BS receiver can adjust its transmit power in response to the uplink TPC pattern. The cumulative power change as a result of ten successive (identical) TPC bits is also checked (aggregated transmit power).

The test is passed when the single or aggregated power control steps are within tolerance throughout the total dynamic range at the test frequencies B, M, and T.

Quotation from TS 25.141

The power control step is the required step change in the code domain power of a code channel in response to the corresponding power control command. The combined output power change is the required total change in the DL transmitter output power of a code channel in response to multiple consecutive power control commands corresponding to that code channel.

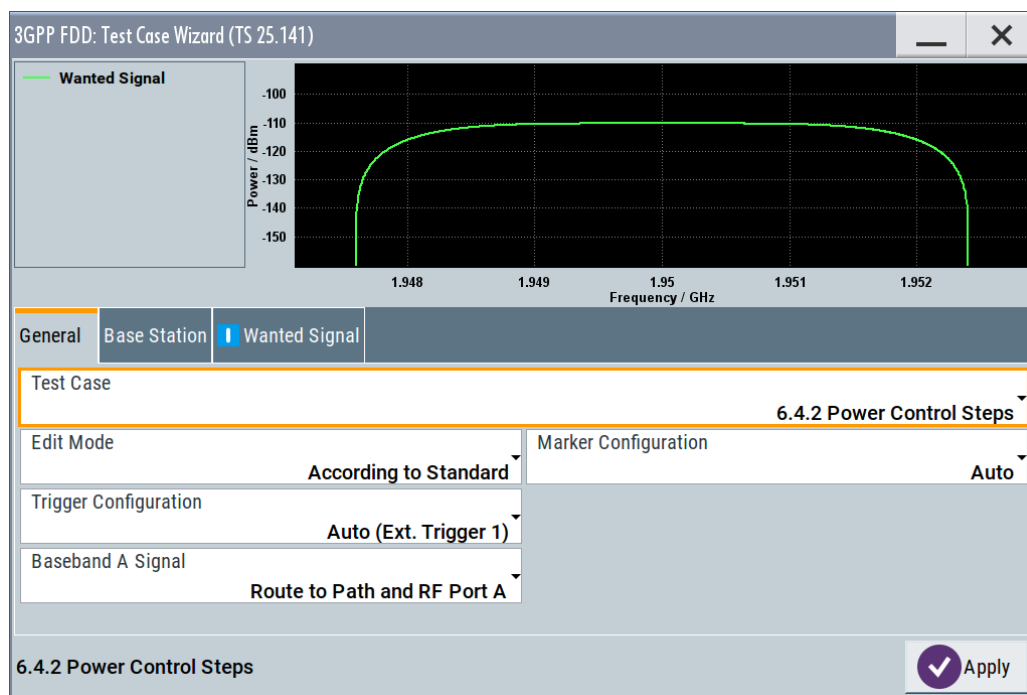

General Base Station **Wanted Signal**

Scrambling Code (hex) **00 0000**

Scrambling Mode **Long Scrambling Code**

Power Class **Wide Area BS**

General Base Station **Wanted Signal**

State ☒

RF Frequency **1.950 000 000 00 GHz** Power Level **-110.3 dBm**

General Base Station **Wanted Signal**

Slot Format DPCH # **0** Overall Symbol Rate DPCH **60 ksps**

Pow Ratio DPC/DPCH **0.00 dB** Propagation Delay **0.00 Chips**

TPC Start Pattern **Max. Pow. Less N Steps** Power Up Steps **1** Power Dn Steps **1**

TPC Repeat Pattern **Single Power Steps**

Wanted Signal State - Test Case 6.4.2

Enables/disables the signal generation of the wanted 3GPP signal.

In edit mode "According to Standard", the state is fixed to On.

Remote command:

[:SOURce] :BB:W3GPp:TS25141:WSIGnal:STATe on page 562

Wanted Signal Frequency - Test Case 6.4.2

Sets the RF frequency of the wanted signal.

Remote command:

[:SOURce] :BB:W3GPp:TS25141:WSIGnal:FREQuency on page 560

Wanted Signal Level - Test Case 6.4.2

Sets the RF level in edit mode "User Definable".

In edit mode "According to Standard", the RF level is determined by the selected "Power Class".

It is always 10 dBm above the reference sensitivity:

- "-120.3 dB + 10 dBm" when "Wide Area BS"
- "-110.3 dB + 10 dBm" when "Medium Range BS"
- "-106.3 dB + 10 dBm" when "Local Area BS"

Remote command:

[:SOURce] :BB:W3GPp:TS25141:WSIGnal:POWer on page 561

Slot Format DPCCH - Test Case 6.4.2

Selects the slot format.

Slot formats 0 to 5 are available for the DPCCH channel. The slot format defines the FBI mode and the TFCI status.

"Slot format 0"	No FBI field / TFCI on
"Slot format 1"	No FBI field / TFCI off
"Slot format 2"	1 FBI field / TFCI on
"Slot format 3"	1 FBI field / TFCI off
"Slot format 4"	2 FBI field / TFCI off
"Slot format 5"	2 FBI field / TFCI on

Remote command:

[:SOURce] :BB:W3GPp:TS25141:WSIGnal:DPCCh:SFOFormat on page 556

Overall Symbol Rate - Test Case 6.4.2

Sets the overall symbol rate of all the DPDCH channels.

The structure of the DPDCH channel table depends on this parameter. The overall symbol rate determines which DPDCHs are active, which symbol rate they have and which channelization codes they use.

Remote command:

[:SOURce] :BB:W3GPp:TS25141:WSIGnal:DPDCh:ORATe on page 560

Power Ratio DPCCH to DPDCH - Test Case 6.4.2

Sets the channel power ratio of DPCCH to DPDCH.

Remote command:

[:SOURce] :BB:W3GPp:TS25141:WSIGnal:DCRatio on page 555

Propagation Delay - Test Case 6.4.2

Sets an additional propagation delay besides the fixed DL-UL timing offset of 1024 chip periods.

Note: The additional propagation delay is achieved by charging the start trigger impulse with the respective delay (= entering the value as an "External Delay" in the 3GPP "Trigger /Marker" dialog).

Remote command:

`[ :SOURce ] :BB:W3GPp:TS25141:WSIGnal:TRIGger[:EXternal]:DElay`
on page 562

TPC Start Pattern - Test Case 6.4.2

Sets the TPC pattern for initialization of the base stations power level in edit mode "User Definable". The TPC start pattern is sent before the TPC repeat pattern.

In edit mode "According to Standard", the pattern is fixed to "Maximum Power Less n Steps".

Note: In edit mode "According to Standard", the TPC bits are read out of predefined data lists.

The TPC start pattern ensures that the base station responds reliably to the TPC bits from the generator. It sets the base station to a defined initial state for the actual recording of the measurement data. The analyzer is only triggered after the generation of the start pattern using marker 1 of the generator.

"Maximum Power Less n Steps"

A sequence of power-up steps (TPC bits "1") is followed by a sequence of power down steps (TPC bits "0").

A sufficiently long sequence of TPC bits "1" ('power up' commands) forces the base station to maximum transmit power. By the nth power down command, the BS is set to a defined number of n power steps below its maximum transmit power. The maximum transmit power is set at the beginning of the measurement.

"Data List" The TPC start pattern is taken from a user defined data list. When "Data List" is selected, a button appears for calling the "File Select" window.

Remote command:

`[ :SOURce ] :BB:W3GPp:TS25141:WSIGnal:DPCCh:TPC:SDATa` on page 557
`[ :SOURce ] :BB:W3GPp:TS25141:WSIGnal:DPCCh:TPC:SDATa:DSElect`
on page 558

TPC Power Up Steps - Test Case 6.4.2

If "TPC Start Pattern > Max. Pow. Less N Steps", sets the amount of power up bits ("1") in the TPC start pattern. The total TPC start pattern length is the number of 'power up' bits plus the number of n 'power down' bits.

Remote command:

`[ :SOURce ] :BB:W3GPp:TS25141:WSIGnal:DPCCh:TPC:SDATa:PUSSteps`
on page 559

TPC Power Down Steps - Test Case 6.4.2

If "TPC Start Pattern > Max. Pow. Less N Steps", sets the amount of power down bits ('0') in the TPC start pattern. The total TPC start pattern length is the number of 'power up' ('1') bits plus the number of n 'power down' ('0') bits.

Remote command:

`[ :SOURce ] :BB:W3GPp:TS25141:WSIGnal:DPCCh:TPC:SDATa:PDSTeps`

on page 558

TPC Repeat Pattern - Test Case 6.4.2

Sets the TPC pattern for verification of the base stations power control steps.

In edit mode "According to Standard", the selection is limited.

"Single Power Steps"

A 01 pattern is sent periodically for measurement of the transmitter power control step tolerance.

"Aggregated Power Steps"

A 00000000001111111111 pattern is sent periodically for measurement of the transmitter aggregated power control step range. The power of the base station is measured after 10 consecutive equal TPC bits ('1' or '0').

"(All 1) Maximum Power"

A all 1 pattern is sent continuously. The base station is forced to maximum power. This selection is only available in edit mode "User Definable"

"(All 0) Minimum Power"

A all 0 pattern is sent continuously. The base station is forced to minimum power. This selection is only available in edit mode "User Definable"

"User Defined Pattern"

The TPC repeat pattern can be input. When "User Defined Pattern" is selected, an input field appears for entering the pattern. The maximum bit pattern length is 64 bits. This selection is only available in edit mode "User Definable"

Remote command:

`[ :SOURce ] :BB:W3GPp:TS25141:WSIGnal:DPCCh:TPC:RDATa:PATtern`

on page 557

"Data List"

The TPC repeat pattern is taken from a data list. When "Data List" is selected, a button appears for calling the "File Select" window.

Remote command:

`[ :SOURce ] :BB:W3GPp:TS25141:WSIGnal:DPCCh:TPC:RDATa:DSElect`

on page 556

Remote command:

`[ :SOURce ] :BB:W3GPp:TS25141:WSIGnal:DPCCh:TPC:RDATa` on page 556

7.3.2.2 Carrying Out the Test Case 6.4.2 Measurement

For the preset Marker Configuration "Auto", Marker 1 starts delayed by the TPC start pattern length.

Each slot takes 0.625 ms and consists of 2560 chips. Depending on the slot format, 1 or 2 TPC bits are sent for each slot.

Table 7-16: The following table lists the settings on the base station:

Parameter	Value
Frequency	B, M and T
Test model	2
Transmit power	Any
Scrambling code	Any

1. Set the base station to the basic state
 - a) Initialize the base station,
 - b) Set the scrambling scheme,
 - c) Set the base station to test model 2,
 - d) Set the frequency
2. Set the signal generator to the basic state
 - a) Preset the signal generator.
3. Set the analyzer to the basic state
 - a) Set the test case wizard
 - b) Open the 3GPP FDD menu in the baseband block
 - c) Open the "Test Case Wizard". Select "Test Case > 6.4.2".
Preset the "General Settings" parameters according to TS 25.141
 - d) Enter scrambling code and scrambling mode according to the base station scrambling scheme.
 - e) Enter the power class of the base station under test. The RF level is automatically adjusted to the selected power class.
 - f) Enter the test frequency (e.g. M). It must be the same as the BS frequency.
 - g) Enter the Wanted Signal parameters.
 - h) Activate the settings with the "Apply Settings" button.
The signal generator is now ready to start signal generation
4. Set the analyzer to the measurement frequency
5. Switch on RF output
6. Start the measurement
 - a) Send a start trigger impulse from the base station to the signal generator and to the analyzer.
Start signal generation and measurement procedures.
7. Calculate the result

The analyzer calculates the resulting code domain power of the BS downlink channel.


7.3.3 Test Case 6.6 - Transmit Intermodulation

The test case requires the basic configuration.

It can be performed using the standard test setup according to TS 25.141. A vector signal analyzer is required, e.g. the R&S FSQ.

For the signal generator, in case of two-path instruments signal routing to path A is assumed.

RF port A is connected to the RF input of the analyzer via a circulator and an external attenuator. The Tx Signal of the base station is connected to the RF input of the analyzer via a circulator.

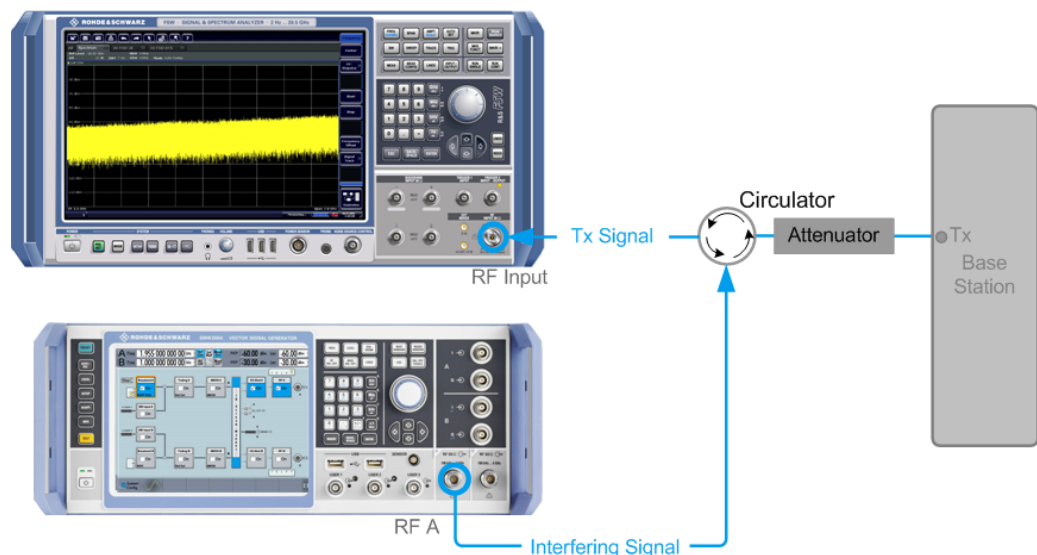

The signal generator outputs the test model interfering signal with different frequency offsets in relation to the BS carrier frequency and provides the trigger for the analyzer ("Marker 1").

7.3.3.1 Test Purpose and Test Settings - Test Case 6.6

The test case verifies that a BS transmitter can inhibit intermodulation products of non-linear elements caused by the presence of an interfering signal at the adjacent frequency channels.

The test is passed when the transmit intermodulation level is below an upper out of band emission and spurious emission threshold at the test frequencies B, M, and T.


Quotation from TS 25.141

The transmit intermodulation performance is a measure of the capability of the transmitter to inhibit the generation of signals in its non-linear elements. Non-linear elements

are caused by presence of the wanted signal and an interfering signal reaching the transmitter via the antenna.

The transmit intermodulation level is the power of the intermodulation products when a WCDMA modulated interference signal is injected into an antenna connector at a mean power level of 30 dB lower than that of the mean power of the wanted signal. The frequency of the interference signal shall be 5 MHz, 10 MHz and 15 MHz offset from the subject signal carrier frequency, but exclude interference frequencies that are outside of the allocated frequency band for UTRA-FDD downlink specified in subclause 3.4.1.

The requirements are applicable for single carrier.

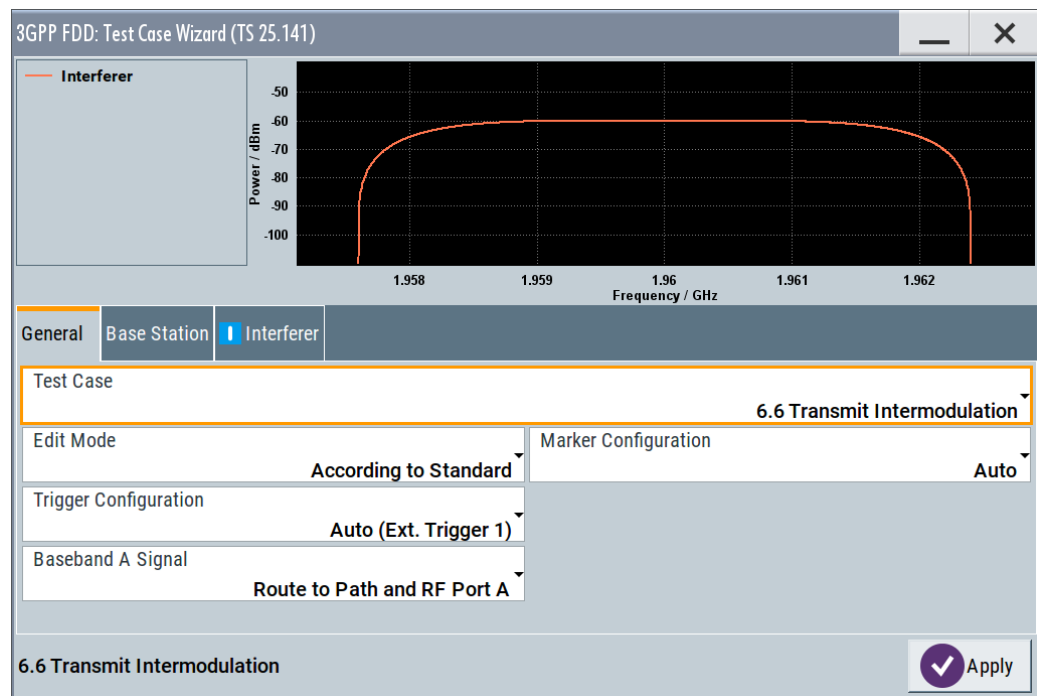

General Base Station **Interferer**

Scrambling Code (hex) **0000**

Scrambling Mode **On**

RF Frequency **1.950 000 000 00 GHz**

Power Level **-30.00 dBm**

General Base Station **Interferer**

State **I** Frequency Offset **+10 MHz**

Interference Model **Test Model 1, 64 DPCHs** Interferer Level / Wanted Signal Level **-30.00 dB**

BS Frequency - Test Case 6.6

Enters the RF frequency of the base station.

Note: In this test case, the signal generator generates no wanted signal, but just the interfering signal.

Remote command:

[\[:SOURce\]:BB:W3GPp:TS25141:BSSignal:FREQuency](#) on page 545

BS RF Power - Test Case 6.6

Enters the RF power of the base station.

Note: In this test case, the signal generator generates no wanted signal, but just the interfering signal.

Remote command:

[\[:SOURce\]:BB:W3GPp:TS25141:BSSignal:POWer](#) on page 545

Interferer State - Test Case 6.6

Enables/disables the signal generation of the interfering 3GPP signal.

In edit mode "According to Standard", the state is fixed to "On".

In this test case, the signal generator generates no wanted signal, but just the interfering signal .

Remote command:

[\[:SOURce\]:BB:W3GPp:TS25141:IFSignal:STATe](#) on page 551

Interferer Mode - Test Case 6.6

Selects the interfering signal from a list of test models in accordance with TS 25.141.

All test models refer to the predefined downlink configurations. In edit mode "According to Standard", "Test Model 1; 64 DPCHs" is fixed.

The following test models are available for selection in edit mode "User Definable":

- Test Model 1; 64 DPCHs
- Test Model 1; 16 Channels
- Test Model 1; 32 Channels
- Test Model 2
- Test Model 3; 16 Channels
- Test Model 3; 32 Channels
- Test Model 4
- Test Model 5; 38 Channels
- Test Model 5; 28 Channels
- Test Model 5; 8 Channels

Remote-control command: TM164

Remote command:

[\[:SOURce\]:BB:W3GPp:TS25141:IFSignal:SETTing:TMODeL:BSTation](#)
on page 551

Frequency Offset - Test Case 6.6

Enters the frequency offset of the interfering signal versus the wanted signal.

In edit mode "According to Standard" the choice is limited to values between +/- 15 MHz in 5 MHz steps:

Remote-control command: -15 MHz

Remote command:

[:SOURce] :BB:W3GPP:TS25141:IFSignal:FOFFset on page 548

Interferer Level to Signal Level - Test Case 6.6

Enters the ratio of interfering signal level versus wanted signal level.

In edit mode "According to Standard", the value is fixed to - 30 dB:

Remote-control command: -30

Remote command:

[:SOURce] :BB:W3GPP:TS25141:IFSignal:CNRatio on page 547

7.3.3.2 Carrying Out a Test Case 6.6 Measurement

The signal generator outputs the test model interfering signal.

Table 7-17: The following table lists the settings on the base station:

Parameter	Value
Frequency	B, M and T
Test model	1
Transmit power	Maximum
Scrambling code	any

1. Set the base station to the basic state
 - a) Initialize the base station,
 - b) Set the scrambling scheme,
 - c) Set the base station to test model 1,
 - d) Set maximum transmit power,
 - e) Set the frequency
2. Set the signal generator to the basic state
 - a) Preset the signal generator.
3. Set the analyzer to the basic state
4. Set the test case wizard
 - a) Open the 3GPP FDD menu in the baseband block
 - b) Open the "Test Case Wizard". Select "Test Case > 6.6".
Preset the "General Settings" parameters according to TS 25.141
 - c) Enter scrambling code and scrambling mode according to the base station scrambling scheme.
 - d) Enter the power class of the base station under test. The RF level is automatically adjusted to the selected power class.
 - e) Enter the test frequency (e.g. M). It must be the same as the BS frequency.
 - f) Enter the Interfering Signal parameters.

- g) Activate the settings with the "Apply Settings" button.
The signal generator is now ready to start signal generation
- 5. Set the analyzer to the measurement frequency
- 6. Switch on RF output
- 7. Start the measurement
 - a) Send a start trigger impulse from the base station to the signal generator and to the analyzer.
Start signal generation and measurement procedures.
- 8. Calculate the result
The analyzer calculates the out of band emission and the spurious emission.

8 Remote-Control Commands

The following commands are required to perform signal generation with the 3GPP FDD options in a remote environment. We assume that the R&S SMW has already been set up for remote operation in a network as described in the R&S SMW documentation. Knowledge about the remote control operation and the SCPI command syntax are assumed.



Conventions used in SCPI command descriptions

For a description of the conventions used in the remote command descriptions, see section "Remote Control Commands" in the R&S SMW user manual.

Common suffixes

The following common suffixes are used in remote commands:

Suffix	Value range	Description
ENTity<ch>	1 to 4	entity in a multiple entity configuration with separate baseband sources ENTity3 4 require option R&S SMW-K76
SOURce<hw>	[1] to 4	available baseband signals only SOURce1 possible, if the keyword ENTity is used
OUTPut<ch>	1 to 3	available markers
BSTation<st>	1 to 4	Base station If the suffix is omitted, BS1 is selected.
CHANnel<ch>	0 to 138	channel If the suffix is omitted, Channel1 is selected.
MSTation<st>	1 to 4	user equipment. If the suffix is omitted, MS1 is selected.



Using SCPI command aliases for advanced mode with multiple entities

You can address multiple entities configurations by using the SCPI commands starting with the keyword `SOURce` or the alias commands starting with the keyword `ENTity`.

Note that the meaning of the keyword `SOURce<hw>` changes in the second case.

For details, see section "SCPI Command Aliases for Advanced Mode with Multiple Entities" in the R&S SMW user manual.

The commands in the `SOURce:BB:W3GPP` subsystem are described in several sections, separated into general remote commands, commands for base station settings and commands for user equipment settings.

This subsystem contains commands for the primary and general settings of the 3GPP FDD standard. These settings concern activation of the standard, setting the transmis-

sion direction, filter, clock, trigger and clipping settings, defining the chip rate and the sequence length, as well as the preset and power adjust setting.

The commands for setting the base station and the user equipment, the enhanced channels of the base and user equipment, as well as the commands for selecting the test models and the test setups, are described in separate sections. The commands are divided up in this way to make the comprehensive `SOURCE:BB:W3GPP` subsystem clearer.

The following commands specific to the 3GPP FDD options are described here:

• General Commands.....	352
• Filter/Clipping Settings.....	358
• Trigger Settings.....	363
• Marker Settings.....	367
• Clock Settings.....	369
• Test Models and Predefined Settings.....	370
• Setting Base Stations.....	374
• Enhanced Channels of Base Station 1.....	421
• User Equipment Settings.....	443
• Enhanced Channels of the User Equipment.....	528
• Setting Up Test Cases According to TS 25.141.....	541

8.1 General Commands

<code>[SOURce<hw>]:BB:W3GPP:PRESet</code>	352
<code>[SOURce<hw>]:BB:W3GPP:SETTing:CATalog?</code>	353
<code>[SOURce<hw>]:BB:W3GPP:SETTing:DELeTe</code>	353
<code>[SOURce<hw>]:BB:W3GPP:SETTing:LOAD</code>	353
<code>[SOURce<hw>]:BB:W3GPP:SETTing:STORe</code>	354
<code>[SOURce<hw>]:BB:W3GPP:SLENgth</code>	354
<code>[SOURce<hw>]:BB:W3GPP:STATe</code>	354
<code>[SOURce<hw>]:BB:W3GPP:WAVeform:CREate</code>	355
<code>[SOURce]:BB:W3GPP:GPP3:VERSion?</code>	355
<code>[SOURce<hw>]:BB:W3GPP:BSTation:PRESet</code>	355
<code>[SOURce<hw>]:BB:W3GPP:CoPY:COFFset</code>	355
<code>[SOURce<hw>]:BB:W3GPP:CoPY:DESTination</code>	356
<code>[SOURce<hw>]:BB:W3GPP:CoPY:EXECute</code>	356
<code>[SOURce<hw>]:BB:W3GPP:CoPY:SOURce</code>	357
<code>[SOURce<hw>]:BB:W3GPP:LiNK</code>	357
<code>[SOURce<hw>]:BB:W3GPP:POWeR:ADJust</code>	357
<code>[SOURce<hw>]:BB:W3GPP:POWeR[:TOTal]?</code>	358

`[SOURce<hw>]:BB:W3GPP:PRESet`

Sets the parameters of the digital standard to their default values (*RST values specified for the commands).

Not affected is the state set with the command `SOURce<hw>:BB:W3GPP:STATe`.

Example: `SOURce1:BB:W3GPp:PRESet`

Usage: Event

Manual operation: See ["Set to default"](#) on page 56

[SOURce<hw>]:BB:W3GPp:SETting:CATalog?

This command reads out the files with 3GPP FDD settings in the default directory. The default directory is set using command `MMEM:CDIRectory`. Only files with the file extension `*.3g` are listed.

Return values:

<Catalog> string

Example:

`MMEM:CDIR '/var/user/temp/3gpp`

Sets the default directory.

`BB:W3GP:SETT:CAT?`

Reads out all the files with 3GPP FDD settings in the default directory.

Response: UPLINK, DOWNLINK

The files UPLINK and DOWNLINK are available.

Usage: Query only

Manual operation: See ["Save/Recall"](#) on page 56

[SOURce<hw>]:BB:W3GPp:SETting:DELeTe <Filename>

This command deletes the selected file with 3GPP FDD settings. The directory is set using command `MMEM:CDIRectory`. A path can also be specified, in which case the files in the specified directory are read. The file extension can be omitted. Only files with the file extension `*.3g` are deleted.

Setting parameters:

<Filename> <file_name>

Example:

`BB:W3GP:SETT:DEL 'UPLINK'`

Deletes file UPLINK.

Usage: Setting only

Manual operation: See ["Save/Recall"](#) on page 56

[SOURce<hw>]:BB:W3GPp:SETting:LOAD <Filename>

This command loads the selected file with 3GPP FDD settings. The directory is set using command `MMEM:CDIRectory`. A path can also be specified, in which case the files in the specified directory are read. The file extension can be omitted. Only files with the file extension `*.3g` are loaded.

Setting parameters:

<Filename> <file_name>

Example: `BB:W3GP:SETT:LOAD 'UPLINK'`
Loads file UPLINK.

Usage: Setting only

Manual operation: See ["Save/Recall"](#) on page 56

[[:SOURce<hw>]:BB:W3GPp:SETTing:STORe <Filename>

This command stores the current 3GPP FDD settings into the selected file. The directory is set using command `MMEM:CDIRectory`. A path can also be specified, in which case the files in the specified directory are read. Only enter the file name. 3GPP FDD settings are stored as files with the specific file extensions `*.3g`.

Setting parameters:

<Filename> string

Example: `BB:W3GP:SETT:STOR 'UPLINK'`
Stores the current 3GPP FDD settings into file UPLINK.

Usage: Setting only

Manual operation: See ["Save/Recall"](#) on page 56

[[:SOURce<hw>]:BB:W3GPp:SLENgth <SLength>

Defines the sequence length of the arbitrary waveform component of the 3GPP signal in the number of frames. This component is calculated in advance and output in the arbitrary waveform generator. It is added to the realtime signal components (Enhanced Channels).

When working in Advanced Mode (`W3GP:BST1:CHAN:HSDP:HSET:AMOD ON`), it is recommended to adjust the current ARB sequence length to the suggested one.

Parameters:

<SLength> integer

Range: 1 to Max. No. of Frames = Arbitrary waveform
memory size/(3.84 Mcps x 10 ms).

*RST: 1

Example: `BB:W3GP:SLEN 10`
sets the sequence length to 10 frames.

Manual operation: See ["ARB Seq Length"](#) on page 105

[[:SOURce<hw>]:BB:W3GPp:STATe <State>

Activates the standard and deactivates all the other digital standards and digital modulation modes in the same path.

Parameters:

<State> 0 | 1 | OFF | ON

*RST: 0

Example: SOURce1:BB:W3GPp:STATe ON

Manual operation: See ["State"](#) on page 56

[SOURce<hw>]:BB:W3GPp:WAVEform:CREate <Filename>

This command creates a waveform using the current settings of the 3GPP FDD menu. The file name is entered with the command. The file is stored with the predefined file extension *.wv. The file name and the directory it is stored in are user-definable.

Setting parameters:

<Filename> <file_name>

Example: MMEM:CDIR '/var/user/temp/waveform'
sets the default directory to /var/user/temp/waveform.
BB:W3GP:WAV:CRE 'gpp3_bs'
creates the waveform file gpp3_bs.wv in the default directory.

Usage: Setting only

Manual operation: See ["Generate Waveform"](#) on page 57

[SOURce]:BB:W3GPp:GPP3:VERSion?

The command queries the version of the 3GPP standard underlying the definitions.

Return values:

<Version> string

Example: BB:W3GP:GPP3:VERS?
queries the 3GPP version.

Usage: Query only

Manual operation: See ["3GPP Version"](#) on page 57

[SOURce<hw>]:BB:W3GPp:BSTation:PRESet

The command produces a standardized default for all the base stations. The settings correspond to the *RST values specified for the commands.

All base station settings are preset.

Example: BB:W3GP:BST:PRESet
resets all the base station settings to default values.

Usage: Event

Manual operation: See ["Reset all Base Stations"](#) on page 66

[SOURce<hw>]:BB:W3GPp:COPY:COFFset <COffset>

Sets the offset for the channelization code in the destination base station.

Parameters:

<COffset> integer
 Range: 0 to 511
 *RST: 0

Example:

BB:W3GP:COPY:COFF 10
 the channelization code is shifted by 10 when the source base station is copied to the destination base station.

Manual operation: See " [Copy Basestation/Copy User Equipment...](#) " on page 67

[:SOURce<hw>]:BB:W3GPp:COPY:DESTination <Destination>

The command selects the station to which data is to be copied. Whether the data is copied to a base station or a user equipment depends on which transmission direction is selected (command W3GPp:LINK UP | DOWN).

Parameters:

<Destination> 1 | 2 | 3 | 4
 Range: 1 to 4
 *RST: 2

Example:

BB:W3GP:LINK DOWN
 selects the downlink transmit direction (base station to user equipment).
 BB:W3GP:COPY:SOUR 1
 selects base station 1 as the source.
 BB:W3GP:COPY:DEST 4
 selects base station 4 as the destination.
 BB:W3GP:COPY:EXEC
 starts copying the parameter set of base station 1 to base station 4.

Manual operation: See " [Copy Basestation/Copy User Equipment...](#) " on page 67

[:SOURce<hw>]:BB:W3GPp:COPY:EXECute

The command starts the copy process. The dataset of the source station is copied to the destination station. Whether the data is copied to a base station or a user equipment depends on which transmission direction is selected (command W3GPp:LINK UP | DOWN).

Example:

BB:W3GP:COPY:EXEC
 starts copying the parameter set of the selected source station to the selected destination station.

Usage: Event

Manual operation: See " [Copy Basestation/Copy User Equipment...](#) " on page 67

[[:SOURce<hw>]:BB:W3GPp:COPY:SOURce <Source>

The command selects the station that has data to be copied. Whether the station copied is a base or user equipment depends on which transmission direction is selected (command `W3GPp:LINK UP | DOWN`).

Parameters:

<Source> 1 | 2 | 3 | 4
 Range: 1 to 4
 *RST: 1

Example:

`BB:W3GP:LINK UP`
 selects the uplink transmit direction (user equipment to base station).
`BB:W3GP:COPY:SOUR 1`
 selects user equipment 1 as the source.
`BB:W3GP:COPY:DEST 4`
 selects user equipment 4 as the destination.
`BB:W3GP:COPY:EXEC`
 starts copying the parameter set of user equipment 1 to user equipment 4.

Manual operation: See "[Copy Basestation/Copy User Equipment...](#)" on page 67

[[:SOURce<hw>]:BB:W3GPp:LINK <Link>

The command defines the transmission direction. The signal either corresponds to that of a base station (`FORWARD | DOWN`) or that of a user equipment (`REVERSE | UP`).

Parameters:

<Link> DOWN | UP | FORWARD | REVERSE
 *RST: FORWARD|DOWN

Example:

`BB:W3GP:LINK DOWN`
 the transmission direction selected is base station to user equipment. The signal corresponds to that of a base station.

Manual operation: See "[Link Direction](#)" on page 57

[[:SOURce<hw>]:BB:W3GPp:POWER:ADJust

The command sets the power of the active channels in such a way that the total power of the active channels is 0 dB. This does not change the power ratio among the individual channels.

Example:

`BB:W3GP:POW:ADJ`
 The total power of the active channels is set to 0 dB, the power ratio among the individual channels is unchanged.

Usage: Event

Manual operation: See "[Adjust Total Power to 0dB](#)" on page 69

[[:SOURce<hw>]:BB:W3GPp:POWer[:TOTal]]?

The command queries the total power of the active channels. After "Power Adjust", this power corresponds to 0 dB.

Return values:

<Total> float

Example:

BB:W3GP:POW?

queries the total power of the active channels.

Response: -22.5

the total power is -25 dB.

Usage:

Query only

Manual operation: See ["Total Power"](#) on page 69

8.2 Filter/Clipping Settings

[:SOURce<hw>]:BB:W3GPp:CLIPping:LEVel	358
[:SOURce<hw>]:BB:W3GPp:CLIPping:MODE	359
[:SOURce<hw>]:BB:W3GPp:CLIPping:STATe	359
[:SOURce<hw>]:BB:W3GPp:CRATe?	359
[:SOURce<hw>]:BB:W3GPp:CRATe:VARiation	360
[:SOURce<hw>]:BB:W3GPp:FILTer:PARAmeter:APCO25	360
[:SOURce<hw>]:BB:W3GPp:FILTer:PARAmeter:COSSine	360
[:SOURce<hw>]:BB:W3GPp:FILTer:PARAmeter:GAUSSs	360
[:SOURce<hw>]:BB:W3GPp:FILTer:PARAmeter:LPASSs	361
[:SOURce<hw>]:BB:W3GPp:FILTer:PARAmeter:LPASSEVM	361
[:SOURce<hw>]:BB:W3GPp:FILTer:PARAmeter:RCOSSine	361
[:SOURce<hw>]:BB:W3GPp:FILTer:PARAmeter:SPHase	362
[:SOURce<hw>]:BB:W3GPp:FILTer:TYPE	362

[[:SOURce<hw>]:BB:W3GPp:CLIPping:LEVel <Level>

The command sets the limit for level clipping (Clipping). This value indicates at what point the signal is clipped. It is specified as a percentage, relative to the highest level. 100% indicates that clipping does not take place.

Level clipping is activated with the command `SOUR:BB:W3GP:CLIP:STAT ON`

Parameters:

<Level> integer
 Range: 1 to 100
 *RST: 100

Example:

BB:W3GP:CLIP:LEV 80PCT

sets the limit for level clipping to 80% of the maximum level.

BB:W3GP:CLIP:STAT ON

activates level clipping.

Manual operation: See ["Clipping Level"](#) on page 264

[:SOURce<hw>]:BB:W3GPp:CLIPping:MODE <Mode>

The command sets the method for level clipping (Clipping).

Parameters:

<Mode> VECTor | SCALar

VECTor

The reference level is the amplitude | i+jq |

SCALar

The reference level is the absolute maximum of the I and Q values.

*RST: VECTor

Example:

BB:W3GP:CLIP:MODE SCAL

selects the absolute maximum of all the I and Q values as the reference level.

BB:W3GP:CLIP:LEV 80PCT

sets the limit for level clipping to 80% of this maximum level.

BB:W3GP:CLIP:STAT ON

activates level clipping.

Manual operation: See ["Clipping Mode"](#) on page 264

[:SOURce<hw>]:BB:W3GPp:CLIPping:STATe <State>

Activates level clipping.

Parameters:

<State> 0 | 1 | OFF | ON

*RST: 0

Example:

BB:W3GP:CLIP:STAT ON

activates level clipping.

Manual operation: See ["Clipping State"](#) on page 262

[:SOURce<hw>]:BB:W3GPp:CRATe?

The command queries the set system chip rate. The output chip rate can be set with the command SOUR:BB:W3GP:CRAT:VAR.

Return values:

<CRate> R3M8

*RST: R3M8

Example:

BB:W3GP:CRAT?

queries the system chip rate.

Response: R3M8

the system chip rate is 3.8 Mcps.

Usage: Query only

Manual operation: See ["Chip Rate"](#) on page 57

[[:SOURce<hw>]:BB:W3GPp:CRATe:VARiation <Variation>

Sets the output chip rate.

The chip rate entry changes the output clock and the modulation bandwidth, as well as the synchronization signals that are output. It does not affect the calculated chip sequence.

Parameters:

<Variation> float
 Range: 400 to 5E6
 Increment: 0.001
 *RST: 3.84 MCps

Example: BB:W3GP:CRAT:VAR 4086001
 sets the chip rate to 4.08 Mcps.

Manual operation: See ["Chip Rate Variation"](#) on page 262

[[:SOURce<hw>]:BB:W3GPp:FILTer:PARAmeter:APCO25 <Apco25>

The command sets the roll-off factor for filter type APCO25.

Parameters:

<Apco25> float
 Range: 0.05 to 0.99
 Increment: 0.01
 *RST: 0.2

Example: BB:W3GP:FILT:PAR:APCO25 0.2
 sets the roll-off factor to 0.2 for filter type APCO25.

Manual operation: See ["Roll Off Factor or BxT"](#) on page 261

[[:SOURce<hw>]:BB:W3GPp:FILTer:PARAmeter:COSine <Cosine>

The command sets the roll-off factor for the Cosine filter type.

Parameters:

<Cosine> float
 Range: 0 to 1
 Increment: 0.01
 *RST: 0.35

Example: BB:W3GP:FILT:PAR:COS 0.35
 sets the roll-off factor to 0.35 for filter type Cosine.

Manual operation: See ["Roll Off Factor or BxT"](#) on page 261

[[:SOURce<hw>]:BB:W3GPp:FILTer:PARAmeter:GAUSs <Gauss>

The command sets the roll-off factor for the Gauss filter type.

Parameters:

<Gauss> float
 Range: 0.15 to 2.5
 Increment: 0.01
 *RST: 0.5

Example:

BB:W3GP:FILT:PAR:GAUS 0.5
 sets B x T to 0.5 for the Gauss filter type.

Manual operation: See ["Roll Off Factor or BxT"](#) on page 261

[[:SOURce<hw>]:BB:W3GPp:FILT:PAR:LPASs <LPass>

Sets the cut off frequency factor for the Lowpass (ACP opt.) filter type. The minimum/maximum values depend on the current symbol rate:

Parameters:

<LPass> float
 Range: 0.05 to 2
 Increment: 0.01
 *RST: 0.5

Example:

BB:W3GP:FILT:PAR:LPAS 0.5
 the cut of frequency factor is set to 0.5.

Manual operation: See ["Cut Off Frequency Factor"](#) on page 262

[[:SOURce<hw>]:BB:W3GPp:FILT:PAR:LPASSEVM <LPassEvm>

Sets the cut off frequency factor for the Lowpass (EVM opt.) filter type.

Parameters:

<LPassEvm> float
 Range: 0.05 to 2
 Increment: 0.01
 *RST: 0.5

Example:

BB:W3GP:FILT:PAR:LPASSEVM 0.5
 the cut of frequency factor is set to 0.5.

Manual operation: See ["Cut Off Frequency Factor"](#) on page 262

[[:SOURce<hw>]:BB:W3GPp:FILT:PAR:RCOSine <RCosine>

The command sets the roll-off factor for the Root Cosine filter type.

Parameters:

<RCosine> float
 Range: 0 to 1.0
 Increment: 0.01
 *RST: 0.22

Example: `BB:W3GP:FILT:PAR:RCOS 0.22`
sets the roll-off factor to 0.22 for filter type Root Cosine.

Manual operation: See ["Roll Off Factor or BxT"](#) on page 261

[[:SOURce<hw>]:BB:W3GPp:FILT:PAR:SPHase <SPHase>

The command sets B x T for the Split Phase filter type.

Parameters:

<SPHase> float
Range: 0.15 to 2.5
Increment: 0.01
*RST: 2

Example: `BB:W3GP:FILT:PAR:SPH 0.5`
sets B x T to 0.5 for the Split Phase filter type.

Manual operation: See ["Roll Off Factor or BxT"](#) on page 261

[[:SOURce<hw>]:BB:W3GPp:FILT:TYPE <Type>

Selects the filter type.

Parameters:

<Type> RCOSine | COSine | GAUSS | LGAuss | CONE | COF705 |
COEQUALizer | COFEQUALizer | C2K3x | APCO25 | SPHase |
RECTangle | LPASS | DIRac | ENPShape | EWPSshape |
LPASSEVM | PGAuss
COSine = "Cosine" = Raised Cosine
RCOSine = "Root Cosine" = Root Raised Cosine (RRC)
*RST: RCOSine

Example: `SOURce1:BB:W3GPp:FILT:TYPE RCOS`
Select RRC filter.

Manual operation: See ["Filter"](#) on page 261

8.3 Trigger Settings

Example: Trigger configuration

```

SOURce1:BB:W3GPp:TRIGger:SOURce INTernal
SOURce1:BB:W3GPp:TRIGger:SEQuence ARETrigger
SOURce1:BB:W3GPp:STAT ON
SOURce1:BB:W3GPp:TRIGger:EXECute
SOURce1:BB:W3GPp:TRIGger:ARM:EXECute
SOURce1:BB:W3GPp:TRIGger:RMODE?
// stopped
SOURce1:BB:W3GPp:TRIGger:EXECute
SOURce1:BB:W3GPp:TRIGger:RMODE?
// run

// SOURce1:BB:W3GPp:TRIGger:SEQuence SING
// SOURce1:BB:W3GPp:TRIGger:SLUNit SEQuence
// SOURce1:BB:W3GPp:TRIGger:SLENGth 2

// SOURce1:BB:W3GPp:TRIGger:SEQuence ARET
// SOURce1:BB:W3GPp:TRIGger:SOURce EGT1
// SOURce1:BB:W3GPp:TRIGger:EXTErnal:SYNChronize:OUTPut 1
// SOURce1:BB:W3GPp:TRIGger:EXTErnal:INHibit 100
// SOURce1:BB:W3GPp:TRIGger:EXTErnal:DELAy 10

```

[SOURce<hw>]:BB:W3GPp[:TRIGger]:SEQuence.....	363
[SOURce<hw>]:BB:W3GPp:TRIGger:SOURce.....	364
[SOURce<hw>]:BB:W3GPp:TRIGger:ARM:EXECute.....	364
[SOURce<hw>]:BB:W3GPp:TRIGger:EXECute.....	365
[SOURce<hw>]:BB:W3GPp:TRIGger:EXTErnal:SYNChronize:OUTPut.....	365
[SOURce<hw>]:BB:W3GPp:TRIGger:OBASeband:DELAy.....	365
[SOURce<hw>]:BB:W3GPp:TRIGger:OBASeband:INHibit.....	365
[SOURce<hw>]:BB:W3GPp:TRIGger:RMODE?.....	366
[SOURce<hw>]:BB:W3GPp:TRIGger:SLENGth.....	366
[SOURce<hw>]:BB:W3GPp:TRIGger:SLUNit.....	366
[SOURce<hw>]:BB:W3GPp:TRIGger[:EXTErnal]:DELAy.....	366
[SOURce<hw>]:BB:W3GPp:TRIGger[:EXTErnal]:INHibit.....	367

[SOURce<hw>]:BB:W3GPp[:TRIGger]:SEQuence <Sequence>

Selects the trigger mode:

- AUTO = auto
- RETRigger = retrigger
- AAUTO = armed auto
- ARETrigger = armed retrigger
- SINGLE = single

Parameters:

<Sequence> AUTO | RETRigger | AAUTo | ARETrigger | SINGLE
 *RST: AUTO

Example: See [Example "Trigger configuration"](#) on page 363

Manual operation: See ["Trigger Mode"](#) on page 59

[:SOURce<hw>]:BB:W3GPp:TRIGger:SOURce <Source>

Selects the trigger signal source and determines the way the triggering is executed. Provided are:

- Internal triggering by a command (INTernal)
- External trigger signal via one of the local or global connectors
 - EGT1 | EGT2: External global trigger
 - EGC1 | EGC2: External global clock
 - ELTRigger: External local trigger
 - ELCLock: External local clock
- Internal triggering by a signal from the other basebands (INTA | INTB)
- In master-slave mode, the external baseband synchronization signal (BBSY)
- OBASeband | BEXTernal | EXTernal: Setting only
 Provided only for backward compatibility with other Rohde & Schwarz signal generators.
 The R&S SMW accepts these values and maps them automatically as follows:
 EXTernal = EGT1, BEXTernal = EGT2, OBASeband = INTA or INTB
 (depending on the current baseband)

Parameters:

<Source> INTB|INTernal|OBASeband|EGT1|EGT2|EGC1|EGC2|ELTRigger|INTA|ELCLock|BEXTernal|EXTernal | BBSY
 *RST: INTernal

Example: See [Example "Trigger configuration"](#) on page 363.

Options: ELTRigger|ELCLock require R&S SMW-B10
 BBSY require R&S SMW-B9

Manual operation: See ["Trigger Source"](#) on page 60

[:SOURce<hw>]:BB:W3GPp:TRIGger:ARM:EXECute

Stops signal generation; a subsequent trigger event restarts signal generation.

Example: See [Example "Trigger configuration"](#) on page 363

Usage: Event

Manual operation: See ["Arm"](#) on page 60

[:SOURce<hw>]:BB:W3GPp:TRIGger:EXECute

Executes a trigger.

Example: See [Example "Trigger configuration"](#) on page 363

Usage: Event

Manual operation: See ["Execute Trigger"](#) on page 60

[:SOURce<hw>]:BB:W3GPp:TRIGger:EXternal:SYNChronize:OUTPut <Output>

Enables signal output synchronous to the trigger event.

Parameters:

<Output> 0 | 1 | OFF | ON
*RST: 1

Example: See [Example "Trigger configuration"](#) on page 363

Manual operation: See ["Sync. Output to External Trigger/Sync. Output to Trigger"](#) on page 61

[:SOURce<hw>]:BB:W3GPp:TRIGger:OBASeband:DELay <Delay>

Specifies the trigger delay for triggering by the trigger signal from the other baseband.

Parameters:

<Delay> float
Range: 0 to 2147483647
Increment: 0.01
*RST: 0

Example:
SOURce1:BB:W3GPp:TRIGger:SOURce INTB
SOURce1:BB:W3GPp:TRIGger:OBASeband:DELay 100
SOURce1:BB:W3GPp:TRIGger:OBASeband:INHibit 10

Manual operation: See ["Trigger Delay"](#) on page 62

[:SOURce<hw>]:BB:W3GPp:TRIGger:OBASeband:INHibit <Inhibit>

For triggering via the other path, specifies the duration by which a restart is inhibited.

Parameters:

<Inhibit> integer
Range: 0 to 67108863
*RST: 0

Example: See [\[:SOURce<hw>\]:BB:W3GPp:TRIGger:OBASeband:DELay](#) on page 365

Manual operation: See ["External / Trigger Inhibit"](#) on page 62

[[:SOURce<hw>]:BB:W3GPp:TRIGger:RMODe?

Queries the signal generation status.

Return values:

<RMode> STOP | RUN
*RST: STOP

Example: See [Example "Trigger configuration"](#) on page 363

Usage: Query only

Manual operation: See ["Running/Stopped"](#) on page 60

[[:SOURce<hw>]:BB:W3GPp:TRIGger:SEnLength <SLength>

Defines the length of the signal sequence that is output in the `SINGLE` trigger mode.

Parameters:

<SLength> integer
Range: 1 to 4293120000
*RST: 1

Example: See [Example "Trigger configuration"](#) on page 363

Manual operation: See ["Trigger Signal Duration"](#) on page 59

[[:SOURce<hw>]:BB:W3GPp:TRIGger:SLUNit <SLunit>

Defines the unit for the entry of the signal sequence length.

Parameters:

<SLunit> CHIP | FRAME | SLOT | SEquence
*RST: SEquence

Example: See [Example "Trigger configuration"](#) on page 363

Manual operation: See ["Signal Duration Unit"](#) on page 59

[[:SOURce<hw>]:BB:W3GPp:TRIGger[:EXTErnal]:DELay <Delay>

Sets the trigger delay.

Parameters:

<Delay> float
Range: 0 to 2147483647
Increment: 0.01
*RST: 0
Default unit: samples

Example: See [Example "Trigger configuration"](#) on page 363.

Manual operation: See ["Trigger Delay"](#) on page 62

[[:SOURce<hw>]:BB:W3GPp:TRIGger[:EXtErnal]:INHibit <Inhibit>

Specifies the duration by which a restart is inhibited.

Parameters:

<Inhibit> integer
 Range: 0 to 21.47*chipRate
 *RST: 0

Example: See [Example "Trigger configuration"](#) on page 363.

Manual operation: See ["External / Trigger Inhibit"](#) on page 62

8.4 Marker Settings

Example: Marker configuration

```
SOURce1:BB:W3GPp:TRIGger:OUTPut1:MODE USER
```

```
SOURce1:BB:W3GPp:TRIGger:OUTPut1:PERiod 38400
```

```
SOURce1:BB:W3GPp:TRIGger:OUTPut1:MODE RAT
```

```
SOURce1:BB:W3GPp:TRIGger:OUTPut1:ONTime 1
```

```
SOURce1:BB:W3GPp:TRIGger:OUTPut1:OFFTime 1
```

```
// defines the on/off ratio
```

```
// Marker delay configuration
```

```
SOURce1:BB:W3GPp:TRIGger:OUTPut2:DELay 1600
```

[:SOURce<hw>]:BB:W3GPp:TRIGger:OUTPut<ch>:MODE	367
[:SOURce<hw>]:BB:W3GPp:TRIGger:OUTPut<ch>:ONTime	368
[:SOURce<hw>]:BB:W3GPp:TRIGger:OUTPut<ch>:OFFTime	368
[:SOURce<hw>]:BB:W3GPp:TRIGger:OUTPut<ch>:PERiod	368
[:SOURce<hw>]:BB:W3GPp:TRIGger:OUTPut<ch>:DELay	368

[[:SOURce<hw>]:BB:W3GPp:TRIGger:OUTPut<ch>:MODE <Mode>

Defines the signal for the selected marker output.

Parameters:

<Mode> SLOT | RFRame | CSPeriod | SFNR | RATio | USER
 SLOT = Slot
 RFRame = Radio Frame
 CSPeriod = Chip Sequence Period (ARB)
 SFNR = System Frame Number (SFN) Restart
 RATio = ON/OFF Ratio
 USER = User
 *RST: RFRame

Example: `SOURce1:BB:W3GPp:TRIGger:OUTPut2:MODE SLOT`
selects the slot marker for the corresponding marker signal.

Manual operation: See ["Marker Mode"](#) on page 63

[:SOURce<hw>]:BB:W3GPp:TRIGger:OUTPut<ch>:ONTime <OnTime>
[:SOURce<hw>]:BB:W3GPp:TRIGger:OUTPut<ch>:OFFTime <OffTime>

Sets the number of chips during which the marker output is on or off.

*) If R&S SMW-B9 is installed, the minimum marker duration depends on the sample/symbol rate.

See chapter "Basics on ..." in the R&S SMW user manual.

Parameters:

<OffTime> integer
Range: 1 (R&S SMW-B10) / 1* (R&S SMW-B9) to 16777215
*RST: 1
Default unit: chip

Example: See [Example "Marker configuration"](#) on page 367

Manual operation: See ["Marker Mode"](#) on page 63

[:SOURce<hw>]:BB:W3GPp:TRIGger:OUTPut<ch>:PERiod <Period>

Sets the repetition rate for the signal at the marker outputs.

*) If R&S SMW-B9 is installed, the minimum marker duration depends on the sample/symbol rate.

See chapter "Basics on ..." in the R&S SMW user manual.

Parameters:

<Period> integer
Range: 1 (R&S SMW-B10) / 1* (R&S SMW-B9) to 2³²-1 chips
*RST: 38400

Example: See [Example "Marker configuration"](#) on page 367.

Manual operation: See ["Marker Mode"](#) on page 63

[:SOURce<hw>]:BB:W3GPp:TRIGger:OUTPut<ch>:DELay <Delay>

Defines the delay between the signal on the marker outputs and the start of the signals.

Parameters:

<Delay> float
 Range: 0 to 16777215
 Increment: 0.001
 *RST: 0

Example: See [Example "Marker configuration"](#) on page 367

Manual operation: See ["Marker x Delay"](#) on page 64

8.5 Clock Settings

[:SOURce<hw>]:BB:W3GPp:CLOCK:MODE.....	369
[:SOURce<hw>]:BB:W3GPp:CLOCK:SOURce.....	369

`[:SOURce<hw>]:BB:W3GPp:CLOCK:MODE <Mode>`

Sets the type of externally supplied clock.

Parameters:

<Mode> CHIP
 *RST: CHIP

Example: `SOURce1:BB:W3GPp:CLOCK:MODE CHIP`
 Selects clock type chip.

Options: R&S SMW-B10

Manual operation: See ["Clock Mode"](#) on page 65

`[:SOURce<hw>]:BB:W3GPp:CLOCK:SOURce <Source>`

Selects the clock source:

- `INTernal`: Internal clock reference
- `ELCLock`: External local clock
- `EXTernal` = `ELCLock`: Setting only
 Provided for backward compatibility with other Rohde & Schwarz signal generators

Parameters:

<Source> INTernal|ELCLock|EXTernal
 *RST: INTernal

Example: `SOURce1:BB:W3GPp:CLOCK:SOURce INTernal`
 selects an internal clock reference.

Options: ELCLock requires R&S SMW-B10

8.6 Test Models and Predefined Settings

The provided commands give you the opportunity to generate standardized or predefined test settings:

- Test Models:
 - Selection of test models for the downlink in accordance with 3GPP standard 25.141.
 - Selection of non-standardized test models for the uplink.
- Predefined Settings:

Definition of Predefined Settings for base station 1 which enable the creation of highly complex scenarios for the downlink by presetting the channel table of base station 1. The settings take effect only after execution of command

BB:W3GPp:PPARameter:EXECute.

[SOURce<hw>]:BB:W3GPp:PPARameter:CRESt.....	370
[SOURce<hw>]:BB:W3GPp:PPARameter:DPCH:COUNt.....	371
[SOURce<hw>]:BB:W3GPp:PPARameter:DPCH:SRATe.....	371
[SOURce<hw>]:BB:W3GPp:PPARameter:EXECute.....	371
[SOURce<hw>]:BB:W3GPp:PPARameter:SCCPch:SRATe.....	372
[SOURce<hw>]:BB:W3GPp:PPARameter:SCCPch:STATe.....	372
[SOURce<hw>]:BB:W3GPp:PPARameter:SCHannels.....	372
[SOURce<hw>]:BB:W3GPp:SETTing:TMODeL:BSTation.....	373
[SOURce<hw>]:BB:W3GPp:SETTing:TMODeL:BSTation:CATalog?.....	373
[SOURce<hw>]:BB:W3GPp:SETTing:TMODeL:MSTation.....	373
[SOURce<hw>]:BB:W3GPp:SETTing:TMODeL:MSTation:CATalog?.....	374

[SOURce<hw>]:BB:W3GPp:PPARameter:CRESt <Crest>

This command selects the desired range for the crest factor of the test scenario. The crest factor of the signal is kept in the desired range by automatically setting appropriate channelization codes and timing offsets.

The setting takes effect only after execution of command

BB:W3GPp:PPARameter:EXECute.

The settings of commands

- BB:W3GP:BST<n>:CHAN<n>:CCODE and
- BB:W3GP:BST<n>:CHAN<n>:TOFFset

Are adjusted according to the selection.

Parameters:

<Crest>

MINimum | AVERage | WORSt

MINimum

The crest factor is minimized. The channelization codes are distributed uniformly over the code domain. The timing offsets are increased by 3 per channel.

AVERage

An average crest factor is set. The channelization codes are distributed uniformly over the code domain. The timing offsets are all set to 0.

WORSt

The crest factor is set to an unfavorable value (i.e. maximum). The channelization codes are assigned in ascending order. The timing offsets are all set to 0.

*RST: MINimum

Example:

BB:W3GP:PPAR:CRES WORS

Sets the crest factor to an unfavorable value.

Manual operation: See " [Crest Factor](#) " on page 76

[[:SOURce<hw>]:BB:W3GPp:PPARameter:DPCH:COUNT <Count>

Sets the number of activated DPCHs. The maximum number is the ratio of the chip rate and the symbol rate (maximum 512 at the lowest symbol rate of 7.5 ksps).

Parameters:

<Count> integer
 Range: 0 to 512 (Max depends on other settings)
 *RST: 10

Example:

BB:W3GP:PPAR:DPCH:COUN 21

the predefined signal contains 21 DPCHs.

BB:W3GPp:PPARameter:EXECute

Manual operation: See " [Number of DPCH](#) " on page 76

[[:SOURce<hw>]:BB:W3GPp:PPARameter:DPCH:SRATe <SRate>

This command sets the symbol rate of DPCHs.

The setting takes effect only after execution of command

BB:W3GPp:PPARameter:EXECute.

Parameters:

<SRate> D7K5 | D15K | D30K | D60K | D120k | D240k | D480k | D960k
 *RST: D30K

Example:

BB:W3GP:PPAR:DPCH:SRAT D240K

sets the symbol rate of the DPCHs to 240ksps.

Manual operation: See " [Symbol Rate DPCH](#) " on page 76

[[:SOURce<hw>]:BB:W3GPp:PPARameter:EXECute

This command presets the channel table of base station 1 with the parameters defined by the PPARameter commands.

Example: `BB:W3GP:PPAR:EXEC`
configures the signal sequence as defined by the `:PPARameter` commands.

Usage: Event

Manual operation: See "[Accept](#)" on page 76

[:SOURce<hw>]:BB:W3GPp:PPARameter:SCCPch:SRATe <SRate>

The command sets the symbol rate of S-CCPCH.

The setting takes effect only after execution of command

`BB:W3GPp:PPARameter:EXECute.`

Parameters:

<SRate> D15K | D30K | D60K | D120k | D240k | D480k | D960k
*RST: D30K

Example: `BB:W3GP:PPAR:SCCP:SRAT D240K`
'sets the SCCPCH to 240 kps.

Manual operation: See "[Symbol Rate S-CCPCH](#)" on page 76

[:SOURce<hw>]:BB:W3GPp:PPARameter:SCCPch:STATe <State>

Activates/deactivates the S-CCPCH.

Parameters:

<State> 0 | 1 | OFF | ON
*RST: 0

Example: `BB:W3GP:PPAR:SCCP:STAT ON`
S-CCPCH is activated.
`BB:W3GPp:PPARameter:EXECute`

Manual operation: See "[Use S-CCPCH](#)" on page 75

[:SOURce<hw>]:BB:W3GPp:PPARameter:SCHannels <SChannels>

The command activates/deactivates the PCPICH, PSCH, SSCH and PCCPCH. These "special channels" are required by a user equipment for synchronization.

The setting takes effect only after execution of command

`BB:W3GPp:PPARameter:EXECute.`

Parameters:

<SChannels> 0 | 1 | OFF | ON
*RST: 0

Manual operation: See "[Use Channels](#)" on page 75

[[:SOURce<hw>]:BB:W3GPp:SETTing:TMODeL:BSTation <BStation>

Selects a standard test model for the downlink.

Parameters:

<BStation> string

Example:

SOURce1:BB:W3GPp:SETTing:TMODeL:BSTation:
CATalog?

queries the list of available test models for the downlink transmission direction.

Response: Test_Model_1_16channels, ...

SOURce1:BB:W3GPp:SETTing:TMODeL:BSTation:
"Test_Model_1_64channels"

selects the test model Measurement: Spectrum emission mask ACLR; 64 Channels.

Manual operation: See ["Test Models Downlink"](#) on page 72

[[:SOURce<hw>]:BB:W3GPp:SETTing:TMODeL:BSTation:CATalog?

Queries the list of test models defined by the standard for the downlink.

Return values:

<Catalog> string

Example:

see [\[:SOURce<hw>\]:BB:W3GPp:SETTing:TMODeL:BSTation](#) on page 373

Usage: Query only

Manual operation: See ["Test Models Downlink"](#) on page 72

[[:SOURce<hw>]:BB:W3GPp:SETTing:TMODeL:MSTation <MStation>

he command selects a test model that is not defined by the standard for the uplink.

Parameters:

<MStation> string

DPCCH_DPDCH_60ksps

Preset, Uplink, UE1 on, DPDCH + DPCCH, Overall symbol rate 60 ksps.

DPCCH_DPDCH960ksps

Preset, Uplink, UE1 on, DPDCH + DPCCH, Overall symbol rate 960 ksps

TS34121_R6_Table_C_10_1_4_Subtest4

Uplink test model according to 3GPP TS 34.121 Release 6, Table C.10.1.4.

TS34121_R8_Table_C_10_1_4_Subtest3

Uplink test models for transmitter characteristics tests with HS-DPCCH according to 3GPP TS 34.121 Release 8, Table C.10.1.4.

TS34121_R8_Table_C_11_1_3_Subtest2

Uplink test models for transmitter characteristics tests with HS-DPCCH and E-DCH according to 3GPP TS 34.121 Release 8, Table C.11.1.3.

TS34121_R8_Table_C_11_1_4_Subtest1

Uplink test model for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM according to 3GPP TS 34.121 Release 8, Table C.11.1.4.

Example: `BB:W3GP:SETT:TMOD:MST 'DPCCH_DPDCH960ksps'`
selects the test model with a symbol rate of 960 ksps.

Manual operation: See ["Test Models Uplink"](#) on page 73

[[:SOURce<hw>]:BB:W3GPp:SETTing:TMOdel:MSStation:CATalog?

The command queries the list of non-standardized test models for the uplink.

Return values:

<Catalog> string

Example:

`BB:W3GP:SETT:TMOD:MST:CAT?`

queries the list of available test models

Response: `DPCCH_DPDCH960ksps,DPCCH_DPDCH_60ksps`

Usage: Query only

Manual operation: See ["Test Models Uplink"](#) on page 73

8.7 Setting Base Stations

The `SOURCE:BB:W3GPp:BSTation` system contains commands for setting base stations. The commands of this system only take effect if the 3GPP FDD standard is activated, the `DOWN` transmission direction is selected and the particular base station is enabled:

`SOURCE:BB:W3GPp:STATE ON`

`SOURCE:BB:W3GPp:LINK DOWN`

`SOURCE:BB:W3GPp:BSTation2:STATE ON`

BSTation<st>

The numeric suffix to `BSTation` determines the base station. The value range is 1 .. 4. If the suffix is omitted, BS1 is selected.

CHANnel<ch>



In case of remote control, suffix counting for channels corresponds to the suffix counting with 3GPP FDD (channel 0 to channel 138). SCPI prescribes that suffix 1 is the default state and used when no specific suffix is specified. Therefore, channel 1 (and not channel 0) is selected when no suffix is specified.

The commands for setting the enhanced channels of base station 1 are described in [Chapter 8.8, "Enhanced Channels of Base Station 1"](#), on page 421.

[:SOURce<hw>]:BB:W3GPp:BSTation:OCNS:STATe <State>

Activates OCNS channels according to the scenario selected with the command [:SOURce<hw>]:BB:W3GPp:BSTation:OCNS:MODE.

Parameters:

<State> 0 | 1 | OFF | ON
 *RST: 0

Example: See [:SOURce<hw>]:BB:W3GPp:BSTation:OCNS:MODE on page 375.

Manual operation: See " OCNS On" on page 81

[:SOURce<hw>]:BB:W3GPp:BSTation:OCNS:MODE <Mode>

Selects the scenario for setting the OCNS channels.

To activate the selected scenario, send the command [:SOURce<hw>]:BB:W3GPp:BSTation:OCNS:STATe.

Parameters:

<Mode> STANdard | HSDPa | HSDP2 | M3I
 Four different OCNS scenarios are defined in the standard; one standard scenario, two scenarios for testing HSDPA channels and one for enhanced performance type 3i tests.
 *RST: STANdard

Example: BB:W3GP:BST:OCNS:MODE HSDP
 Selects the scenario for testing the high-speed channels.
 BB:W3GP:BST:OCNS:STAT ON
 Activates the OCNS channels with the settings defined in the standard.

Options: R&S SMW-K83

Manual operation: See " OCNS Mode " on page 81

[:SOURce<hw>]:BB:W3GPp:BSTation:OCNS:SEED <Seed>

In "3i" OCNS mode, sets the seed for both the random processes, the power control simulation process and the process controlling the switch over of the channelization codes.

Parameters:

<Seed> integer
 Range: 0 to 65535
 *RST: dynamic

Options: R&S SMW-K83

Manual operation: See "OCNS Seed" on page 82

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel:HSDPa:HSET:PRESet

Sets the default settings of the channel table for the HSDPA H-Set mode. Channels 12 to 17 are preset for HSDPA H-Set 1.

Example:

SOURce1:BB:W3GPp:BSTation1:CHANnel12:HSDPa:MODE
 HSET

selects H-Set mode.

SOURce1:BB:W3GPp:BSTation1:CHANnel12:HSDPa:
 HSET:PRESet

presets the H-Set.

SOURce1:BB:W3GPp:BSTation1:CHANnel12:TYPE?

Response: HSSC

SOURce1:BB:W3GPp:BSTation1:CHANnel12:HSDPa:
 HSET:PREDeFined?

Response: P1QPSK

Usage: Event

Manual operation: See "Preset HSDPA H-Set" on page 83

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel:PRESet

The command calls the default settings of the channel table.

Example:

BB:W3GP:BST:CHAN:PRESet

presets all channels of the base station.

Usage: Event

Manual operation: See "Reset All Channels" on page 83

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:AICH:ASLOt <ASlot>

Selects the slot in which the burst is transmitted.

Suffix:

<ch0> 7..7

Parameters:

<ASlot> integer
 Range: 0 to 15
 *RST: 0

Example: `SOURce1:BB:W3GPp:BSTation1:CHANnel7:AICH:ASLOt 5`
defines the slot to transmit the burst.

Manual operation: See "[Access Slot](#)" on page 141

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:AICH:SAPattern <SaPattern>

Enters the 16 bit pattern for the ACK/NACK field.

Parameters:

<SaPattern> <16 bit pattern>
*RST: +00000000000000

Example: `SOURce1:BB:W3GPp:BSTation1:CHANnel<ch0>:AICH:SAPattern "+00000000000000"`
sets the bit pattern to "+00000000000000" (ACK).

Manual operation: See "[Signature ACK/NACK Pattern](#)" on page 140

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:APAIch:ASLOt <ASlot>

Selects the slot in which the burst is transmitted.

Suffix:

<ch0> 8..8

Parameters:

<ASlot> integer
Range: 0 to 15
*RST: 0

Example: `SOURce1:BB:W3GPp:BSTation1:CHANnel8:APAIch:ASLOt 5`
defines the slot to transmit the burst.

Manual operation: See "[Access Slot](#)" on page 141

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:APAIch:SAPattern <SaPattern>

Enters the 16-bit pattern for the ACK/NACK field.

This field is used by the base station to acknowledge, refuse or ignore requests of up to 16 user equipment.

Parameters:

<SaPattern> <16 bit pattern>
*RST: "+00000000000000"

Example: SOUR:BB:W3GP:BST1:CHAN8:APAI:SAP
 "+000000000000"
 Sets the bit pattern to "+" (ACK).

Manual operation: See "[Signature ACK/NACK Pattern](#)" on page 140

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:CCODE <CCode>

The command sets the channelization code (formerly the spreading code number). The range of values of the channelization code depends on the symbol rate of the channel. The standard assigns a fixed channelization code to some channels (P-CPICH, for example, always uses channelization code 0).

$[\text{chip-rate}(=3.84\text{Mcps}) / \text{symbol\_rate}] - 1$

The slot format determines the symbol rate (and thus the range of values for the channelization code), the TFCI state and the pilot length. If the value of any one of the four parameters is changed, all the other parameters are adapted as necessary.

In the case of enhanced channels with active channel coding, the selected channel coding also affects the slot format and thus the remaining parameters. If these parameters are changed, the channel coding type is set to user.

Parameters:

<CCode> integer
 Range: 0 to 511
 Increment: 1
 *RST: depends on channel type

Example: BB:W3GP:BST1:CHAN15:CCOD 123
 Sets channelization code 123 for channel 15 of base station 1.

Manual operation: See "[Channelization Code](#)" on page 85

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:DATA <Data>

The command determines the data source for the data fields of the specified channel.

For enhanced channels with channel coding, the data source is set with the command
[\[:SOURce<hw>\]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:TCChannel<di0>:DATA](#) on page 430.

Parameters:

<Data> PN9 | PN11 | PN15 | PN16 | PN20 | PN21 | PN23 | DLISt |
 ZERO | ONE | PATtern

PNxx

The pseudo-random sequence generator is used as the data source. Different random sequence lengths can be selected.

DLISt

A data list is used. The data list is selected with the command :BB:W3GPp:BST:CHANnel:DATA:DSElect.

ZERO | ONE

Internal 0 and 1 data is used.

PATtern

Internal data is used. The bit pattern for the data is defined by the command `:BB:W3GPp:BST:CHANnel:DATA:PATtern`.

*RST: PN9

Example:

```
BB:W3GP:BST2:CHAN13:DATA PATT
```

Selects as the data source for the data fields of channel 13 of base station 2, the bit pattern defined with the following command.

```
BB:W3GP:BST2:CHAN13:DATA:PATT #H3F,8
```

Defines the bit pattern.

Manual operation: See ["Data"](#) on page 86

[[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:DATA:DSElect<DSelect>

The command selects the data list for the DLIS data source selection.

The lists are stored as files with the fixed file extensions `*.dm_iqd` in a directory of the user's choice. The directory applicable to the following commands is defined with the command `MMEMory:CDIR`. To access the files in this directory, you only have to give the file name, without the path and the file extension.

Parameters:

<DSelect> string

Example:

```
BB:W3GP:BST2:CHAN13:DATA DLIS
```

selects the Data Lists data source.

```
MMEM:CDIR '/var/user/temp/IqData'
```

selects the directory for the data lists.

```
BB:W3GP:BST2:CHAN13:DATA:DSEL '3gpp_list1'
```

selects file '3gpp_list1' as the data source. This file must be in the directory `/var/user/temp/IqData` and have the file extension `*.dm_iqd`.

Manual operation: See ["Data"](#) on page 86

[[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:DATA:PATtern<Pattern>, <BitCount>

The command determines the bit pattern for the PATtern selection. The maximum length is 64 bits.

Parameters:

<Pattern> numeric

*RST: #H0

<BitCount> integer
 Range: 1 to 64
 *RST: 1

Example: BB:W3GP:BST2:CHAN13:DATA:PATT #H3F,8
 defines the bit pattern.

Manual operation: See ["Data"](#) on page 86

**[[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:DPCCh:MCODE
 <MCode>**

The command activates multicode transmission for the selected channel (ON) or deactivates it (OFF). The multicode channels are destined for the same receiver, that is to say, are part of a radio link. The first channel of this group is used as the master channel. The common components (Pilot, TPC and TCFI) for all the channels are then spread using the spreading code of the master channel.

Parameters:

<MCode> 0 | 1 | OFF | ON
 *RST: 0

Example: BB:W3GP:BST2:CHAN12:DPCC:MCOD ON
 activates the simulation in multicode mode for channel 12 of base station 2.
 BB:W3GP:BST2:CHAN13:DPCC:MCOD ON
 activates the simulation in multicode mode for channel 13 of base station 2. Channel 12 is the master channel.

Manual operation: See [" Multicode State \(DPCCH\) "](#) on page 143

**[[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:DPCCh:PLENght
 <PLength>**

Sets the length of the pilot fields.

The range of values for this parameter depends on the channel type and the symbol rate. The slot format determines the symbol rate (and thus the range of values for the channelization code), the TFCI state and the pilot length. If the value of any one of the four parameters is changed, all the other parameters are adapted as necessary.

In the case of enhanced channels with active channel coding, the selected channel coding also affects the slot format and thus the remaining parameters. If these parameters are changed, the channel coding type is set to user.

Parameters:

<PLength> BIT2 | BIT4 | BIT8 | BIT16 | BIT0
 *RST: BIT4, bei S-CCPCH 0

Example: SOURce1:W3GPp:BSTation1:CHANnel12:DPCC:PLENght
 BIT8
 Sets the length of the pilot fields for channel 12 of base station 1.

Manual operation: See "[Pilot Length](#)" on page 139

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:DPCCh:POFFset:PILot<Pilot>

Sets an offset to the set channel power for the pilot field.

Parameters:

<Pilot> float
 Range: -10 to 10
 Increment: 0.01
 *RST: 0

Example: BB:W3GP:BST2:CHAN12:DPCC:POFF:PIL -2 dB
 in the pilot field, sets an offset of -2 dB relative to the channel power.

Manual operation: See "[Power Offset Pilot \(DPCCH\)](#)" on page 147

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:DPCCh:POFFset:TFCI<Tfci>

The command sets an offset to the set channel power for the TFCI field.

Parameters:

<Tfci> float
 Range: -10 to 10
 Increment: 0.01
 *RST: 0

Example: BB:W3GP:BST2:CHAN12:DPCC:POFF:PIL -2 dB
 in the TFCI field, sets an offset of -2 dB relative to the channel power.

Manual operation: See "[Power Offset TFCI \(DPCCH\)](#)" on page 148

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:DPCCh:POFFset:TPC<Tpc>

The command sets an offset to the set channel power for the TPC field.

This setting is only valid for the DPCHs.

Parameters:

<Tpc> float
 Range: -10 to 10
 Increment: 0.01
 *RST: 0

Example: BB:W3GP:BST2:CHAN12:DPCC:POFF:TPC -2 dB
 in the TPC field, sets an offset of -2 dB relative to the channel power.

Manual operation: See " [Power Offset TPC \(DPCCH\)](#) " on page 148

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:DPCCh:TFCI <Tfci>

The command enters the value of the TFCI field (Transport Format Combination Indicator) for the selected channel of the specified base station. The TFCI field is always filled with exactly 10 bits with leading zeros.

Parameters:

<Tfci> integer
 Range: 0 to 1023
 *RST: 0

Example: BB:W3GP:BST2:CHAN12:DPCC:TFCI 22
 sets the value 22 for the TFCI field of channel 12 of base station 2.

Manual operation: See " [TFCI Value](#) " on page 139

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:DPCCh:TFCI:STATe <State>

The command activates the TFCI field (Transport Format Combination Identifier) for the selected channel of the specified base station.

The slot format determines the symbol rate (and thus the range of values for the channelization code), the TFCI state and the pilot length. If the value of any one of the four parameters is changed, all the other parameters are adapted as necessary.

In the case of enhanced channels with active channel coding, the selected channel coding also affects the slot format and thus the remaining parameters. If these parameters are changed, the channel coding type is set to user.

Parameters:

<State> ON | OFF
 *RST: OFF

Example: BB:W3GP:BST2:CHAN12:DPCC:TFCI:STAT OFF
 Sets that the TFCI field of channel 12 of base station 2 is not used.

Manual operation: See " [Use TFCI](#) " on page 139

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:DPCCh:TPC:DATA <Data>

Determines the data source for the TPC field of the channel.

Parameters:

<Data> ZERO | ONE | PATtern | DLISt

DLIS

A data list is used.

Use the command `[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:DPCCh:TPC:DATA:DSElect` to define the data list file.

ZERO | ONE

Internal 0 and 1 data is used.

PATtern

Internal data is used. Use the command `[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:DPCCh:TPC:DATA:PATtern` to define the bit pattern.

*RST: ZERO

Example:

```
SOURce1:BB:W3GPp:BSTation2:CHANnel13:DPCCh:TPC:
DATA PATtern
```

Selects as the data source for the TPC field of channel 13 of base station 2

```
SOURce1:BB:W3GPp:BSTation2:CHANnel13:DPCCh:TPC:
DATA:PATtern #H3F,8
```

Defines the bit pattern.

Example:

```
SOURce1:BB:W3GPp:BSTation2:CHANnel13:DPCCh:TPC:
DATA DLIS
```

Selects the data source.

```
MMEM:CDIR '/var/user/IqData'
```

Selects the directory for the data lists.

```
SOURce1:BB:W3GPp:BSTation2:CHANnel13:DPCCh:TPC:
DATA:DSElect 'tpc_ch4'
```

Selects the file `tpc_ch4` as the data source.

Manual operation: See " [TPC Data Source \(DPCCH\)](#) " on page 144

`[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:DPCCh:TPC:DATA:DSElect <DSelect>`

Selects the data list for the `DLIS` data source selection.

The lists are stored as files with the fixed file extensions `*.dm_iqd` in a directory of the user's choice. The directory is defined with the command `MMEMory:CDIR`. To access the files in this directory, you only have to give the file name, without the path and the file extension.

Parameters:

`<DSelect>` `<data list name>`

Example:

see `[ :SOURCE<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:DPCCh:TPC:DATA` on page 382

Manual operation: See " [TPC Data Source \(DPCCH\)](#) " on page 144

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:DPCCh:TPC:DATA: PATTERN <Pattern>, <BitCount>

Determines the bit pattern.

Parameters:

<Pattern>	numeric
*RST:	#H0
<BitCount>	integer
Range:	1 to 64
*RST:	1

Example: see [\[:SOURce<hw>\]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:DPCCh:TPC:DATA](#) on page 382

Manual operation: See [" TPC Data Source \(DPCCH\) "](#) on page 144

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:DPCCh:TPC:MISuse <MisUse>

The command activates "mis-" use of the TPC field (Transmit Power Control) of the selected channel for controlling the channel powers of these channels of the specified base station.

The bit pattern (see commands [:W3GPp:BSTation<n>:CHANnel<n>:DPCCh:TPC...](#)) of the TPC field of each channel is used to control the channel power. A "1" leads to an increase of channel powers, a "0" to a reduction of channel powers. Channel power is limited to the range 0 dB to -60 dB. The step width of the change is defined with the command [\[:SOURce<hw>\]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:DPCCh:TPC:PSTep](#).

Parameters:

<MisUse>	ON OFF
*RST:	0

Manual operation: See [" Misuse TPC for Output Power Control \(DPCCH\) "](#) on page 146

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:DPCCh:TPC:PSTep <PowerStep>

The command defines the step width for the change of channel powers in the case of "mis-" use of the TPC field.

Parameters:

<PowerStep>	float
Range:	-10 to 10
Increment:	0.01
*RST:	0

Example: `BB:W3GP:BST2:CHAN13:DPCC:TPC:PST 1 dB`
sets the step width for the change of channel powers for channel 13 of base station 2 to 1 dB.

Manual operation: See " [TPC Power Step \(DPCCH\)](#) " on page 146

**[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:DPCCh:TPC:READ
<Read>**

The command sets the read out mode for the bit pattern of the TPC field.

The bit pattern is defined with the commands `:BB:W3GPp:BST<i>:CHANnel<n>:DPCCh:TPC...`

Parameters:

<Read> CONTInuous | S0A | S1A | S01A | S10A

CONTInuous

The bit pattern is used cyclically.

S0A

The bit pattern is used once, then the TPC sequence continues with 0 bits.

S1A

The bit pattern is used once, then the TPC sequence continues with 1 bit.

S01A

The bit pattern is used once and then the TPC sequence is continued with 0 bits and 1 bit alternately (in multiples, depending on by the symbol rate, for example, 00001111).

S10A

The bit pattern is used once and then the TPC sequence is continued with 1 bit and 0 bits alternately (in multiples, depending on by the symbol rate, for example, 11110000).

*RST: CONTInuous

Example: `BB:W3GP:BST2:CHAN13:DPCC:TPC:READ S0A`
The bit pattern is used once, after which a 0 sequence is generated (applies to channel 13 of base station 2).

Manual operation: See " [TPC Read Out Mode \(DPCCH\)](#) " on page 145

**[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:FDPCh:DPCCh:TPC:
DATA <Data>**

The command determines the data source for the TPC field of the channel.

Parameters:

<Data> DLISt | ZERO | ONE | PATTern

DLIS

A data list is used. The data list is selected with the command

```
[ :SOURce<hw> ] :BB:W3GPp:BSTation<st>:
CHANnel<ch0>:FDPCh:DPCCCh:TPC:DATA:DSElect
```

ZERO | ONE

Internal 0 and 1 data is used.

PATtern

Internal data is used. The bit pattern for the data is defined by the command [:SOURce<hw>] :BB:W3GPp:BSTation<st>: CHANnel<ch0>:FDPCh:DPCCCh:TPC:DATA:PATtern.

```
*RST:      PATtern
```

Example:

```
BB:W3GP:BST1:CHAN11:FDPC:DPCC:TPC:DATA PATT
selects as the data source for the TPC field of channel 11 of
base station 1, the bit pattern defined with the following com-
mand:
```

```
BB:W3GP:BST1:CHAN11:FDPC:DPCC:TPC:DATA:PATt
#H3F,8
defines the bit pattern.
```

Manual operation: See " [TPC Source](#) " on page 153

```
[ :SOURce<hw> ] :BB:W3GPp:BSTation<st>:CHANnel<ch0>:FDPCh:DPCCCh:TPC:
DATA:DSElect <DSelect>
```

The command selects the data list for the DLIS data source selection.

The lists are stored as files with the fixed file extensions *.dm_iqd in a directory of the user's choice. The directory applicable to the following commands is defined with the command `MMEMory:CDIR`. To access the files in this directory, you only have to give the file name, without the path and the file extension.

Parameters:

<DSelect> <data list name>

Example:

```
BB:W3GP:BST1:CHAN11:FDPC:DPCC:TPC:DATA DLIS
selects the "Data Lists" data source.
```

```
MMEM:CDIR '/var/user/temp/IqData'
selects the directory for the data lists.
```

```
BB:W3GP:BST1:CHAN11:FDPC:DPCC:TPC:DATA:DSEL
'tpc_ch4'
```

selects the file 'tpc_ch4' as the data source. This file must be in the directory /var/user/temp/IqData and have the file extension *.dm_iqd.

Manual operation: See " [TPC Source](#) " on page 153

```
[ :SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:FDPCh:DPCCCh:TPC:
DATA:PATtern <Pattern>, <BitCount>
```

The command determines the bit pattern for the PATtern selection. The maximum bit pattern length is 32 bits.

Parameters:

<Pattern>	numeric
	*RST: #H0
<BitCount>	integer
	Range: 1 to 64
	*RST: 1

Example: BB:W3GP:BST1:CHAN11:FDPCh:DPCCCh:TPC:DATA:PATT
#H3F, 8
defines the bit pattern for the TPC field of channel 11 of base station 1.

Manual operation: See "TPC Source" on page 153

```
[ :SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:FDPCh:DPCCCh:TPC:
MISuse <Misuse>
```

The command activates "mis-" use of the TPC field (Transmit Power Control) of the selected channel for controlling the channel powers of these channels of the specified base station.

The bit pattern (see command [\[:SOURce<hw>\]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:FDPCh:DPCCCh:TPC:DATA:PATtern](#)) of the TPC field of each channel is used to control the channel power. A "1" leads to an increase of channel powers, a "0" to a reduction of channel powers. Channel power is limited to the range 0 dB to -60 dB. The step width of the change is defined with the command [\[:SOURce<hw>\]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:FDPCh:DPCCCh:TPC:PSTep](#).

Parameters:

<Misuse>	ON OFF
	*RST: 0

Example: BB:W3GP:BST1:CHAN11:FDPCh:DPCCCh:TPC:MIS ON
activates regulation of channel power for channel 11 of base station 1 via the bit pattern of the associated TPC field.
BB:W3GP:BST1:CHAN11:FDPCh:DPCCCh:TPC:PST 1dB
sets the step width for the change of channel powers for channel 11 of base station 1 to 1 dB.

Manual operation: See "TPC For Output Power Control (Mis-) Use" on page 154

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:FDPCh:DPCCCh:TPC: PStep <PStep>

The command defines the step width for the change of channel powers in the case of "mis-" use of the TPC field.

Suffix:

<ch0> 11..138

Parameters:

<PStep> float
 Range: -10.0 dB to 10.0 dB
 Increment: 0.01 dB
 *RST: 0 dB

Example: BB:W3GP:BST1:CHAN11:FDPC:DPCC:TPC:PST 1.5dB
 sets the step width for the change of channel powers for channel 11 of base station 1 to 1.5 dB.

Manual operation: See " [TPC Power Step \(F-DPCH\)](#) " on page 155

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:FDPCh:DPCCCh:TPC: READ <Read>

The command sets the read out mode for the bit pattern of the TPC field.

Parameters:

<Read> CONTinuous | S0A | S1A | S01A | S10A

CONTinuous

The bit pattern is used cyclically.

S0A

The bit pattern is used once, then the TPC sequence continues with 0 bits.

S1A

The bit pattern is used once, then the TPC sequence continues with 1 bit.

S01A

The bit pattern is used once and then the TPC sequence is continued with 0 bits and 1 bit alternately (in multiples, depending on by the symbol rate, for example, 00001111).

S10A

The bit pattern is used once and then the TPC sequence is continued with 1 bit and 0 bits alternately (in multiples, depending on by the symbol rate, for example, 11110000).

*RST: CONTinuous

Example: BB:W3GP:BST1:CHAN11:FDPC:DPCC:TPC:READ S0A
 The bit pattern is used once, after which a 0 sequence is generated (applies to channel 11 of base station 1).

Manual operation: See " [TPC Read Out Mode \(F-DPCH\)](#) " on page 154

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:BMODE[:STATe] <State>

The command activates/deactivates burst mode. The signal is bursted when on, otherwise dummy data are sent during transmission brakes.

Parameters:

<State> ON | OFF
 *RST: 1

Example: BB:W3GP:BST1:CHAN12:HSDP:BMOD OFF
 deactivates burst mode, dummy data are sent during the transmission brakes.

Manual operation: See " [Burst Mode](#) " on page 99

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:CVPB <Cvpb>

The command switches the order of the constellation points of the 16QAM and 64QAM mapping. The re-arrangement is done according to 3GPP TS25.212.

Parameters:

<Cvpb> integer
 Range: 0 to 3
 *RST: 0

Example: BB:W3GP:BST1:CHAN12:HSDP:CVPB 1
 selects interchange of MSBs with LSBs.

Manual operation: See " [Constellation Version Parameter b - BS](#) " on page 100

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:AMODE <AMode>

Activates/deactivates the advanced mode in which the H-Set is generated by the ARB.

The parameter can be configured only for H-Sets 1 - 5.

For H-Sets 6 to 12 and User, it is always enabled.

Parameters:

<AMode> ON | OFF
 *RST: OFF (H-Sets 1..5); ON (H-Sets 6..12, User);

Example: BB:W3GP:BST1:CHAN12:HSDP:MODE HSET
 Selects H-Set mode.
 BB:W3GP:BST1:CHAN12:HSDP:HSET:PRED P1QAM16
 Selects H-Set 1 (16QAM).
 BB:W3GP:BST1:CHAN12:HSDP:HSET:AMOD ON
 Enables advanced mode for the selected H-Set.

Manual operation: See " [Advanced Mode \(requires ARB\)](#) " on page 104

**[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:
ACLength <AcLength>**

Sets the alternative number of HS-PDSCH channelization codes (see [Chapter 4.13.9, "Randomly Varying Modulation and Number of Codes \(Type 3i\) Settings"](#), on page 117).

Parameters:

<AcLength> integer
 Range: 1 to 15 (max depends on other values)
 *RST: 5

Example: SOURce:BB:W3GPp:BST1:CHANnel12:HSDPa:HSET:
 CLEnGth 8
 SOURce:BB:W3GPp:BST1:CHANnel12:HSDPa:HSET:
 AClengTh 8

Options: R&S SMW-K83

Manual operation: See ["Alternative Number of HS-PDSCH Channelization Codes"](#) on page 119

**[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:
ALTModulation <ALTModulation>**

Sets the alternative modulation (see [Chapter 4.13.9, "Randomly Varying Modulation and Number of Codes \(Type 3i\) Settings"](#), on page 117).

Parameters:

<ALTModulation> QPSK | QAM16 | QAM64
 *RST: QAM16

Example: :SOURce:BB:W3GPp:BSTation1:CHANnel12:HSDPa:
 HSET:ALTModulation QPSK

Options: R&S SMW-K83

Manual operation: See ["Alternative HS-PDSCH Modulation"](#) on page 119

**[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:
BCBTti<di>?**

Displays the binary channel bits per TTI and per stream.

The value displayed is calculated upon the values sets with the commands:

- `[ :SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:MODulation<di>`,
- `[ :SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:SRATe` and
- `[ :SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:HSCCode`.

Return values:**<Bcbtti>** float**Example:**

BB:W3GP:BST1:CHAN12:HSDP:MODE HSET
selects H-Set mode.
BB:W3GP:BST1:CHAN12:HSDP:HSET:TYPE MIMO
sets the H-set type.
BB:W3GP:BST1:CHAN12:HSDP:HSET:BCBT2?
queries the binary channel bits per TTI for stream 2.
Response: "4800"

Usage: Query only**Manual operation:** See " [Binary Channel Bits per TTI \(Physical Layer\) Stream1/2](#) " on page 111

**[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:
BPAYload<di>?**

The command queries the payload of the information bit. This value determines the number of transport layer bits sent in each subframe.

Return values:

<BPayload> float
Range: 1 to 5000

Example:

BB:W3GP:BST1:CHAN12:HSDP:MODE HSET
selects H-Set mode.
BB:W3GP:BST1:CHAN12:HSDP:HSET:BPAY2?
queries the payload of the information bit.
Response: "256"

Usage: Query only**Manual operation:** See " [Information Bit Payload \(TB-Size\) Stream 1/2](#) " on page 112

**[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:
CLENgth <CLength>**

The command queries the number of physical HS-PDSCH data channels assigned to the HS-SCCH.

Parameters:

<CLength> integer
Range: 1 to 15
*RST: 5

- Example:** BB:W3GP:BST1:CHAN12:HSDP:MODE HSET
selects H-Set mode.
BB:W3GP:BST1:CHAN12:HSDP:HSET:CLLEN?
queries the number of physical HS-PDSCH data channels assigned to the HS-SCCH.
Response: "4"
- Manual operation:** See " [Number of HS-PDSCH Channelization Codes](#) " on page 109

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:CRATe<di>?

Queries the resulting coding rate per stream.

The coding rate is calculated as a relation between the "Information Bit Payload" and "Binary Channel Bits per TTI".

Return values:

<CRate> float

- Example:** BB:W3GP:BST1:CHAN12:HSDP:MODE HSET
selects H-Set mode.
BB:W3GP:BST1:CHAN12:HSDP:HSET:CRAT2?
queries the coding rate of stream 2.
Response: "0.658"

Usage: Query only

Manual operation: See " [Coding Rate Stream 1/2](#) " on page 112

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:DATA<Data>

Selects the data source for the transport channel.

Parameters:

<Data> ZERO | ONE | PATtern | PN9 | PN11 | PN15 | PN16 | PN20 | PN21 | PN23 | DLISt

ZERO | ONE

Internal 0 and 1 data is used.

PATtern

Internal data is used. Use the command `[ :SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:DATA:PATtern` to set the pattern.

DLISt

A data list is used. Use the command `[ :SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:DATA:DSELeCt` to select the data list file.

*RST: PN9

Example: BB:W3GP:BST1:CHAN11:HSDP:HSET:DATA PATT
selects as the data source for the transport channel
BB:W3GP:BST1:CHAN11:HSDP:HSET:DATA:PATT #H3F, 8
defines the bit pattern.

Manual operation: See " [Data Source \(HS-DSCH\)](#) " on page 108

**[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:DATA:
DSElect <DSelect>**

The command selects the data list for the DLIS data source selection.

The lists are stored as files with the fixed file extensions *.dm_iqd in a directory of the user's choice. The directory applicable to the following commands is defined with the command MMEMoRY:CDIR. To access the files in this directory, you only have to give the file name, without the path and the file extension.

Parameters:

<DSelect> string

Example: BB:W3GP:BST1:CHAN11:HSDP:HSET:DATA DLIS
selects the Data Lists data source.
MMEMoRY:CDIR '/var/user/temp/H-Sets'
selects the directory for the data lists.
BB:W3GP:BST1:CHAN11:HSDP:HSET:DATA:DSEL
'hset_ch11'
selects the file hset_ch11 as the data source. This file must be
in the directory /var/user/temp/H-Sets and have the file
extension *.dm_iqd.

Manual operation: See " [Data Source \(HS-DSCH\)](#) " on page 108

**[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:DATA:
PATtern <Pattern>, <BitCount>**

Determines the bit pattern for the PATtern selection.

Parameters:

<Pattern> numeric
*RST: #H0

<BitCount> integer
Range: 1 to 64
*RST: 1

Example: BB:W3GP:BST1:CHAN11:HSDP:HSET:DATA PATT
selects as the data source for the H-set
BB:W3GP:BST1:CHAN11:HSDP:HSET:DATA:PATT #H3F, 8
defines the bit pattern for the H-set.

Manual operation: See " [Data Source \(HS-DSCH\)](#) " on page 108

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:HARQ:LENGTH <Length>

Sets the number of HARQ processes. This value determines the distribution of the payload in the subframes.

Parameters:

<Length> integer
 Range: 1 to 6
 *RST: 0

Example: SOURce1:BB:BB:W3GPp:BSTation1:CHANnel12:HSDPa:HSET:HARQ:MODE HSET
 selects H-Set mode.
 SOURce1:BB:BB:W3GPp:BSTation1:CHANnel12:HSDPa:HSET:HARQ:LENGTH?
 queries the number of HARQ processes.
 Response: 2

Manual operation: See " [Number of HARQ Processes per Stream](#) " on page 114

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:HARQ:MODE <Mode>

Sets the HARQ Simulation Mode.

Parameters:

<Mode> CACK | CNACK
 CACK
 New data is used for each new TTI.
 CNACK
 Enables NACK simulation, i.e. depending on the sequence selected for the parameter Redundancy Version Parameter Sequence packets are retransmitted.
 *RST: CACK

Example: BB:W3GP:BST1:CHAN12:HSDP:MODE HSET
 selects H-Set mode.
 BB:W3GP:BST1:CHAN12:HSDP:HSET:AMOD ON
 enables advanced mode.
 BB:W3GP:BST1:CHAN12:HSDP:HSET:HARQ:MODE CNAC
 sets Constant NACK HARQ Mode.

Manual operation: See " [Mode \(HARQ Simulation\)](#) " on page 115

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:HSCCode <HsCCode>

Sets the channelization code of the HS-SCCH.

Parameters:

<HsCCode> float
Range: 0 to 127

Example:

BB:W3GP:BST1:CHAN12:HSDP:MODE HSET
Selects H-Set mode.
BB:W3GP:BST1:CHAN12:HSDP:HSET:HSCC 10
Sets channelization code 10 for the HS-SCCH.

Manual operation: See "[Channelization Code HS-SCCH \(SF128\)](#)" on page 109

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:MODulation<di> <Modulation>

Sets the modulation for stream 1 and stream 2 to QPSK, 16QAM or 64QAM.
For HS-SCCH Type 2, the available modulation scheme is QPSK only.

Parameters:

<Modulation> QPSK | QAM16 | QAM64
*RST: QPSK

Example:

BB:W3GP:BST1:CHAN12:HSDP:HSET:TYPE MIMO
BB:W3GP:BST1:CHAN12:HSDP:HSET:MOD1 QAM64

Options:

64QAM requires R&S SMW-K83

Manual operation: See "[HS-PDSCH Modulation Stream1/2](#)" on page 111

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:NAIBitrate?

Queries the average data rate on the transport layer (Nominal Average Information Bitrate).

Return values:

<NaiBitrate> float
Range: 1 to 5000
Increment: 0.1
*RST: 0

Example:

BB:W3GP:BST1:CHAN12:HSDP:MODE HSET
selects H-Set mode.
BB:W3GP:BST1:CHAN12:HSDP:HSET:NAIB?
queries the average data rate on the transport layer.
Response: "455"

Usage:

Query only

Manual operation: See "[Nominal Average Information Bit Rate](#)" on page 105

**[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:
PREDefined <Predefined>**

The command selects the H-Set and the modulation according to TS 25.101 Annex A. 7.

Parameters:

<Predefined> P1QPSK | P1QAM16 | P2QPSK | P2QAM16 | P3QPSK |
P3QAM16 | P4QPSK | P5QPSK | P6QPSK | P6QAM16 |
P7QPSK | P8QAM64 | P9QAM16QPSK | P10QPSK |
P10QAM16 | P11QAM64QAM16 | P12QPSK | USER
*RST: P1QPSK

Example:

BB:W3GP:BST1:CHAN12:HSDP:MODE HSET
selects H-Set mode.
BB:W3GP:BST1:CHAN12:HSDP:HSET:PRED P3QPSK
selects H-Set 3 (QPSK).

Manual operation: See " [Predefined H-Set](#) " on page 104

**[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:
PWPattern <PwPattern>**

Sets the precoding weight parameter w2 for MIMO precoding.

The values of the weight parameters w1, w3 and w4 are calculated based on the value for w2 (see [Chapter 3.3.15, "MIMO in HSPA+"](#), on page 38).

Parameters:

<PwPattern> string
*RST: 0

Example:

BB:W3GP:BST1:CHAN12:HSDP:HSET:PWP "0,1,3"
selects the pattern.

Manual operation: See " [Precoding Weight Pattern \(w2\)](#) " on page 107

**[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:
RVParameter<di> <RvParameter>**

The parameter is enabled for "HARQ Simulation Mode" set to Constant ACK.

The command sets the Redundancy Version Parameter. This value determines the processing of the Forward Error Correction and Constellation Arrangement (QAM16 and 64QAM modulation), see TS 25.212 4.6.2.

For HS-SCCH Type 2 (less operation), the Redundancy Version Parameter is always 0.

Parameters:

<RvParameter> integer
Range: 0 to 7
*RST: 0

Example:

```
BB:W3GP:BST1:CHAN12:HSDP:MODE HSET
selects H-Set mode.
BB:W3GP:BST1:CHAN12:HSDP:HSET:HARQ:MODE CACK
sets Constant ACK HARQ Mode.
BB:W3GP:BST1:CHAN12:HSDP:HSET:RVP 7
sets the Redundancy Version Parameter to 7.
BB:W3GP:BST1:TDIV ANT1
enables transmit diversity
BB:W3GP:BST1:CHAN12:HSDP:HSET:TYPE MIMO
selects HS-SCCH Type 3 (MIMO).
BB:W3GP:BST1:CHAN12:HSDP:HSET:RVP2 4
sets the Redundancy Version Parameter of stream 2.
```

Manual operation: See "[Redundancy Version Stream1/2](#)" on page 115

**[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:
RVPSequence<di> <RvpSequence>**

The parameter is enabled for "HARQ Simulation Mode" set to Constant NACK.

Enters a sequence of Redundancy Version Parameters per stream. The value of the RV parameter determines the processing of the Forward Error Correction and Constellation Arrangement (16/64QAM modulation), see TS 25.212 4.6.2.

The sequence has a length of maximum 30 values. The sequence length determines the maximum number of retransmissions. New data is used after reaching the end of the sequence.

For HS-SCCH Type 2 (less operation), the Redundancy Version Parameter Sequence is a read-only parameter.

Parameters:

<RvpSequence> string

Example:

```
BB:W3GP:BST1:CHAN12:HSDP:MODE HSET
selects H-Set mode.
BB:W3GP:BST1:CHAN12:HSDP:HSET:AMOD ON
enables advanced mode.
BB:W3GP:BST1:CHAN12:HSDP:HSET:HARQ:MODE CNAC
sets Constant NACK HARQ Mode.
BB:W3GP:BST1:TDIV ANT1
enables transmit diversity
BB:W3GP:BST1:CHAN12:HSDP:HSET:TYPE MIMO
selects HS-SCCH Type 3 (MIMO).
BB:W3GP:BST1:CHAN12:HSDP:HSET:RVPS2
'0,1,3,2,0,1,2,3'
sets the Redundancy Version Parameter sequence of stream 2.
```

Example:

```
BB:W3GP:BST1:CHAN12:HSDP:HSET:TYPE LOP
selects HS-SCCH Type 2 (less operation).
BB:W3GP:BST1:CHAN12:HSDP:HSET:RVPS?
queries the Redundancy Version Parameter sequence.
Response: 0,3,4
```

Manual operation: See "[Redundancy Version Sequence Stream 1/2](#)" on page 116

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:RVState<RvState>

Enables/disables the random variation of the modulation and number of codes (see [Chapter 4.13.9, "Randomly Varying Modulation and Number of Codes \(Type 3i\) Settings"](#), on page 117).

Parameters:

<RvState> 0 | 1 | OFF | ON
 *RST: OFF

Example: SOURce:BB:W3GPp:BST1:CHAN12:HSDPa:HSET:RVState
 ON

Options: R&S SMW-K83

Manual operation: See "[Randomly Varying Modulation And Number Of Codes](#)" on page 119

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:SEED<Seed>

Sets the seed for the random process deciding between the four options (see [Chapter 4.13.9, "Randomly Varying Modulation and Number of Codes \(Type 3i\) Settings"](#), on page 117).

Parameters:

<Seed> integer
 Range: 0 to 65535
 *RST: 0 for path A, 1 for path B

Example: SOURce:BB:W3GPp:BST1:CHANnel12:HSDPa:HSET:SEED
 5

Options: R&S SMW-K83

Manual operation: See "[Random Seed](#)" on page 119

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:S64Qam<S64qam>

Enables/disables UE support of 64QAM.

This command is enabled only for HS-SCCH Type 1 (normal operation) and 16QAM modulation.

In case this parameter is disabled, i.e. the UE does not support 64QAM, the xccs,7 bit is used for channelization information.

Parameters:

<S64qam> ON | OFF
 *RST: OFF

Example:

BB:W3GP:BST1:CHAN12:HSDP:MODE HSET
 selects H-Set mode.
 BB:W3GP:BST1:CHAN12:HSDP:HSET:TYPE NORM
 selects HS-SCCH Type 1 (normal operation).
 BB:W3GP:BST1:CHAN12:HSDP:HSET:MOD QAM16
 sets 16QAM modulation.
 BB:W3GP:BST1:CHAN12:HSDP:HSET:S64Q ON
 enables UE to support 64QAM

Manual operation: See "[UE Supports 64QAM](#)" on page 111

**[[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:SCCode
 <SCcode>**

Sets the channelization code of the first HS-PDSCH channel in the H-Set. The channelization codes of the rest of the HS-PDSCHs in this H-Set are set automatically.

Note: To let the instrument generate a signal equal to the one generated by an instrument equipped with older firmware, set the same Channelization Codes as the codes used for your physical channels.

Parameters:

<SCcode> integer
 Range: 1 to 15
 *RST: 8

Example:

BB:W3GP:BST1:CHAN12:HSDP:MODE HSET
 Selects H-Set mode.
 BB:W3GP:BST1:CHAN12:HSDP:HSET:SCC 10
 Sets channelization code of the first HS-PDSCH.

Manual operation: See "[Start Channelization Code HS-PDSCH \(SF16\)](#)" on page 109

**[[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:
 SLENgth?**

Queries the suggested ARB sequence length.

Return values:

<SLength> integer
 Range: 1 to max

Example:

see [[:SOURce<hw>]:BB:W3GPp:BSTation<st>:
[CHANnel<ch0>:HSDPa:HSET:SLENgth:ADJust](#)
 on page 400

Usage:

Query only

Manual operation: See " [Advanced Mode \(requires ARB\)](#) " on page 104

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET: SLENGth:ADJust

Sets the ARB sequence length to the suggested value.

Example:

```
BB:W3GP:BST1:CHAN12:HSDP:MODE HSET
selects H-Set mode.
BB:W3GP:BST1:CHAN12:HSDP:HSET:AMOD ON
enables advanced mode.
BB:W3GP:BST1:CHAN12:HSDP:HSET:SLEN?
queries the suggested ABR sequence length.
Response: 21
BB:W3GP:SLEN?
queries the current ABR sequence length.
Response: 12
BB:W3GP:BST1:CHAN12:HSDP:HSET:SLEN:ADJ
sets the ARB sequence length to the suggested value.
BB:W3GP:SLEN?
queries the current ABR sequence length.
Response: 21
```

Usage: Event

Manual operation: See " [Adjust](#) " on page 105

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET: SPATtern<di>?

Queries the distribution of packets over time. A "-" indicates no packet

Return values:

<SPattern> string

Example:

```
BB:W3GP:BST1:CHAN15:HSDP:TTID 3
sets the TTI
BB:W3GP:BST1:CHAN12:HSDP:HSET:HARQ:LENG 2
sets the number of HARQ processes
BB:W3GP:BST1:CHAN12:HSDP:HSET:SPAT1?
queries the signaling pattern for stream 1
Response: 0,-,-1,-,-
```

Usage: Query only

Manual operation: See " [Signaling Pattern Stream1/2](#) " on page 114

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET: STAPattern <StaPattern>

Enables/disables a temporal deactivation of Stream 2 per TTI in form of sending pattern.

The stream 2 sending pattern is a sequence of max 16 values of "1" (enables Stream 2 for that TTI) and "-" (disabled Stream 2 for that TTI).

Parameters:

<StaPattern> string
 *RST: 1

Example:

BB:W3GP:BST1:CHAN12:HSDP:HSET:STAP "11-"
 selects the pattern.

Manual operation: See "[Stream 2 Active Pattern](#)" on page 107

**[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:TPOWer
 <Tpower>**

Sets the total power of the HS-PDSCH channels in the H-Set.

The individual power levels of the HS-PDSCHs are calculated automatically and can be queried with the command [\[:SOURce<hw>\]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:POWer](#).

Parameters:

<Tpower> float
 The min/max values depend on the number of HS-PDSCH channelization codes ([\[:SOURce<hw>\]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:CLENGTH](#)) and are calculated as follow:
 min = -80 dB + 10*log₁₀(NumberOfHS-PDSCHChannelizationCodes)
 max = 0 dB + 10*log₁₀(NumberOfHS-PDSCHChannelizationCodes)
 Range: dynamic to dynamic
 Increment: 0.01
 *RST: -13.01

Example:

```
:SOURce:BB:W3GPp:BST1:CHAN12:HSDPa:MODE HSET
:SOURce:BB:W3GPp:BST1:CHAN12:HSDPa:HSET:
CLENGTH?
Response: 5
:SOURce:BB:W3GPp:BST1:CHAN13:POWER -10
:SOURce:BB:W3GPp:BST1:CHAN12:HSDPa:HSET:TPOWER?
Response: -3.01029995663981 dB
:SOURce:BB:W3GPp:BST1:CHAN12:HSDPa:HSET:TPOWER
-5
:SOURce:BB:W3GPp:BST1:CHAN13:POWER?
Response: -11.9897000433602 dB
```

Manual operation: See "[Total HS-PDSCH Power](#)" on page 109

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:TBS:INDex<di> <Index>

Selects the Index ki for the corresponding table and stream, as described in 3GPP TS 25.321.

Parameters:

<Index> integer
Range: 0 to 62

Example:

```
BB:W3GP:BST1:CHAN12:HSDP:MODE HSET
Selects H-Set mode.
BB:W3GP:BST1:CHAN12:HSDP:HSET:TBS:TABL2 TAB0
Selects Table 0 for stream 2.
BB:W3GP:BST1:CHAN12:HSDP:HSET:TBS:IND2 25
Sets the Index ki
```

Manual operation: See " [Transport Block Size Index Stream1/2](#) " on page 112

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:TBS:REFerence <Reference>

While working in less operation mode, this command is signaled instead of the command BB:W3GP:BST:CHAN:HSDP:HSET:TBS:IND.

Parameters:

<Reference> integer
Range: 0 to 3
*RST: 0

Example:

```
BB:W3GP:BST1:CHAN12:HSDP:MODE HSET
selects H-Set mode.
BB:W3GP:BST1:CHAN12:HSDP:HSET:TYPE LOP
selects less operation mode.
BB:W3GP:BST1:CHAN12:HSDP:HSET:TBS:TABL2 TAB0
selects Table 0 for stream 2.
BB:W3GP:BST1:CHAN12:HSDP:HSET:TBS:REF 2
sets the reference.
```

Manual operation: See " [Transport Block Size Reference Stream1/2](#) " on page 112

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:TBS:TABLE<di> <Table>

Selects Table 0 or Table 1 as described in 3GPP TS 25.321.

For HS-PDSCH Modulation set to 64QAM, only Table 1 is available.

Parameters:

<Table> TAB0 | TAB1
*RST: TAB0

Example: BB:W3GP:BST1:CHAN12:HSDP:MODE HSET
Selects H-Set mode.
BB:W3GP:BST1:CHAN12:HSDP:HSET:TBS:TABL2 TAB0
Selects Table 0 for stream 2.

Manual operation: See " [Transport Block Size Table Stream1/2](#) " on page 112

**[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:TYPE
<Type>**

Sets the HS-SCCH type.

Parameters:

<Type> NORMal | LOPeration | MIMO

NORMal
Normal operation mode.

LOPeration
HS-SCCH less operation mode.

MIMO
HS-SCCH Type 3 mode is defined for MIMO operation.
Enabling this operation mode, enables the MIMO parameters [:
[SOURce<hw>\]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:
HSDPa:MIMO:CVPB<di>](#), [:[SOURce<hw>\]:BB:W3GPp:
BSTation<st>:CHANnel<ch0>:HSDPa:MIMO:
MODulation<di>](#), [:[SOURce<hw>\]:BB:W3GPp:
BSTation<st>:CHANnel<ch0>:HSDPa:MIMO:PWPattern](#)
and [:[SOURce<hw>\]:BB:W3GPp:BSTation<st>:
CHANnel<ch0>:HSDPa:MIMO:STAPattern](#) and all Stream 2
parameters.

*RST: NORMal

Example: BB:W3GP:BST1:TDIV ANT1
enables transmit diversity and antenna 1.
BB:W3GP:BST1:CHAN12:HSDP:HSET:TYPE MIMO
sets MIMO operation mode.

Manual operation: See " [HS-SCCH Type](#) " on page 105

**[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:
UECategory?**

Queries the UE category number.

Return values:

<UeCategory> integer
Range: 0 to 5000

Example: BB:W3GP:BST1:CHAN12:HSDP:MODE HSET
selects H-Set mode.
BB:W3GP:BST1:CHAN12:HSDP:HSET:PRED P3QPSK
selects H-Set 3 (QPSK).
BB:W3GP:BST1:CHAN12:HSDP:HSET:UEC?
queries the UE Category.
Response: 5

Usage: Query only

Manual operation: See "UE Category" on page 105

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:UEID
<Ueid>

The command sets the UE identity which is the HS-DSCH Radio Network Identifier (H-RNTI) defined in 3GPP TS 25.331: "Radio Resource Control (RRC); Protocol Specification".

Parameters:

<Ueid> integer
Range: 0 to 65535
*RST: 0

Example: BB:W3GP:BST1:CHAN12:HSDP:MODE HSET
selects H-Set mode.
BB:W3GP:BST1:CHAN12:HSDP:HSET:UEID 256
sets the UE identity.

Manual operation: See "UEID (H-RNTI)" on page 109

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:
VIBSize<di> <VibSize>

Sets the size of the Virtual IR Buffer (Number of SMLs per HARQ-Process) per stream.

Parameters:

<VibSize> integer
Range: 800 to 304000
Increment: 800
*RST: 9600

Example: SOURce1:BB:W3GPp:BSTation1:TDIV ANT1
SOURce1:BB:W3GPp:BSTation1:CHANnel12:HSDPa:
HSET:TYPE MIMO
SOURce1:BB:W3GPp:BSTation1:CHANnel12:HSDPa:
HSET:VIBSize1?
Response: 9600
SOURce1:BB:W3GPp:BSTation1:CHANnel12:HSDPa:
HSET:VIBSize1 300000
SOURce1:BB:W3GPp:BSTation1:CHANnel12:HSDPa:
HSET:VIBSize2 300000

Manual operation: See " [Virtual IR Buffer Size \(per HARQ Process\) Stream1/2](#) " on page 112

**[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:MIMO:
CVPB<di> <Cvpb>**

The command switches the order of the constellation points of the 16QAM and 64QAM mapping.

The re-arrangement is done according to 3GPP TS25.212.

Parameters:

<Cvpb> 0 | 1 | 2 | 3
 Range: 0 to 3
 *RST: 0

Example: BB:W3GP:BST1:CHAN12:HSDP:MIMO:CVPB2 1
 selects interchange of MSBs with LSBs for stream 2.

Manual operation: See " [Constellation Version Parameter b Stream 1/2 - BS](#) " on page 102

**[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:MIMO:
MODulation<di> <Modulation>**

Sets the modulation for stream 1 and stream 2 to QPSK, 16QAM or 64QAM.

Parameters:

<Modulation> QPSK | QAM16 | QAM64
 *RST: HSQP

Example: BB:W3GP:BST1:CHAN12:HSDP:MIMO:MOD1 HS64Q

Options: 64QAM requires R&S SMW-K83

Manual operation: See " [Modulation Stream 1/2 \(HS-PDSCH MIMO\)](#) " on page 101

**[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:MIMO:
PWPatten <PwPattern>**

Sets the precoding weight parameter w2 for MIMO precoding.

The values of the weight parameters w1, w3 and w4 are calculated based on the value for w2 (see [Chapter 3.3.15, "MIMO in HSPA+"](#), on page 38).

Parameters:

<PwPattern> string
 *RST: 0

Example: BB:W3GP:BST1:CHAN12:HSDP:MIMO:PWP "0,1,3
 selects the pattern.

Manual operation: See " [Precoding Weight Pattern \(w2\)](#) " on page 101

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:MIMO:STAPattern <StaPattern>

Enables/disables a temporal deactivation of Stream 2 per TTI in form of sending pattern.

The stream 2 sending pattern is a sequence of max 16 values of "1" (enables Stream 2 for that TTI) and "-" (disabled Stream 2 for that TTI).

Parameters:

<StaPattern> string
 *RST: 1

Example: BB:W3GP:BST1:CHAN12:HSDP:MIMO:STAP "11-"
 selects the pattern.

Manual operation: See " [Stream 2 Active Pattern](#) " on page 101

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:MODE <Mode>

The command selects the HSDPA mode.

Parameters:

<Mode> CONTInuous | PSF0 | PSF1 | PSF2 | PSF3 | PSF4 | HSET

CONTInuous

The high speed channel is generated continuously. This mode is defined in test model 5.

PSFx

The high speed channel is generated in packet mode. The start of the channel is set by selecting the subframe in which the first packet is sent.

HSET

The high speed channels are preset according to TS 25.1401 Annex A.7, H-Set.

*RST: CONTInuous

Example: BB:W3GP:BST1:CHAN12:HSDP:MODE PSF1
 selects packet mode for channel 12. The first packet is sent in packet subframe 1 (PSF1).

Manual operation: See " [HSDPA Mode](#) " on page 99

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:TTIDistance <TtiDistance>

The command selects the distance between two packets in HSDPA packet mode. The distance is set in number of sub-frames (3 slots = 2 ms). An "Inter TTI Distance" of 1 means continuous generation.

Parameters:

<TtiDistance> integer
 Range: 1 to 16
 *RST: 5

Example:

BB:W3GP:BST1:CHAN12:HSDP:TTID 2
 selects an Inter TTI Distance of 2 subframes.

Manual operation: See ["Inter TTI Distance \(H-Set\)"](#) on page 100

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:POWer <Power>

Sets the channel power relative to the powers of the other channels. This setting also determines the starting power of the channel for Misuse TPC, Dynamic Power Control and the power control sequence simulation of OCNS mode 3i channels.

With the command `SOURce:BB:W3GPp:POWer:ADJust`, the power of all the activated channels is adapted so that the total power corresponds to 0 dB. This does not change the power ratio among the individual channels.

Parameters:

<Power> float
 Range: -80 to 0
 Increment: 0.01
 *RST: depends on channel

Example:

BB:W3GP:BST2:CHAN12:POW -10dB
 Sets the channel power of channel 12 of base station 2 dB to -10 dB relative to the power of the other channels.

Manual operation: See ["Power"](#) on page 85

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:SFORmat <SFormat>

The command sets the slot format of the selected channel. The value range depends on the selected channel.

The slot format determines the symbol rate (and thus the range of values for the channelization code), the TFCI state and the pilot length. If the value of any one of the four parameters is changed, all the other parameters are adapted as necessary.

In the case of enhanced channels with active channel coding, the selected channel coding also affects the slot format and thus the remaining parameters. If these parameters are changed, the channel coding type is set to user.

Parameters:

<SFormat> integer
 Range: 0 to dynamic
 *RST: 0

Example:

BB:W3GP:BST2:CHAN12:SFOR 8
 Selects slot format 8 for channel 12 of base station 2.

Manual operation: See ["Slot Format"](#) on page 85

[[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:SRATe <SRate>

The command sets the symbol rate of the selected channel. The value range depends on the selected channel and the selected slot format.

The slot format determines the symbol rate (and thus the range of values for the channelization code), the TFCI state and the pilot length. If the value of any one of the four parameters is changed, all the other parameters are adapted as necessary.

In the case of enhanced channels with active channel coding, the selected channel coding also affects the slot format and thus the remaining parameters. If these parameters are changed, the channel coding type is set to user.

Parameters:

<SRate> D7K5 | D15K | D30K | D60K | D120k | D240k | D480k | D960k
 *RST: DPCHs D30K; CHAN1..10 D15K; DL-DPCCH (CHAN11) D7K5;

Example:

BB:W3GP:BST2:CHAN12:SRAT D120K
 Sets the symbol rate for channel 12 of base station 2 to 120 ksps.

Manual operation: See ["Symbol Rate"](#) on page 85

[[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:STATe <State>

The command activates the selected channel.

Parameters:

<State> ON | OFF
 *RST: 0

Example:

BB:W3GP:BST2:CHAN12:STAT OFF
 deactivates channel 12 of base station 2.

Manual operation: See ["Channel State"](#) on page 87

[[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:TOFFset <TOffset>

Sets the timing offset.

Parameters:

<TOffset> integer
 For F-DPCH channels, the value range is 0 to 9.
 *RST: 0

Example:

BB:W3GP:BST2:CHAN12:TOFF 20
 defines a frame shift relative to the scrambling code sequence of 20*256 chips.

Manual operation: See ["Timing Offset"](#) on page 86

```
[ :SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:TYPE <Type>
```

Sets the channel type.

Parameters:

<Type> PCPich | SCPich | PSCH | SSCH | PCCPch | SCCPch | PICH |
 APAich | AICH | PDSch | DPCCh | DPCH | HSSCch | HSQPsk |
 HSQam | HS64Qam | HSMimo | EAGCh | ERGCh | EHICH |
 FDPCh | HS16Qam

The channels types of CHANnel0 to CHANnel8 are predefined.
 For the remaining channels, you can select a channel type from
 the relevant standard channels and the high-speed channels

Example:

```
SOURce1:BB:W3GPp:BSTation1:CHANnel12:TYPE  

HSQPsk  

selects channel type HS-PDS, QPSK for channel 12
```

Manual operation: See ["Channel Type"](#) on page 84

```
[ :SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>[:HSUPa]:EAGCh:  

IFCoding <IfCoding>
```

Enables/disables the information coding.

Parameters:

<IfCoding> 0 | 1 | OFF | ON
0|OFF
 corresponds to a standard operation; no coding is performed
 and the data is sent uncoded.
1|ON
 you can configure the way the data is coded
 *RST: 0

Example:

```
SOURce1:BB:W3GPp:BSTation1:CHANnel9:HSUPa:  

EAGCh:IFCoding 1  

SOURce1:BB:W3GPp:BSTation1:CHANnel9:HSUPa:  

EAGCh:TTIEdch 2  

SOURce1:BB:W3GPp:BSTation1:CHANnel9:HSUPa:  

EAGCh:TTICount 2  

SOURce1:BB:W3GPp:BSTation1:CHANnel9:HSUPa:  

EAGCh:TTI0:UEID 100  

SOURce1:BB:W3GPp:BSTation1:CHANnel9:HSUPa:  

EAGCh:TTI0:AGVIndex 20  

SOURce1:BB:W3GPp:BSTation1:CHANnel9:HSUPa:  

EAGCh:TTI0:AGSCope PER  

SOURce1:BB:W3GPp:BSTation1:CHANnel9:HSUPa:  

EAGCh:TTI1:UEID 10000  

SOURce1:BB:W3GPp:BSTation1:CHANnel9:HSUPa:  

EAGCh:TTI1:AGVIndex 1  

SOURce1:BB:W3GPp:BSTation1:CHANnel9:HSUPa:  

EAGCh:TTI1:AGSCope ALL
```

Manual operation: See " [E-AGCH Information Field Coding](#) " on page 149

**[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>[:HSUPa]:EAGCh:
TTI<di0>:AGScope <AGScope>**

Sets the scope of the selected grant. According to the TS 25.321, the impact of each grant on the UE depends on this parameter.

For E-DCH TTI = 10ms, the absolute grant scope is always `ALL` (All HARQ Processes).

Parameters:

<AGScope> `ALL | PER`

Example: see [\[:SOURce<hw>\]:BB:W3GPp:BSTation<st>:
CHANnel<ch0>\[:HSUPa\]:EAGCh:IFCoding](#) on page 409

Manual operation: See " [Absolute Grant Scope](#) " on page 149

**[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>[:HSUPa]:EAGCh:
TTI<di0>:AGVIndex <AgvIndex>**

Sets the Index for the selected TTI. According to the TS 25.212 (4.10.1A.1), there is a cross-reference between the grant's index and the grant value.

Parameters:

<AgvIndex> integer
Range: 0 to 31

Example: see [\[:SOURce<hw>\]:BB:W3GPp:BSTation<st>:
CHANnel<ch0>\[:HSUPa\]:EAGCh:IFCoding](#) on page 409

Manual operation: See " [Absolute Grant Value Index](#) " on page 149

**[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>[:HSUPa]:EAGCh:
TTI<di0>:UEID <Ueid>**

Sets the UE Id for the selected TTI.

Parameters:

<Ueid> integer
Range: 0 to 65535

Example: see [\[:SOURce<hw>\]:BB:W3GPp:BSTation<st>:
CHANnel<ch0>\[:HSUPa\]:EAGCh:IFCoding](#) on page 409

Manual operation: See " [UEID \(A-GCH\)](#) " on page 149

**[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>[:HSUPa]:EAGCh:
TTICount <TtiCount>**

Sets the number of configurable TTIs.

Parameters:

<TtiCount> integer
Range: 1 to 10

Example:

```
SOURce1:BB:W3GPp:BSTation1:CHANnel9:TYPE EAGCh
SOURce1:BB:W3GPp:BSTation1:CHANnel9:HSUPa:
EAGCh:TTICount 5
```

Manual operation: See " [Number of Configurable TTIs](#) " on page 149

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>[:HSUPa]:EAGCh:TTIEdch <Ttiedch>

Sets the processing duration.

Parameters:

<Ttiedch> 2ms | 10ms
*RST: 2ms

Example:

see [\[:SOURce<hw>\]:BB:W3GPp:BSTation<st>:CHANnel<ch0>\[:HSUPa\]:EAGCh:IFCoding](#) on page 409

Manual operation: See " [E-DCH TTI](#) " on page 149

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>[:HSUPa]:EHICH:CTYPE <CType>

Sets the cell type.

Parameters:

<CType> SERVing | NOSERVing
*RST: SERVing

Example:

```
SOURce1:BB:W3GPp:BSTation1:CHANnel9:TYPE EHICH
SOURce1:BB:W3GPp:BSTation1:CHANnel9:HSUPa:
EHICH:CTYPE SERVing
SOURce1:BB:W3GPp:BSTation1:CHANnel9:HSUPa:
EHICH:TTIEdch 2ms
SOURce1:BB:W3GPp:BSTation1:CHANnel9:HSUPa:
EHICH:SSINDEX 2
SOURce1:BB:W3GPp:BSTation1:CHANnel9:HSUPa:
EHICH:DTAU 2
SOURce1:BB:W3GPp:BSTation1:CHANnel9:HSUPa:
EHICH:ETAU?
```

Response: 5

```
SOURce1:BB:W3GPp:BSTation1:CHANnel9:HSUPa:
EHICH:RGPattern "+-+-"
SOURce1:BB:W3GPp:BSTation1:CHANnel9:HSUPa:
EHICH:CTYPE NOSERVing
SOURce1:BB:W3GPp:BSTation1:CHANnel9:HSUPa:
EHICH:RGPattern "+0+0"
```

Manual operation: See " [Type of Cell](#) " on page 150

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>[:HSUPa]:EHICH:DTAU<Dtau>

Sets the offset of the downlink dedicated offset channels.

Suffix:

<ch0> 9..138

Parameters:

<Dtau> integer
Range: 0 to 149
*RST: 0

Example: see [\[:SOURce<hw>\]:BB:W3GPp:BSTation<st>:CHANnel<ch0>\[:HSUPa\]:EHICH:CTYPE](#) on page 411

Manual operation: See " [Tau DPCH](#) " on page 151

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>[:HSUPa]:EHICH:ETAU?

Queries the offset of the P-CCPCH frame boundary.

Return values:

<Etau> integer
Range: 0 to 149

Example: see [\[:SOURce<hw>\]:BB:W3GPp:BSTation<st>:CHANnel<ch0>\[:HSUPa\]:EHICH:CTYPE](#) on page 411

Usage: Query only

Manual operation: See " [Tau E-RGCH/E-HICH](#) " on page 151

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>[:HSUPa]:EHICH:RGPattern <RgPattern>

Sets the bit pattern for the ACK/NACK field.

Parameters:

<RgPattern> <32-bit long pattern>
"+" (ACK) and "0" (no signal)
For the non serving cell
"+" (ACK) and "-" (NACK)
For the serving cell
*RST: +

Example: see [\[:SOURce<hw>\]:BB:W3GPp:BSTation<st>:CHANnel<ch0>\[:HSUPa\]:EHICH:CTYPE](#) on page 411

Manual operation: See " [ACK/NACK Pattern](#) " on page 151

**[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>[:HSUPa]:EHICH:
SSIndex <SsIndex>**

Sets the value that identifies the user equipment. The values are defined in TS 25.211.

Suffix:

<ch0> 9..138

Parameters:

<SsIndex> integer
Range: 0 to 39
*RST: 0

Example: see [:SOURce<hw>]:BB:W3GPp:BSTation<st>:
CHANnel<ch0>[:HSUPa]:EHICH:CTYPE on page 411

Manual operation: See " [Signature Hopping Pattern Index – HSUPA BS](#) " on page 151

**[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>[:HSUPa]:EHICH:
TTIEdch <Ttiedch>**

Sets the processing duration.

Parameters:

<Ttiedch> 2ms | 10ms
*RST: 2ms

Example: see [:SOURce<hw>]:BB:W3GPp:BSTation<st>:
CHANnel<ch0>[:HSUPa]:EHICH:CTYPE on page 411

Manual operation: See " [E-DCH TTI](#) " on page 150

**[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>[:HSUPa]:ERGCh:
CTYPE <CType>**

Selects the cell type.

Parameters:

<CType> SERVing | NOSERVing
*RST: SERVing

Example: SOUR:BB:W3GP:BST1:CHAN9:HSUP:ERGC:CTYP SERV

Manual operation: See " [Type of Cell](#) " on page 150

**[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>[:HSUPa]:ERGCh:
DTAU <Dtau>**

Sets the offset of the downlink dedicated offset channels.

Parameters:

<Dtau> integer
 Range: 0 to 149
 *RST: 0

Example: SOUR:BB:W3GP:BST1:CHAN12:HSUP:ERGC:DTAU 5

Manual operation: See " [Tau DPCH](#) " on page 151

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>[:HSUPa]:ERGCh:ETAU?

Queries the offset of the P-CCPCH frame boundary.

Return values:

<Etau> integer
 Range: 0 to 149

Example: SOUR:BB:W3GP:BST1:CHAN12:HSUP:ERGC:ETAU?

Usage: Query only

Manual operation: See " [Tau E-RGCH/E-HICH](#) " on page 151

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>[:HSUPa]:ERGCh:RGPattern <RgPattern>

Sets the bit pattern for the relative grant pattern field.

Parameters:

<RgPattern> string

Example: SOUR:BB:W3GP:BST1:CHAN10:HSUP:ERGC:RGPA "-"
 Sets the bit pattern to "-" (down).

Manual operation: See " [Relative Grant Pattern](#) " on page 151

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>[:HSUPa]:ERGCh:SSIndex <SsIndex>

Sets the value that identifies the user equipment. The values are defined in TS 25.211.

Parameters:

<SsIndex> integer
 Range: 0 to 39
 *RST: 0

Example: SOUR:BB:W3GP:BST1:CHAN9:HSUP:ERGC:SSIN 0
 Sets the value to identify the user equipment.

Manual operation: See " [Signature Hopping Pattern Index – HSUPA BS](#) " on page 151

```
[ :SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>[:HSUPa]:ERGCh:
TTIEdch <Ttiedch>
```

Sets processing duration.

Parameters:

<Ttiedch> 2ms | 10ms
 *RST: 2ms

Example: SOUR:BB:W3GP:BST1:CHAN10:HSUP:ERGC:TTIE 2ms

Manual operation: See "E-DCH TTI" on page 150

```
[ :SOURce<hw>]:BB:W3GPp:BSTation<st>:CMODE:DLFStructure <DlfStructure>
```

The command selects the frame structure. The frame structure determines the transmission of TPC and pilot field in the transmission gaps.

Parameters:

<DlfStructure> A | B
 A
 Type A, the pilot field is sent in the last slot of each transmission gap.
 B
 Type B, the pilot field is sent in the last slot of each transmission gap. The first TPC field of the transmission gap is sent in addition.
 *RST: A

Example: BB:W3GP:BST2:CMOD:DLFS A
 selects frame structure of type A.

Manual operation: See "DL Frame Structure - BS" on page 94

```
[ :SOURce<hw>]:BB:W3GPp:BSTation<st>:CMODE:METHod <Method>
```

The command selects compressed mode method.

Parameters:

<Method> PUNCturing | HLSCheduling | SF2
 PUNCturing
 The data is compressed by reducing error protection.
 HLSCheduling
 The data is compressed by stopping the transmission of the data stream during the transmission gap.
 SF2
 The data is compressed by halving the spreading factor.
 *RST: SF2

Example: BB:W3GP:BST2:CMOD:METH HLSC
 selects compressed mode method High Layer Scheduling.

Manual operation: See ["Compressed Mode Method - BS"](#) on page 94

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CMODE:PATtern<ch>:TGD <Tgd>

Sets the transmission gap distances.

Parameters:

<Tgd> integer
 Range: 3 to 100
 *RST: 15

Example: BB:W3GP:BST2:CMOD:PATT2:TGD 7
 sets transmission gap distance of pattern 2 to 7 slots.

Manual operation: See ["Distance"](#) on page 96

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CMODE:PATtern<ch>:TGL<di> <Tgl>

Sets the transmission gap lengths.

Parameters:

<Tgl> integer
 Range: 3 to 14
 *RST: 3

Example: BB:W3GP:BST2:CMOD:PATT2:TGL1 4
 sets transmission gap length of gap 1 of pattern 2 to 4 slots.

Manual operation: See ["Gap Len:"](#) on page 96

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CMODE:PATtern<ch>:TGPL <Tgpl>

The command sets the transmission gap pattern lengths. Setting 0 is available only for pattern 2.

The transmission gap pattern length of the user equipment with the same suffix as the selected base station is set to the same value.

Parameters:

<Tgpl> integer
 Range: 0 to 100
 *RST: 2

Example: BB:W3GP:BST2:CMOD:PATT2:TGPL 7
 sets transmission gap pattern length of pattern 2 to 7 frames.

Manual operation: See ["Pattern Len:"](#) on page 97

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CMODE:PATtern<ch>:TGSN <Tgsn>

Sets the transmission gap slot number of pattern 1.

Parameters:

<Tgsn> integer
 Range: 0 to 14
 *RST: 7

Example:

BB:W3GP:BST2:CMOD:PATT:TGSN 4
 sets slot number of pattern 1 to slot 4.

Manual operation: See ["At Slot:"](#) on page 96

[:SOURce<hw>]:BB:W3GPp:BSTation<st>|MSTation<st>:CMODE:POFFset
 <POffset>

The command sets the power offset for mode USER.

Parameters:

<POffset> float
 Range: 0 dB to 10 dB
 Increment: 0.01 dB
 *RST: 0 dB

Example:

BB:W3GP:BST2|UE2:CMOD:POFF 4
 sets the power offset value to 4 dB.
 BB:W3GP:BST2|UE2:CMOD:POM USER
 selects power offset mode USER

Manual operation: See ["Power Offset"](#) on page 95

[:SOURce<hw>]:BB:W3GPp:BSTation<st>|MSTation<st>:CMODE:POMode
 <PoMode>

The command selects the power offset mode.

Parameters:

<PoMode> AUTO | USER

AUTO

The power offset is obtained by pilot bit ratio as follows:

$$\text{Number of pilots bits of non-compressed slots} / \text{Number of pilot bits by compressed slots.}$$

USER

The power offset is defined by command `[ :SOURce<hw>]:BB:W3GPp:BSTation<st>|MSTation<st>:CMODE:POFFset`.

*RST: AUTO

Example:

BB:W3GP:BST2|UE2:CMOD:POFF 4
 sets the power offset value to 4 dB.
 BB:W3GP:BST2|UE2:CMOD:POM USER
 selects power offset mode USER.

Manual operation: See ["Power Offset Mode"](#) on page 95

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:CMODE:STATe <State>

The command activates/deactivates the compressed mode.

Parameters:

<State> ON | OFF
 *RST: 0

Example: BB:W3GP:BST2:CMOD:STAT ON
 activates compressed mode for base station 2.

Manual operation: See "[Compressed Mode State](#)" on page 93

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:DCONflict:RESolve

The command resolves existing domain conflicts by modifying the Channelization Codes of the affected channels.

Example: BB:W3GP:BST2:DCON:STAT?
 queries whether a code domain conflict exists for base station 2.
 Response: 1
 there is a conflict.
 BB:W3GP:BST2:DCON:RES
 resolves the code domain error by modifying the Channelization
 codes of the affected channels.

Usage: Event

Manual operation: See "[Domain Conflict, Resolving Domain Conflicts](#)" on page 88

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:DCONflict[:STATe]?]

The command queries whether there is (response 1) or is not (response 0) a conflict (overlap) in the hierarchically-structured channelization codes. The cause of a possible domain conflict can be ascertained by manual operation in the "BS > Code Domain" dialog.

Return values:

<State> 0 | 1 | OFF | ON
 *RST: 0

Example: BB:W3GP:BST2:DCON:STAT?
 queries whether a code domain conflict exists for base station 2.
 Response: 0
 there is no conflict.

Usage: Query only

Manual operation: See "[Domain Conflict, Resolving Domain Conflicts](#)" on page 88

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:OLTDiversity <OltDiversity>

Activates/deactivates open loop transmit diversity.

The antenna whose signal is to be simulated is selected with the command `[ :SOURce<hw>]:BB:W3GPp:BSTation<st>:TDIVersity`.

Parameters:

<OltDiversity> ON | OFF
 *RST: OFF

Example:

BB:W3GP:BST2:TDIV ANT2
 calculates and applies the output signal for antenna 2 of one two-antenna system.
 BB:W3GP:BST2:OLTD ON
 enables open loop transmit diversity.

Manual operation: See ["Open Loop Transmit Diversity"](#) on page 80

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:PINDicator:COUNT <Count>

The command sets the number of page indicators (PI) per frame in the page indicator channel (PICH).

Parameters:

<Count> D18 | D36 | D72 | D144
 *RST: D18

Example:

BB:W3GP:BST2:PIND:COUN D36
 sets the number of page indicators (PI) per frame in the page indicator channel (PICH) to 36.

Manual operation: See ["Page Indicators/Frame"](#) on page 80

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:SCODE <SCode>

Sets the identification for the base station. This value is simultaneously the initial value of the scrambling code generator.

Parameters:

<SCode> integer
 Range: #H0 to #H5FFF
 *RST: #H0

Example:

BB:W3GP:BST2:SCOD #H1FFF
 sets the scrambling code

Manual operation: See ["Scrambling Code \(hex\)"](#) on page 79

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:SCODE:STATE <State>

The command makes it possible to deactivate base station scrambling for test purposes.

Parameters:

<State> ON | OFF
 *RST: ON

Example:

BB:W3GP:BST2:SCOD:STAT OFF
 deactivates scrambling for base station 2.

Manual operation: See ["Scrambling Code On"](#) on page 79

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:SCPich:PREFence[:STATe] <State>

The command activates or deactivates the use of S-CPICH as reference phase.

Parameters:

<State> ON | OFF
 *RST: 0

Example:

BB:W3GP:BST2:SCP:REF ON
 activates the use of S-CPICH as reference phase for base station 2.

Manual operation: See ["S-CPICH As Phase Reference"](#) on page 80

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:SSCG?

The command queries the secondary synchronization code group. This parameter is specified in the table defined by the 3GPP standard "Allocation of SSCs for secondary SCH". This table assigns a specific spreading code to the synchronization code symbol for every slot in the frame. The value is calculated from the scrambling code.

Return values:

<Sscg> integer
 Range: 0 to 63

Example:

BB:W3GP:BST2:SSCG?
 queries the 2nd search code group for base station 2.
 Response: 24
 the base station is part of second search group 24.

Usage: Query only

Manual operation: See ["2nd Search Code Group"](#) on page 79

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:STATe <State>

Activates and deactivates the specified base station.

Parameters:

<State> 0 | 1 | OFF | ON
 *RST: 1 (BSTation1), 0 (all other)

Example:

BB:W3GP:BST2:STAT OFF
 deactivates base station 2.

Manual operation: See "[Select Basestation/User Equipment](#)" on page 69

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:TDElay <Tdelay>

Adds a time shift for the selected base station compared to base station 1.

Parameters:

<Tdelay> integer
 Range: 0 to 38400
 *RST: 0
 Default unit: chip

Example: BB:W3GP:BST2:TDEL 256
 shifts base station 2 by 256 chips compared to base station 1.

Manual operation: See "[Time Delay](#)" on page 80

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:TDiversity <TDiversity>

Selects the antenna and the antenna configuration to be simulated.

To simulate transmit diversity, a two-antenna system has to be selected and Open Loop Transmit Diversity has to be activated (command BB:W3GP:BST:OLTD ON).

Parameters:

<TDiversity> SANT | ANT1 | ANT2 | OFF
 SANT = single-antenna system
 *RST: SANT

Example: BB:W3GP:BST2:TDIV ANT2
 the signal of antenna 2 of one two-antenna system is simulated.

Manual operation: See "[Diversity / MIMO](#)" on page 80

8.8 Enhanced Channels of Base Station 1

The SOURce:BB:W3GPp:BSTation:ENHanced subsystem contains the commands for setting the enhanced channels of base station 1. The commands of this system only take effect when the 3GPP FDD standard is activated, the downlink transmission direction is selected, base station 1 is enabled and enhanced channels are activated:

SOURce:BB:W3GPp:STATe ON

SOURce:BB:W3GPp:LINK DOWN

SOURce:BB:W3GPp:BST1:STATe ON

SOURce:BB:W3GPp:BST:ENHanced:CHANnel<11...13>:DPCH:STATe ON

Or

SOURce:BB:W3GPp:BST:ENHanced:PCCPch:STATe ON

BSTation<st>

The numeric suffix to **BSTation** determines the base station. Enhanced channels are enabled for base station 1 only.

CHANnel<ch0>

The value range is **CHANnel<11 | 12 | 13>** for enhanced DPCHs and **CHANnel<4>** for P-CCPCH.

TCHannel<di>

The transport channel designations for remote control are **TCHannel0** for DCCH, **TCHannel1** to **TCHannel6** for DTCH1 to DTCH6.

8.8.1 General Settings

[:SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:STATe.....	422
[:SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:PCCPch:STATe.....	422
[:SOURce<hw>]:BB:W3GPp:BSTation<st>:ENHanced:PCPich:PATtern.....	422

[:SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:STATe <State>

The command switches the selected channel to the enhanced state.

Parameters:

<State> ON | OFF
*RST: 0

Example: BB:W3GP:BST:ENH:CHAN13:DPCH:STAT ON
switches DPCH 13 to Enhanced State.

Manual operation: See " [Enhanced State](#) " on page 124

[:SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:PCCPch:STATe <State>

The command activates or deactivates the enhanced state of the P-CCPCH (BCH).

Parameters:

<State> ON | OFF
*RST: OFF

Example: BB:W3GP:BST:ENH:PCCP:STAT ON
switches the P-CCPCH to Enhanced State.

Manual operation: See " [State \(Enhanced P-CCPCH\)](#) " on page 121

[:SOURce<hw>]:BB:W3GPp:BSTation<st>:ENHanced:PCPich:PATtern <Pattern>

Sets the P-CPICh pattern (channel 0).

Parameters:

<Pattern> ANT1 | ANT2
 *RST: ANT1

Example:

BB:W3GP:BST2:ENH:PCP:PATT ANT2
 sets the P-CPICH Pattern to Antenna 2.

Manual operation: See " [P-CPICH Pattern](#) " on page 120

8.8.2 Channel Coding

[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel:DPCH:CCODing:USER:DELeTe.....	424
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:CCODing:BPFRame?.....	424
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:CCODing:SFORmat.....	425
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:CCODing:SRATe?.....	425
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:CCODing:STATe.....	426
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:CCODing:TYPE.....	426
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel:DPCH:CCODing:USER:CATalog?.....	427
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:CCODing:USER:LOAD.....	428
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:CCODing:USER:STORE.....	428
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:INTERleaver2.....	429
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:TCHannel<di0>:CRCSize.....	429
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:TCHannel<di0>:DATA.....	430
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:TCHannel<di0>:DATA:DSElect.....	430
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:TCHannel<di0>:DATA:PATtern.....	431
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:TCHannel<di0>:DTX.....	431
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:TCHannel<di0>:EPROtection.....	432
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:TCHannel<di0>:INTERleaver.....	432
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:TCHannel<di0>:RMATtribute.....	432
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:TCHannel<di0>:STATe.....	433
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:TCHannel<di0>:TBCount.....	433
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:TCHannel<di0>:TBSize.....	433

<code>[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:</code>	
<code> TCHannel<di0>:TTINterval.....</code>	434
<code>[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:PCCPch:CCODing:INTerleaver<di>.....</code>	434
<code>[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:PCCPch:CCODing:STATE.....</code>	434
<code>[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:PCCPch:CCODing:TYPE?.....</code>	434

`[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel:DPCH:CCODing:`
`USER:DELeTe <Filename>`

Deletes the specified files with stored user channel codings.

The files are stored with the fixed file extensions `*.3g_ccod_dl` in a directory of the user's choice. The directory applicable to the commands is defined with the command `MMEMory:CDIR`. To access the files in this directory, you only have to give the file name, without the path and the file extension.

Setting parameters:

`<Filename>` string

Example: `MMEM:CDIR ' /var/user/temp/CcodDpchUser '`
 selects the directory for the user channel coding files.
 `BB:W3GP:BST:ENH:CHAN:DPCH:CCOD:USER:DEL`
 `'user_cc1'`
 deletes the specified file with user coding.

Usage: Setting only

`[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:`
`CCODing:BPFRame?`

Queries the number of data bits in the DPDCH component of the frame at the physical layer.

Return values:

`<BpFrame>` integer
 Range: 30 to 20000
 *RST: 510

Example: `BB:W3GP:BST:ENH:CHAN13:DPCH:CCOD:BPFR?`
 queries the number of data bits.
 Response: 1
 the number of data bits is 1.

Usage: Query only

Manual operation: See "[Bits per Frame \(DPDCH\)](#)" on page 128

[:SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:CCODing:SFORMAT <SFormat>

The command sets the slot format for the selected enhanced DPCH of base station 1. The slot format is fixed for channel-coded measurement channels conforming to the standard - "Reference Measurement Channel". Changing the slot format automatically activates User coding (W3GP:BST:ENH:CHAN<11...13>:DPCH:CCOD:TYPE USER). The slot format also fixes the symbol rate, bits per frame, pilot length and TFCI state parameters.

When a channel coding type conforming to the standard is selected ([:SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:CCODing:TYPE) and channel coding is activated, the slot format is ([:SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:CCODing:STATE) automatically set to the associated value.

Changing the slot format automatically activates User coding (W3GP:BST:ENH:CHAN<11...13>:DPCH:CCOD:TYPE USER).

The command sets the symbol rate (W3GP:BST:ENH:CHAN:DPCH:CCOD:SRAT), the bits per frame (W3GP:BST:ENH:CHAN:DPCH:CCOD:BFFR), the pilot length (W3GP:BST1:CHAN:DPCC:PLEN), and the TFCI state (W3GP:BST1:CHAN:DPCC:TFCI STAT) to the associated values.

Parameters:

<SFormat> integer
 Range: 0 to dynamic
 *RST: 0

Example: BB:W3GP:BST:ENH:CHAN13:DPCH:CCOD:SFOR 4
 sets slot format 4 for Enhanced DPCH13.

Manual operation: See " Slot Format (DPDCH) " on page 128

[:SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:CCODing:SRATe?

The command queries the symbol rate.

The symbol rate depends on the selected slot format ([:SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:CCODing:SFORMAT), and if the slot format changes, this changes automatically as well.

Return values:

<SRate> D7K5 | D15K | D30K | D60K | D120k | D240k | D480k | D960k |
 D1920k | D2880k | D3840k | D4800k | D5760k | D2X1920K |
 D2X960K2X1920K
 *RST: D30K

Example: BB:W3GP:BST:ENH:CHAN13:DPCH:CCOD:SRAT?
 queries the symbol rate.
 Response: 'D30K'
 the symbol rate of Enhanced DPCH 13 is 30 ksp/s.

Usage: Query only

Manual operation: See " [Symbol Rate \(DPDCH\)](#) " on page 128

[:SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:CCODing:STATe <State>

The command activates or deactivates channel coding for the selected enhanced DPCH.

When channel coding is activated and a channel coding type conforming to the standard is selected, (BB:W3GP:BST:ENH:CHAN:DPCH:CCOD:TYPE) the slot format, (BB:W3GP:BST:ENH:CHAN:DPCH:CCOD:SFOR) and thus the symbol rate, (BB:W3GP:BST:ENH:CHAN:DPCH:CCOD:SRAT) the bits per frame, (BB:W3GP:BST:ENH:CHAN:DPCH:CCOD:BPFR), the pilot length (BB:W3GP:BST1:CHAN:DPCC:PLEN) and the TFCI state (BB:W3GP:BST1:CHAN:DPCC:TFCI STAT) are set to the associated values.

Parameters:

<State> ON | OFF
 *RST: OFF

Example:

BB:W3GP:BST:ENH:CHAN13:DPCH:CCOD:TYPE M12K2
 selects channel coding type RMC 12.2 kbps for Enhanced DPCH 13.
 BB:W3GP:BST:ENH:CHAN13:DPCH:CCOD:STAT ON
 activates channel coding.

Manual operation: See " [Channel Coding State](#) " on page 126

[:SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:CCODing:TYPE <Type>

The command selects the channel coding scheme in accordance with the 3GPP specification.

The 3GPP specification defines 4 reference measurement channel coding types, which differ in the input data bit rate to be processed (12.2, 64, 144 and 384 kbps). The additional AMR CODER coding scheme generates the coding of a voice channel. The BTFD coding types with different data rates are also defined in the 3GPP specification (TS 34.121). They are used for the receiver quality test Blind Transport Format Detection.

When a channel coding type conforms to the standard and channel coding is activated, (:BB:W3GP:BST:ENH:CHAN<n>:DPCH:CCOD:STAT) the slot format (:BB:W3GP:BST:ENH:CHAN<n>:DPCH:CCOD:SFOR) and thus the symbol rate (:BB:W3GP:BST:ENH:CHAN<n>:DPCH:CCOD:SRAT), the bits per frame, (:BB:W3GP:BST:ENH:CHAN<n>:DPCH:CCOD:BPFR), the pilot length (:BB:W3GP:BST1:CHAN<n>:DPCC:PLEN) and the TFCI state (:BB:W3GP:BST1:CHAN<n>:DPCC:TFCI:STAT) are set to the associated values.

Parameters:

<Type>

M12K2 | M64K | M144k | M384k | AMR | BTFD1 | BTFD2 | BTFD3

M12K2

Measurement channel with an input data bit rate of 12.2 kbps.

M64K

Measurement channel with an input data bit rate of 64 kbps.

M144k

Measurement channel with an input data bit rate of 144 kbps.

M384k

Measurement channel with an input data bit rate of 384 kbps.

AMR

Channel coding for the AMR Coder (coding a voice channel).

USER

This parameter cannot be set. USER is returned whenever a user-defined channel coding is active, that is to say, after a channel coding parameter has been changed or a user coding file has been loaded. The file is loaded by the command [:

SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:CCODing:USER:LOAD.

BTFD1

Blind Transport Format Detection Rate 1 (12.2 kbps).

BTFD2

Blind Transport Format Detection Rate 2 (7.95 kbps).

BTFD3

Blind Transport Format Detection Rate 3 (1.95 kbps).

*RST: M12K2

Example:

BB:W3GP:BST:ENH:CHAN13:DPCH:CCOD:TYPE M144
selects channel coding scheme RMC 144 kbps.

Manual operation: See " [Channel Coding Type](#) " on page 127

[:SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel:DPCH:CCODing:
USER:CATalog?

Queries existing files with stored user channel codings.

The files are stored with the fixed file extensions *.3g_ccod_d1 in a directory of the user's choice. The directory applicable to the commands is defined with the command `MMEMory:CDIR`.

Return values:

<Catalog> string

Example:

```
MMEM:CDIR '/var/user/temp/CcodDpchUser'
selects the directory for the user channel coding files.
BB:W3GP:BST:ENH:CHAN:DPCH:CCOD:USER:CAT?
queries the existing files with user coding.
Response: user_cc1
there is one file with user coding.
```

Usage: Query only

Manual operation: See " [User Coding](#) " on page 127

**[[:SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:
CCODing:USER:LOAD <Filename>**

The command loads the specified files with stored user channel codings.

The files are stored with the fixed file extensions *.3g_ccod_d1 in a directory of the user's choice. The directory applicable to the commands is defined with the command `MMEMory:CDIR`. To access the files in this directory, you only have to give the file name, without the path and the file extension.

Setting parameters:

<Filename> <user_coding>

Example:

```
MMEM:CDIR '/var/user/temp/CcodDpchUser'
selects the directory for the user channel coding files.
BB:W3GP:BST:ENH:CHAN13:DPCH:CCOD:USER:LOAD
'user_cc1'
loads the specified file with user coding.
```

Usage: Setting only

Manual operation: See " [User Coding](#) " on page 127

**[[:SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:
CCODing:USER:STORE <Filename>**

The command saves the current settings for channel coding as user channel coding in the specified file.

The files are stored with the fixed file extensions *.3g_ccod_d1 in a directory of the user's choice. The directory in which the file is stored is defined with the command `MMEMory:CDIR`. To store the files in this directory, you only have to give the file name, without the path and the file extension.

Setting parameters:

<Filename> string

Example: `MMEM:CDIR '/var/user/temp/CcodDpchUser'`
 selects the directory for the user channel coding files.
`BB:W3GP:BST:ENH:CHAN13:DPCH:CCOD:USER:STOR`
`'user_cc1'`
 saves the current channel coding setting in file `user_cc1` in
 directory `/var/user/temp/CcodDpchUser`.

Usage: Setting only

Manual operation: See " [User Coding](#) " on page 127

[:SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:
INTerleaver2 <Interleaver2>

The command activates or deactivates channel coding interleaver state 2 for the selected channel.

Interleaver state 2 is activated or deactivated for all the transport channels together. Interleaver state 1 can be activated and deactivated for each transport channel individually (command `[ :SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:TCHannel<di0>:INTerleaver`).

Note: The interleaver states do not cause the symbol rate to change.

Parameters:

<Interleaver2> ON | OFF
 *RST: ON

Example: `BB:W3GP:BST:ENH:CHAN13:DPCH:INT OFF`
 deactivates channel coding interleaver state 2 for all the TCHs of DPCH13.

Manual operation: See " [Interleaver 2 State](#) " on page 131

[:SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:
TCHannel<di0>:CRCSize <CrcSize>

The command defines the CRC length for the selected transport channel. It is also possible to deactivate checksum determination.

Parameters:

<CrcSize> NONE | 8 | 12 | 16 | 24
 *RST: 16

Example: `BB:W3GP:BST:ENH:CHAN13:DPCH:TCH0:CRCS NONE`
 deactivates checksum determination for the DCCH of DPCH13.

Manual operation: See " [Size of CRC](#) " on page 130

**[:SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:
TCHannel<di0>:DATA <Data>**

The command determines the data source for the data fields of enhanced channels with channel coding. If channel coding is not active, the DPCH data source is used (:SOURce:BB:W3GPp:BST:CHANnel:DATA).

Parameters:

<Data> PN9 | PN11 | PN15 | PN16 | PN20 | PN21 | PN23 | DLISt |
ZERO | ONE | PATTern |

PNxx

The pseudo-random sequence generator is used as the data source. Different random sequence lengths can be selected.

DLISt

A data list is used. The data list is selected with the command
[:SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:
CHANnel<ch0>:DPCH:TCHannel<di0>:DATA:DSElect.

ZERO | ONE

Internal 0 and 1 data is used.

PATTern

Internal data is used. The bit pattern for the data is defined with the command [:SOURce<hw>]:BB:W3GPp:BSTation:
ENHanced:CHANnel<ch0>:DPCH:TCHannel<di0>:DATA:
PATTern.

*RST: PN9

Example:

BB:W3GP:BST:ENH:CHAN13:DPCH:TCH1:DATA PATT
Selects the Pattern data source for the data fields of DTCH1 of
DPCH13. The bit pattern is defined with the following command.
BB:W3GP:BST:ENH:CHAN13:DPCH:TCH1:DATA:PATT
#H3F, 8
Defines the bit pattern.

Manual operation: See " [Data Source](#) " on page 129

**[:SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:
TCHannel<di0>:DATA:DSElect <DSelect>**

The command selects the data list for enhanced channels for the DLISt selection.

The files are stored with the fixed file extensions *.dm_iqd in a directory of the user's choice. The directory applicable to the commands is defined with the command MME-Mory:CDIR. To access the files in this directory, you only have to give the file name, without the path and the file extension.

Parameters:

<DSelect> string

Example: BB:W3GP:BST:ENH:CHAN13:DPCH:TCH1:DATA DLIS
 selects the Data Lists data source for DTCH1 of DPCH13.
 MMEM:CDIR '/var/user/temp/IQData'
 selects the directory for the data lists.
 BB:W3GP:BST:ENH:CHAN13:DPCH:TCH1:DATA:DSEL
 'bts_tch'
 selects the file bts_tch as the data source.

Manual operation: See " [Data Source](#) " on page 129

**[[:SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:
 TCHannel<di0>:DATA:PATtern <Pattern>, <BitCount>**

The command determines the bit pattern for the PATtern selection. The maximum length is 64 bits.

Parameters:

<Pattern> numeric
 *RST: #H0
 <BitCount> integer
 Range: 1 to 64
 *RST: 1

Example: BB:W3GP:BST:ENH:CHAN13:DPCH:TCH1:DATA:PATT
 #H3F, 8
 defines the bit pattern.

Manual operation: See " [Data Source](#) " on page 129

**[[:SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:
 TCHannel<di0>:DTX <Dtx>**

The command sets the number of DTX (Discontinuous Transmission) bits. These bits are entered in the data stream between rate matching and interleaver 1 and used for the BTFD reference measurement channels rate 2 and rate 3.

Parameters:

<Dtx> integer
 Range: 0 to 1024
 *RST: 0

Example: BB:W3GP:BST:ENH:CHAN13:DPCH:TCH1:DTX 257
 257 bits are entered in the data stream between rate matching and interleaver 1.

Manual operation: See " [DTX Indication Bits](#) " on page 131

**[:SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:
TCHannel<di0>:EPProtection <EProtection>**

Sets the error protection.

Parameters:

<EProtection> NONE | TURBo3 | CON2 | CON3

NONE

No error protection

TURBo3

Turbo Coder of rate 1/3 in accordance with the 3GPP specifications.

CON2 | CON3

Convolution Coder of rate 1/2 or 1/3 with generator polynomials defined by 3GPP.

*RST: CON3

Example:

BB:W3GP:BST:ENH:CHAN13:DPCH:TCH1:EPR NONE
error protection for transport channel DTCH1 of DPCH13 is deactivated.

Manual operation: See " [Error Protection](#) " on page 131

**[:SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:
TCHannel<di0>:INTerleaver <Interleaver>**

The command activates or deactivates channel coding interleaver state 1 for the selected channel.

Interleaver state 1 can be activated and deactivated for each transport channel individually. The channel is selected via the suffix at TCHannel.

Interleaver state 2 can only be activated or deactivated for all the transport channels together ([:SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:INTerleaver2).

Note: The interleaver states do not cause the symbol rate to change.

Parameters:

<Interleaver> ON | OFF

*RST: ON

Manual operation: See " [Interleaver 1 State](#) " on page 131

The transport channel designations for remote control are TCHannel0 for DCCH, TCHannel1 to TCHannel6 for DTCH1 to DTCH6.

**[:SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:
TCHannel<di0>:RMAtribute <RmAttribute>**

Sets data rate matching.

Parameters:

<RmAttribute> integer
 Range: 1 to 1024
 *RST: 256

Example:

BB:W3GP:BST:ENH:CHAN13:DPCH:TCH1:RMAT 1024
 sets the rate matching attribute for DTCH1 of DPCH13 to 1024.

Manual operation: See "[Rate Matching Attribute](#)" on page 130

**[:SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:
 TCHannel<di0>:STATe <State>**

The command activates/deactivates the selected transport channel.

Parameters:

<State> ON | OFF
 *RST: OFF

Example:

BB:W3GP:BST:ENH:CHAN13:DPCH:TCH1:STAT ON
 activates DTCH1 of DPCH13.

Manual operation: See "[Transport Channel State](#)" on page 129

**[:SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:
 TCHannel<di0>:TBCount <TbCount>**

Defines the number of blocks used for the selected transport channel.

Parameters:

<TbCount> integer
 Range: 1 to 24
 *RST: 1

Example:

BB:W3GP:BST:ENH:CHAN13:DPCH:TCH:TBC 4
 sets 4 transport blocks for DTCH1 of DPCH13.

Manual operation: See "[Transport Block](#)" on page 130

**[:SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:
 TCHannel<di0>:TBSize <TbSize>**

Sets the size of the data blocks.

Parameters:

<TbSize> integer
 Range: 0 to 4096

Example:

BB:W3GP:BST:ENH:CHAN13:DPCH:TCH:TBS 1024
 sets the length of the transport blocks for DTCH1 of DPCH13 to 1024.

Manual operation: See "[Transport Block Size](#)" on page 130

**[:SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:
TCHannel<di0>:TTInterval <TtInterval>**

Sets the number of frames into which a TCH is divided. This setting also defines the interleaver depth.

Parameters:

<TtInterval> 10MS | 20MS | 40MS

Example:

SOURce1:BB:W3GPp:BSTation:ENHanced:CHANnel13:
DPCH:TCHannel1:TTInterval 20ms
sets that DTCH1 of DPCH13 is divided into 2 frames.

Manual operation: See " [Transport Time Interval](#) " on page 130

**[:SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:PCCPch:CCODing:
INTerleaver<di> <Interleaver>**

The command activates or deactivates channel coding interleaver state 1 or 2 for the P-CCPCH.

Note: The interleaver states do not cause the symbol rate to change.

Parameters:

<Interleaver> ON | OFF

*RST: ON

Example:

BB:W3GP:BST:ENH:PCCP:CCOD:INT1 OFF
deactivates channel coding interleaver state 1 for the P-CCPCH.

Manual operation: See " [Interleaver](#) " on page 123

**[:SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:PCCPch:CCODing:STATe
<State>**

The command activates or deactivates channel coding for the enhanced P-CCPCH. The coding scheme of the P-CCPCH (BCH) is defined in the standard.

Parameters:

<State> ON | OFF

*RST: OFF

Example:

BB:W3GP:BST:ENH:PCCP:CCOD:STAT ON
activates channel coding for the enhanced P-CCPCH.

Manual operation: See " [Channel Coding State](#) " on page 123

[:SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:PCCPch:CCODing:TYPE?

The command queries the channel coding scheme in accordance with the 3GPP specification. The coding scheme of the P-CCPCH (BCH) is defined in the standard. The channel is generated automatically with the counting system frame number (SFN). The system information after the SFN field is completed from the selected data source.

Return values:

<Type> BCHSfn
 *RST: BCHSfn

Example:

BB:W3GPp:BSTation:ENHanced:PCCP:CCOD:TYPE?
 queries the channel coding scheme of the P-CCPCH.
 Response: 'BCHS'
 the channel coding scheme with SFN is used.

Usage:

Query only

Manual operation: See "Channel Coding Type" on page 123

8.8.3 Dynamic Power Control Settings

(R&S SMW-B10 required; not supported in Baseband C/D)

Suffixes

SOURce<hw>: value range [1]|2

Example: Configuring the Dynamic Power Control Settings

The following is a simple programming example with the purpose to show **all** commands for this task. In real application, some of the commands can be omitted.

```
SOURce:BB:W3GPp:BSTation:ENHanced:CHAN11:DPCH:DPControl:DIRection UP
// selects direction up, a high level of the control signals
// leads to an increase of the channel power
SOURce:BB:W3GPp:BSTation:ENHanced:CHAN11:DPCH:DPControl:STEP 1 dB
// selects a step width of 1 dB.
// A high level of the control signal leads to
// an increase of 1 dB of the channel power,
// a low level to a decrease of 1 dB.
SOURce:BB:W3GPp:BSTation:ENHanced:CHAN11:DPCH:DPControl:RANGe:DOWN 10 dB
// selects a dynamic range of 10 dB for ranging up the channel power
SOURce:BB:W3GPp:BSTation:ENHanced:CHAN11:DPCH:DPControl:RANGe:UP 50 dB
// selects a dynamic range of 50 dB for ranging up the channel power
// The overall increase and decrease of channel power,
// i.e. the dynamic range is limited to 60 dB
SOURce:BB:W3GPp:BSTation:ENHanced:CHAN11:DPCH:DPControl:MODE TPC
// selects the source of the power control signal
SOURce:BB:W3GPp:BSTation:ENHanced:CHAN11:DPCH:DPControl:STATe ON
// activates Dynamic Power Control for DPCH 11
SOURce:BB:W3GPp:BSTation:ENHanced:CHAN11:DPCH:DPControl:POWer?
// queries the deviation of the channel power of DPCH 11
```

[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:DPControl:
 DIRection.....436
 [SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:DPControl:
 CONNector.....436
 [SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:DPControl:MODE.437

<code>[SOURce<hw>]:BB:W3GPp:BSTation<st>:ENHanced:CHANnel<ch0>:DPCH:</code>	
<code>DPControl:RANGe:UP.....</code>	437
<code>[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:DPControl:</code>	
<code>RANGe:DOWN.....</code>	437
<code>[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:DPControl:STATe.</code>	437
<code>[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:DPControl:</code>	
<code>STEP:MANual.....</code>	437
<code>[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:DPControl:</code>	
<code>STEP[:EXternal].....</code>	438
<code>[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:DPControl[:</code>	
<code>POWER]?</code>	438

`[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:`
`DPControl:DIRection <Direction>`

The command selects the Dynamic Power Control direction. The selected mode determines if the channel power is increased (UP) or decreased (DOWN) by a control signal with high level.

Parameters:

<Direction> UP | DOWN
 *RST: UP

Example: see [Example "Configuring the Dynamic Power Control Settings"](#) on page 435

Manual operation: See "[Direction](#)" on page 137

`[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:`
`DPControl:CONNector <Connector>`

Determines the input connector at that the instrument expects the external control signal.

Parameters:

<Connector> LOCAL | GLOBAL
 *RST: LOCAL

Example: External control signal at the T/M3 connector of Baseband A.
`SOURce1:INPut:TM3:DIRection INPut`
`SOURce1:INPut:TM3:SIGNAL FEEDback`
`SOURce1:BB:W3GPp:BSTation:ENHanced:CHANnel12:`
`DPCH:DPControl:CONNector LOCAL`

Example: External control signal at the global USER6 connector.
`SOURce:INPut:USER6:DIRection INPut`
`SOURce:INPut:USER6:SIGNAL FEEDback`
`SOURce1:BB:W3GPp:BSTation:ENHanced:CHANnel12:`
`DPCH:DPControl:CONNector GLOBAL`

Manual operation: See "[Connector](#)" on page 137

```
[ :SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:
  DPControl:MODE <Mode>
```

Selects the control signal source for Dynamic Power Control.

Parameters:

<Mode> TPC | MANual | EXTernal

Example: See [Example "Configuring the Dynamic Power Control Settings"](#) on page 435.

Manual operation: See " [Mode](#) " on page 136

```
[ :SOURce<hw>]:BB:W3GPp:BSTation<st>:ENHanced:CHANnel<ch0>:DPCH:
  DPControl:RANGE:UP <Up>
[ :SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:
  DPControl:RANGE:DOWN <Down>
```

The command selects the dynamic range for ranging down the channel power.

Parameters:

<Down> float
 Range: 0 to 60
 Increment: 0.01
 *RST: 10
 Default unit: dB

Example: see [Example "Configuring the Dynamic Power Control Settings"](#) on page 435

Manual operation: See " [Up Range / Down Range](#) " on page 137

```
[ :SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:
  DPControl:STATE <State>
```

The command activates/deactivates Dynamic Power Control.

Parameters:

<State> 0 | 1 | OFF | ON
 *RST: 0

Example: see [Example "Configuring the Dynamic Power Control Settings"](#) on page 435

Manual operation: See " [Dynamic Power Control State](#) " on page 136

```
[ :SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:
  DPControl:STEP:MANual <Manual>
```

Sets the control signal for manual mode of Dynamic Power Control.

Setting parameters:

<Manual> MAN0 | MAN1
 *RST: MAN0

Example:

```
BB:W3GP:BST:ENH:CHAN11:DPCH:DPC:MODE MAN
BB:W3GP:BST:ENH:CHAN11:DPCH:DPC:STEP 0.5 dB
BB:W3GP:BST:ENH:CHAN11:DPCH:DPC:STAT ON
BB:W3GP:BST:ENH:CHAN11:DPCH:DPC:STEP:MAN MAN0
```

Usage: Setting only

Manual operation: See " [Mode](#) " on page 136

**[[:SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:
 DPControl:STEP[:EXTernal] <External>**

This command sets step width by which – with Dynamic Power Control being switched on - the channel power of the selected enhanced channel is increased or decreased.

Parameters:

<External> float
 Range: 0.5 to 6
 Increment: 0.01
 *RST: 1
 Default unit: dB

Example: see [Example "Configuring the Dynamic Power Control Settings"](#)
 on page 435

Manual operation: See " [Power Step](#) " on page 137

**[[:SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:
 DPControl[:POWER]?**

The command queries the deviation of the channel power (delta POW) from the set power start value of the corresponding enhanced channels.

Return values:

<Power> float
 Range: -60 to 60
 Increment: 0.01
 *RST: 0

Example: see [Example "Configuring the Dynamic Power Control Settings"](#)
 on page 435

Usage: Query only

Manual operation: See " [Power Control Graph](#) " on page 137

8.8.4 Error Insertion

<code>[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:DERRor:BIT:LAYer</code>	439
<code>[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:DERRor:BIT:RATE</code>	439
<code>[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:DERRor:BIT:STATe</code>	440
<code>[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:DERRor:BLOCK:RATE</code>	440
<code>[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:DERRor:BLOCK:STATe</code>	441
<code>[SOURce<hw>]:BB:W3GPp:BSTation[:ENHanced]:CHANnel<ch0>:HSDPa:DERRor:BIT:LAYer</code>	441
<code>[SOURce<hw>]:BB:W3GPp:BSTation[:ENHanced]:CHANnel<ch0>:HSDPa:DERRor:BIT:RATE</code>	441
<code>[SOURce<hw>]:BB:W3GPp:BSTation[:ENHanced]:CHANnel<ch0>:HSDPa:DERRor:BIT:STATe</code>	442
<code>[SOURce<hw>]:BB:W3GPp:BSTation[:ENHanced]:CHANnel<ch0>:HSDPa:DERRor:BLOCK:RATE</code>	442
<code>[SOURce<hw>]:BB:W3GPp:BSTation[:ENHanced]:CHANnel<ch0>:HSDPa:DERRor:BLOCK:STATe</code>	442

`[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:DERRor:BIT:LAYer <Layer>`

The command selects the layer in the coding process in which bit errors are inserted.

Parameters:

<code><Layer></code>	TRANsport PHYSical
	TRANsport
	Transport Layer (Layer 2). This layer is only available when channel coding is active.
	PHYSical
	Physical layer (Layer 1).
	*RST: PHYSical

Example: `BB:W3GP:BST:ENH:CHAN13:DPCH:DERR:BIT:LAY PHYS`
selects layer 1 for entering bit errors.

Manual operation: See " [Insert Errors On](#) " on page 133

`[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:DERRor:BIT:RATE <Rate>`

The command sets the bit error rate.

Parameters:

<Rate> float
 Range: 1E-7 to 0.5
 Increment: 1E-7
 *RST: 0.001

Example:

BB:W3GP:BST:ENH:CHAN13:DPCH:DERR:BIT:RATE 1E-4
 sets a bit error rate of 0.0001.

Manual operation: See " [Bit Error Rate](#) " on page 133

**[:SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:DERRor:
 BIT:STATe <State>**

The command activates bit error generation or deactivates it.

Bit errors are inserted into the data fields of the enhanced channels. When channel coding is active, it is possible to select the layer in which to insert the errors (the physical or the transport layer, [:SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:DERRor:BIT:LAYer). When the data source is read out, individual bits are deliberately inverted at random points in the data bit stream at the specified error rate in order to simulate an invalid signal.

Parameters:

<State> ON | OFF
 *RST: 0

Example:

BB:W3GP:BST:ENH:CHAN13:DPCH:DERR:BIT:STAT ON
 activates bit error generation.

Manual operation: See " [Bit Error State \(Enhanced DPCHs\)](#) " on page 132

**[:SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:DERRor:
 BLOCK:RATE <Rate>**

Sets the block error rate.

Parameters:

<Rate> float
 Range: 1E-4 to 0.5
 Increment: 1E-4
 *RST: 0.1

Example:

BB:W3GP:BST:ENH:CHAN13:DPCH:DERR:BLOC:RATE 1E-2
 sets the block error rate to 0.01.

Manual operation: See " [Block Error Rate](#) " on page 133

**[:SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:DERRor:
BLOCK:STATe <State>**

The command activates or deactivates block error generation. Block error generation is only possible when channel coding is activated.

During block error generation, the CRC checksum is determined and then the last bit is inverted at the specified error probability in order to simulate a defective signal.

Parameters:

<State> ON | OFF
*RST: 0

Example:

BB:W3GP:BST:ENH:CHAN13:DPCH:CCOD:STAT ON
activates channel coding.
BB:W3GP:BST:ENH:CHAN13:DPCH:DERR:BLOC:RATE 5E-1
sets the block error rate to 0.1.
BB:W3GP:BST:ENH:CHAN13:DPCH:DERR:BLOC:STAT ON
activates block error generation.

Manual operation: See " [Block Error State](#) " on page 133

**[:SOURce<hw>]:BB:W3GPp:BSTation[:ENHanced]:CHANnel<ch0>:HSDPa:
DERRor:BIT:LAYer <Layer>**

The command selects the layer in the coding process in which bit errors are inserted.

Parameters:

<Layer> TRANsport | PHYSical
TRANsport
Transport Layer (Layer 2)
PHYSical
Physical layer (Layer 1)
*RST: PHYSical

Example:

BB:W3GP:BST:ENH:CHAN12:HSDP:DERR:BIT:LAY PHYS
selects layer 1 for entering bit errors.

Manual operation: See " [Insert Errors On \(HSDPA H-Set\)](#) " on page 117

**[:SOURce<hw>]:BB:W3GPp:BSTation[:ENHanced]:CHANnel<ch0>:HSDPa:
DERRor:BIT:RATE <Rate>**

Sets the bit error rate.

Parameters:

<Rate> float
*RST: 1E-3

Example:

BB:W3GP:BST:ENH:CHAN12:HSDP:DERR:BIT:RATE 1E-4
sets a bit error rate of 0.0001.

Manual operation: See " [Bit Error Rate \(HSDPA H-Set\)](#) " on page 117

**[:SOURce<hw>]:BB:W3GPp:BSTation[:ENHanced]:CHANnel<ch0>:HSDPa:
DERRor:BIT:STATe <State>**

The command activates bit error generation or deactivates it.

Bit errors are inserted into the data stream of the coupled HS-PDSCHs. It is possible to select the layer in which the errors are inserted (physical or transport layer). When the data source is read out, individual bits are deliberately inverted at random points in the data bit stream at the specified error rate in order to simulate an invalid signal.

Parameters:

<State> ON | OFF
*RST: 0

Example: BB:W3GP:BST:ENH:CHAN12:HSDP:DERR:BIT:STAT ON
 activates bit error generation.

Manual operation: See " [Bit Error State \(HSDPA H-Set\)](#) " on page 117

**[:SOURce<hw>]:BB:W3GPp:BSTation[:ENHanced]:CHANnel<ch0>:HSDPa:
DERRor:BLOCK:RATE <Rate>**

The command sets the block error rate.

Parameters:

<Rate> float
Range: 1E-4 to 5E-1
*RST: 5E-1

Example: BB:W3GP:BST:ENH:CHAN12:HSDP:DERR:BLOC:RATE 1E-2
 sets the block error rate to 0.01.

Manual operation: See " [Block Error Rate \(HSDPA H-Set\)](#) " on page 117

**[:SOURce<hw>]:BB:W3GPp:BSTation[:ENHanced]:CHANnel<ch0>:HSDPa:
DERRor:BLOCK:STATe <State>**

The command activates or deactivates block error generation. During block error generation, the CRC checksum is determined and then the last bit is inverted at the specified error probability in order to simulate a defective signal.

Parameters:

<State> ON | OFF
*RST: 0

Example: BB:W3GP:BST:ENH:CHAN12:HSDP:DERR:BLOC:RATE 5E-1
 sets the block error rate to 0.1.
 BB:W3GP:BST:ENH:CHAN12:HSDP:DERR:BLOC:STAT ON
 activates block error generation.

Manual operation: See " [Block Error State \(HSDPA H-Set\)](#) " on page 117

8.9 User Equipment Settings

The `SOURce:BB:W3GPp:MSTation` system contains commands for setting the user equipment. The commands of this system only take effect when the 3GPP FDD standard is activated, the UP transmission direction is selected and the particular user equipment is enabled:

```
SOURce:BB:W3GPp:STATe ON
```

```
SOURce:BB:W3GPp:LINK UP
```

```
SOURce:BB:W3GPp:MSTation2:STATe ON
```

MSTation<st>

The numeric suffix to `MSTation` determines the user equipment. The value range is 1 .. 4. If the suffix is omitted, MS1 is selected.

• General Settings	443
• Compressed Mode Settings	448
• DPCCH Settings	450
• HS-DPCCH Settings	457
• DPDCH Settings	475
• PCPCH Settings	479
• PRACH Settings	490
• HSUPA Settings	499
• UL-DTX and Uplink Scheduling Settings	519
• Dynamic Power Control Settings	524

8.9.1 General Settings

[:SOURce<hw>]:BB:W3GPp:MSTation:ADDITIONal:COUNT	443
[:SOURce<hw>]:BB:W3GPp:MSTation:ADDITIONal:POWER:OFFSet	444
[:SOURce<hw>]:BB:W3GPp:MSTation:ADDITIONal:SCODE:STEP	444
[:SOURce<hw>]:BB:W3GPp:MSTation:ADDITIONal:STATe	445
[:SOURce<hw>]:BB:W3GPp:MSTation:ADDITIONal:TDElay:STEP	445
[:SOURce<hw>]:BB:W3GPp:MSTation:PRESet	445
[:SOURce<hw>]:BB:W3GPp:MSTation<st>:MODE	445
[:SOURce<hw>]:BB:W3GPp:MSTation<st>:SCODE	446
[:SOURce<hw>]:BB:W3GPp:MSTation<st>:SCODE:MODE	447
[:SOURce<hw>]:BB:W3GPp:MSTation<st>:STATe	447
[:SOURce<hw>]:BB:W3GPp:MSTation<st>:TDElay	447
[:SOURce<hw>]:BB:W3GPp:LREference	447

[:SOURce<hw>]:BB:W3GPp:MSTation:ADDITIONal:COUNT <Count>

The command sets the amount of additional user equipment.

Up to 128 additional user equipment can be simulated - corresponding to a receive signal for a base station with high capacity utilization. The fourth user equipment (UE4) serves as a template for all other stations. The only parameters of the additional user equipment to be modified are the scrambling code and the power.

Parameters:

<Count> integer
 Range: 1 to 128
 *RST: 4

Example:

BB:W3GP:MST:ADD:COUN 20
 Sets 20 additional user equipment.
 BB:W3GP:MST:ADD:POW:OFFS -3.0
 Sets the power offset to -3 dB.
 BB:W3GP:MST:ADD:SCOD:STEP 1
 Sets the step width for increasing the scrambling code to 1.
 BB:W3GP:MST:ADD:STAT ON
 Connects the 20 user equipment to the 3GPP FDD signal.

Manual operation: See ["Number of Additional UE"](#) on page 78

[[:SOURce<hw>]:BB:W3GPp:MSTation:ADDITIONal:POWER:OFFSet <Offset>

Sets the power offset of the active channels of the additional user equipment relative to the power of the active channels of the reference station UE4.

The offset applies to all the additional user equipment. The resultant overall power must fall within the range 0 ... - 80 dB. If the value is above or below this range, it is limited automatically.

Parameters:

<Offset> float
 Range: -80 to 0
 Increment: 0.01
 *RST: 0

Example:

BB:W3GP:MST:ADD:POW:OFFS -3.0
 sets the offset to -3 dB.

Manual operation: See ["Power Offset"](#) on page 78

[[:SOURce<hw>]:BB:W3GPp:MSTation:ADDITIONal:SCODE:STEP <Step>

Sets the step width for increasing the scrambling code of the additional user equipment. The start value is the scrambling code of UE4.

Parameters:

<Step> integer
 Range: 0 to #FFFFFFF

Example:

BB:W3GP:MST:ADD:SCOD:STEP #H55
 sets the step width for increasing the scrambling code to #H55.

Manual operation: See ["Scrambling Code Step"](#) on page 78

[:SOURce<hw>]:BB:W3GPp:MSTation:ADDITIONal:STATe <State>

Activates additional user equipment.

Parameters:

<State> 0 | 1 | OFF | ON
 *RST: 0

Example: SOURce1:BB:W3GPp:MSTation:ADDITIONal:STATe ON
 connects the additional user equipment to the 3GPP FDD signal.

Manual operation: See "State" on page 77

[:SOURce<hw>]:BB:W3GPp:MSTation:ADDITIONal:TDELay:STEP <Step>

Sets the step width for the time delay of the additional user equipment to one another. The start value is the time delay of UE4.

Parameters:

<Step> integer
 Range: 0 to 38400 (1 frame)
 *RST: 0
 Default unit: chip

Example: BB:W3GP:MST:ADD:TDEL:STEP 256
 shifts each of the user equipment 256 chips apart, starting from the time delay of UE4.

Manual operation: See "Time Delay Step" on page 78

[:SOURce<hw>]:BB:W3GPp:MSTation:PRESet

The command produces a standardized default for all the user equipment. The settings correspond to the *RST values specified for the commands.

All user equipment settings are preset.

Example: BB:W3GP:MST:PRESet
 resets all the user equipment settings to default values.

Usage: Event

Manual operation: See "Reset User Equipment" on page 67

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:MODE <Mode>

The command selects the operating mode for the user equipment.

Parameters:

<Mode> PRACH | PCPCh | DPCDch | PPRach | PPCPch

PRACH

The user equipment only generates a signal with a physical random access channel (PRACH). This channel is used to set up the user equipment connection with the base station. The channel-specific parameters of the PRACH can be set with the commands :SOURce:BB:W3GPp:MSTation<n>:PRACH:....

PPRACH

The user equipment only generates a signal with the preamble component of a physical random access channel (PRACH). The parameters of the PRACH preamble can be set with the commands :SOURce:BB:W3GPp:MSTation<n>:PRACH:....

PCPCh

The user equipment only generates a signal with a physical common packet channel (PCPCH). This channel is used to transmit packet-oriented services (e.g. SMS). The channel-specific parameters of the PCPCH can be set with the commands :SOURce:BB:W3GPp:MSTation<n>:PCPCh:....

PPCPCh

The user equipment only generates a signal with the preamble component of a physical common packet channel (PCPCH). The parameters of the PCPCH preamble can be set with the commands :SOURce:BB:W3GPp:MSTation<n>:PCPCh:....

DPCDch

The user equipment generates a signal with a dedicated physical control channel (DPCCH), up to 6 dedicated physical data channels (DPDCH), up to one HS-DPCCH channel, up to one E-DPCCH channel and up to four E-DPDCH channels. This signal is used for voice and data transmission.

*RST: DPCDch

Example:

BB:W3GP:MST1:MODE DPCD

switches the user equipment to standard mode - transmission of voice and data.

Manual operation: See "Mode" on page 161

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:SCODE <SCode>

The command sets the scrambling code. Long or short scrambling codes can be generated (command [:SOURce<hw>]:BB:W3GPp:MSTation<st>:SCODE:MODE).

Parameters:

<SCode> integer
Range: #H0 to #FFFFFFF
*RST: #H0

Example:

BB:W3GP:MST2:SCOD #H12
sets scrambling code #12.

Manual operation: See "Scrambling Code (hex)" on page 162

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:SCODE:MODE <Mode>

The command sets the type for the scrambling code. The scrambling code generator can also be deactivated for test purposes.

SHORT is only standardized for the selection :BB:W3GP:MST:MODE DPCh and :BB:W3GP:MST:MODE PCPCh. But it can also be generated for the PCPCh for test purposes.

Parameters:

<Mode> LONG | SHORT | OFF
*RST: LONG

Example: BB:W3GP:MST2:SCODE:MODE OFF
deactivates the scrambling code generator.

Manual operation: See ["Scrambling Mode"](#) on page 162

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:STATE <State>

The command activates and deactivates the specified user equipment.

Parameters:

<State> 0 | 1 | OFF | ON
*RST: ON

Example: BB:W3GP:MST2:STAT OFF
deactivates user equipment 2.

Manual operation: See ["Select Basestation/User Equipment"](#) on page 69

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:TDElay <TDelay>

Adds a time shift for the selected user equipment compared to user equipment 1.

Parameters:

<TDelay> integer
Range: 0 to 38400
*RST: 0
Default unit: chip

Example: BB:W3GP:MST2:TDEL 256
shifts user equipment 2 by 256 chips compared to user equipment 1.

Manual operation: See ["Time Delay"](#) on page 163

[:SOURce<hw>]:BB:W3GPp:LREference <Reference>

Determines the power reference for the calculation of the output signal power in uplink direction.

Parameters:

<Reference>

RMS | DPCC | PMP | LPP | EDCH | HACK | PCQI

RMS = RMS Power, DPCC = First DPCCCH, PMP = PRACH Message Part, LPP = Last PRACH Preamble, EDCH = First E-DCH, HACK = First HARQ-ACK, PCQI = First PCI/CQI

*RST: RMS

Example:

SOURce1:BB:W3GPp:LREference RMS

Manual operation: See ["Power Reference"](#) on page 69

8.9.2 Compressed Mode Settings

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:CMODE:METHod	448
[:SOURce<hw>]:BB:W3GPp:MSTation<st>:CMODE:PATtern<ch>:TGD	448
[:SOURce<hw>]:BB:W3GPp:MSTation<st>:CMODE:PATtern<ch>:TGL<di>	449
[:SOURce<hw>]:BB:W3GPp:MSTation<st>:CMODE:PATtern<ch>:TGPL	449
[:SOURce<hw>]:BB:W3GPp:MSTation<st>:CMODE:PATtern<ch>:TGSN	449
[:SOURce<hw>]:BB:W3GPp:MSTation<st>:CMODE:STATE	449

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:CMODE:METHod <Method>

The command selects compressed mode method.

Parameters:

<Method>

HLScheduling | SF2

SF2

The data is compressed by halving the spreading factor.

HLScheduling

The data is compressed by stopping the transmission of the data stream during the transmission gap.

*RST: SF2

Example:

BB:W3GP:MST2:CMOD:METH HLSC

selects compressed mode method High Layer Scheduling.

Manual operation: See ["Compressed Mode Method - UE"](#) on page 94

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:CMODE:PATtern<ch>:TGD <Tgd>

Sets the transmission gap distances.

Parameters:

<Tgd>

integer

Range: 3 to 100

*RST: 15

Example:

BB:W3GP:MST2:CMOD:PATT2:TGD 7

sets transmission gap distance of pattern 2 to 7 slots.

Manual operation: See ["Distance"](#) on page 96

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:CMODE:PATtern<ch>:TGL<di> <Tgl>

Sets the transmission gap lengths.

Parameters:

<Tgl> integer
 Range: 3 to 14
 *RST: 3

Example: BB:W3GP:MST2:CMOD:PATT2:TGL1 4
 sets transmission gap length of gap 1 of pattern 2 to 4 slots.

Manual operation: See ["Gap Len:"](#) on page 96

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:CMODE:PATtern<ch>:TGPL <Tgpl>

The command sets the transmission gap pattern lengths. Setting 0 is available only for pattern 2.

The transmission gap pattern lengths of the base station with the same suffix as the selected user equipment is set to the same value.

Parameters:

<Tgpl> integer
 Range: 0 to 100
 *RST: 2

Example: BB:W3GP:MST2:CMOD:PATT2:TGPL 7
 sets transmission gap pattern length of pattern 2 to 7 frames.

Manual operation: See ["Pattern Len:"](#) on page 97

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:CMODE:PATtern<ch>:TGSN <Tgsn>

Sets the transmission gap slot number of pattern 1.

Parameters:

<Tgsn> integer
 Range: 0 to 14
 *RST: 7

Example: BB:W3GP:MST2:CMOD:PATT:TGSN 4
 sets slot number of pattern 1 to slot 4.

Manual operation: See ["At Slot:"](#) on page 96

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:CMODE:STATe <State>

The command activates/deactivates the compressed mode.

Parameters:

<State> ON | OFF
 *RST: 0

Example: BB:W3GP:MST2:CMOD:STAT ON
activates compressed mode for user equipment 2.

Manual operation: See " [Compressed Mode State](#) " on page 93

8.9.3 DPCCH Settings

[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:CCODE?	450
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:FBI:MODE	450
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:FBI:PATtern	451
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:POWer	451
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:SFOrmat	452
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:TFCI	452
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:TFCI:STATe	452
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:TOFFset	453
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:TPC:DATA	453
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:TPC:DATA:DSElect	454
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:TPC:DATA:PATtern	454
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:TPC:MISuse	454
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:TPC:MODE	455
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:TPC:PSTep	455
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:TPC:READ	456

[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:CCODE?

Queries the channelization code and the modulation branch of the specified channel.
The value is fixed.

Return values:

<CCode> integer
Range: 0 to max

Example: BB:W3GP:MST1:DPCC:CCOD?
queries the channelization code for DPCCH of user equipment 1.
Response: Q, 64

Usage: Query only

[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:FBI:MODE <Mode>

The command sets the number of bits for the FBI field. With OFF, the FBI field is not used.

Note: The former 2-bits long FBI Mode "D2B" according to 3GPP Release 4 specification TS 25.211 is not supported any more.

The command sets the slot format (`[ :SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:SFORmat`) in conjunction with the set TFCI status (`[ :SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:TFCI:STATe`) and the TPC Mode (`[ :SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:TPC:MODE`) to the associated values.

Parameters:

<Mode> OFF | D1B
 *RST: OFF

Example:

BB:W3GP:MST1:DPCC:FBI:MODE OFF
 an FBI field is not used.

Manual operation: See "FBI Mode" on page 179

`[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:FBI:PATtern <Pattern>,
 <BitCount>`

The command determines the bit pattern when the `PATtern` data source is selected for the FBI field.

Parameters:

<Pattern> numeric
 The first parameter determines the bit pattern (choice of hexadecimal, octal or binary notation), the second specifies the number of bits to use.
 *RST: #H0

<BitCount> integer
 Range: 1 to 32
 *RST: 1

Example:

BB:W3GP:MST1:DPCC:FBI:PATT #H3F,8
 defines the bit pattern of the data for the FBI field.

Manual operation: See "FBI Pattern (bin)" on page 179

`[ :SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:POWer <Power>`

The command defines the channel power for the DPCCH.

Parameters:

<Power> float
 Range: -80 dB to 0 dB
 Increment: 0.1 dB
 *RST: 0 dB

Example:

BB:W3GP:MST1:DPCC:POW -10 dB
 sets the channel power to -10 dB.

Manual operation: See "Power" on page 176

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:SFORmat <SFormat>

The command sets the slot format for the DPCCH. The slot format defines the structure of the DPCCH slots and the control fields.

Slot Format # 4 is available only for instruments equipped with R&S SMW-K83.

Slot formats 0 to 4 are available for the DPCCH channel as defined in the 3GPP Release 7 specification TS 25.211.

Note:

The former slot formats 4 and 5 according to 3GPP Release 4 specification TS 25.211 are not supported any more.

The command sets the FBI mode ([:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:FBI:MODE), the TFCI status ([:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:TFCI:STATE) and the TPC Mode ([:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:TPC:MODE) to the associated values.

Parameters:

<SFormat>	integer
Range:	0 to 4
*RST:	0

Example: BB:W3GP:MST2:DPCC:SFOR 3
selects slot format 3 for the DPCCH of user equipment 2.

Manual operation: See "Slot Format #" on page 177

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:TFCI <Tfci>

Sets the value of the TFCI (Transport Format Combination Indicator) field. This value selects a combination of 30 bits, which are divided into two groups of 15 successive slots.

Parameters:

<Tfci>	integer
Range:	0 to 1023
*RST:	0

Example: BB:W3GP:MST1:DPCC:TFCI 21
sets the TFCI value to 21.

Manual operation: See "TFCI" on page 179

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:TFCI:STATE <State>

The command activates the TFCI (Transport Format Combination Indicator) field for the DPCCH.

The command sets the slot format (`[ :SOURCE<hw>]:BB:W3GPp:MSTation<st>:DPCCh:SFormat`) in conjunction with the set FBI mode (`[ :SOURCE<hw>]:BB:W3GPp:MSTation<st>:DPCCh:FBI:MODE`) and the TPC Mode (`[ :SOURCE<hw>]:BB:W3GPp:MSTation<st>:DPCCh:TPC:MODE`) to the associated values.

Parameters:

<State> ON | OFF
*RST: 1

Example:

BB:W3GP:MST1:DPCC:TFCI:STAT ON
activates the TFCI field.

Manual operation: See "Use TFCI" on page 179

`[ :SOURCE<hw>]:BB:W3GPp:MSTation<st>:DPCCh:TOFFset <TOffset>`

Sets the timing offset.

Parameters:

<TOffset> integer
Range: 0 to 1024
Increment: 1024

Example:

BB:W3GP:MST1:DPCC:TOFF?
queries the timing offset.

Manual operation: See "DL-UL Timing Offset" on page 177

`[ :SOURCE<hw>]:BB:W3GPp:MSTation<st>:DPCCh:TPC:DATA <Data>`

The command determines the data source for the TPC field of the DPCCH.

Parameters:

<Data> DLISt | ZERO | ONE | PATTern |

DLISt

A data list is used. The data list is selected with the command `[ :SOURCE<hw>]:BB:W3GPp:MSTation<st>:DPCCh:TPC:DATA:DSElect`.

ZERO | ONE

Internal 0 and 1 data is used.

PATTern

Internal data is used. The bit pattern for the data is defined by the command `[ :SOURCE<hw>]:BB:W3GPp:MSTation<st>:DPCCh:TPC:DATA:PATTern`. The maximum length is 64 bits.

*RST: ZERO

Example:

BB:W3GP:MST2:DPCC:TPC:DATA PATT
selects as the data source for the TPC field of user equipment 2 the bit pattern defined with the following command.
BB:W3GP:MST2:DPCC:TPC:DATA:PATT #H48D0,16
defines the bit pattern.

Manual operation: See ["TPC Data Source"](#) on page 180

[[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:TPC:DATA:DSElect <DSelect>

The command selects the data list when the DLIS data source is selected for the TPC field of the DPCCH.

The files are stored with the fixed file extensions *.dm_iqd in a directory of the user's choice. The directory applicable to the commands is defined with the command `MMEMory:CDIR`. To access the files in this directory, you only have to give the file name, without the path and the file extension.

Parameters:

<DSelect> string

Example:

```
BB:W3GP:MST1:DPCC:TPC:DATA DLIS
selects the Data Lists data source.
MMEM:CDIR '/var/user/temp/IQData'
selects the directory for the data lists.
BB:W3GP:MST1:DPCC:TPC:DATA:DSEL 'dpcch_tpc_1'
selects the data list dpcch_tpc1.
```

Manual operation: See ["TPC Data Source"](#) on page 180

[[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:TPC:DATA:PATtern <Pattern>, <BitCount>

The command determines the bit pattern for the PATtern data source selection. The maximum length of the bit pattern is 64 bits.

Parameters:

<Pattern> numeric
 *RST: #H0

<BitCount> integer
 Range: 1 to 64
 *RST: 1

Example: BB:W3GP:MST1:DPCC:TPC:DATA:PATT #B11110000,8
 defines the bit pattern of the data for the TPC field.

Manual operation: See ["TPC Data Source"](#) on page 180

[[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:TPC:MISuse <MisUse>

The command activates "mis-" use of the TPC field (Transmit Power Control) for controlling the channel power of the user equipment.

The bit pattern (see commands `:SOURce:BB:W3GPp:MSTation:DPCCh:TPC:DATA...`) of the TPC field of the DPCCH is used to control the channel power. A "1" leads to an increase of channel powers, a "0" to a reduction of channel powers. Channel power is limited to the range 0 dB to -60 dB. The step width for the change is defined by the command `[ :SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:TPC:PSTep`.

Note: "Mis-"using the TPC field is available for UE2, UE3, UE4 only.

Parameters:

<MisUse> ON | OFF
*RST: 0

Example:

`BB:W3GP:MST2:DPCC:TPC:MIS ON`
activates regulation of the channel power via the bit pattern of the TPC field.
`BB:W3GP:MST2:DPCC:TPC:PST 1 dB`
sets the step width for the change of channel power to 1 dB.

Manual operation: See "Misuse TPC for Output Power Control" on page 181

`[ :SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:TPC:MODE <Mode>`

Selects the TPC (Transmit Power Control) mode.

The command sets the slot format (`[ :SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:SFORmat`) in conjunction with the set TFCI status (`[ :SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:TFCI:STATE`) and the FBI Mode (`[ :SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:FBI:MODE`) to the associated values.

Parameters:

<Mode> D2B | D4B
D2B
A TPC field with a length of 2 bits is used.
D4B
(enabled only for instruments equipped with R&S SMW-K83)
A TPC field with a length of 4 bits is used.
A 4 bits long TPC field can be selected, only for Slot Format 4 and disabled FBI and TFCI fields.
*RST: D2B

Example:

`BB:W3GP:MST1:DPCC:TPC:MODE D2B`
an TPC field with a length of 2 bits is used.

Manual operation: See "TPC Mode" on page 179

`[ :SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:TPC:PSTep <PStep>`

The command sets the level of the power step in dB for controlling the transmit power via the data of the TPC field.

Parameters:

<PStep> float
 Range: -10 to 10
 Increment: 0.01
 *RST: 0

Example:

BB:W3GP:MST:DPCC:TPC:MIS ON
 activates regulation of the channel power via the bit pattern of the TPC field.
 BB:W3GP:MST:DPCC:TPC:PST 1 dB
 sets the step width for the change of channel power to 1 dB.

Manual operation: See ["TPC Power Step"](#) on page 181

[[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCC:TPC:READ <Read>

The command sets the read out mode for the bit pattern of the TPC field of the DPCC.

The bit pattern is selected with the command

SOUR:BB:W3GPp:MST:DPCC:TPC:DATA:PATT.

Parameters:

<Read> CONTInuous | S0A | S1A | S01A | S10A

CONTInuous

The bit pattern is used cyclically.

S0A

The bit pattern is used once, then the TPC sequence continues with 0 bits.

S1A

The bit pattern is used once, then the TPC sequence continues with 1 bit.

S01A

The bit pattern is used once and then the TPC sequence is continued with 0 bits and 1 bit alternately (in multiples, depending on by the symbol rate, for example, 00001111).

S10A

The bit pattern is used once and then the TPC sequence is continued with 1 bit and 0 bits alternately (in multiples, depending on by the symbol rate, for example, 11110000).

*RST: CONTInuous

Example:

BB:W3GP:MST2:DPCC:TPC:READ CONT
 The selected bit pattern is repeated continuously for the TPC sequence.

Manual operation: See ["TPC Read Out Mode"](#) on page 180

8.9.4 HS-DPCCH Settings

8.9.4.1 Common Settings

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:STATE	457
[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:POWer	457
[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:COMPatibility	457
[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:CCODE?	458
[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:SDELaY	458
[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:TTIDistance	458

[\[:SOURce<hw>\]:BB:W3GPp:MSTation<st>:DPCCh:HS:STATE](#) <State>

This command activates or deactivates the HS-DPCCH.

Parameters:

<State> 0 | 1 | OFF | ON
 *RST: 0

Example: BB:W3GP:MST1:DPCC:HS:STAT ON
 activates HS-DPCCH.

Manual operation: See "[State \(HS-DPCCH\)](#)" on page 189

[\[:SOURce<hw>\]:BB:W3GPp:MSTation<st>:DPCCh:HS:POWer](#) <Power>

Sets the channel power in dB.

The power is set relative to the powers of the other channels. If "Adjust Total Power to 0 dB" is executed ([\[:SOURce<hw>\]:BB:W3GPp:POWer:ADJust](#)), the power is normalized to total power for all channels of 0 dB. The power ratio of the individual channels remains unchanged.

Parameters:

<Power> float
 Range: -80 to 0
 Increment: 0.01
 *RST: 0

Example: BB:W3GP:MST1:DPCC:HS:POW -30
 Sets the channel power to -30 dB.

Manual operation: See "[Power \(HS-DPCCH\)](#)" on page 190

[\[:SOURce<hw>\]:BB:W3GPp:MSTation<st>:DPCCh:HS:COMPatibility](#) <Compatibility>

The concept of the graphical user interface for the configuration of HS-DPCCH has been adapted to support simultaneous DC-HSDPA and MIMO operation, as required in 3GPP Release 9 onwards.

This command enables the configuration of the HS-DPCCH settings provided for backwards compatibility (REL7).

Parameters:

<Compatibility> REL7 | REL8 | REL8RT
 *RST: REL8

Example:

BB:W3GP:MST1:DPCC:HS:COMP REL8
 Sets the compatibility mode to Release 8 and Later.

Options:

REL8RT requires R&S SMW-B10

Manual operation: See ["Compatibility Mode \(HS-DPCCH\)"](#) on page 190

[[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCC:HS:CCODE?

Queries the channelization code and the modulation branch of the HS-DPCCH.

Return values:

<CCode> integer
 Range: 1 to 64
 *RST: 64

Example:

BB:W3GP:MST1:DPCC:HS:CCOD?
 queries the channelization code.
 Response: Q, 32
 the channelization code is 32 and the modulation branch is Q.

Usage:

Query only

Manual operation: See ["Channelization Code"](#) on page 176

[[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCC:HS:SDElay <SDelay>

Sets the delay between the uplink HS-DPCCH and the frame of uplink DPCH.

Parameters:

<SDelay> integer
 a multiple m of 256 chips according to TS 25.211 7.7
 Range: 0 to 250
 *RST: 101
 Default unit: * 256 Chips

Example:

BB:W3GP:MST1:DPCC:HS:SDEL 101
 sets a start delay of 101 x 256 chips.

Manual operation: See ["Start Delay"](#) on page 190

[[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCC:HS:TTIDistance <TtiDistance>

Selects the distance between two packets in HSDPA packet mode.

Parameters:

<TtiDistance> integer
 Range: 1 to 16
 *RST: 5

Example:

BB:W3GP:MST1:DPCC:HS:TTID 4
 selects an Inter TTI Distance of 4 subframes.

Manual operation: See ["Inter TTI Distance \(Interval\)"](#) on page 191

8.9.4.2 Up to Release 7 Settings

[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCCh:HS:POACK.....	459
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCCh:HS:PONAck.....	459
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCCh:HS:HAPattern.....	460
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCCh:HS:CQI:PLENgt.....	460
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCCh:HS:CQI<ch>[:VALues].....	461
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCCh:HS:MIMO[:MODE].....	461
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCCh:HS:MIMO:POAAck.....	461
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCCh:HS:MIMO:POANack.....	462
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCCh:HS:MIMO:PONAck.....	463
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCCh:HS:MIMO:PONNack.....	463
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCCh:HS:MIMO:POCA.....	464
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCCh:HS:MIMO:TTICount.....	464
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCCh:HS:MIMO:TTI<ch0>:HACK.....	465
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCCh:HS:MIMO:TTI<ch0>:PCI.....	465
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCCh:HS:MIMO:TTI<ch0>:CQIType.....	465
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCCh:HS:MIMO:TTI<ch0>:CQI<di>.....	466

[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCCh:HS:POACK <Poack>

(Up to Release 7)

Sets the channel power part of the ACK in dB.

Parameters:

<Poack> float
 Range: -10 to 10
 Increment: 0.1
 *RST: 0

Example:

BB:W3GP:MST1:DPCC:HS:POAC -2.5dB
 Sets the channel power part of the ACK to 2.5 dB.

Manual operation: See ["Power Offset ACK"](#) on page 202

[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCCh:HS:PONAck <PoNack>

(Up to Release 7)

Sets the channel power part of the NACK in dB.

Parameters:

<PoNack> float
 Range: -10 to 10
 Increment: 0.1
 *RST: 0

Example:

BB:W3GP:MST1:DPCC:HS:PONA -2.5dB
 Sets the channel power part of the NACK to 2.5 dB.

Manual operation: See ["Power Offset NACK"](#) on page 202

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCCh:HS:HAPattern <HaPattern>

(Up to Release 7)

The command enters the pattern for the HARQ-ACK field (Hybrid-ARQ Acknowledgement). One bit is used per HS-DPCCH packet.

Parameters:

<HaPattern> string
 The pattern is entered as string, the maximum number of entries is 32. Three different characters are permitted.
1
 The HARQ ACK is sent (ACK). Transmission was successful and correct.
0
 The NACK is sent (NACK). Transmission was not correct. With an NACK, the UE requests retransmission of the incorrect data.
-
 Nothing is sent. Transmission is interrupted (Discontinuous Transmission, DTX).
 *RST: <empty>

Example:

BB:W3GP:MST1:DPCC:HS:COMP REL7
 BB:W3GP:MST1:DPCC:HS:HAP "110--110-0"
 enters the pattern for the HARQ-ACK field.

Manual operation: See ["ACK/NACK Pattern"](#) on page 203

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCCh:HS:CQI:PLENgtH <PLength>

Sets the length of the CQI sequence.

The values of the CQI sequence are defined with command [\[:SOURce<hw>\]:BB:W3GPp:MSTation<st>:DPCCCh:HS:CQI<ch>\[:VALues\]](#). The pattern is generated cyclically.

Parameters:

<PLength> integer
 Range: 1 to 10
 *RST: 1

Example: BB:W3GP:MST1:DPCC:HS:CQI:PLEN 2
the CQI sequence length is 2 values.
BB:W3GP:MST1:DPCC:HS:CQI1 -1
the first CQI value is -1.
BB:W3GP:MST1:DPCC:HS:CQI2 2
the second CQI value is 2.

Manual operation: See ["CQI Pattern Length"](#) on page 203

**[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:CQI<ch>[:VALues]
<Values>**

Sets the values of the CQI sequence.

The length of the CQI sequence is defined with command [\[:SOURce<hw>\]:BB:W3GPp:MSTation<st>:DPCCh:HS:CQI:PLENgtth](#). The pattern is generated cyclically.

Parameters:

<Values> integer
Value -1 means that no CQI is sent (DTX - Discontinuous Transmission).
Range: -1 to 30
*RST: 1

Example: BB:W3GP:MST1:DPCC:HS:CQI:PLEN 2
the CQI sequence length is 2 values.
BB:W3GP:MST1:DPCC:HS:CQI1 1
the first CQI value is -1.
BB:W3GP:MST1:DPCC:HS:CQI2 2
the second CQI value is 2.

Manual operation: See ["CQI Values"](#) on page 203

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:MIMO[:MODE] <Mode>

Enables/disables working in MIMO mode for the selected UE.

Parameters:

<Mode> 0 | 1 | OFF | ON
*RST: 0

Example: BB:W3GP:MST1:DPCC:HS:MIMO:MODE ON
Enables MIMO mode for UE 1.

Options: R&S SMW-K83

Manual operation: See ["MIMO Mode \(Up to Release 7\)"](#) on page 204

**[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:MIMO:POAAck <PoaAck>
(up to Release 7)**

Sets the power offset $P_{\text{off\_ACK/ACK}}$ of an ACK/ACK response to two scheduled transport blocks relative to the CQI Power P_{CQI} (`[ :SOURce<hw> ] :BB:W3GPp:MSTation<st>:DPCCh:HS:POWer`).

The power $P_{\text{ACK/ACK}}$ used during the HARQ-ACK slots is calculated as:

$$P_{\text{ACK/ACK}} = P_{\text{CQI}} + P_{\text{off\_ACK/ACK}}$$

Parameters:

<PoaAck> float
Range: -10 to 10
Increment: 0.1
*RST: 0

Example:

BB:W3GP:MST1:DPCC:HS:MIMO:MODE ON
Enables MIMO mode for UE 1.
BB:W3GP:MST1:DPCC:HS:MIMO:TTI2:HACK AACK
Sets the HARQ-ACK to ACK/ACK.
BB:W3GP:MST1:DPCC:HS:MIMO:POAA -2.5dB
Sets the power offset to -2.5 dB.

Options: R&S SMW-K83

Manual operation: See "Power Offset ACK/ACK" on page 205

`[:SOURce<hw>] :BB:W3GPp:MSTation<st>:DPCCh:HS:MIMO:POANack
<PoaNack>`

(up to Release 7)

Sets the power offset $P_{\text{off\_ACK/NACK}}$ of an ACK/NACK response to two scheduled transport blocks relative to the CQI Power P_{CQI} (`[ :SOURce<hw> ] :BB:W3GPp:MSTation<st>:DPCCh:HS:POWer`).

The power $P_{\text{ACK/NACK}}$ used during the HARQ-ACK slots is calculated as:

$$P_{\text{ACK/NACK}} = P_{\text{CQI}} + P_{\text{off\_ACK/NACK}}$$

Parameters:

<PoaNack> float
Range: -10 to 10
Increment: 0.1
*RST: 0

Example:

BB:W3GP:MST1:DPCC:HS:MIMO:MODE ON
Enables MIMO mode for UE 1.
BB:W3GP:MST1:DPCC:HS:MIMO:TTI2:HACK ANAC
Sets the HARQ-ACK to ACK/NACK.
BB:W3GP:MST1:DPCC:HS:MIMO:POAN -1.5dB
Sets the power offset to -1.5 dB.

Options: R&S SMW-K83

Manual operation: See "Power Offset ACK/NACK" on page 205

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:MIMO:PONack <PoNack>

(up to Release 7)

Sets the power offset $P_{\text{off\_NACK/ACK}}$ of an NACK/ACK response to two scheduled transport blocks relative to the CQI Power P_{CQI} (**[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:Power**).

The power $P_{\text{NACK/ACK}}$ used during the HARQ-ACK slots is calculated as:

$$P_{\text{NACK/ACK}} = P_{\text{CQI}} + P_{\text{off\_NACK/ACK}}$$

Parameters:

<PoNack> float
 Range: -10 to 10
 Increment: 0.1
 *RST: 0

Example:

BB:W3GP:MST1:DPCC:HS:MIMO:MODE ON
 Enables MIMO mode for UE 1.
 BB:W3GP:MST1:DPCC:HS:MIMO:TTI2:HACK NACK
 Sets the HARQ-ACK to NACK/ACK.
 BB:W3GP:MST1:DPCC:HS:MIMO:PONA -1dB
 Sets the power offset to -1dB.

Options: R&S SMW-K83

Manual operation: See ["Power Offset NACK/ACK"](#) on page 205

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:MIMO:PONNack <PonNack>

(up to Release 7)

Sets the power offset $P_{\text{off\_NACK/NACK}}$ of an NACK/NACK response to two scheduled transport blocks relative to the CQI Power P_{CQI} (**[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:Power**).

The power $P_{\text{NACK/NACK}}$ used during the HARQ-ACK slots is calculated as:

$$P_{\text{NACK/NACK}} = P_{\text{CQI}} + P_{\text{off\_NACK/NACK}}$$

Parameters:

<PonNack> float
 Range: -10 to 10
 Increment: 0.1
 *RST: 0

Example:

BB:W3GP:MST1:DPCC:HS:MIMO:MODE ON
 Enables MIMO mode for UE 1.
 BB:W3GP:MST1:DPCC:HS:MIMO:TTI2:HACK NNAC
 Sts the HARQ-ACK to NACK/NACK.
 BB:W3GP:MST1:DPCC:HS:MIMO:PONN -3dB
 Sets the power offset to -3dB.

Options: R&S SMW-K83

Manual operation: See ["Power Offset NACK/NACK"](#) on page 205

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:MIMO:POCA <Poca>

(up to Release 7)

Sets the power offset $P_{\text{off\_CQI Type A}}$ of the PCI/CQI slots in case a CQI Type A report is sent relative to the CQI Power P_{CQI} ([\[:SOURce<hw>\]:BB:W3GPp:MSTation<st>:DPCCh:HS:POWer](#)).

The power $P_{\text{CQI Type A}}$ used during the PCI/CQI slots is calculated as:

$$P_{\text{CQI Type A}} = P_{\text{CQI}} + P_{\text{off\_CQI Type A}}$$

Since the CQI Type B reports are used in a single stream transmission, the power $P_{\text{CQI Type B}} = P_{\text{CQI}}$.

Parameters:

<Poca> float
 Range: -10 to 10
 Increment: 0.1
 *RST: 0

Example:

BB:W3GP:MST1:DPCC:HS:MIMO:MODE ON
 Enables MIMO mode for UE 1.
 BB:W3GP:MST1:DPCC:HS:MIMO:MODE:TT2:CQIT TADT
 Selects CQI Type A Dual TB report for TTI2.
 BB:W3GP:MST1:DPCC:HS:MIMO:POCA -4dB
 Sets the power offset to -4dB.

Options: R&S SMW-K83

Manual operation: See ["Power Offset CQI Type A"](#) on page 206

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:MIMO:TTICount <TtiCount>

Selects the number of configurable TTI's.

Parameters:

<TtiCount> integer
 Range: 1 to 32
 *RST: 1

Example:

BB:W3GP:MST1:DPCC:HS:MIMO:MODE ON
 Enables MIMO mode for UE 1.
 BB:W3GP:MST1:DPCC:HS:MIMO:TTIC 4
 Sets the number of configurable TTI's to 4.

Options: R&S SMW-K83

Manual operation: See ["Number of TTIs \(Up to Release 7\)"](#) on page 206

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:MIMO:TTI<ch0>:HACK
<Hack>

Selects the information transmitted during the HARQ-ACK slot of the corresponding TTI.

Suffix:

<ch0> 0..Number of TTI -1

Parameters:

<Hack> DTX | SACK | SNACK | AACK | ANACK | NACK | NNACK
 *RST: AACK (for TTI 1)

Example:

BB:W3GP:MST1:DPCC:HS:MIMO:MODE ON
 Enables MIMO mode for UE 1.
 BB:W3GP:MST1:DPCC:HS:MIMO:TTI2:HACK SACK
 Sets the HARQ-ACK to single ACK.

Options: R&S SMW-K83

Manual operation: See ["HARQ-ACK \(Up to Release 7\)"](#) on page 206

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:MIMO:TTI<ch0>:PCI <Pci>

Selects the PCI value transmitted during the PCI/CQI slots of the corresponding TTI.

Suffix:

<ch0> 0 to Number of TTI -1

Parameters:

<Pci> integer
 Range: 0 to 3
 *RST: 0

Example:

BB:W3GP:MST1:DPCC:HS:MIMO:MODE ON
 Enables MIMO mode for UE 1.
 BB:W3GP:MST1:DPCC:HS:MIMO:TTI2:HACK SACK
 Sets the HARQ-ACK to single ACK.
 BB:W3GP:MST1:DPCC:HS:MIMO:TTI2:PCI 2
 Sets the PCI.

Options: R&S SMW-K83

Manual operation: See ["PCI \(Up to Release 7\)"](#) on page 207

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:MIMO:TTI<ch0>:CQIType
<CqiType>

Selects the type of the CQI report.

Suffix:

<ch0> 0..Number of TTI -1

Parameters:

<CqiType> TAST | TADT | TB
 *RST: TADT

Example:

BB:W3GP:MST1:DPCC:HS:MIMO:MODE ON
 Enables MIMO mode for UE 1.
 BB:W3GP:MST1:DPCC:HS:MIMO:TTI2:HACK SACK
 Ssets the HARQ-ACK to single ACK.
 BB:W3GP:MST1:DPCC:HS:MIMO:TTI2:CQIT TADT
 Selects CQI Type A dual TB report for TTI2.

Options:

R&S SMW-K83

Manual operation: See ["CQI Type \(Up to Release 7\)"](#) on page 207

**[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCC:HS:MIMO:TTI<ch0>:CQI<di>
 <Cqi>**

Selects the CQI report transmitted during the PCI/CQI slots of the corresponding TTI.

For single stream transmission (BB:W3GP:MST:DPCC:HS:MIMO:TTI:CQI1), this command set the CQI values of the following cases:

- The CQI (the value for CQI Type B report)
- The CQI_S (the CQI value in case a CQI Type A report when one transport block is preferred)

For dual stream transmission (BB:W3GP:MST:DPCC:HS:MIMO:TTI:CQI2), this command sets:

- The CQI₁, the first of the two CQI values of CQI Type A report when two transport blocks are preferred
- The CQI₂, the second of the two CQI values of CQI Type A report when two transport blocks are preferred. The CQI then is calculated as follows:

$$CQI = 15 * CQI_1 + CQI_2 + 31$$

Suffix:

<ch0> 0..Number of TTI -1
 TTI

<di> 1|2
 The suffix CQI<1 | 2> distinguishes between CQI/CQI_S/CQI₁ and CQI₂.

Parameters:

<Cqi> integer
 Range: 0 to 30
 *RST: 0

- Example:** BB:W3GP:MST1:DPCC:HS:MIMO:MODE ON
Enables MIMO mode for UE 1.
BB:W3GP:MST1:DPCC:HS:MIMO:TTI2:HACK SACK
Sets the HARQ-ACK to single ACK.
BB:W3GP:MST1:DPCC:HS:MIMO:TTI2:CQIT TADT
Selects CQI Type A dual TB report for TTI2.
BB:W3GP:MST1:DPCC:HS:MIMO:TTI2:CQI1 1.5
Sets CQI1
BB:W3GP:MST1:DPCC:HS:MIMO:TTI2:CQI2 2
Sets CQI2
- Example:** BB:W3GP:MST1:DPCC:HS:MIMO:TTI2:CQIT TAST
Selects CQI Type A single TB report for TTI2.
BB:W3GP:MST1:DPCC:HS:MIMO:TTI2:CQI1 3
Sets CQIS
- Example:** BB:W3GP:MST1:DPCC:HS:MIMO:TTI2:CQIT TB
Selects CQI Type B
BB:W3GP:MST1:DPCC:HS:MIMO:TTI2:CQI1 0
Sets CQI
- Options:** R&S SMW-K83
- Manual operation:** See "[CQI/CQIs/CQI₁/CQI₂ \(Up to Release 7\)](#)" on page 207

8.9.4.3 Release 8 and Later (RT) Settings

Example: HS-DPCCH Scheduling

The following is a simple example intended to explain the principle. Configured is an HS-DPCCH scheduling in MIMO Mode and with "Secondary Cell Enabled = 1".

```
BB:W3GP:MST1:DPCC:HS:COMP REL8
BB:W3GP:MST1:DPCC:HS:TTID 5
BB:W3GP:MST1:DPCC:HS:MMOD ON
BB:W3GP:MST1:DPCC:HS:SC:ENABled 1
BB:W3GP:MST1:DPCC:HS:SC:ACT 0
BB:W3GP:MST1:DPCC:HS:HACK:ROWS 2
BB:W3GP:MST1:DPCC:HS:HACK:REPeat 4
BB:W3GP:MST1:DPCC:HS:ROW0:HACK:FROM 0
BB:W3GP:MST1:DPCC:HS:ROW0:HACK:TO 1
BB:W3GP:MST1:DPCC:HS:ROW0:HACK1 MS_AA_D
BB:W3GP:MST1:DPCC:HS:ROW1:HACK:FROM 3
BB:W3GP:MST1:DPCC:HS:ROW1:HACK:TO 3
BB:W3GP:MST1:DPCC:HS:ROW1:HACK1 MS_NN_NN
BB:W3GP:MST1:DPCC:HS:PCQI:ROWS 2
BB:W3GP:MST1:DPCC:HS:PCQI:REPeat 3
BB:W3GP:MST1:DPCC:HS:ROW0:PCQI:FROM 0
BB:W3GP:MST1:DPCC:HS:ROW0:PCQI:TO 0
BB:W3GP:MST1:DPCC:HS:ROW1:PCQI1:TYPE DTX
BB:W3GP:MST1:DPCC:HS:ROW1:PCQI:FROM 1
```

```

BB:W3GP:MST1:DPCC:HS:ROW1:PCQI:TO 1
BB:W3GP:MST1:DPCC:HS:ROW1:PCQI1:TYPE TADT
BB:W3GP:MST1:DPCC:HS:ROW1:PCQI1:CQI1 10
BB:W3GP:MST1:DPCC:HS:ROW1:PCQI1:CQI2 20
BB:W3GP:MST1:DPCC:HS:ROW1:PCQI1:PCI 2
BB:W3GP:MST1:DPCC:HS:STAT ON

```

[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:SFOFormat?	468
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:MMODE	468
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:SC:ENABLEd	469
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:SC:ACTive	469
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:HACK:ROWS	469
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:PCQI:ROWS	469
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:ROW<ch0>:HACK:FROM	470
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:ROW<ch0>:HACK:TO	470
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:ROW<ch0>:HACK<di>	470
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:ROW<ch0>:POHAck	471
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:ROW<ch0>:PCQI:FROM	472
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:ROW<ch0>:PCQI:TO	472
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:ROW<ch0>:PCQI<di>:TYPE	472
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:ROW<ch0>:PCQI<di>:CQI<us>	473
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:ROW<ch0>:PCQI<di>:PCI	473
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:ROW<ch0>:POPCqi	473
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:HACK:REPeat	474
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:PCQI:REPeat	474
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:SLENgth?	474
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:SLENgth:ADJust	474

[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:SFOFormat?

Queries the used slot format.

Return values:

<SlotFormat> integer
 Range: 0 to 1
 *RST: 0

Usage: Query only

Options: R&S SMW-K83

Manual operation: See "Slot Format" on page 192

[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:MMODE <MMode>

(Release 8 and Later, Release 8 and Later (RT))

Enables/disables working in MIMO mode for the selected UE.

Parameters:

<MMode> 0 | 1 | OFF | ON
 *RST: 0

Example: see [Example "HS-DPCCH Scheduling"](#) on page 467

Options: R&S SMW-K83

Manual operation: See ["MIMO Mode"](#) on page 194

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:SC:ENABLEd
 <SecCellEnabled>

Enables the selected number of secondary cells for the selected UE.

Parameters:

<SecCellEnabled> integer
 Range: 0 to 7
 *RST: 0

Example: see [Example "HS-DPCCH Scheduling"](#) on page 467

Options: R&S SMW-K83

Manual operation: See ["Secondary Cell Enabled"](#) on page 194

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:SC:ACTIve
 <SecCellActive>

(Release 8 and Later)

Sets the number of active secondary cells for the selected UE.

Parameters:

<SecCellActive> integer
 Range: 0 to 7
 *RST: 0

Example: see [Example "HS-DPCCH Scheduling"](#) on page 467

Options: R&S SMW-K83

Manual operation: See ["Secondary Cell Active"](#) on page 195

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:HACK:ROWS <RowCount>
[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:PCQI:ROWS <RowCount>

Determines the number of the rows in the HARQ-ACK respectively in the PCI/CQI scheduling table.

Parameters:

<RowCount> integer
 Range: 1 to 32
 *RST: 1

Example: See [Example "HS-DPCCH Scheduling"](#) on page 467

Options: R&S SMW-K83

Manual operation: See "Number of Rows" on page 198

```
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCCh:HS:ROW<ch0>:HACK:FROM
<HackFrom>
```

[:SOURCE<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:ROW<ch0>:HACK:TO
<HackTo>

(Release 8 and later)

Defines the beginning / end of the HARQ-ACK transmissions inside the HARQ-ACK cycle. R&S SMWThe range is specified in multiples of intervals (Inter-TTI distance).

Suffix:

<ch0> 0 to <RowCount>

Parameters:

<HackTo>	integer
Range:	0 to dynamic
*RST:	row index

Example: See [Example "HS-DPCCH Scheduling"](#) on page 467

Options: R&S SMW-K83

Manual operation: See "HARQ-ACK From Interval/ HARQ-ACK To Interval" on page 195

```
[ :SOURce<hw>]:BB:W3GPp:MStation<st>:DPCCh:HS:ROW<ch0>:HACK<di>
<HargAck>
```

(Release 8 and Later)

Sets the information transmitted during the HARQ-ACK slots of the TTIs during the corresponding specified HARQ-ACK From/To range.

For detailed description, see "HS-DPCCH 1/2, HARQ-ACK 1/2/3/4" on page 195. The Table 8-1 provides the necessary cross-reference information.

Table 8-1: Cross-reference between the used GUI terms and abbreviations in the SCPI command

Value name	Parameter value
"DTX"	DTX D_DTX
"PRE, POST"	PRE POST
"A, N"	A N
"AA, AN, NA, NN"	M_A M_N M_AA M_AN M_NA M_NN
"A/D, N/A, ... " (different combinations possible)	S_A_D S_N_A ... (different combinations possible)

Value name	Parameter value
"A/D/D, N/D/D, ... " (different combinations possible)	S2_N_N_N S2_N_N_A ... (different combinations possible)
"AN/NN, D/AA, ... " (different combinations possible)	MS_AA_AA MS_D_AA ... (different combinations possible)

Suffix:

<ch0> 0..<RowCount>

Parameters:

<HarqAck>

DTX | PRE | POST | A | N | M_A | M_N | M_AA | M_AN | M_NA |
M_NN | S_A_D | S_N_D | S_D_A | S_D_N | S_A_A | S_A_N |
S_N_A | S_N_N | MS_A_D | MS_N_D | MS_AA_D | MS_AN_D |
MS_NA_D | MS_NN_D | MS_D_A | MS_D_N | MS_D_AA |
MS_D_AN | MS_D_NA | MS_D_NN | MS_A_A | MS_A_N |
MS_N_A | MS_N_N | MS_A_AA | MS_A_AN | MS_A_NA |
MS_A_NN | MS_N_AA | MS_N_AN | MS_N_NA | MS_N_NN |
MS_AA_A | MS_AA_N | MS_AN_A | MS_AN_N | MS_NA_A |
MS_NA_N | MS_NN_A | MS_NN_N | MS_AA_AA |
MS_AA_AN | MS_AA_NA | MS_AA_NN | MS_AN_AA |
MS_AN_AN | MS_AN_NA | MS_AN_NN | MS_NA_AA |
MS_NA_AN | MS_NA_NA | MS_NA_NN | MS_NN_AA |
MS_NN_AN | MS_NN_NA | MS_NN_NN | S2_A_D_D |
S2_N_D_D | S2_D_A_D | S2_D_N_D | S2_D_D_A |
S2_D_D_N | S2_A_A_D | S2_A_N_D | S2_N_A_D |
S2_N_N_D | S2_A_D_A | S2_A_D_N | S2_N_D_A |
S2_N_D_N | S2_D_A_A | S2_D_A_N | S2_D_N_A |
S2_D_N_N | S2_A_A_A | S2_A_A_N | S2_A_N_A |
S2_A_N_N | S2_N_A_A | S2_N_A_N | S2_N_N_A |
S2_N_N_N | D_DTX

Example: See [Example "HS-DPCCH Scheduling"](#) on page 467**Options:** R&S SMW-K83**Manual operation:** See ["HS-DPCCH 1/2, HARQ-ACK 1/2/3/4"](#) on page 195

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:ROW<ch0>:POHAcK
<PoHack>

(Release 8 and Later)

Sets the power offset of a HARQ-ACK response relative to the [\[:SOURce<hw>\]:BB:W3GPp:MSTation<st>:DPCCh:HS:POWer](#).

Suffix:

<ch0> 0..<RowCount>

Parameters:

<PoHack> float
 Range: -10 to 10
 Increment: 0.1
 *RST: 0

Options: R&S SMW-K83

Manual operation: See ["Power Offset HARQ-ACK"](#) on page 197

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:ROW<ch0>:PCQI:FROM
 <PcqiFrom>

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:ROW<ch0>:PCQI:TO
 <PcqiTo>

(Release 8 and later)

Defines the beginning / end of the PCI/CQI transmissions inside the PCI/CQI cycle.
 The range is specified in multiples of intervals (Inter-TTI distance).

Suffix:

<ch0> 0 to <RowCount>

Parameters:

<PcqiTo> integer
 Range: 0 to dynamic
 *RST: row index

Example: See [Example "HS-DPCCH Scheduling"](#) on page 467

Options: R&S SMW-K83

Manual operation: See ["PCI-CQI From Interval/ PCI-CQI To Interval"](#) on page 198

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:ROW<ch0>:PCQI<di>:
TYPE <CqiType>

Selects the type of the PCI/CQI report.

Suffix:

<ch0> 0..<RowCount>

Parameters:

<CqiType> DTX | CQI | TAST | TADT | TB | CCQI
TAST|TADT
 Type A Single TB, Type A Double TB
TB
 Type B
CCQI
 Composite CQI

Example: see [Example "HS-DPCCH Scheduling"](#) on page 467

Options: R&S SMW-K83

Manual operation: See ["HS-DPCCH 1/2, PCI/CQI 1/2/3/4 Type"](#) on page 198

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:ROW<ch0>:PCQI<di>:CQI<us> <Cqi>

Parameters:

<Cqi> integer
 Range: 0 to 30
 *RST: 0

Example: see [Example "HS-DPCCH Scheduling"](#) on page 467

Options: R&S SMW-K83

Manual operation: See ["CQI/CQI_S/CQI_I/CQI₂"](#) on page 200

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:ROW<ch0>:PCQI<di>:PCI<PCI>

Suffix:

<ch0> 0..[<RowCount>](#)

Parameters:

<PCI> integer
 Range: 0 to 3
 *RST: 0

Example: see [Example "HS-DPCCH Scheduling"](#) on page 467

Manual operation: See ["PCI"](#) on page 200

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:ROW<ch0>:POPcqi<PoPcqi>

(Release 8 and Later)

Sets the power offset $P_{\text{off\_PCI/CQI}}$ of all PCI/CQI slots during the corresponding specified PCI/CQI From/To range relative to the [\[:SOURce<hw>\]:BB:W3GPp:MSTation<st>:DPCCh:HS:POWER](#).

Suffix:

<ch0> 0..[<RowCount>](#)

Parameters:

<PoPcqi> float
 Range: -10 to 10
 Increment: 0.1
 *RST: 0

Options: R&S SMW-K83

Manual operation: See ["Power Offset PCI/CQI"](#) on page 199

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:HACK:REPeat <HackRep>

Defines the cycle length after that the information in the HS-DPCCH scheduling table is read out again from the beginning.

Parameters:

<HackRep> integer
Range: 1 to dynamic

Example: see [Example "HS-DPCCH Scheduling"](#) on page 467

Manual operation: See ["HARQ-ACK Repeat After"](#) on page 195

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:PCQI:REPeat <PcqiRep>

(Release 8 and Later)

Defines the cycle length after that the information in the HS-DPCCH scheduling table is read out again from the beginning.

Parameters:

<PcqiRep> integer
Range: 1 to dynamic
*RST: 1

Example: see [Example "HS-DPCCH Scheduling"](#) on page 467

Manual operation: See ["PCI/CQI Repeat After"](#) on page 198

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:SLENgth?

(Release 8 and Later)

Queries the suggested and current ARB sequence length.

The current ARB sequence length is adjusted with the command [\[:SOURce<hw>\]:BB:W3GPp:MSTation<st>:DPCCh:HS:SLENgth:ADJust](#) on page 474.

Return values:

<SLength> float

Example: BB:W3GP:MST1:DPCC:HS:SLEN?
Queries the ARB sequence length

Usage: Query only

Options: R&S SMW-K83

Manual operation: See ["Suggested / Current ARB Seq. Length \(HS-DPCCH\)"](#) on page 200

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:SLENgth:ADJust

(Release 8 and Later)

Sets the current ARB sequence length to the suggested value.

Example: BB:W3GP:MST1:DPCC:HS:SLen:ADJ
Adjusts the ARB sequence length

Usage: Event

Options: R&S SMW-K83

Manual operation: See ["Adjust ARB Sequence Length \(HS-DPCCH\)"](#) on page 201

8.9.5 DPDCH Settings

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:CHANnel<ch>:DPDCh:CCode?	475
[:SOURce<hw>]:BB:W3GPp:MSTation<st>:CHANnel<ch>:DPDCh:DATA	475
[:SOURce<hw>]:BB:W3GPp:MSTation<st>:CHANnel<ch>:DPDCh:DATA:DSElect	476
[:SOURce<hw>]:BB:W3GPp:MSTation<st>:CHANnel<ch>:DPDCh:DATA:PATtern	476
[:SOURce<hw>]:BB:W3GPp:MSTation<st>:CHANnel<ch>:DPDCh:SRate?	477
[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPDCh:FCIO	477
[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPDCh:ORate	478
[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPDCh:POWer	478
[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPDCh:STAt	478

[\[:SOURce<hw>\]:BB:W3GPp:MSTation<st>:CHANnel<ch>:DPDCh:CCode?](#)

The command queries the channelization code of the specified channel. The value is fixed and depends on the overall symbol rate of the user equipment.

Return values:

<CCode> float

Example: BB:W3GP:MST1:CHAN:DPDC:CCOD?
queries the channelization code for DPDCH 1 of user equipment 1.

Usage: Query only

Manual operation: See ["Channelization Code"](#) on page 184

[\[:SOURce<hw>\]:BB:W3GPp:MSTation<st>:CHANnel<ch>:DPDCh:DATA <Data>](#)

The command determines the data source for the selected DPDCH.

For the enhanced channels of user equipment 1 (UE1), this entry is valid when channel coding is deactivated. When channel coding is active, data sources are selected for the transport channels with the com-

mands :BB:W3GPp:MST:CHANnel:DPDCh:DCCH:DATA

and :BB:W3GPp:MST:ENHanced:TCHannel:DATA.

Parameters:

<Data> PN9 | PN11 | PN15 | PN16 | PN20 | PN21 | PN23 | DLIS |
ZERO | ONE | PATtern

PNxx

The pseudo-random sequence generator is used as the data source. Different random sequence lengths can be selected.

DLIS

A data list is used. The data list is selected with the command

```
[ :SOURce<hw> ] :BB:W3GPp:MSTation<st> :
CHANnel<ch> :DPDCh:DATA:DSElect.
```

ZERO | ONE

Internal 0 and 1 data is used.

PATtern

Internal data is used. The bit pattern for the data is defined by the command `[ :SOURce<hw> ] :BB:W3GPp:MSTation<st> : CHANnel<ch> :DPDCh:DATA:PATtern.`

```
*RST:      PN9
```

Example:

```
BB:W3GP:MST1:CHAN:DPDC:DATA PN11
```

Selects internal PRBS data with period length $2^{11}-1$ as the data source.

Manual operation: See ["DPDCH Data Source"](#) on page 185

```
[ :SOURce<hw> ] :BB:W3GPp:MSTation<st> :CHANnel<ch> :DPDCh:DATA:DSElect
<DSelect>
```

The command selects the data list for the DLIS data source selection.

The files are stored with the fixed file extensions `*.dm_iqd` in a directory of the user's choice. The directory applicable to the commands is defined with the command `MMEMory:CDIR`. To access the files in this directory, you only have to give the file name, without the path and the file extension.

Parameters:

```
<DSelect>      <data list name>
```

Example:

```
BB:W3GP:MST1:CHAN1:DPDC:DATA DLIS
```

selects the Data Lists data source.

```
MMEM:CDIR '/var/user/temp/IQData'
```

selects the directory for the data lists.

```
BB:W3GP:MST1:CHAN1:DPDC:DATA:DSEL 'dpdch_13'
```

selects the file `dpdch_13` as the data source.

```
[ :SOURce<hw> ] :BB:W3GPp:MSTation<st> :CHANnel<ch> :DPDCh:DATA:PATtern
<Pattern>, <BitCount>
```

The command enters the bit pattern for the PATtern data source selection. The first parameter determines the bit pattern (choice of hexadecimal, octal or binary notation), the second specifies the number of bits to use.

Parameters:

<Pattern> numeric
 *RST: #H0

<BitCount> integer
 Range: 1 to 64
 *RST: 1

Example:

BB:W3GP:MST1:CHAN1:DPDC:DATA PATT
 selects the Pattern data source.
 BB:W3GP:MST1:CHAN1:DPDC:DATA:PATT #H3F, 8
 defines the bit pattern.

Manual operation: See ["DPDCH Data Source"](#) on page 185

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:CHANnel<ch>:DPDCh:SRATe?

The command queries the symbol rate of the DPDCH. The symbol rate depends on the overall symbol rate set and cannot be modified.

Return values:

<SRate> D15K | D30K | D60K | D120k | D240k | D480k | D960k

Example:

BB:W3GP:MST4:CHAN2:DPDC:SRAT?
 queries the symbol rate of DPDCH 2 of user equipment 4.
 Response: 960
 the symbol rate is 960 ksps.

Note:

DPDCH 2 is only active once the overall symbol rate is 2 x 960 ksps or more. When overall symbol rates are less, the error message "???" is returned.

Usage: Query only

Manual operation: See ["Symbol Rate / State"](#) on page 184

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPDCh:FCIO <Fcio>

The command sets the channelization code to I/O. This mode can only be activated if the overall symbol rate is < 2 x 960 kbps.

Parameters:

<Fcio> ON | OFF
 *RST: OFF

Example:

BB:W3GP:MST1:DPDC:FCIO ON
 sets the channelization code to I/O.

Manual operation: See ["Force Channelization Code To I/O"](#) on page 183

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPDCh:ORATe <ORate>

The command sets the overall symbol rate. The overall symbol rate determines the number of DPDCHs as well as their symbol rate and channelization codes.

Parameters:

<ORate> D15K | D30K | D60K | D120k | D240k | D480k | D960k |
D1920k | D2880k | D3840k | D4800k | D5760k

D15K ... D5760K

15 ksps ... 6 x 960 ksps

*RST: D60K

Example:

BB:W3GP:MST1:DPDC:ORAT D15K

sets the overall symbol rate to 15 ksps. Only DPDCH1 is active, the symbol rate is 15 ksps and the channelization code is 64.

Manual operation: See ["Overall Symbol Rate"](#) on page 183

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPDCh:POWER <Power>

Sets the channel power of the DPDCHs. The power entered is relative to the powers of the other channels. If "Adjust Total Power to 0 dB" is executed ([\[:SOURce<hw>\]:BB:W3GPp:POWER:ADJust](#)), the power is normalized to a total power for all channels of 0 dB. The power ratios of the individual channels remains unchanged.

Note: The uplink channels are not blanked in this mode (duty cycle 100%).

Parameters:

<Power> float
Range: -80 to 0
Increment: 0.01
*RST: 0

Example:

BB:W3GP:MST4:DPDC:POW -60dB

Sets the channel power for DPDCH 2 of user equipment 4 to -60 dB. The channel power relates to the power of the other channels.

BB:W3GP:POW:ADJ

The channel power relates to 0 dB.

Manual operation: See ["Channel Power"](#) on page 182

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:DPDCh:STATE <State>

The command activates or deactivates DPDCHs. This always activates or deactivates all the channels. The number of channels (1...6) is determined by the overall symbol rate.

Parameters:

<State> ON | OFF
*RST: OFF

Example: BB:W3GP:MST1:DPDC:STAT ON
activates all the DPDCHs.

Manual operation: See "State (DPDCH)" on page 182

8.9.6 PCPCH Settings

[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:CPOWER.....	479
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:CPSFormat.....	480
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:DATA.....	480
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:DATA:DSElect.....	481
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:DATA:PATtern.....	481
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:DPOWER.....	481
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:FBI:MODE.....	482
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:FBI:PATtern.....	482
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:MLENgt.....	482
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:PLENgt.....	483
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:PPOWER.....	483
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:PPOWER:STEP.....	483
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:PREPetition.....	484
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:RAFter.....	484
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:RARb.....	484
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:SIGNature.....	485
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:SRATe.....	485
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:TFCI.....	486
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:TIMing:DPOWER:MPARt?.....	486
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:TIMing:DPOWER:PREamble?.....	486
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:TIMing:SOFFset.....	487
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:TIMing:SPERiod?.....	487
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:TIMing:TIME:PREMp.....	487
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:TIMing:TIME:PREPre.....	488
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:TPC:DATA.....	488
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:TPC:DATA:DSElect.....	488
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:TPC:DATA:PATtern.....	489
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:TPC:READ.....	489

[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:CPOWER <CPower>

Sets the power of the control component of the PCPCH.

Parameters:

<CPower>	float
Range:	-80 to 0
Increment:	0.01
*RST:	0

Example: BB:W3GP:MST1:PCPC:CPOW -10 dB
Sets the power to -10 dB.

Manual operation: See "Control Power" on page 255

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:CPSFormat <CpSFormat>

The command defines the slot format of the control component of the PCPCH.

The slot format sets the associated FBI mode automatically:

- Slot format 0 = FBI OFF
- Slot format 1 = FBI 1 bit
- Slot format 2 = FBI 2 bits

Parameters:

<CpSFormat> integer
 Range: 0 to 2
 *RST: 0

Example: BB:W3GP:MST1:PCPC:CPSF 2
 sets slot format 2.

Manual operation: See " [Slot Format](#) " on page 256

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:DATA <Data>

The command determines the data source for the PCPCH.

Parameters:

<Data> ZERO | ONE | PATtern | PN9 | PN11 | PN15 | PN16 | PN20 |
 PN21 | PN23 | DLISt

PNxx

The pseudo-random sequence generator is used as the data source. Different random sequence lengths can be selected.

DLISt

A data list is used. The data list is selected with the command

SOURce:BB:W3GPp:MST:PCPCh:DATA:DSElect [:
[SOURce<hw>\]:BB:W3GPp:MSTation<st>:PCPCh:DATA:](#)
[DSElect.](#)

ZERO | ONE

Internal 0 and 1 data is used.

PATtern

Internal data is used. The bit pattern for the data is defined by the command [:[SOURce<hw>\]:BB:W3GPp:MSTation<st>:PCPCh:DATA:PATtern.](#)

*RST: PN9

Example: BB:W3GP:MST1:PCPC:DATA PN11
 selects internal PRBS data with period length $2^{11}-1$ as the data source.

Manual operation: See " [Data Source](#) " on page 257

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:DATA:DSElect <DSelect>

The command selects the data list for the DLIS data source.

The files are stored with the fixed file extensions *.dm_iqd in a directory of the user's choice. The directory applicable to the commands is defined with the command `MMEMory:CDIR`. To access the files in this directory, you only have to give the file name, without the path and the file extension.

Parameters:

<DSelect> string

Example:

```
BB:W3GP:MST1:PCPC:DATA DLIS
selects data lists as the data source.
MMEM:CDIR '/var/user/temp/IQData'
selects the directory for the data lists.
BB:W3GP:MST1:PCPC:DATA:DSEL 'pcpch_data'
selects the data list pcpch_data.
```

Manual operation: See "[Data Source](#)" on page 257

**[:SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:DATA:PATtern <Pattern>,
<BitCount>**

The command determines the bit pattern for the data component when the PATTERN data source is selected. The first parameter determines the bit pattern (choice of hexadecimal, octal or binary notation), the second specifies the number of bits to use.

Parameters:

<Pattern> numeric
 *RST: #H0

<BitCount> integer
 Range: 1 to 64
 *RST: 1

Example:

```
BB:W3GP:MST:PCPC:DATA:PATT #H3F,8
defines the bit pattern of the data for the DATA component.
```

Manual operation: See "[Data Source](#)" on page 257

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:DPOWER <DPower>

Sets the power of the data component of the PCPCH.

Parameters:

<DPower> float
 Range: -80 to 0
 Increment: 0.01
 *RST: 0

Example:

```
BB:W3GP:MST1:PCPC:DPOW -10 dB
Sets the power to -10 dB.
```

Manual operation: See " [Data Power](#) " on page 255

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:FBI:MODE <Mode>

The command sets the number of bits (1 or 2) for the FBI field. With OFF, the field is not used.

The FBI pattern automatically sets the associated slot format:

- FBI OFF = Slot format 0
- FBI 1 bit = Slot format 1
- FBI 2 bits = Slot format 2

Parameters:

<Mode> OFF | D1B | D2B
 *RST: OFF

Example: BB:W3GP:MST2:PCPC:FBI:MODE OFF
 the FBI field is not used.

Manual operation: See " [FBI Mode](#) " on page 256

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:FBI:PATtern <Pattern>, <BitCount>

The command determines the bit pattern for the FBI field when the PATtern data source is selected. The maximum length of the pattern is 32 bits. The first parameter determines the bit pattern (choice of hexadecimal, octal or binary notation), the second specifies the number of bits to use.

Parameters:

<Pattern> numeric
 *RST: #H0

 integer
 Range: 1 to 32
 *RST: 1

Example: BB:W3GP:MST1:PCPC:FBI:PATT #H3F,8
 defines the bit pattern of the data for the FBI field.

Manual operation: See " [FBI Pattern](#) " on page 256

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:MLENgtH <MLength>

The command sets the length of the message component as a number of frames.

Parameters:

<MLength> 1 | 2 Frames
 Range: 1 to 2
 *RST: 1 Frame

Example: `BB:W3GP:MST4:PCPC:MLEN 2`
the length of the message component is 2 frames.

Manual operation: See " [Message Length](#) " on page 256

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:PLENgtH <PLength>

The command defines the length of the power control preamble of the PCPCH as a number of slots.

Parameters:

<PLength> S0 | S8
*RST: S8

Example: `BB:W3GP:MST1:PCPC:PLEN S8`
sets a length of 8 slots for the power control preamble.

Manual operation: See " [Power Control Preamble Length](#) " on page 255

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:PPOWer <PPower>

Sets the power of the preamble component of the PCPCH. If the preamble is repeated and the power increased with each repetition, this setting specifies the power achieved during the last repetition.

Parameters:

<PPower> float
Range: -80 to 0
Increment: 0.01
*RST: 0

Example: `BB:W3GP:MST1:PCPC:PPOW -10 dB`
Sets the power to -10 dB.
`BB:W3GP:MST1:PCPC:PPOW:STEP 1 dB`
Sets an increase in power of 1 dB per preamble repetition.
`BB:W3GP:MST1:PCPC:PREP 2`
Sets a sequence of 2 preambles. The power of the first preamble is -9 dB, the power of the second, -1 dB.

Manual operation: See " [Preamble Power](#) " on page 254

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:PPOWer:STEP <Step>

The command defines the step width of the power increase, by which the preamble component of the PCPCH is increased from repetition to repetition. The power during the last repetition corresponds to the power defined by the command [:

[SOURce<hw>\]:BB:W3GPp:MSTation<st>:PCPCh:PPOWer.](#)

Parameters:

<Step> float
 Range: 0 dB to 10 dB
 Increment: 0.1 dB
 *RST: 0 dB

Example:

BB:W3GP:MST1:PCPC:PPOW:STEP 2dB
 the power of the PCPCH preamble is increased by 2 dB with every repetition.

Manual operation: See " [Preamble Power Step](#) " on page 254

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:PREPetition <PRepetition>

The command defines the number of PCPCH preamble components.

Parameters:

<PRepetition> integer
 Range: 1 to 10
 *RST: 1

Example:

BB:W3GP:MST1:PCPC:PREP 3
 sets three preamble components.

Manual operation: See " [Preamble Repetition](#) " on page 254

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:RAFTer <Repeatafter>

Sets the number of access slots after that the PCPCH structure is repeated.

Parameters:

<Repeatafter> integer
 Range: 1 to 1000
 *RST: 18

Example:

See [:SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:
[RARb](#) on page 484

Manual operation: See " [Repeat Structure After \(x Acc. Slots\)](#) " on page 253

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:RARb <State>

Enables/disables repeating the selected PCPCH structure during one ARB sequence.

Parameters:

<State> 0 | 1 | OFF | ON
ON
 Within one ARB sequence, the selected PCPCH structure is repeated once.

OFF

The selected PCPCH structure can be repeated several time, depending on the structure length (`[ :SOURce<hw> ] :BB:W3GPp:MSTation<st>:PRCh:TIMing:SPERiod?`) and the `[ :SOURce<hw> ] :BB:W3GPp:MSTation<st>:PCPCh:RAFTer`.

*RST: 1

Example:

```
SOURce1:BB:W3GPp:SLENgth 4
SOURce1:BB:W3GPp:MSTation3:PCPCh:TIMing:
SPERiod?
Response: 14
SOURce1:BB:W3GPp:MSTation1:PCPCh:RARb OFF
SOURce1:BB:W3GPp:MSTation1:PCPCh:RAFTer 20
```

Manual operation: See "[Repeat Structure After ARB Sequence Length](#)" on page 253

[:SOURce<hw>] :BB:W3GPp:MSTation<st>:PCPCh:SIGNature <Signature>

The command selects the signature of the PCPCH (see Table 3 in 3GPP TS 25.213 Version 3.4.0 Release 1999).

Parameters:

<Signature> integer
Range: 0 to 15
*RST: 0

Example:

```
BB:W3GP:MST1:PCPC:SIGN 5
selects signature 5.
```

Manual operation: See "[Signature](#)" on page 255

[:SOURce<hw>] :BB:W3GPp:MSTation<st>:PCPCh:SRATe <SRate>

The command sets the symbol rate of the PCPCH.

User Equipment 1: When channel coding is active, the symbol rate is limited to the range between 15 and 120 ksp/s. Values above this limit are automatically set to 120 ksp/s.

Parameters:

<SRate> D15K | D30K | D60K | D120k | D240k | D480k | D960k
*RST: D30K

Example:

```
BB:W3GP:MST1:PCPC:SRAT D15K
sets the symbol rate of the PCPCH of user equipment 1 to 15
ksp/s.
```

Manual operation: See "[Symbol Rate](#)" on page 256

[[:SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:TFCI <Tfci>

Sets the value of the TFCI (Transport Format Combination Indicator) field. This value selects a combination of 30 bits, which are divided into two groups of 15 successive slots.

Parameters:

<Tfci> integer
 Range: 0 to 1023
 *RST: 0

Example: BB:W3GP:MST1:PCPC:TFCI 21
 sets the TFCI value to 21.

Manual operation: See " [TFCI](#) " on page 257

[[:SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:TIMing:DPOWER:MPARt?

Queries the level correction value for the message part. In case of one UE active, the power of the message part can be calculated by adding the set RF level.

Return values:

<MPart> float
 Range: -80 to 0
 Increment: 0.01
 *RST: 0

Example: BB:W3GP:MST3:PCPC:TIM:DPOW:MPAR?
 queries the level correction value for the message part.
 Response: 1.2
 the correction value is 1.2 dB.
 POW?
 queries the RF level.
 Response: 2
 the RF output level is 2 dBm. The message part power is 3.2 dBm

Usage: Query only

Manual operation: See " [Delta Power \(Message Part\)](#) " on page 251

[[:SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:TIMing:DPOWER:PREamble?

Queries level correction value for the last AICH preamble before the message part. This value is identical to the correction value for the CD preamble. The level of the other preambles can be calculated by subtracting the set Preamble Power Step.

Return values:

<PRreamble> float
 Range: -80 to 0
 Increment: 0.01
 *RST: 0

Example: BB:W3GP:MST3:PCPC:TIM:DPOW:PRE?
queries the level correction value for the last AICH preamble before the message part.

Usage: Query only

Manual operation: See " [Delta Power \(Preamble\)](#) " on page 251

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:TIMing:SOFFset <SOffset>

This command defines the start offset of the PCPCH in access slots. The starting time delay in timeslots is calculated according to: 2 x Start Offset.

Parameters:

<SOffset> integer
Range: 1 to 14
*RST: 0

Example: BB:W3GP:MST3:PCPC:TIM:SOFF 1
the start offset of the PCPCH of UE 3 is 2 access slots.

Manual operation: See " [Start Offset #](#) " on page 251

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:TIMing:SPERiod?

Queries the structure length.

Return values:

<SPeriod> float

Example: See [\[:SOURce<hw>\]:BB:W3GPp:MSTation<st>:PCPCh:RARB](#) on page 484

Usage: Query only

Manual operation: See " [Structure Length](#) " on page 252

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:TIMing:TIME:PREMp <Premp>

This command defines the AICH Transmission Timing. This parameter defines the time difference between the preamble and the message part. Two modes are defined in the standard. In mode 0, the preamble to message part difference is 3 access slots, in mode 1 it is 4 access slots.

Parameters:

<Premp> integer
Range: 1 to 14
*RST: 3

Example: BB:W3GP:MST3:PCPC:TIM:TIME:PREM 3
the difference between the preamble and the message part is 3 access slots.

Manual operation: See " [Transmission Timing \(Message Part\)](#) " on page 252

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:TIMing:TIME:PREPre <Prepre>

This command defines the time difference between two successive preambles in access slots.

Parameters:

<Prepre> integer
 Range: 1 to 14
 *RST: 3

Example: BB:W3GP:MST3:PCPC:TIM:TIME:PREP 3
 the time difference between two successive preambles is 3
 access slots.

Manual operation: See " [Transmission Timing \(Preamble\)](#) " on page 252

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:TPC:DATA <Data>

The command determines the data source for the TPC field of the PCPCH.

Parameters:

<Data> ZERO | ONE | PATtern | DLISt

DLISt

A data list is used. The data list is selected with the command
[\[:SOURce<hw>\]:BB:W3GPp:MSTation<st>:PCPCh:TPC:DATA:DSElect](#).

ZERO | ONE

Internal 0 and 1 data is used.

PATtern

Internal data is used. The bit pattern for the data is defined by the command [\[:SOURce<hw>\]:BB:W3GPp:MSTation<st>:PCPCh:TPC:DATA:PATtern](#). The maximum length is 64 bits.

*RST: PATtern

Example: BB:W3GP:MST2:PCPC:TPC:DATA PATT
 selects as the data source for the TPC field of user equipment 2
 the bit pattern defined with the following command.
 BB:W3GP:MST2:PCPC:TPC:DATA:PATT #H48D0,16
 defines the bit pattern.

Manual operation: See " [TPC Data Source](#) " on page 257

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:TPC:DATA:DSElect <DSelect>

The command selects the data list when the DLISt data source is selected for the TPC field of the PCPCH.

The files are stored with the fixed file extensions *.dm_iqd in a directory of the user's choice. The directory applicable to the commands is defined with the command `MMEMory:CDIR`. To access the files in this directory, you only have to give the file name, without the path and the file extension.

Parameters:**<DSelect>** string**Example:**

BB:W3GP:MST1:PCPC:TPC:DATA DLIS

selects data lists as the data source.

MMEM:CDIR '/var/user/temp/IQData'

selects the directory for the data lists.

BB:W3GP:MST1:PCPC:TPC:DATA:DSEL 'dpcch_tpc_1'

selects the data list dpcch_tpc1.

Manual operation: See " [TPC Data Source](#) " on page 257**[:SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:TPC:DATA:PATtern <Pattern>, <BitCount>**

The command determines the bit pattern for the PATtern data source selection. The maximum length of the bit pattern is 64 bits.

Parameters:**<Pattern>** numeric***RST:** #H0**<BitCount>** integer**Range:** 1 to 64***RST:** 1**Example:**

BB:W3GP:MST1:PCPC:DATA:PATT #H3F, 8

defines the bit pattern of the data for the FBI field.

Manual operation: See " [TPC Data Source](#) " on page 257**[:SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:TPC:READ <Read>**

The command sets the read out mode for the bit pattern of the TPC field of the PCPCH.

The bit pattern is selected with the command [\[:SOURce<hw>\]:BB:W3GPp:MSTation<st>:PCPCh:TPC:DATA](#).

Parameters:**<Read>** CONTinuous | S0A | S1A | S01A | S10A**CONTinuous**

The bit pattern is used cyclically.

S0A

The bit pattern is used once, then the TPC sequence continues with 0 bits.

S1A

The bit pattern is used once, then the TPC sequence continues with 1 bits.

S01A

The bit pattern is used once and then the TPC sequence is continued with 0 and 1 bits alternately (in multiples, depending on by the symbol rate, for example, 00001111).

S10A

The bit pattern is used once and then the TPC sequence is continued with 1 and 0 bits alternately (in multiples, depending on by the symbol rate, for example, 11110000).

*RST: CONTInuous

Example:

BB:W3GP:MST2:PCPC:TPC:READ CONT

the selected bit pattern is repeated continuously for the TPC sequence.

Manual operation: See " [Read Out Mode](#) " on page 258

8.9.7 PRACH Settings

[SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:ATTiming.....	490
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:CPOWer.....	491
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:DATA.....	491
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:DATA:DSElect.....	492
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:DATA:PATtern.....	492
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:DPOWer.....	492
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:MLENgtH.....	493
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:PPOWer.....	493
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:PPOWer:STEP.....	493
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:PREPetition.....	494
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:RAFter.....	494
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:RARb.....	494
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:SFOrmat.....	495
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:SIGNature.....	495
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:SRATe.....	495
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:TFCI.....	496
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:TIMing:DPOWer:MPARt?.....	496
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:TIMing:DPOWer:MPARt:CONTrol?.....	497
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:TIMing:DPOWer:MPARt:DATA?.....	497
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:TIMing:DPOWer:PREAmble?.....	497
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:TIMing:SOFFset.....	498
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:TIMing:SPERiod?.....	498
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:TIMing:TIME:PREMp.....	498
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:TIMing:TIME:PREPre.....	499

[SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:ATTiming <AtTiming>

This command defines which AICH Transmission Timing, time difference between the preamble and the message part or the time difference between two successive preambles in access slots, is defined.

Parameters:

<AtTiming> ATT0 | ATT1
 *RST: ATT0

Example:

BB:W3GP:MST3:PRAC:ATT ATT1
 Selects the AICH Transmission Timing as the difference between the preamble and the message part.

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:CPOWER <CPower>

The command defines the power of the control component of the PRACH.

Parameters:

<CPower> float
 Range: -80 dB to 0 dB
 Increment: 0.1 dB
 *RST: 0 dB

Example:

BB:W3GP:MST1:PRAC:CPOW -10 dB
 sets the power to -10 dB.

Manual operation: See " [Control Power](#) " on page 245

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:DATA <Data>

The command determines the data source for the PRACH.

Parameters:

<Data> ZERO | ONE | PATtern | PN9 | PN11 | PN15 | PN16 | PN20 |
 PN21 | PN23 | DLISt

PNxx

The pseudo-random sequence generator is used as the data source. Different random sequence lengths can be selected.

DLISt

A data list is used. The data list is selected with the command [\[:SOURce<hw>\]:BB:W3GPp:MSTation<st>:PRACH:DATA:DSElect](#).

ZERO | ONE

Internal 0 and 1 data is used.

PATtern

Internal data is used. The bit pattern for the data is defined by the command [\[:SOURce<hw>\]:BB:W3GPp:MSTation<st>:PRACH:DATA:PATtern](#).

*RST: PN9

Example:

BB:W3GP:MST1:PRAC:DATA PN11
 selects internal PRBS data with period length $2^{11}-1$ as the data source.

Manual operation: See " [Data Source](#) " on page 246

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:DATA:DSElect <DSelect>

The command selects the data list for the DLIS data source.

The files are stored with the fixed file extensions *.dm_iqd in a directory of the user's choice. The directory applicable to the commands is defined with the command `MMEMory:CDIR`. To access the files in this directory, you only have to give the file name, without the path and the file extension.

Parameters:

<DSelect> string

Example:

```
BB:W3GP:MST1:PRAC:DATA DLIS
selects data lists as the data source.
MMEM:CDIR '/var/user/temp/IQData'
selects the directory for the data lists.
BB:W3GP:MST1:PRAC:DATA:DSEL 'pcpch_data'
selects the data list pcpch_data.
```

Manual operation: See "[Data Source](#)" on page 246

**[:SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:DATA:PATtern <Pattern>,
<BitCount>**

The command determines the bit pattern for the data component when the PATTERN data source is selected. The first parameter determines the bit pattern (choice of hexadecimal, octal or binary notation), the second specifies the number of bits to use.

Parameters:

<Pattern> numeric
 *RST: #H0

<BitCount> integer
 Range: 1 to 64
 *RST: 1

Example:

```
BB:W3GP:MST1:PRAC:DATA:PATT #H3F,8
defines the bit pattern of the data for the DATA component.
```

Manual operation: See "[Data Source](#)" on page 246

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:DPOWER <DPower>

The command defines the power of the data component of the PRACH.

Parameters:

<DPower> float
 Range: -80 dB to 0 dB
 Increment: 0.1 dB
 *RST: 0 dB

Example:

```
BB:W3GP:MST1:PRAC:DPOW -10 dB
sets the power to -10 dB.
```


Manual operation: See " [Data Power](#) " on page 245

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:MLEN<g> <MLength>

The command sets the length of the message component as a number of frames.

Parameters:

<MLength> 1 | 2 Frames
 *RST: 1

Example: BB:W3GP:MST4:PRAC:MLEN 2
 the length of the message component is 2 frames.

Manual operation: See " [Message Length](#) " on page 245

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:PPower <PPower>

The command defines the power of the preamble component of the PRACH. If the preamble is repeated and the power increased with each repetition, this setting specifies the power achieved during the last repetition.

Parameters:

<PPower> float
 Range: -80 dB to 0 dB
 Increment: 0.1 dB
 *RST: 0 dB

Example: BB:W3GP:MST1:PRAC:PPOW -10 dB
 sets the power to -10 dB.
 BB:W3GP:MST1:PRAC:PPOW:STEP 1 dB
 sets an increase in power of 1 dB per preamble repetition.
 BB:W3GP:MST1:PRAC:PREP 2
 sets a sequence of 2 preambles. The power of the first preamble is - 9 dB, the power of the second, -1 dB.

Manual operation: See " [Preamble Power](#) " on page 243

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:PPower:STEP <Step>

The command defines the step width of the power increase, by which the preamble component of the PRACH is increased from repetition to repetition. The power defined during the last repetition corresponds to the power defined by the command [:
[SOURce<hw>\]:BB:W3GPp:MSTation<st>:PRACH:PPower](#).

Parameters:

<Step> float
 Range: 0 dB to 10 dB
 Increment: 0.1 dB
 *RST: 0 dB

Example: BB:W3GP:MST1:PRAC:PPOW:STEP 2 dB
the power of the PRACH preamble is increased by 2 dB with every repetition.

Manual operation: See " [Preamble Power Step](#) " on page 243

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:PREPetition <PRepetition>

The command defines the number of PRACH preamble components.

Parameters:

<PRepetition> integer
Range: 1 to 10
*RST: 1

Example: BB:W3GP:MST1:PRAC:PREP 3
sets three preamble components.

Manual operation: See " [Preamble Repetition](#) " on page 244

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:RAFTer <Repeatafter>

Sets the number of access slots after that the PRACH structure is repeated.

Parameters:

<Repeatafter> integer
Range: 1 to 1000
*RST: 11

Example: See [:SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:RARb on page 494

Manual operation: See "Repeat Structure After (x Acc. Slots)" on page 243

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:RARb <State>

Enables/disables repeating the selected PRACH structure during one ARB sequence.

Parameters:

<State> 0 | 1 | OFF | ON

ON

Within one ARB sequence, the selected PRACH structure is repeated once.

OFF

The selected PRACH structure can be repeated several time, depending on the structure length ([:SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:TIMing:SPERiod?) and the [:SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:RAFTer.

*RST: 1

Example: SOURce1:BB:W3GPp:SLENgth 4
 SOURce1:BB:W3GPp:MSTation3:PRACH:TIMing:
 SPERiod?
 Response: 14
 SOURce1:BB:W3GPp:MSTation1:PRACH:RARb OFF
 SOURce1:BB:W3GPp:MSTation1:PRACH:RAFTer 20

Manual operation: See "Repeat Structure After ARB Sequence Length" on page 242

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:SFORmat <SFormat>

Defines the slot format of the PRACH.

A change of slot format leads to an automatic change of symbol rate [:

SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:SRATe

When channel coding is active, the slot format is predetermined. So in this case, the command has no effect.

Parameters:

<SFormat> 0 | 1 | 2 | 3
 *RST: 1

Example: BB:W3GP:MST:PRAC:SFOR 2
 sets slot format 2.

Manual operation: See "Slot Format" on page 245

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:SIGNature <Signature>

The command selects the signature of the PRACH (see Table 3 in 3GPP TS 25.213 Version 3.4.0 Release 1999).

Parameters:

<Signature> integer
 Range: 0 to 15
 *RST: 0

Example: BB:W3GP:MST1:PRAC:SIGN 5
 selects signature 5.

Manual operation: See "Signature" on page 244

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:SRATe <SRate>

The command sets the symbol rate of the PRACH.

A change of symbol rate leads to an automatic change of slot format [:

SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:SFORmat.

Parameters:

<SRate> D15K | D30K | D60K | D120k
 *RST: D30K

Example:

BB:W3GP:MST1:PRAC:SRAT D15K
 sets the symbol rate of the PRACH of user equipment 1 to 15 kbps.

Manual operation: See " [Symbol Rate](#) " on page 245

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:TFCI <Tfci>

Sets the value of the TFCI (Transport Format Combination Indicator) field. This value selects a combination of 30 bits, which are divided into two groups of 15 successive slots.

Parameters:

<Tfci> integer
 Range: 0 to 1023
 *RST: 0

Example:

BB:W3GP:MST1:PRAC:TFCI 21
 sets the TFCI value to 21.

Manual operation: See " [TFCI](#) " on page 246

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:TIMing:DPOWer:MPARt?

Queries the level correction value for the message part. In case of one UE active and "Level Reference" set to "RMS Power", the power of the message part can be calculated by adding the set RF level.

Return values:

<MPart> float
 Range: -80 to 0
 Increment: 0.01
 *RST: 0

Example:

BB:W3GP:MST3:PRAC:TIM:DPOW:MPAR?
 queries the level correction value for the message part.
 Response: 1.2
 the correction value is 1.2 dB.
 POW?
 queries the RF level.
 Response: 2
 the RF output level is 2 dBm. The message part power is 3.2 dBm.

Usage: Query only

Manual operation: See " [Delta Power \(Message Part\)](#) " on page 240

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:TIMing:DPOWer:MPARt:CONTROL?

Queries the level correction value for the message control part.

Return values:

<Control> float
 Range: -80 to 0
 Increment: 0.01
 *RST: 0

Example: BB:W3GP:MST3:PRAC:TIM:DPOW:MPAR:CONT?
 queries the level correction value for the message control part.
 Response: -3.24
 the correction value is -3.24 dB.

Usage: Query only

Manual operation: See " [Delta Power \(Message Part\)](#) " on page 240

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:TIMing:DPOWer:MPARt:DATA?

Queries the level correction value for the message data part.

Return values:

<Data> float
 Range: -80 to 0
 Increment: 0.01
 *RST: 0

Example: BB:W3GP:MST3:PRAC:TIM:DPOW:MPAR:DATA?
 queries the level correction value for the message data part.
 Response: -3.24
 the correction value is -3.24 dB.

Usage: Query only

Manual operation: See " [Delta Power \(Message Part\)](#) " on page 240

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:TIMing:DPOWer:PREamble?

Queries level correction value for the preamble before the message part.

Return values:

<Preamble> float
 Range: -80 to 0
 Increment: 0.01
 *RST: 0

Example: BB:W3GP:MST3:PRAC:TIM:DPOW:PRE?
 queries the level correction value for the last preamble before the message part.

Usage: Query only

Manual operation: See " [Delta Power \(Preamble\)](#) " on page 240

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:TIMing:SOFFset <SOffset>

This command defines the start offset of the PRACH in access slots. The starting time delay in timeslots is calculated according to: 2 x Start Offset.

Parameters:

<SOffset> integer
 Range: 1 to 50
 *RST: 0

Example: BB:W3GP:MST3:PRAC:TIM:SOFF 1
 the start offset of the PRACH of UE 3 is 2 access slots.

Manual operation: See " [Start Offset #](#) " on page 241

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:TIMing:SPERiod?

Queries the structure length.

Return values:

<SPeriod> float

Example: see [:SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:
[RARB](#) on page 494

Usage: Query only

Manual operation: See " [Structure Length](#) " on page 241

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:TIMing:TIME:PREMp <Premp>

This command defines the AICH Transmission Timing. This parameter defines the time difference between the preamble and the message part. Two modes are defined in the standard. In mode 0, the preamble to message part difference is 3 access slots, in mode 1 it is 4 access slots.

Parameters:

<Premp> integer
 Range: 1 to 14
 *RST: 3

Example: BB:W3GP:MST3:PRAC:TIM.TIME:PREM 3
 the difference between the preamble and the message part is 3 access slots.

Manual operation: See " [Time Pre->MP](#) " on page 241

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACh:TIMing:TIME:PREPre <Prepre>

This command defines the time difference between two successive preambles in access slots.

Parameters:

<Prepre> integer
 Range: 1 to 14
 *RST: 3

Example: BB:W3GP:MST3:PRAC:TIM.TIME:PREP 3
 the time difference between two successive preambles is 3
 access slots.

Manual operation: See " [Time Pre->Pre](#) " on page 241

8.9.8 HSUPA Settings

[:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:CHANnel<ch>:DPDCh:E:CCODE?.....500
 [:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:CHANnel<ch>:DPDCh:E:DATA.....501
 [:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:CHANnel<ch>:DPDCh:E:DATA:
 DSElect..... 501
 [:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:CHANnel<ch>:DPDCh:E:DATA:
 PATtern..... 502
 [:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:CHANnel<ch>:DPDCh:E:POWER..... 502
 [:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:CHANnel<ch>:DPDCh:E:SRATE?..... 502
 [:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:CHANnel..... 503
 [:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:CRATE?..... 503
 [:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:DATA..... 503
 [:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:DATA:DSElect..... 504
 [:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:DATA:PATtern..... 504
 [:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:DERRor:BIT:LAYer..... 505
 [:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:DERRor:BIT:RATE..... 505
 [:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:DERRor:BIT:STATE..... 505
 [:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:DERRor:BLOCK:RATE. 506
 [:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:DERRor:BLOCK:
 STATE..... 506
 [:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:DTX:PATtern..... 506
 [:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:DTX:STATE..... 507
 [:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:HARQ:SIMulation:
 CONNector..... 507
 [:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:HARQ:SIMulation:
 ADEFinition..... 507
 [:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:HARQ:SIMulation:
 DELay:AUSer..... 508
 [:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:HARQ:SIMulation:
 DELay:FEEDback?..... 508
 [:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:HARQ:SIMulation:
 MODE..... 508

[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:HARQ:SIMulation: MRETransmissions.....	509
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:HARQ:SIMulation: RVZero.....	509
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:HARQ:SIMulation[: STATE].....	509
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:HARQ[: SIMulation]:PATtern<ch>.....	510
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:HPOcesses?.....	510
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:MIBRate?.....	510
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:MODulation.....	511
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:ORATe.....	511
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:PAYBits?.....	511
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:STATe.....	512
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:TBS:INdex.....	512
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:TBS:TABLE.....	512
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:TTIBits?.....	513
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:TTIEdch.....	513
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:UECategory?.....	514
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:CCODE?.....	514
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:HBIT.....	514
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:POWEr.....	514
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:RSNumber.....	515
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:STATe.....	515
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:TFCI.....	515
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPDCh:E:FCIO.....	516
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPDCh:E:MODulation.....	516
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPDCh:E:ORATe.....	516
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPDCh:E:STATe.....	517
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPDCh:E:TTIEdch.....	517
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:EDCH:TTIEdch.....	517
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:EDCH:REPeat.....	518
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:EDCH:ROW<ch0>:FROM.....	518
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:EDCH:ROW<ch0>:TO.....	518
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:EDCH:ROWCount.....	518

**[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:CHANnel<ch>:DPDCh:E:
CCODE?**

Queries the channelization code and the modulation branch (I or Q) of the E-DPDCH channel.

The channelization code is dependent on the overall symbol rate set and cannot be modified.

Return values:

<ChannelCode> integer

- Example:** BB:W3GP:MST4:HSUP:CHAN1:DPDC:E:CCOD?
queries the channelization code and the modulation branch (I or Q) of E-DPDCH 1 of user equipment 4.
Response: Q, 32
- Usage:** Query only
- Manual operation:** See " [Channelization Code](#) " on page 223

[:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:CHANnel<ch>:DPDCh:E:DATA <Data>

The command selects the data source for the E-DPDCH channel.

Parameters:

- <Data> ZERO | ONE | PATtern | PN9 | PN11 | PN15 | PN16 | PN20 | PN21 | PN23 | DLISt
- PNxx**
The pseudo-random sequence generator is used as the data source. Different random sequence lengths can be selected.
- DLISt**
A data list is used. The data list is selected with the command SOURce: [:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:CHANnel<ch>:DPDCh:E:DATA:DSElect.
- ZERO | ONE**
Internal 0 and 1 data is used.
- PATtern**
Internal data is used. The bit pattern for the data is defined by the command [:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:CHANnel<ch>:DPDCh:E:DATA:PATtern.
- *RST: PN9

- Example:** SOUR:BB:W3GP:MST1:HSUP:CHAN1:DPDC:E:DATA PN11
selects internal PRBS data with period length $2^{11}-1$ as the data source.

- Manual operation:** See " [E-DPDCH Data Source](#) " on page 224

[:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:CHANnel<ch>:DPDCh:E:DATA:DSElect <DSelect>

The command selects the data list for the DLISt data source.

The files are stored with the fixed file extensions *.dm_iqd in a directory of the user's choice. The directory applicable to the commands is defined with the command MMEMoRY:CDIR. To access the files in this directory, you only have to give the file name, without the path and the file extension.

Parameters:

- <DSelect> string

Example: SOUR:BB:W3GP:MST1:CHAN1:DPDC:E:DATA DLIS
 selects data lists as the data source.
 MMEM:CDIR '/var/user/temp/IQData'
 selects the directory for the data lists.
 BB:W3GP:MST1:CHAN1:DPDC:E:DATA:DSEL 'dp1'
 selects the data list dp1.

Manual operation: See ["DPDCH Data Source"](#) on page 185

[[:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:CHANnel<ch>:DPDCh:E:DATA:PATtern <Pattern>, <BitCount>

The command determines the bit pattern for the data component when the PATTERN data source is selected. The first parameter determines the bit pattern (choice of hexadecimal, octal or binary notation), the second specifies the number of bits to use.

Parameters:

<Pattern> numeric
 *RST: #H0
 <BitCount> integer
 Range: 1 to 64
 *RST: 1

Example: SOUR:BB:W3GP:MST1:HSUP:CHAN1:DPDC:E:PATT #H3F,8
 defines the bit pattern of the data for the DATA component.

Manual operation: See ["E-DPDCH Data Source"](#) on page 224

[[:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:CHANnel<ch>:DPDCh:E:POWER <Power>

The command sets the power of the selected E-DPDCH channel.

Parameters:

<Power> float
 Range: -80 dB to 0 dB
 Increment: 0.01
 *RST: 0 dB

Example: BB:W3GP:MST1:HSUP:CHAN1:DPDC:E:POW -2.5dB
 sets the power of E-DPDCH channel 1 to 2.5 dB.

Manual operation: See ["Channel Power / dB"](#) on page 224

[[:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:CHANnel<ch>:DPDCh:E:SRATe?

The command queries the symbol rate and the state of the E-DPDCH channel.

The symbol rate and the state of the channels are dependent on the overall symbol rate set and cannot be modified.

Return values:

<SRate> D15K | D30K | D60K | D120k | D240k | D480k | D960k |
D1920k | D2X1920K | D2X960K2X1920K

Example:

BB:W3GP:MST4:HSUP:CHAN1:DPDC:E:SRAT?
queries the symbol rate of E-DPDCH 1 of user equipment 4.
Response: 960
the symbol rate is 960 ksps.

Usage:

Query only

Manual operation: See " [Symbol Rate / State](#) " on page 223

**[:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:CHANnel
<Channel>**

The command sets the FRC according to TS 25.141 Annex A.10.

Selection of FRC#8 is enabled only for instruments equipped with option SMW-K83.

Parameters:

<Channel> USER | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8
*RST: 4

Example:

SOUR:BB:W3GP:MST1:HSUP:DPCC:E:FRC:CHAN 4
sets the FRC to channel 4.

Manual operation: See " [Fixed Reference Channel \(FRC\)](#) " on page 211

[:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:CRATe?

The command queries the relation between the information bits to binary channel bits.

Return values:

<CRate> float

Example:

SOUR1:BB:W3GP:MST1:HSUP:DPCC:E:FRC:CRAT?
queries the coding rate.
Response: 0.705
the coding rate is 0.705.

Usage:

Query only

Manual operation: See " [Coding Rate \(Ninf/Nbin\)](#) " on page 214

[:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:DATA <Data>

Selects the data source for the E-DCH channels, i.e. this parameter affects the corresponding parameter of the E-DPDCH.

Parameters:

<Data> PN9 | PN11 | PN15 | PN16 | PN20 | PN21 | PN23 | DLISt |
ZERO | ONE | PATtern

PNxx

The pseudo-random sequence generator is used as the data source. Different random sequence lengths can be selected.

DLISt

A data list is used. The data list is selected with the command `[ :SOURce<hw> ] :BB:W3GPp:MSTation<st> [ :HSUPa ] :DPCCCh:E:FRC:DATA:DSElect`.

ZERO | ONE

Internal 0 and 1 data is used.

PATtern

Internal data is used. The bit pattern for the data is defined by the command `[ :SOURce<hw> ] :BB:W3GPp:MSTation<st> [ :HSUPa ] :DPCCCh:E:FRC:DATA:PATtern`. The maximum length is 64 bits.

*RST: PN9

Example:

```
BB:W3GP:MST:HSUP:DPCC:E:FRC:DATA PATT
```

Selects as the data source

```
BB:W3GP:MST:HSUP:DPCC:E:FRC:DATA:PATT #H48D0,16
```

Defines the bit pattern.

Manual operation: See ["Data Source \(E-DCH\)"](#) on page 212

[:SOURce<hw>] :BB:W3GPp:MSTation<st> [:HSUPa] :DPCCCh:E:FRC:DATA: DSElect <DSelect>

The command selects the data list when the DLISt data source is selected for E-DCH channels.

The files are stored with the fixed file extensions `*.dm_iqd` in a directory of the user's choice. The directory applicable to the commands is defined with the command `MMEMory:CDIR`. To access the files in this directory, you only have to give the file name, without the path and the file extension.

Parameters:

<DSelect> string

Example:

```
BB:W3GP:MST:HSUP:DPCC:E:FRC:DATA DLIS
```

selects the Data Lists data source.

```
MMEM:CDIR '/var/user/temp/IQData'
```

selects the directory for the data lists.

```
BB:W3GP:MST:HSUP:DPCC:E:FRC:DATA:DSEL 'frc_1'
```

selects the data list `frc_1`.

Manual operation: See ["Data Source \(E-DCH\)"](#) on page 212

[:SOURce<hw>] :BB:W3GPp:MSTation<st> [:HSUPa] :DPCCCh:E:FRC:DATA: PATtern <Pattern>, <BitCount>

The command determines the bit pattern for the PATtern data source selection. The maximum length of the bit pattern is 64 bits.

Parameters:

<Pattern> numeric
 *RST: #H0

<BitCount> integer
 Range: 1 to 64
 *RST: 1

Example:

BB:W3GP:MST:HSUP:DPCC:E:FRC:DATA:PATT
 #B11110000,8
 defines the bit pattern of the data for the E-DCH channels.

Manual operation: See ["Data Source \(E-DCH\)"](#) on page 212

**[[:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:DERRor:BIT:
 LAYer <Layer>**

The command sets the layer in the coding process at which bit errors are inserted.

Parameters:

<Layer> TRANsport | PHYSical
 *RST: PHYSical

Example:

SOUR:BB:W3GP:MST1:HSUP:DPCC:E:FRC:DERR:BIT:LAY
 TRAN
 sets the bit error insertion to the transport layer.

Manual operation: See ["Insert Errors On"](#) on page 220

**[[:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:DERRor:BIT:
 RATE <Rate>**

Sets the bit error rate.

Parameters:

<Rate> float
 Range: 1E-7 to 0.5
 Increment: 1E-7
 *RST: 0.001

Example:

SOUR:BB:W3GP:MST1:HSUP:DPCC:E:FRC:DERR:BIT:RATE
 1e-3
 sets the bit error rate to 1E-3.

Manual operation: See ["Bit Error Rate"](#) on page 220

**[[:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:DERRor:BIT:
 STATE <State>**

The command activates or deactivates bit error generation.

Parameters:

<State> ON | OFF
 *RST: 0

Example:

SOUR:BB:W3GP:MST1:HSUP:DPCC:E:FRC:DERR:BIT:STAT
 ON
 activates the bit error state.

Manual operation: See ["Bit Error State"](#) on page 220

**[:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:DERRor:
 BLOCK:RATE <Rate>**

Sets the block error rate.

Parameters:

<Rate> float
 Range: 1E-4 to 0.5
 Increment: 1E-4
 *RST: 0.1

Example:

SOUR:BB:W3GP:MST1:HSUP:DPCC:E:FRC:DERR:BLOC:
 RATE 1E-3
 sets the block error rate.

Manual operation: See ["Block Error Rate"](#) on page 221

**[:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:DERRor:
 BLOCK:STATE <State>**

The command activates or deactivates block error generation.

Parameters:

<State> ON | OFF
 *RST: 0

Example:

SOUR:BB:W3GP:MST1:HSUP:DPCC:E:FRC:DERR:BLOC:
 STAT ON
 activates the block error generation.

Manual operation: See ["Block Error State"](#) on page 221

**[:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:DTX:PATtern
 <Pattern>**

The command sets the user-definable bit pattern for the DTX.

Parameters:

<Pattern> string
 *RST: "1"

Example: SOUR:BB:W3GP:MST1:HSUP:DPCC:E:FRC:DTX:PATT
"11-1-"
sets the bit pattern for the DTX.

Manual operation: See ["User Data \(DTX Pattern\)"](#) on page 215

**[:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:DTX:STATe
<State>**

The command activates or deactivates the DTX (Discontinuous Transmission) mode.

Parameters:

<State> ON | OFF
*RST: 0

Example: SOUR:BB:W3GP:MST1:HSUP:DPCC:E:FRC:DTX:STAT ON
activates the DTX.

Manual operation: See ["State \(DTX\)"](#) on page 215

**[:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:HARQ:
SIMulation:CONNector <Connector>**

Determines the input connector at that the instrument expects the feedback signal.

Parameters:

<Connector> LOCAL | GLOBAL
*RST: LOCAL

Example: External control signal at the local [TM3] connector of Baseband A.

```
SOURce1:INPut:TM3:DIRection INPut
SOURce1:INPut:TM3:SIGNAL FEEDback
SOURce1:BB:W3GPp:MSTation1[:HSUPa]:DPCCh:E:FRC:
HARQ:SIMulation:CONNector LOCAL
```

Example: External control signal at the global [USER6] connector.

```
SOURce:INPut:USER6:DIRection INPut
SOURce:INPut:USER6:SIGNAL FEEDback
SOURce1:BB:W3GPp:MSTation1[:HSUPa]:DPCCh:E:FRC:
HARQ:SIMulation:CONNector GLOBAL
```

Manual operation: See ["Connector \(HARQ\)"](#) on page 219

**[:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:HARQ:
SIMulation:ADEFinition <ADefinition>**

Selects whether a high level (TTL) is interpreted as an ACK or a low level.

Parameters:

<ADefinition> HIGH | LOW
*RST: HIGH

Example: SOUR1:BB:W3GP:MST1:HSUP:DPCC:E:FRC:HARQ:SIM:
ADEF HIGH
a high level (TTL) is interpreted as an ACK.

Manual operation: See ["ACK Definition \(HARQ\)"](#) on page 219

**[:SOURce<hw>]:BB:W3GP:MSTation<st>[:HSUPa]:DPCCh:E:FRC:HARQ:
SIMulation:DElay:AUSer <AUser>**

Selects an additional delay to adjust the delay between the HARQ and the feedback.

Parameters:

<AUser> integer
Range: -50 to 60
*RST: 0

Example: SOUR1:BB:W3GP:MST1:HSUP:DPCC:E:FRC:HARQ:SIM:
DEL:AUS 20
sets the additional user delay to 20.

Manual operation: See ["Additional User Delay"](#) on page 219

**[:SOURce<hw>]:BB:W3GP:MSTation<st>[:HSUPa]:DPCCh:E:FRC:HARQ:
SIMulation:DElay:FEEDback?**

Queries the delay between the HARQ and the feedback.

Return values:

<Feedback> float
Range: 0 to 600
*RST: 378

Example: SOUR1:BB:W3GP:MST1:HSUP:DPCC:E:FRC:HARQ:SIM:
DEL:FEED?
queries the delay between HARQ and feedback.

Usage: Query only

Manual operation: See ["Delay Between HARQ And Feedback \(HARQ\)"](#) on page 219

**[:SOURce<hw>]:BB:W3GP:MSTation<st>[:HSUPa]:DPCCh:E:FRC:HARQ:
SIMulation:MODE <Mode>**

Selects the HARQ simulation mode.

Parameters:

<Mode> VHARq | HFEedback
VHARq
Simulates basestation feedback.

HFEedback

Allows to control the transmission of the HSUPA fixed reference channels dynamically.

*RST: HFE

Example:

SOUR1:BB:W3GP:MST1:HSUP:DPCC:E:FRC:HARQ:SIM:
MODE VHAR
Sets simulation mode virtual HARQ.

Options:

HFEedback requires R&S SMW-B10

Manual operation: See ["Mode \(HARQ\)"](#) on page 217

**[[:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCC:h:E:FRC:HARQ:
SIMulation:MRETransmissions <MRetransmission>**

Sets the maximum number of retransmissions. After the expiration of this value, the next packet is send, regardless of the received feedback.

Parameters:

<MRetransmission> integer

Range: 0 to 20

*RST: 4

Example:

SOUR1:BB:W3GP:MST1:HSUP:DPCC:E:FRC:HARQ:SIM:
MRET 10
sets the maximum number of retransmissions to 10.

Manual operation: See ["Maximum Number Of Retransmissions \(HARQ\)"](#) on page 219

**[[:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCC:h:E:FRC:HARQ:
SIMulation:RVZero <RvZero>**

If activated, the same redundancy version is sent, that is, the redundancy version is not adjusted for the next retransmission in case of a received NACK.

Parameters:

<RvZero> ON | OFF

*RST: 1

Example:

SOUR1:BB:W3GP:MST1:HSUP:DPCC:E:FRC:HARQ:SIM:RVZ
ON
the same redundancy version is sent for the next retransmission.

Manual operation: See ["Always Use Redundancy Version 0 \(HARQ\)"](#) on page 218

**[[:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCC:h:E:FRC:HARQ:
SIMulation[:STATE] <State>**

Activates or deactivates the HARQ simulation mode.

Parameters:

<State> ON | OFF
 *RST: 0

Example:

SOUR1:BB:W3GP:MST1:HSUP:DPCC:E:FRC:HARQ:SIM:
 STAT ON
 activates the HARQ simulation mode.

Manual operation: See ["State \(HARQ\)"](#) on page 217

**[:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCC:h:E:FRC:HARQ[:
 SIMulation]:PATTern<ch> <Pattern>**

Sets the HARQ Pattern. The maximum length of the pattern is 32 bits.

Parameters:

<Pattern> string

Example:

SOUR1:BB:W3GP:MST1:HSUP:DPCC:E:FRC:HARQ:SIM:
 HARQ:PATT 1010
 sets the HARQ simulation pattern.

Manual operation: See ["HARQ1..8: ACK/NACK"](#) on page 218

**[:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCC:h:E:FRC:
 HPROcesses?**

The command queries the number of HARQ (Hybrid-ARQ Acknowledgement) process.

Return values:

<HProcesses> integer
 Range: 1 to 8

Example:

SOUR:BB:W3GP:MST1:HSUP:DPCC:E:FRC:HPRO?
 queries the number of HARQ processes.
 Response: 5

Usage: Query only

Manual operation: See ["Number Of HARQ Processes"](#) on page 213

[:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCC:h:E:FRC:MIBRate?

Queries the maximum information bit rate.

Return values:

<MiBRate> float
 Increment: 0.1

Example:

SOUR:BB:W3GP:MST1:HSUP:DPCC:E:FRC:HPRO?
 Queries the maximum information bit rate.
 Response: 1353.0

Usage: Query only

Manual operation: See ["Maximum Information Bitrate/kbps"](#) on page 211

[:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCCh:E:FRC:MODulation<Modulation>

Sets the modulation used for the selected FRC.

Two modulation schemes are defined: BPSK for FRC 1 - 7 and 4PAM (4 Pulse-Amplitude Modulation) for FRC 8.

Parameters:

<Modulation> BPSK | PAM4
 *RST: BPSK

Example:

BB:W3GP:MST1:HSUP:DPCC:E:FRC:CHAN 8
 sets the FRC to channel 8.
 BB:W3GP:MST1:HSUP:DPCC:E:FRC:MOD 4PAM
 sets the modulation.

Manual operation: See ["Modulation"](#) on page 212

[:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCCh:E:FRC:ORATe<ORate>

Sets the overall symbol rate for the E-DCH channels, i.e. this parameter affects the corresponding parameter of the E-DPDCH.

Parameters:

<ORate> D15K | D30K | D60K | D120k | D240k | D480k | D960k |
 D1920k | D2X1920K | D2X960K2X1920K
 *RST: D960k

Example:

BB:W3GP:MST1:HSUP:DPCC:E:FRC:ORAT D2X1920K

Manual operation: See ["Overall Symbol Rate"](#) on page 212

[:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCCh:E:FRC:PAYBits?

The command queries the payload of the information bit. This value determines the number of transport layer bits sent in each HARQ process.

Return values:

<PayBits> integer

Example:

SOUR:BB:W3GP:MST1:HSUP:DPCC:E:FRC:PAYB?
 Queries the payload of the information bit.
 Response: 2706

Usage: Query only

Manual operation: See ["Information Bit Payload \(Ninf\)"](#) on page 214

[:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:STATe<State>

The command activates or deactivates the FRC state for the E-DPCCH channels.

Parameters:

<State> ON | OFF
 *RST: 0

Example: SOUR:BB:W3GP:MST1:HSUP:DPCC:E:FRC:STAT ON
 activates the FRC state for the E-DPCCH channels.

Manual operation: See "State (HSUPA FRC)" on page 210

[:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:TBS:INDeX<Index>

Selects the Transport Block Size Index (E-TFCI) for the corresponding table, as described in 3GPP TS 25.321, Annex B.

The value range of this parameter depends on the selected Transport Block Size Table ([:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:TBS:TABLE).

Parameters:

<Index> integer
 Range: 0 to max
 *RST: 41

Example: BB:W3GP:MST:HSUP:DPCC:E:FRC:TBS:TABLE TAB0TTI10
 sets the transport block size table
 BB:W3GP:MST:HSUP:DPCC:E:FRC:TBS:INX 127
 sets the transport block size index.

Manual operation: See "Transport Block Size Index (E-TFCI)" on page 214

[:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:TBS:TABLE<Table>

Selects the Transport Block Size Table from 3GPP TS 25.321, Annex B according to that the transport block size is configured.

The transport block size is determined also by the Transport Block Size Index ([:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:TBS:INDeX).

The allowed values for this command depend on the selected E-DCH TTI ([:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:TTIEdch) and modulation scheme ([:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:MODulation).

E-DCH TTI	Modulation	Transport Block Size Table	SCPI Parameter	Transport Block Size Index (E-TFCI)
2ms	BPSK	Table 0	TAB0TTI2	0 .. 127
		Table 1	TAB1TTI2	0 .. 125
	4PAM	Table 2	TAB2TTI2	0 .. 127
		Table 3	TAB3TTI2	0 .. 124
10ms	-	Table 0	TAB0TTI10	0 .. 127
		Table 1	TAB1TTI10	0 .. 120

Parameters:

<Table>

TAB0TTI2 | TAB1TTI2 | TAB2TTI2 | TAB3TTI2 | TAB0TTI10 | TAB1TTI10

*RST: TAB0TTI10

Example:

BB:W3GP:MST:HSUP:DPCC:E:FRC:ORAT D1920

sets the overall symbol rate

BB:W3GP:MST:HSUP:DPCC:E:FRC:MOD BPSK

sets the modulation

BB:W3GP:MST:HSUP:DPCC:E:FRC:TTIE 2

sets the E-DCH TTI

BB:W3GP:MST:HSUP:DPCC:E:FRC:TBS:TABL TAB0TTI2

sets the transport block size table

BB:W3GP:MST:HSUP:DPCC:E:FRC:TBS:IND 25

sets the transport block size index

Manual operation: See ["Transport Block Size Table"](#) on page 213**[[:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCC:h:E:FRC:TTIBits?**

The command queries the number of physical bits sent in each HARQ process.

Return values:

<TtiBits>

float

Example:

BB:W3GP:MST1:HSUP:DPCC:E:FRC:TTIB?

queries the number of physical bits sent in each HARQ process.

Usage:

Query only

**[[:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCC:h:E:FRC:TTIEdch
<Ttiedch>**

Sets the TTI size (Transmission Time Interval).

Parameters:

<Ttiedch>

2ms | 10ms

*RST: 2ms

Example: `BB:W3GP:MST1:HSUP:DPCC:E:FRC:TtIE 2ms`
sets the TTI.

Manual operation: See "[E-DCH TTI](#)" on page 213

[:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:UECategory?

Queries the UE category that is minimum required for the selected FRC.

Return values:

<UeCategory> integer

Example: `BB:W3GP:MST1:HSUP:DPCC:E:FRC:UEC?`
queries the UE category.

Usage: Query only

Manual operation: See "[UE Category](#)" on page 211

[:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:CCODE?

Queries the channelization code.

Return values:

<CCode> integer

Range: 1 to max

*RST: 1

Usage: Query only

Manual operation: See "[Channelization Code](#)" on page 208

[:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:HBIT <Hbit>

The command activates the happy bit.

Parameters:

<Hbit> ON | OFF

*RST: ON

Example: `BB:W3GP:MST1:HSUP:DPCC:E:HBIT ON`
sets the happy bit.

Manual operation: See "[Happy Bit](#)" on page 209

[:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:POWer <Power>

The command sets the power of the E-DPCCH channel.

Parameters:

<Power> float
 Range: -80 dB to 0 dB
 Increment: 0.01
 *RST: 0 dB

Example:

BB:W3GP:MST1:HSUP:DPCC:E:POW -2.5dB
 sets the power of the E-DPCCH channel.

Manual operation: See " [Power](#) " on page 208

[:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCC:h:E:RSNumber
 <RsNumber>

The command sets the retransmission sequence number.

Parameters:

<RsNumber> integer
 Range: 0 to 3
 *RST: 0

Example:

BB:W3GP:MST1:HSUP:DPCC:E:RSN 0
 sets the retransmission sequence number.

Manual operation: See " [Retransmission Sequence Number](#) " on page 208

[:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCC:h:E:STATe <State>

The command activates/deactivates the E-DPCCH.

Parameters:

<State> ON | OFF
 *RST: OFF

Example:

BB:W3GP:MST1:HSUP:DPCC:E:STAT ON
 activates the E-DPCCH.

Manual operation: See " [State \(E-DPCCH\)](#) " on page 208

[:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCC:h:E:TFCI <Tfci>

The command sets the value for the TFCI (Transport Format Combination Indicator) field.

Parameters:

<Tfci> integer
 Range: 0 to 127
 *RST: 0

Example:

BB:W3GP:MST1:HSUP:DPCC:E:TFCI 0
 sets the value for the TFCI.

Manual operation: See " [E-TFCI Information](#) " on page 209

[:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPDCh:E:FCIO <Fcio>

The command sets the channelization code to I/Q.

Parameters:

<Fcio> ON | OFF
 *RST: OFF

Example: BB:W3GP:MST1:HSUP:DPDC:E:FCIO ON
 sets the channelization code to I/Q.

Manual operation: See " [Force Channelization Code To I/Q](#) " on page 222

**[:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPDCh:E:MODulation
 <Modulation>**

Sets the modulation of the E-DPDCH.

There are two possible modulation schemes specified for this channel, BPSK and 4PAM (4 Pulse-Amplitude Modulation). The latter one is available only for the following Overall Symbol Rates ([:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPDCh:E:ORATe):

- 2x960 ksps
- 2x1920 ksps
- 2x960 + 2x1920 ksps
- 2x960 ksps, I or Q only
- 2x1920 ksps, I or Q only
- 2x960 + 2x1920 ksps, I or Q only

Parameters:

<Modulation> BPSK | PAM4
 *RST: BPSK

Example: BB:W3GP:MST1:HSUP:DPDC:E:ORAT D2x960K2x1920K
 sets the overall symbol rate
 BB:W3GP:MST1:HSUP:DPDC:E:MOD 4PAM
 sets the modulation to 4PAM

Options: Modulation scheme 4PAM requires the HSPA+ option R&S SMW-K83.

Manual operation: See " [Modulation](#) " on page 222

[:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPDCh:E:ORATe <ORate>

Sets the overall symbol rate of all the E-DPDCH channels.

Parameters:

<ORate> D15K | D30K | D60K | D120k | D240k | D480k | D960k |
 D1920k | D2X1920K | D2X960K2X1920K | D2880k | D3840k |
 D4800k | D5760k
 *RST: D60K

Example:

BB:W3GP:MST1:HSUP:DPDC:E:ORAT D60K

Manual operation: See "Overall Symbol Rate" on page 222

[:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPDCh:E:STATe <State>

The command activates or deactivates the E-DPDCHs. This always activates or deactivates all the channels.

Parameters:

<State> ON | OFF
 *RST: 0

Example:

BB:W3GP:MST1:HSUP:DPDC:E:STAT ON
 activates all the E-DPDCHs.

Manual operation: See "State (E-DPDCH)" on page 222

[:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPDCh:E:TTIEdch <Ttiedch>

The command sets the value for the TTI (Transmission Time Interval).

Parameters:

<Ttiedch> 2ms | 10ms
 *RST: 2ms

Example:

BB:W3GP:MST1:HSUP:DPDC:E:TTIE 2ms
 sets the value for the TTI to 2 ms.

Manual operation: See "E-DCH TTI" on page 227

[:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:EDCH:TTIEdch <Ttiedch>

Sets the value for the TTI size (Transmission Time Interval).

This command is a query only, if an UL-DTX is enabled ([:SOURce<hw>]:BB:W3GPp:MSTation:UDTX:STATe ON) or an FRC is activated ([:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:STATe ON).

Parameters:

<Ttiedch> 2ms | 10ms
 *RST: 2ms

Example: BB:W3GP:MST[:HSUPa]:EDCH:TTIE 10ms
 BB:W3GP:MST:UDTX:TTIE 2ms
 BB:W3GP:MST:UDTX:STAT ON
 BB:W3GP:MST[:HSUPa]:EDCH:TTIE?
 Response: 2ms

Manual operation: See ["E-DCH TTI"](#) on page 227

[:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:EDCH:REPeat <Repeat>

Determine the number of TTIs after that the E-DCH scheduling is repeated.

Parameters:

<Repeat> integer
 Range: 1 to dynamic
 *RST: 1

Example: [:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:
 EDCH:ROWCount on page 518

Manual operation: See ["E-DCH Schedule Repeats After"](#) on page 227

**[:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:EDCH:ROW<ch0>:FROM
 <TtiFrom>**

[:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:EDCH:ROW<ch0>:TO <TtiTo>

Determines the start/end TTI of the corresponding E-DCH burst.

Parameters:

<TtiTo> integer
 Range: 0 to dynamic
 *RST: row index

Example: [:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:
 EDCH:ROWCount on page 518

Manual operation: See ["E-DCH TTI To"](#) on page 228

**[:SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:EDCH:ROWCount
 <RowCount>**

Sets the number of the rows in the scheduling table.

Parameters:

<RowCount> integer
 Range: 1 to 32
 *RST: 1

Example:**E-DCH scheduling example**

```

BB:W3GP:MST[:HSUPa]:EDCH:TTIE 2ms
BB:W3GP:MST[:HSUPa]:EDCH:ROWC 2
BB:W3GP:MST[:HSUPa]:EDCH:REP 1000
BB:W3GP:MST[:HSUPa]:EDCH:ROW0:FROM 3
BB:W3GP:MST[:HSUPa]:EDCH:ROW0:TO 6
BB:W3GP:MST[:HSUPa]:EDCH:ROW1:FROM 128
BB:W3GP:MST[:HSUPa]:EDCH:ROW0:TO 156

```

Manual operation: See ["Number of Table Rows"](#) on page 227

8.9.9 UL-DTX and Uplink Scheduling Settings

The following are simple programming examples with the purpose to show **all** commands for this task. In real application, some of the commands can be omitted.

Example: Configuring the UL-DTX settings

```

*****
SOURCE:BB:W3GPp:LINK UP
SOURCE:BB:W3GPp:MSTation:UDTX:MODE UDTX
SOURCE:BB:W3GPp:MSTation:UDTX:TTIEdch 2
SOURCE:BB:W3GPp:MSTation:UDTX:OFFSet 2
SOURCE:BB:W3GPp:MSTation:UDTX:ITHReshold 8
SOURCE:BB:W3GPp:MSTation:UDTX:LPLength 4
SOURCE:BB:W3GPp:MSTation:UDTX:CYCLE1 4
SOURCE:BB:W3GPp:MSTation:UDTX:CYCLE2 8
SOURCE:BB:W3GPp:MSTation:UDTX:BURSt1 1
SOURCE:BB:W3GPp:MSTation:UDTX:BURSt2 1
// SOURCE:BB:W3GPp:MSTation:UDTX:PREamble2?
// SOURCE:BB:W3GPp:MSTation:UDTX:POSTamble1?
SOURCE:BB:W3GPp:MSTation:UDTX:STATE ON

```

Example: Enabling User Scheduling

(R&S SMW-B10 required; not supported in Baseband C/D)

```

*****
SOURCE:BB:W3GPp:LINK UP
SOURCE:BB:W3GPp:MSTation:UDTX:MODE USCH
SOURCE:BB:W3GPp:MSTation:UDTX:USCH:CATalog?
// queries the files with user scheduling settings *.3g_sch
// in the default directory
// "example", "ul_sch_dpc", "up_sch_loop"
SOURCE:BB:W3GPp:MSTation:UDTX:USCH:FSElect "up_sch_loop"
SOURCE:BB:W3GPp:MSTation:UDTX:USCH:DElete "example"
SOURCE:BB:W3GPp:MSTation:UDTX:STATE ON

```

```

[:SOURCE<hw>]:BB:W3GPp:MSTation:UDTX:MODE.....520
[:SOURCE<hw>]:BB:W3GPp:MSTation:UDTX:STATE.....520
[:SOURCE<hw>]:BB:W3GPp:MSTation:UDTX:TTIEdch.....520

```

[SOURce<hw>]:BB:W3GPp:MSTation:UDTX:OFFSet.....	521
[SOURce<hw>]:BB:W3GPp:MSTation:UDTX:ITHReshold.....	521
[SOURce<hw>]:BB:W3GPp:MSTation:UDTX:LPLength.....	521
[SOURce<hw>]:BB:W3GPp:MSTation:UDTX:CYCLe<ch>.....	522
[SOURce<hw>]:BB:W3GPp:MSTation:UDTX:BURSt<ch>.....	522
[SOURce<hw>]:BB:W3GPp:MSTation:UDTX:PREamble<ch>?.....	522
[SOURce<hw>]:BB:W3GPp:MSTation:UDTX:POSTamble<ch>?.....	523
[SOURce<hw>]:BB:W3GPp:MSTation:UDTX:USCH:CATalog?.....	523
[SOURce<hw>]:BB:W3GPp:MSTation:UDTX:USCH:DElete.....	523
[SOURce<hw>]:BB:W3GPp:MSTation:UDTX:USCH:FSElect.....	524

[SOURce<hw>]:BB:W3GPp:MSTation:UDTX:MODE <UldtxMode>

Switches between the UL-DTX or user scheduling function.

Parameters:

<UldtxMode> UDTX | USCH
 *RST: UDTX

Example: See ["Example: Enabling User Scheduling"](#) on page 519.

Example: See ["Example: Configuring the UL-DTX settings"](#) on page 519.

Options: R&S SMW-K83

Manual operation: See ["Mode"](#) on page 167

[SOURce<hw>]:BB:W3GPp:MSTation:UDTX:STATE <State>

Enables/disables UL-DTX or user scheduling, as selected with the command [:
[SOURce<hw>\]:BB:W3GPp:MSTation:UDTX:MODE](#).

Enabling the UL-DTX deactivates the DPDCH and the HSUPA FRC.

Enabled user scheduling deactivates the HSUPA FRC.

Parameters:

<State> 0 | 1 | OFF | ON
 *RST: 0

Example: See ["Example: Configuring the UL-DTX settings"](#) on page 519.

Options: R&S SMW-K83

Manual operation: See ["UL-DTX... / User Scheduling State"](#) on page 167

[SOURce<hw>]:BB:W3GPp:MSTation:UDTX:TTIEdch <EdchTti>

Sets the duration of a E-DCH TTI.

Parameters:

<EdchTti> 2ms | 10ms
 Range: 2ms to 10ms
 *RST: 2ms

Example: see ["Example: Configuring the UL-DTX settings"](#) on page 519

Options: R&S SMW-K83

Manual operation: See ["E-DCH TTI"](#) on page 167

[:SOURce<hw>]:BB:W3GPp:MSTation:UDTX:OFFSet <Offset>

Sets the parameter UE_DTX_DRX_Offset and determines the start offset in subframes of the first uplink DPCCH burst (after the preamble). The offset is applied only for bursts belonging to the DPCCH burst pattern; HS-DPCCH or E-DCH transmissions are not affected.

Parameters:

<Offset> integer
 Range: 0 to 159
 Increment: depends on E-DCH TTI parameter
 *RST: 0

Example: See ["Example: Configuring the UL-DTX settings"](#) on page 519

Options: R&S SMW-K83

Manual operation: See ["Offset"](#) on page 167

[:SOURce<hw>]:BB:W3GPp:MSTation:UDTX:ITHReshold <Threshold>

Defines the number of consecutive E-DCH TTIs without an E-DCH transmission, after which the UE shall immediately move from UE-DTX cycle 1 to using UE-DTX cycle 2.

Parameters:

<Threshold> 1 | 4 | 8 | 16 | 32 | 64 | 128 | 256
 *RST: 16

Example: see ["Example: Configuring the UL-DTX settings"](#) on page 519

Options: R&S SMW-K83

Manual operation: See ["Inactivity Threshold for Cycle 2"](#) on page 168

[:SOURce<hw>]:BB:W3GPp:MSTation:UDTX:LPLength <LongPreamble>

Determines the length in slots of the preamble associated with the UE-DTX cycle 2.

Parameters:

<LongPreamble> 2 | 4 | 15
 *RST: 2

Example: see ["Example: Configuring the UL-DTX settings"](#) on page 519

Options: R&S SMW-K83

Manual operation: See ["Long Preamble Length"](#) on page 168

[:SOURce<hw>]:BB:W3GPp:MSTation:UDTX:CYCLe<ch> <DtxCycle>

Sets the offset in subframe between two consecutive DPCCH bursts within the corresponding UE-DTX cycle, i.e. determines how often the DPCCH bursts are transmitted.

The UE-DTX cycle 2 is an integer multiple of the UE-DTX cycle 1, i.e. has less frequent DPCCH transmission instants.

Note: The allowed values depend on the selected E-DCH TTI.

Suffix:

<ch> 1|2
UL-DTX cycle 1 or 2

Parameters:

<DtxCycle> 1 | 4 | 5 | 8 | 10 | 16 | 20 | 32 | 40 | 64 | 80 | 128 | 160
*RST: 5

Example: see ["Example: Configuring the UL-DTX settings"](#) on page 519

Options: R&S SMW-K83

Manual operation: See ["DTX Cycle 1 / DTX Cycle 2"](#) on page 169

[:SOURce<hw>]:BB:W3GPp:MSTation:UDTX:BURSt<ch> <BurstLength>

Determines the uplink DPCCH burst length in subframes without the preamble and postamble, when the corresponding UE-DTX cycle is applied.

Suffix:

<ch> 1|2
UL-DTX cycle 1 or 2

Parameters:

<BurstLength> 1 | 2 | 5
*RST: 1

Example: See ["Example: Configuring the UL-DTX settings"](#) on page 519

Options: R&S SMW-K83

Manual operation: See ["DPCCH Burst Length 1 / DPCCH Burst Length 2"](#)
on page 169

[:SOURce<hw>]:BB:W3GPp:MSTation:UDTX:PREamble<ch>?

Queries the preamble length in slots, when the corresponding UE-DTX cycle is applied.

The preamble length is fixed to 2 slots.

Suffix:

<ch> 1|2
UL-DTX cycle 1 or 2

Return values:

<Preamble> integer
 Range: 2 to 2
 *RST: 2

Example: see ["Example: Configuring the UL-DTX settings"](#) on page 519

Usage: Query only

Options: R&S SMW-K83

Manual operation: See ["Preamble Length 1 / Preamble Length 2"](#) on page 169

[:SOURce<hw>]:BB:W3GPp:MSTation:UDTX:POSTamble<ch>?

Queries the postamble length in slots, when the corresponding UE-DTX cycle is applied.

The postamble length is fixed to 1 slot.

Suffix:

<ch> 1|2
 UL-DTX cycle 1 or 2

Return values:

<PostAmble> integer
 Range: 1 to 1

Example: see ["Example: Configuring the UL-DTX settings"](#) on page 519

Usage: Query only

Options: R&S SMW-K83

Manual operation: See ["Postamble Length 1 / Postamble Length 2"](#) on page 169

[:SOURce<hw>]:BB:W3GPp:MSTation:UDTX:USCH:CATalog?

Queries the files with uplink user scheduling settings (file extension *.3g_sch) in the default or the specified directory.

Return values:

<Catalog> string

Example: See ["Example: Enabling User Scheduling"](#) on page 519

Usage: Query only

Options: R&S SMW-K83

Manual operation: See ["User Scheduling File"](#) on page 167

[:SOURce<hw>]:BB:W3GPp:MSTation:UDTX:USCH:DELeTe <Filename>

Deletes the selected file from the default or specified directory. Deleted are files with the file extension *.3g_sch.

Setting parameters:

<Filename> string

Example: See ["Example: Enabling User Scheduling"](#) on page 519**Usage:** Setting only**Options:** R&S SMW-K83**Manual operation:** See ["User Scheduling File"](#) on page 167**[[:SOURce<hw>]:BB:W3GPp:MSTation:UDTX:USCH:FSElect <Filename>**

Loads the selected file from the default or the specified directory. Loads are files with extension *.3g_sch.

Parameters:

<Filename> string

Example: See ["Example: Enabling User Scheduling"](#) on page 519**Options:** R&S SMW-K83**Manual operation:** See ["User Scheduling File"](#) on page 167

8.9.10 Dynamic Power Control Settings

(R&S SMW-B10 required; not supported in Baseband C/D)

Example: Configuring the Dynamic Power Control Settings

The following is a simple programming example with the purpose to show **all** commands for this task. In real application, some of the commands can be omitted.

```
SOURce:BB:W3GPp:MSTation:ENHanced:DPDCh:DPControl:DIRection UP
// selects direction up, a high level of the control signals
// leads to an increase of the channel power
SOURce:BB:W3GPp:MSTation:ENHanced:DPDCh:DPControl:STEP 1 dB
// selects a step width of 1 dB.
// A high level of the control signal leads to
// an increase of 1 dB of the channel power,
// a low level to a decrease of 1 dB.
SOURce:BB:W3GPp:MSTation:ENHanced:DPDCh:DPControl:RANGe:DOWN 10 dB
// selects a dynamic range of 10 dB for ranging up the channel power
SOURce:BB:W3GPp:MSTation:ENHanced:DPDCh:DPControl:RANGe:UP 50 dB
// selects a dynamic range of 50 dB for ranging up the channel power
// The overall increase and decrease of channel power,
// i.e. the dynamic range is limited to 60 dB
SOURce:BB:W3GPp:MSTation:ENHanced:DPDCh:DPControl:MODE TPC
// selects the source of the power control signal
SOURce:BB:W3GPp:MSTation:ENHanced:DPDCh:DPControl:STATe ON
// activates Dynamic Power Control for the enhanced channels of UE1
SOURce:BB:W3GPp:MSTation:ENHanced:DPDCh:DPControl:POWer?
```



```
// queries the deviation of the channel power (delta POW)
// from the set power start value of the DPDCH
SOURCE:BB:W3GPp:MSTation:ENHanced:DPDCh:DPControl:AOUE ON
```

[SOURCE<hw>]:BB:W3GPp:MSTation[:ENHanced:DPDCh]:DPControl:ASSignment.....	525
[SOURCE<hw>]:BB:W3GPp:MSTation[:ENHanced:DPDCh]:DPControl:DIRection.....	525
[SOURCE<hw>]:BB:W3GPp:MSTation[:ENHanced:DPDCh]:DPControl:MODE.....	526
[SOURCE<hw>]:BB:W3GPp:MSTation[:ENHanced:DPDCh]:DPControl:CONNector.....	526
[SOURCE<hw>]:BB:W3GPp:MSTation[:ENHanced:DPDCh]:DPControl[:POWER]?.....	526
[SOURCE<hw>]:BB:W3GPp:MSTation[:ENHanced:DPDCh]:DPControl:RANGE:DOWN.....	527
[SOURCE<hw>]:BB:W3GPp:MSTation[:ENHanced:DPDCh]:DPControl:RANGE:UP.....	527
[SOURCE<hw>]:BB:W3GPp:MSTation[:ENHanced:DPDCh]:DPControl:STATe.....	527
[SOURCE<hw>]:BB:W3GPp:MSTation[:ENHanced:DPDCh]:DPControl:STEP:MANual.....	527
[SOURCE<hw>]:BB:W3GPp:MSTation[:ENHanced:DPDCh]:DPControl:STEP[:EXternal].....	528
[SOURCE<hw>]:BB:W3GPp:MSTation[:ENHanced:DPDCh]:DPControl:AOUE.....	528

[SOURCE<hw>]:BB:W3GPp:MSTation[:ENHanced:DPDCh]:DPControl: ASSignment <ASSignment>

Enabled for UL-DTX mode only ([:SOURCE<hw>]:BB:W3GPp:MSTation:UDTX:STATe ON).

The power control recognizes the UL-DPCCH gaps according to 3GPP TS 25.214. Some of the TPC commands sent to the instrument over the external line or by the TPC pattern are ignored, whereas others are summed up and applied later. The processing of the TPC commands depends only on whether the BS sends the TPC bits on the F-DPCH with slot format 0/ slot format 9 or not.

Parameters:

<ASSignment> NORMal | FDPCh
*RST: NORMal

Example:

```
BB:W3GP:MST1:UDTX:STAT ON
BB:W3GP:MST:DPC:ASS FDPCh
```

Manual operation: See "Assignment Mode for UL-DTX" on page 172

[SOURCE<hw>]:BB:W3GPp:MSTation[:ENHanced:DPDCh]:DPControl:DIRection <Direction>

The command selects the Dynamic Power Control direction. The selected direction determines if the channel power is increased (UP) or decreased (DOWN) by control signal with high level.

Parameters:

<Direction> UP | DOWN
*RST: UP

Example:

see [Example "Configuring the Dynamic Power Control Settings"](#) on page 524

Manual operation: See "Direction" on page 171

```
[ :SOURce<hw>]:BB:W3GPp:MSTation[:ENHanced:DPDCh]:DPControl:MODE
<Mode>
```

Determines the source of the control signal.

Parameters:

<Mode> TPC | MANual | EXTernal
 *RST: EXTernal

Example: See [Example "Configuring the Dynamic Power Control Settings"](#) on page 524.

Manual operation: See ["Mode"](#) on page 170

```
[ :SOURce<hw>]:BB:W3GPp:MSTation[:ENHanced:DPDCh]:DPControl:
CONNECTor <Connector>
```

Determines the input connector at that the instrument expects the external control signal.

Parameters:

<Connector> LOCal | GLOBal
 *RST: LOCal

Example: External control signal at the local [TM3] connector of Baseband A.

```
SOURce1:INPut:TM3:DIRection INPut
SOURce1:INPut:TM3:SIGNAL FEEDback
SOURce1:BB:W3GPp:MSTation[:ENHanced:DPDCh] :
DPControl:CONNECTor LOCal
```

Example: External control signal at the global [USER6] connector.

```
SOURce:INPut:USER6:DIRection INPut
SOURce:INPut:USER6:SIGNAL FEEDback
SOURce1:BB:W3GPp:MSTation[:ENHanced:DPDCh] :
DPControl:CONNECTor GLOBal
```

Manual operation: See ["Connector"](#) on page 171

```
[ :SOURce<hw>]:BB:W3GPp:MSTation[:ENHanced:DPDCh]:DPControl[:POWER]?
```

The command queries the deviation of the channel power (delta POW) from the set power start value of the DPDCH.

Return values:

<Power> float
 Range: -60 to 60
 Increment: 0.01
 *RST: 0

Example: see [Example "Configuring the Dynamic Power Control Settings"](#) on page 524

Usage: Query only

Manual operation: See ["Power Control Graph"](#) on page 172

[:SOURce<hw>]:BB:W3GPp:MSTation[:ENHanced:DPDCh]:DPControl:RANGE:DOWN <Down>

[:SOURce<hw>]:BB:W3GPp:MSTation[:ENHanced:DPDCh]:DPControl:RANGE:UP <Up>

The command selects the dynamic range for ranging up the channel power.

Parameters:

<Up> float
 Range: 0 to 60
 Increment: 0.01
 *RST: 10
 Default unit: dB

Example: BB:W3GP:MST:ENH:DPDC:DPC:RANG:UP 20dB
 selects a dynamic range of 20 dB for ranging up the channel power.

Manual operation: See ["Up Range / Down Range"](#) on page 171

[:SOURce<hw>]:BB:W3GPp:MSTation[:ENHanced:DPDCh]:DPControl:STATe <State>

Activates/deactivates Dynamic Power Control.

Parameters:

<State> 0 | 1 | OFF | ON
 *RST: 0

Example: See [Example "Configuring the Dynamic Power Control Settings"](#) on page 524.

Manual operation: See ["Dynamic Power Control State"](#) on page 170

[:SOURce<hw>]:BB:W3GPp:MSTation[:ENHanced:DPDCh]:DPControl:STEP:MANual <Manual>

Sets the control signal for manual mode of Dynamic Power Control.

Parameters:

<Manual> MAN0 | MAN1
 *RST: MAN0

Example: BB:W3GP:MST:ENH:DPDC:DPC:STAT ON
 BB:W3GP:MST:ENH:DPDC:DPC:MODE MAN
 BB:W3GP:MST:ENH:DPDC:DPC:STEP:MAN MAN0

Manual operation: See ["Mode"](#) on page 170

[:SOURce<hw>]:BB:W3GPp:MSTation[:ENHanced:DPDCh]:DPControl:STEP[:EXTernal] <External>

This command sets step width by which – with Dynamic Power Control being switched on - the channel power of the enhanced channels is increased or decreased.

Parameters:

<External> float
 Range: 0.5 to 6
 Increment: 0.01
 *RST: 1
 Default unit: dB

Example: see [Example "Configuring the Dynamic Power Control Settings"](#) on page 524

Manual operation: See ["Power Step"](#) on page 171

[:SOURce<hw>]:BB:W3GPp:MSTation[:ENHanced:DPDCh]:DPControl:AOUE <State>

Enables power control of the enhanced channels of all active UEs with the settings of UE1.

Parameters:

<State> 0 | 1 | OFF | ON
 *RST: 0

Example: see [Example "Configuring the Dynamic Power Control Settings"](#) on page 524

Manual operation: See ["Also Control Other UEs"](#) on page 174

8.10 Enhanced Channels of the User Equipment

The `SOURCE:BB:W3GPp:MSTation:ENHanced` subsystem contains the commands for setting the enhanced channels of user equipment 1 (UE1).

The commands of this system only take effect when the 3GPP FDD standard is activated, the uplink transmission direction is selected and user equipment 1 is enabled:

- `SOURCE:BB:W3GPp:STATE ON`
- `SOURCE:BB:W3GPp:LINK UP`
- `SOURCE:BB:W3GPp:MSTation1:STATE ON`

TCHannel<di>

The transport channel designations for remote control are `TCHannel0` for DCCH, `TCHannel1` to `TCHannel6` for DTCH1 to DTCH6.

[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:BPFRame?	529
[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:CCODing:STATe	530
[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:CCODing:TYPE	530
[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:CCODing:USER:CATalog?	531
[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:CCODing:USER:DELeTe	531
[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:CCODing:USER:LOAD	532
[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:CCODing:USER:STORe	532
[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:DERRor:BIT:LAYer	532
[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:DERRor:BIT:RATE	533
[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:DERRor:BIT:STATe	533
[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:DERRor:BLOCK:RATE	534
[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:DERRor[BLOCK]:STATe	534
[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:INTerleaver2	534
[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:ORATe	535
[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:STATe	535
[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:TCHannel<di0>:RMATtribute	535
[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:TCHannel<di0>:STATe	536
[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:TCHannel<di0>:TBCount	536
[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:TCHannel<di0>:TBSize	536
[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:TCHannel<di0>:TTINterval	536
[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:TCHannel<di0>:CRCSize	537
[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:TCHannel<di0>:DATA	537
DSElect	538
[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:TCHannel<di0>:DATA:PATTern	538
[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:TCHannel<di0>:EPRotection	538
[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:TCHannel<di0>:INTerleaver	539
[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:PCPCh:CCODing:STATe	539
[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:PCPCh:CCODing:TYPE	540
[SOURce<hw>]:BB:W3GPp:MSTation<st>:ENHanced:PRACH:CCODing:STATe	540
[SOURce<hw>]:BB:W3GPp:MSTation<st>:ENHanced:PRACH:CCODing:TYPE	540

[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:BPFRame?

The command queries the number of data bits in the DPDCH component of the frame at the physical layer. The number of data bits depends on the overall symbol rate.

Return values:

<BpFrame> integer
 Range: 150 to 9600

Example:

BB:W3GP:MST:ENH:DPDC:BPFR?
 queries the number of data bits.
 Response: 300
 the number of data bits is 300.

Usage: Query only

Manual operation: See " [Bits per Frame \(DPDCH\)](#) " on page 232

[:SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:CCODing:STATe
<State>

The command activates or deactivates channel coding for the enhanced channels.

When channel coding is activated, the overall symbol rate ([:SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:ORATe) is set to the value predetermined by the selected channel coding type ([:SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:CCODing:TYPE).

Parameters:

<State> 0 | 1 | OFF | ON
 *RST: 0

Example: BB:W3GP:MST:ENH:DPDC:CCOD:TYPE M12K2
 selects channel coding type RMC 12.2 kbps.
 BB:W3GP:MST:ENH:DPDC:CCOD:STAT ON
 activates channel coding.

Manual operation: See " Channel Coding State " on page 231

[:SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:CCODing:TYPE <Type>

The command selects the channel coding scheme in accordance with the 3GPP specification. The channel coding scheme selected predetermines the overall symbol rate.

When channel coding is activated ([:SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:CCODing:STATe) the overall symbol rate ([:SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:ORATe) is set to the value predetermined by the selected channel coding type.

Parameters:

<Type> M12K2 | M64K | M144k | M384k | AMR

M12K2

Measurement channel with an input data bit rate of 12.2 ksps.

M64K

Measurement channel with an input data bit rate of 64 ksps.

M144K

Measurement channel with an input data bit rate of 144 ksps.

M384K

Measurement channel with an input data bit rate of 384 ksps.

AMR

Channel coding for the AMR Coder (coding a voice channel).

USER

This parameter cannot be set. USER is returned whenever a user-defined channel coding is active, that is to say, after a channel coding parameter has been changed or a user coding file has been loaded. The file is loaded by the command [:SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:CCODing:USER:LOAD.

*RST: M12K2

Example: BB:W3GP:MST:ENH:DPDC:CCOD:TYPE M144K
selects channel coding scheme RMC 144 kbps.

Manual operation: See "Coding Type" on page 231

**[:SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:CCODing:USER:
CATalog?**

The command queries existing files with stored user channel codings.

The files are stored with the fixed file extensions *.3g_ccod_ul in a directory of the user's choice. The directory applicable to the commands is defined with the command MMEMory:CDIR.

Return values:

<Catalog> string

Example: MMEM:CDIR '/var/user/temp/CcodDpchUser'
selects the directory for the user channel coding files.
BB:W3GP:MST:ENH:DPDC:CCOD:USER:CAT?
queries the existing files with user coding.
Response: 'user_cc1'
there is one file with user coding.

Usage: Query only

Manual operation: See "User Coding ..." on page 232

**[:SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:CCODing:USER:
DELete <Filename>**

The command deletes the specified files with stored user channel codings.

The files are stored with the fixed file extensions *.3g_ccod_ul in a directory of the user's choice. The directory applicable to the commands is defined with the command MMEMory:CDIR. To access the files in this directory, you only have to give the file name, without the path and the file extension.

The command triggers an event and therefore has no query form and no *RST value.

Setting parameters:

<Filename> string

Example: MMEM:CDIR '/var/user/temp/CcodDpchUser'
selects the directory for the user channel coding files.
BB:W3GP:MST:ENH:DPDC:CCOD:USER:DEL 'user_cc1'
deletes the specified file with user coding.

Usage: Setting only

Manual operation: See "User Coding ..." on page 232

```
[ :SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:CCODing:USER:LOAD
<Filename>
```

The command loads the specified files with stored user channel codings.

The files are stored with the fixed file extensions *.3g_ccod_ul in a directory of the user's choice. The directory applicable to the commands is defined with the command `MMEMory:CDIR`. To access the files in this directory, you only have to give the file name, without the path and the file extension.

Setting parameters:

<Filename> string

Example: `MMEM:CDIR '/var/user/temp/CcodDpchUser'`
 selects the directory for the user channel coding files.
 `BB:W3GP:MST:ENH:DPDC:CCOD:USER:LOAD 'user_cc1'`
 loads the specified file with user coding.

Usage: Setting only

Manual operation: See " [User Coding ...](#) " on page 232

```
[ :SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:CCODing:USER:
STORE <Filename>
```

The command saves the current settings for channel coding as user channel coding in the specified file.

The files are stored with the fixed file extensions *.3g_ccod_ul in a directory of the user's choice. The directory in which the file is stored is defined with the command `MMEMory:CDIR`. To store the files in this directory, you only have to give the file name, without the path and the file extension.

Setting parameters:

<Filename> string

Example: `MMEM:CDIR '/var/user/temp/CcodDpchUser'`
 selects the directory for the user channel coding files.
 `BB:W3GP:MST:ENH:DPDC:CCOD:USER:STOR 'user_cc1'`
 saves the current channel coding setting in file `user_cc1` in
 directory `/var/user/temp/CcodDpchUser`.

Usage: Setting only

Manual operation: See " [User Coding ...](#) " on page 232

```
[ :SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:DERRor:BIT:LAYer
<Layer>
```

The command selects the layer at which bit errors are inserted.

Parameters:

<Layer> TRANsport | PHYSical

TRANsport

Transport Layer (Layer 2). This layer is only available when channel coding is active.

PHYSical

Physical layer (Layer 1)

*RST: PHYSical

Example:

BB:W3GP:MST:ENH:DPDC:DERR:BIT:LAY PHYS
selects layer 1 for entering bit errors.

Manual operation: See " [Insert Errors On](#) " on page 236

[:SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:DERRor:BIT:RATE
<Rate>

Sets the bit error rate.

Parameters:

<Rate> float
Range: 1E-7 to 0.5
Increment: 1E-7
*RST: 0.001

Example:

BB:W3GP:MST:ENH:DPDC:DERR:BIT:RATE 1E-2
sets a bit error rate of 0.01.

Manual operation: See " [Bit Error Rate TCH1](#) " on page 236

[:SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:DERRor:BIT:STATE
<State>

The command activates or deactivates bit error generation.

Bit errors are inserted into the data fields of the enhanced channels. When channel coding is active, it is possible to select the layer in which the errors are inserted (physical or transport layer). When the data source is read out, individual bits are deliberately inverted at random points in the data bit stream at the specified error rate in order to simulate an invalid signal.

Parameters:

<State> 0 | 1 | OFF | ON
*RST: 0

Example:

BB:W3GP:MST:ENH:DPDC:DERR:BIT:RATE 1E-2
sets a bit error rate of 0.01.
BB:W3GP:MST:ENH:DPDC:DERR:BIT:LAY PHYS
selects layer 1 for entering bit errors.
BB:W3GP:MST:ENH:DPDC:DERR:BIT:STAT ON
activates bit error generation.

Manual operation: See " [Bit Error State](#) " on page 236

**[:SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:DERRor:BLOCK:RATE
<Rate>**

Sets the block error rate.

Parameters:

<Rate> float
Range: 1E-4 to 0.5
Increment: 1E-4
*RST: 0.1

Example: BB:W3GP:MST:ENH:DPDC:DERR:BLOC:RATE 1E-2
sets the block error rate to 0.01.

Manual operation: See " [Block Error Rate](#) " on page 237

**[:SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:DERRor[:BLOCK]:
STATE <State>**

The command activates or deactivates block error generation. Block error generation is only possible when channel coding is activated.

During block error generation, the CRC checksum is determined and then the last bit is inverted at the specified error probability in order to simulate a defective signal.

Parameters:

<State> ON | OFF
*RST: OFF

Example: BB:W3GP:MST:ENH:DPDC:CCOD:STAT ON
activates channel coding.
BB:W3GP:MST:ENH:DPDC:DERR:BLOC:RATE 10E-2
sets the block error rate to 0.1.
BB:W3GP:MST:ENH:DPDC:DERR:BLOC:STAT ON
activates block error generation.

**[:SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:INTERleaver2
<Interleaver2>**

The command activates or deactivates channel coding interleaver state 2 for all the transport channels.

Interleaver state 1 can be activated and deactivated for each channel individually ([:SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:TCHannel<di0>:INTERleaver).

Note: The interleaver states do not cause the symbol rate to change

Parameters:

<Interleaver2> 0 | 1 | OFF | ON
*RST: 1

Example: `BB:W3GP:MST:ENH:DPDC:INT2 OFF`
deactivates channel coding interleaver state 2 for all the transport channels.

Manual operation: See " [Interleaver 2 State](#) " on page 235

[:SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:ORATe <ORate>

The command queries the overall symbol rate (Overall Symbol Rate) of the enhanced channels. The value is set with the command `[ :SOURce<hw>]:BB:W3GPp:MSTation<st>:DPDCh:ORATe`. This setting also defines the number of active channels, their symbol rates and channelization codes.

Parameters:

<ORate> D15K | D30K | D60K | D120k | D240k | D480k | D960k |
D1920k | D2880k | D3840k | D4800k | D5760k
*RST: D60K

Example: `BB:W3GP:MST:ENH:DPDC:ORAT?`
queries the overall symbol rate of the DPDCH of user equipment 1.

Manual operation: See " [Overall Symbol Rate](#) " on page 232

[:SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:STATe <State>

Queries the enhanced state of the station.

Parameters:

<State> 0 | 1 | OFF | ON
*RST: 1

Example: `BB:W3GP:MST1:ENH:DPDC:STAT?`

Manual operation: See " [Enhanced Channels State](#) " on page 229

[:SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:TCHannel<di0>:RMATtribute <RmAttribute>

Sets data rate matching.

Parameters:

<RmAttribute> integer
Range: 1 to 1024
*RST: 1

Example: `BB:W3GP:MST:ENH:DPDC:TCH:RMAT 1024`
sets rate matching to 1024 for DTCH1.

Manual operation: See " [Rate Matching Attribute](#) " on page 235

[:SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:TCHannel<di0>:STATe
<State>

The command activates/deactivates the selected transport channel.

Parameters:

<State> 0 | 1 | OFF | ON
 *RST: 0

Example: BB:W3GP:MST:ENH:DPDC:TCH1:STAT
 activates DTCH1.

Manual operation: See " [Transport Channel State](#) " on page 233

[:SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:TCHannel<di0>:
TBCount <TbCount>

The command sets the transport block count.

Parameters:

<TbCount> integer
 Range: 1 to 16
 *RST: 1

Example: BB:W3GP:MST:ENH:DPDC:TCH2:TBC 4
 activates 4 transport blocks for DTCH1.

Manual operation: See " [Number of Transport Blocks](#) " on page 234

[:SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:TCHannel<di0>:TBSize
<TbSize>

Sets the size of the data blocks.

Parameters:

<TbSize> integer

Example: BB:W3GP:MST:ENH:DPDC:TCH2:TBS 1024
 sets the length of the transport blocks for DTCH2 to 1024.

Manual operation: See " [Transport Block Size](#) " on page 234

[:SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:TCHannel<di0>:
TTInterval <TtInterval>

Sets the number of frames into which a TCH is divided. This setting also defines the interleaver depth.

Parameters:

<TtInterval> 10MS | 20MS | 40MS

Example: BB:W3GP:MST:ENH:DPDC:TCH2:TTIN 20ms
 sets that the transport channel is divided into 2 frames.

Manual operation: See " [Transport Time Interval](#) " on page 234

[:SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:TCHannel<di0>:CRCSize <CrcSize>

The command defines the CRC length for the selected transport channel. It is also possible to deactivate checksum determination.

Parameters:

<CrcSize> NONE | 8 | 12 | 16 | 24
*RST: 12

Example: BB:W3GP:MST:ENH:DPDC:TCH:CRCS NONE
deactivates checksum determination for DTCH1.

Manual operation: See " [Size of CRC](#) " on page 235

[:SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:TCHannel<di0>:DATA <Data>

Selects the data source for the transport channel.

Parameters:

<Data> ZERO | ONE | PATtern | PN9 | PN11 | PN15 | PN16 | PN20 | PN21 | PN23 | DList

PNxx

The pseudo-random sequence generator is used as the data source. Different random sequence lengths can be selected.

DList

A data list is used. The data list is selected with the command `[ :SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:TCHannel<di0>:DATA:DSElect`.

ZERO | ONE

Internal 0 and 1 data is used.

PATtern

Internal data is used. The bit pattern for the data is defined by the command `[ :SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:TCHannel<di0>:DATA:PATtern`.

*RST: PN9

Example: BB:W3GP:MST:ENH:DPDC:TCH2:DATA PATT
selects as the data source for the data fields of DTCH2 of user equipment 1, the bit pattern defined with the following command.
BB:W3GP:MST:ENH:DPDC:TCH2:DATA:PATT #H3F, 8
defines the bit pattern.

Manual operation: See " [Data Source](#) " on page 233

**[:SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:TCHannel<di0>:DATA:
DSElect <DSelect>**

The command selects the data list for the enhanced channels for the DLIS selection.

The files are stored with the fixed file extensions *.dm_iqd in a directory of the user's choice. The directory applicable to the commands is defined with the command `MMEMory:CDIR`. To access the files in this directory, you only have to give the file name, without the path and the file extension.

Parameters:

<DSelect> string

Example:

```
BB:W3GP:MST:ENH:DPDC:TCH1:DATA DLIS
selects the Data Lists data source.
MMEM:CDIR '/var/user/temp/IQData'
selects the directory for the data lists.
BB:W3GP:MST:ENH:DPDC:TCH1:DATA:DSEL 'TCH1'
selects the file tch1 as the data source.
```

Manual operation: See " [Data Source](#) " on page 233

**[:SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:TCHannel<di0>:DATA:
PATtern <Pattern>, <BitCount>**

The command determines the bit pattern for the PATtern data source selection for transport channels.

Parameters:

<Pattern> numeric
 *RST: #H0

<BitCount> integer
 Range: 1 to 64
 *RST: 1

Example: BB:W3GP:MST:ENH:DPDC:TCH0:DATA:PATT #H3F, 8
 defines the bit pattern for DCCH.

Manual operation: See " [Data Source](#) " on page 233

**[:SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:TCHannel<di0>:
EPRotectio <EProtection>**

The command determines the error protection.

Parameters:

<EProtection> NONE | CON2 | CON3 | TURBo3
 NONE
 No error protection.

TURBo3

Turbo Coder of rate 1/3 in accordance with the 3GPP specifications.

CON2 | CON3

Convolution Coder of rate 1/2 or 1/3 with generator polynomials defined by 3GPP.

*RST: CON1/3

Example:

BB:W3GP:MST:ENH:DPDC:TCH1:EPR NONE
error protection is deactivated.

Manual operation: See " [Error Protection](#) " on page 235

**[:SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:TCHannel<di0>:
INTerleaver <Interleaver>**

The command activates or deactivates channel coding interleaver state 1 for the selected channel. Interleaver state 1 can be activated and deactivated for each channel individually. The channel is selected via the suffix at TCHannel.

Interleaver state 2 can only be activated or deactivated for all the channels together ([:SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:INTerleaver2).

Parameters:

<Interleaver> 0 | 1 | OFF | ON

*RST: 1

Example:

BB:W3GP:MST:ENH:DPDC:TCH5:INT1 OFF
deactivates channel coding interleaver state 1 for TCH 5.

Manual operation: See " [Interleaver 1 State](#) " on page 235

**[:SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:PCPCh:CCODing:STATE
<State>**

The command activates or deactivates channel coding for the PCPCH.

When channel coding is active, the symbol rate is limited to the range between 15 and 120 ksps. Values above this limit are automatically set to 120 ksps.

Parameters:

<State> ON | OFF

*RST: 0

Example:

BB:W3GP:MST:ENH:PCPC:CCOD:TYPE TB168
selects channel coding type CPCH RMC (TB size 168 bits).
BB:W3GP:MST:ENH:PCPC:CCOD:STAT ON
activates channel coding.

Manual operation: See " [Channel Coding State](#) " on page 259

[:SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:PCPCh:CCODing:TYPE <Type>

The command selects the channel coding scheme in accordance with the 3GPP specification.

Parameters:

<Type> TB168 | TB360

TB168
CPCH RMC (TB size 168 bits)

TB360
CPCH RMC (TB size 360 bits)

*RST: TB168

Example: BB:W3GP:MST:ENH:PCPC:CCOD:TYPE TB168
selects channel coding scheme RMC 168 bits.

Manual operation: See " [Channel Coding Type](#) " on page 259

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:ENHanced:PRACH:CCODing:STATE <State>

The command activates or deactivates channel coding for the PRACH.

Parameters:

<State> ON | OFF

*RST: 0

Example: BB:W3GP:MST:ENH:PRAC:CCOD:TYPE TB168
selects channel coding type RACH RMC (TB size 168 bits).
BB:W3GP:MST:ENH:PRAC:CCOD:STAT ON
activates channel coding.

Manual operation: See " [Coding State](#) " on page 247

[:SOURce<hw>]:BB:W3GPp:MSTation<st>:ENHanced:PRACH:CCODing:TYPE <Type>

The command selects the channel coding scheme in accordance with the 3GPP specification.

Parameters:

<Type> TB168 | TB360 | TU168 | TU360

TB168
RACH RMC (TB size 168 bits)

TB360
RACH RMC (TB size 360 bits)

*RST: TB168

Example: BB:W3GP:MST:ENH:PRAC:CCOD:TYPE TB168
selects channel coding scheme RMC 168 bits.

Manual operation: See " [Coding Type](#) " on page 247

8.11 Setting Up Test Cases According to TS 25.141

The signal generator gives you the opportunity to generate predefined settings which enable tests on base stations in conformance with the 3G standard 3GPP FDD. It offers a selection of predefined settings according to test cases in TS 25.141. The settings take effect only after execution of command `[ :SOURce ] :BB:W3GPp:TS25141:TCASe:EXECute`. For most test cases, the parameters of one or more of the subsystems `SOURce:AWGN`, `SOURce:W3GPp`, `SOURce:DM` and `SOURce:FSIM` are adjusted.

The test setups and equipment requirements for each test case are described in [Chapter 7.1, "Introduction"](#), on page 280.

Unlike most of the other commands of the `SOURce:BB:W3GPp` subsystem, key word `SOURce` is without suffix. Signal routing is possible only for test cases that do not use diversity and is performed via command `[ :SOURce ] :BB:W3GPp:TS25141:ROUte`.

Most of the commands are setting commands in mode "User definable" and respectively are query-only in mode "According to Standard", see the description of the command `[ :SOURce ] :BB:W3GPp:TS25141:EMODE`. The edit mode "According to Standard" puts the required limits in the value ranges of the related commands.

Required options

See ["Required options"](#) on page 280.

<code>[:SOURce] :BB:W3GPp:TS25141:AWGN:CNRatio</code>	542
<code>[:SOURce] :BB:W3GPp:TS25141:AWGN:ENRatio</code>	543
<code>[:SOURce] :BB:W3GPp:TS25141:AWGN:POWer:NOISe</code>	543
<code>[:SOURce] :BB:W3GPp:TS25141:AWGN:RBLock:RATE</code>	544
<code>[:SOURce] :BB:W3GPp:TS25141:AWGN:RPDeTection:RATE</code>	544
<code>[:SOURce] :BB:W3GPp:TS25141:AWGN:STATe</code>	544
<code>[:SOURce] :BB:W3GPp:TS25141:BSPClass</code>	545
<code>[:SOURce] :BB:W3GPp:TS25141:BSSignal:FREQuency</code>	545
<code>[:SOURce] :BB:W3GPp:TS25141:BSSignal:POWer</code>	545
<code>[:SOURce] :BB:W3GPp:TS25141:EMODE</code>	546
<code>[:SOURce] :BB:W3GPp:TS25141:FSIMulator:STATe</code>	546
<code>[:SOURce] :BB:W3GPp:TS25141:IFSignal:BWIDth</code>	546
<code>[:SOURce] :BB:W3GPp:TS25141:IFSignal:CNRatio</code>	547
<code>[:SOURce] :BB:W3GPp:TS25141:IFSignal:CW:FOFFset</code>	547
<code>[:SOURce] :BB:W3GPp:TS25141:IFSignal:CW:POWer</code>	547
<code>[:SOURce] :BB:W3GPp:TS25141:IFSignal:CW:STATe</code>	548
<code>[:SOURce] :BB:W3GPp:TS25141:IFSignal:FOFFset</code>	548
<code>[:SOURce] :BB:W3GPp:TS25141:IFSignal:MODulated:FOFFset</code>	549
<code>[:SOURce] :BB:W3GPp:TS25141:IFSignal:MODulated:POWer</code>	549
<code>[:SOURce] :BB:W3GPp:TS25141:IFSignal:MODulated:STATe</code>	550
<code>[:SOURce] :BB:W3GPp:TS25141:IFSignal:MODulated:TYPE</code>	550
<code>[:SOURce] :BB:W3GPp:TS25141:IFSignal:POWer</code>	551
<code>[:SOURce] :BB:W3GPp:TS25141:IFSignal:SETTing:TMODEL:BSTation</code>	551
<code>[:SOURce] :BB:W3GPp:TS25141:IFSignal:STATe</code>	551
<code>[:SOURce] :BB:W3GPp:TS25141:IFSignal:TYPE</code>	552
<code>[:SOURce] :BB:W3GPp:TS25141:ROUte</code>	552

Setting Up Test Cases According to TS 25.141

[SOURce]:BB:W3GPp:TS25141:RXDiversity.....	552
[SOURce]:BB:W3GPp:TS25141:SCODE.....	553
[SOURce]:BB:W3GPp:TS25141:SCODE:MODE.....	553
[SOURce]:BB:W3GPp:TS25141:TCASe.....	553
[SOURce]:BB:W3GPp:TS25141:TCASe:EXECute.....	554
[SOURce]:BB:W3GPp:TS25141:TRIGger.....	554
[SOURce]:BB:W3GPp:TS25141:TRIGger:OUTPut.....	555
[SOURce]:BB:W3GPp:TS25141:WSIGnal:BTYPe.....	555
[SOURce]:BB:W3GPp:TS25141:WSIGnal:DCRatio.....	555
[SOURce]:BB:W3GPp:TS25141:WSIGnal:DPCCh:SFormat.....	556
[SOURce]:BB:W3GPp:TS25141:WSIGnal:DPCCh:TPC:RDATa.....	556
[SOURce]:BB:W3GPp:TS25141:WSIGnal:DPCCh:TPC:RDATa:DSElect.....	556
[SOURce]:BB:W3GPp:TS25141:WSIGnal:DPCCh:TPC:RDATa:PATtern.....	557
[SOURce]:BB:W3GPp:TS25141:WSIGnal:DPCCh:TPC:SDATa.....	557
[SOURce]:BB:W3GPp:TS25141:WSIGnal:DPCCh:TPC:SDATa:DSElect.....	558
[SOURce]:BB:W3GPp:TS25141:WSIGnal:DPCCh:TPC:SDATa:PDSTeps.....	558
[SOURce]:BB:W3GPp:TS25141:WSIGnal:DPCCh:TPC:SDATa:PUSTeps.....	559
[SOURce]:BB:W3GPp:TS25141:WSIGnal:DPDCh:CCODing:TYPE.....	559
[SOURce]:BB:W3GPp:TS25141:WSIGnal:DPDCh:DERRor:BIT:RATE.....	559
[SOURce]:BB:W3GPp:TS25141:WSIGnal:DPDCh:DERRor:BLOCK:RATE.....	560
[SOURce]:BB:W3GPp:TS25141:WSIGnal:DPDCh:ORATe.....	560
[SOURce]:BB:W3GPp:TS25141:WSIGnal:FREQuency.....	560
[SOURce]:BB:W3GPp:TS25141:WSIGnal:OBAND.....	560
[SOURce]:BB:W3GPp:TS25141:WSIGnal:PCPCh:CCODing:TYPE.....	561
[SOURce]:BB:W3GPp:TS25141:WSIGnal:POWer.....	561
[SOURce]:BB:W3GPp:TS25141:WSIGnal:PRACCh:CCODing:TYPE.....	561
[SOURce]:BB:W3GPp:TS25141:WSIGnal:STATe.....	562
[SOURce]:BB:W3GPp:TS25141:WSIGnal:TRIGger[:EXternal]:DELay.....	562

[SOURce]:BB:W3GPp:TS25141:AWGN:CNRatio <CnRatio>

Sets/queries the carrier/noise ratio.

Parameters:

<CnRatio>	float
Range:	-50 to 45
Increment:	0.01
*RST:	-16.8

Setting Up Test Cases According to TS 25.141

Example: BB:W3GP:TS25141:TCAS TC73
 Selects test case 7.3.
 BB:W3GP:TS25141:EMOD STAN
 Selects mode "According to Standard". Only settings in compliance with the standard can be made.
 BB:W3GP:TS25141:AWGN:POW:NOIS?
 Queries the noise level of the interfering signal.
 Response: -73
 The noise level of the interfering signal is -73 dB.
 BB:W3GP:TS25141:AWGN:CNR?
 Queries the signal/noise ratio of the interfering signal.
 Response: -16.80
 The signal/noise ratio of the interfering signal is -16.8 dB.

Manual operation: See "C/N - Test Case 7.3" on page 297

[:SOURce]:BB:W3GPp:TS25141:AWGN:ENRatio <EnRatio>

Sets/queries the ratio of bit energy to noise power density.

Parameters:

<EnRatio> float
 Range: 0 to 20
 Increment: 0.1
 *RST: 8.7

Example: BB:W3GP:TS25141:TCAS TC821
 selects test case 8.2.1.
 BB:W3GP:TS25141:EMOD STAN
 selects mode "According to Standard". Only settings in compliance with the standard can be made.
 BB:W3GP:TS25141:AWGN:ENR?
 queries the ratio of bit energy to noise power density of the interfering signal.
 Response: 8.70
 the E/N ratio of the interfering signal is 8.7 dB.

Manual operation: See " E_b to N_0 - Test Case 8.x" on page 317

[:SOURce]:BB:W3GPp:TS25141:AWGN:POWER:NOISe <Noise>

Sets/queries the noise level.

Parameters:

<Noise> float
 Increment: 0.01

Example: See [:SOURce]:BB:W3GPp:TS25141:AWGN:CNRatio on page 542

Manual operation: See "Power Level - Test Case 7.3" on page 297

[[:SOURce]:BB:W3GPp:TS25141:AWGN:RBLock:RATE <Rate>

Sets the required block error rate. The possible selection depends on the selected fading configuration.

Parameters:

<Rate> B0 | B01 | B001 | B0001
 *RST: B001

Example:

BB:W3GP:TS25141:TCAS TC893

Selects test case 8.9.3.

BB:W3GP:TS25141:EMOD STAN

Selects mode "According to Standard". Only settings in compliance with the standard can be made.

BB:W3GP:TS25141:AWGN:RBL:RATE B01

Sets the required block error rate to < 0.01.

Manual operation: See ["Required BLER - Test Case 8.x"](#) on page 317

[[:SOURce]:BB:W3GPp:TS25141:AWGN:RPDetection:RATE <Rate>

Sets the required probability of detection of preamble (Pd). The selection determines the ratio E_b/N_0 .

Parameters:

<Rate> PD099 | PD0999
 *RST: PD099

Example:

BB:W3GP:TS25141:TCAS TC891

Selects test case 8.9.1.

BB:W3GP:TS25141:EMOD STAN

Selects mode "According to Standard". Only settings in compliance with the standard can be made.

BB:W3GP:TS25141:AWGN:RPD:RATE PD099

Sets the required probability of detection of preamble to > 0.99. The E/N ratio of the interfering signal is -8.8 dB.

Manual operation: See ["Required Pd - Test Case 8.x"](#) on page 329

[[:SOURce]:BB:W3GPp:TS25141:AWGN:STATE <State>

Enables/disables the generation of the AWGN signal.

Parameters:

<State> 0 | 1 | OFF | ON
 *RST: 1

Setting Up Test Cases According to TS 25.141

Example:

```
BB:W3GP:TS25141:TCAS TC891
```

Selects test case 8.9.1.

```
BB:W3GP:TS25141:EMOD USER
```

Selects mode "User definable". Also settings that are not in compliance with the standard can be made.

```
BB:W3GP:TS25141:AWGN:STAT OFF
```

Disables the generation of the AWGN signal.

Manual operation: See ["AWGN State - Test Case 8.x"](#) on page 317

```
[[:SOURce]:BB:W3GPp:TS25141:BSPClass <BspClass>
```

Selects the base station power class.

Parameters:

<BspClass>

WIDE | MEDium | LOCal

*RST: WIDE

Example:

```
BB:W3GP:TS25141:BSPC WIDE
```

The base station under test is a wide area base station.

Manual operation: See ["Power Class"](#) on page 288

```
[[:SOURce]:BB:W3GPp:TS25141:BSSignal:FREQuency <Frequency>
```

Sets the RF frequency of the base station.

Parameters:

<Frequency>

float

Range: 100 kHz to 6 GHz

*RST: 1.0 GHz

Example:

```
BB:W3GP:TS25141:BSS:FREQ 1GHz
```

the frequency of the base station under test is 1 GHz.

Manual operation: See ["BS Frequency - Test Case 6.6"](#) on page 348

```
[[:SOURce]:BB:W3GPp:TS25141:BSSignal:POWER <Power>
```

Sets the RF power of the base station.

Parameters:

<Power>

float

Range: -145 to 20

Increment: 0.01

*RST: -30

Example:

```
BB:W3GP:TS25141:TCAS TC66
```

selects test case 6.6.

```
BB:W3GP:TS25141:BSS:POW -30
```

the power of the base station under test is -30 dBm.

Manual operation: See ["BS RF Power - Test Case 6.6"](#) on page 348

[[:SOURce]:BB:W3GPp:TS25141:EMODe <EMode>

Selects the edit mode for the configuration of the test cases.

Parameters:

<EMode> STANdard | USER

STANdard

Edit mode "According to Standard". Only settings in compliance with TS 25.141 are possible. All other parameters are preset.

USER

Edit mode "User definable". A wider range of settings is possible

*RST: STANdard

Example: BB:W3GP:TS25141:EMOD USER
selects edit mode "User definable".

Manual operation: See ["Edit Mode"](#) on page 286

[[:SOURce]:BB:W3GPp:TS25141:FSIMulator:STATe <State>

Queries the state of the fading simulator.

Parameters:

<State> 0 | 1 | OFF | ON

*RST: 0

Example: BB:W3GP:TS25141:TCAS TC892
selects test case 8.9.2.
BB:W3GP:TS25141:FSIM:STAT?
queries the state of the fading simulator.
Response: 0
the fading simulator is disabled.

Manual operation: See ["Fading State - Test Case 8.2.1"](#) on page 317

[[:SOURce]:BB:W3GPp:TS25141:IFSIGNAL:BWIDth <BWidth>

Selects the interferer scenario.

Parameters:

<BWidth> WIDE | NARRow

*RST: WIDE

Example: BB:W3GP:TS25141:TCAS TC76
selects test case 7.6.
BB:W3GP:TS25141:IFS:BWID WIDE
selects a 3GPP FDD uplink interfering signal 1

Manual operation: See ["Interferer Bandwidth Type - Test Case 7.6"](#) on page 311

[:SOURce]:BB:W3GPp:TS25141:IFSignal:CNRatio <CnRatio>

In test case 7.4, sets the power ratio of wanted signal to interfering signal.

In test case 6.6, sets the power ratio of interfering signal to wanted signal.

Parameters:

<CnRatio> float
 Range: -145 to 20
 Increment: 0.01
 *RST: -30

Example:

BB:W3GP:TS25141:TCAS TC74

Selects test case 7.4.

BB:W3GP:TS25141:EMOD STAN

Selects mode "According to Standard". Only settings in compliance with the standard can be made.

BB:W3GP:TS25141:IFS:CNR?

Queries the power ratio.

Response: -63.0

The signal/noise ratio of the interfering signal is -63 dB.

Manual operation: See ["C to I - Test Case 7.4"](#) on page 299

[:SOURce]:BB:W3GPp:TS25141:IFSignal:CW:FOFFset <FOffset>

Sets frequency offset of the CW interfering signal versus the wanted signal RF frequency.

Parameters:

<FOffset> float
 Increment: 0.01
 *RST: 10 MHz

Example:

see [\[:SOURce\]:BB:W3GPp:TS25141:IFSignal:CW:STATe](#)
 on page 548

Manual operation: See ["Interferer 1 and 2 Frequency Offset - Test Case 7.6"](#)
 on page 311

[:SOURce]:BB:W3GPp:TS25141:IFSignal:CW:POWer <Power>

Sets the RF level of the CW interfering signal.

Parameters:

<Power> float
 *RST: -48 dBm

Example:

see [\[:SOURce\]:BB:W3GPp:TS25141:IFSignal:CW:STATe](#)
 on page 548

Manual operation: See ["Interferer 1 and 2 Power Level - Test Case 7.6"](#)
 on page 312

[:SOURce]:BB:W3GPp:TS25141:IFSignal:CW:STATe <State>

This command enable/disables the CW interfering signal. In mode "According to Standard" (:SOURce:BB:W3GPp:TS25141:EMODe STANdard), the value is fixed to ON.

Sets commands :SOURce2:AWGN:CNRatio and :SOURce2:AWGN:POWer:NOISe after execution of :SOURce:BB:W3GP:TS25141:TCAS:EXEC

Parameters:

<State> 0 | 1 | OFF | ON
*RST: 1

Example:

BB:W3GP:TS25141:TCAS TC76

Selects test case 7.6.

BB:W3GP:TS25141:EMOD STAN

Selects mode According to Standard. Only settings in compliance with the standard can be made.

BB:W3GP:TS25141:IFS:IFS:BWID WIDE

Selects interferer scenario wideband.

BB:W3GP:TS25141:IFS:CW:FOFF?

Queries the frequency offset of the CW interferer.

Response: 10000000

The frequency offset is 10 MHz.

BB:W3GP:TS25141:IFS:BWID NARR

BB:W3GP:TS25141:IFS:CW:POW?

Queries the RF level of the CW interferer.

Response: -47

The RF level is -47.00 dBm.

BB:W3GP:TS25141:IFS:CW:STAT?

Queries the state of the CW interferer.

Response: 1

The CW interferer is enabled.

Manual operation: See ["Interferer 1 and 2 State - Test Case 7.6"](#) on page 311

[:SOURce]:BB:W3GPp:TS25141:IFSignal:FOFFset <FOffset>

Sets frequency offset of the interfering signal versus the wanted signal RF frequency.).

Parameters:

<FOffset> float
Range: -40 MHz to 40 MHz
Increment: 0.01 Hz
*RST: 1 MHz

Example:

BB:W3GP:TS25141:TCAS TC74

selects test case 7.4.

BB:W3GP:TS25141:EMOD STAN

selects mode "According to Standard". Only settings in compliance with the standard can be made.

BB:W3GP:TS25141:IFS:FOFF 0.5 MHz

sets the frequency offset of the interferer to 5 MHz.

Manual operation: See ["Frequency Offset - Test Case 7.4"](#) on page 299

[[:SOURce]:BB:W3GP:TS25141:IFSIGNAL:MODulated:FOFFset <FOffset>

Sets frequency offset of the modulated interfering signal versus the wanted signal RF frequency.

Parameters:

<FOffset> float
 Range: -40 MHz to 40 MHz
 Increment: 0.01 Hz
 *RST: 20 MHz

Example:

BB:W3GP:TS25141:TCAS TC66
 selects test case 6.6.
 BB:W3GP:TS25141:EMOD STAN
 selects mode According to Standard. Only settings in compliance with the standard can be made.
 BB:W3GP:TS25141:IFS:MOD:FOFF?
 queries the frequency offset of the modulated interferer.
 Response: 20000000
 the frequency offset is 20 MHz.

Manual operation: See ["Interferer 1 and 2 Frequency Offset - Test Case 7.6"](#) on page 311

[[:SOURce]:BB:W3GP:TS25141:IFSIGNAL:MODulated:POWER <Power>

Sets the RF level of the modulated interfering signal.

Parameters:

<Power> float
 Range: -145 to 20
 Increment: 0.01
 *RST: -48

Example: BB:W3GP:TS25141:TCAS TC76
 Selects test case 7.6.
 BB:W3GP:TS25141:EMOD STAN
 Selects mode "According to Standard". Only settings in compliance with the standard can be made.
 BB:W3GP:TS25141:IFS:BWID NARR
 Selects interferer scenario narrowband.
 BB:W3GP:TS25141:IFS:MOD:POW?
 Queries the RF level of the modulated interferer.
 Response: -47
 The RF level is 47.00 dBm.
 BB:W3GP:TS25141:IFS:MOD:TYPE?
 Queries the type of the modulated interferer.
 Response: GMSK
 The modulation type is GMSK.
 BB:W3GP:TS25141:IFS:MOD:STAT?
 Queries the state of the modulated interferer.
 Response: 1
 The modulated interferer is enabled.

Manual operation: See ["Interferer 1 and 2 Power Level - Test Case 7.6"](#) on page 312

[:SOURce]:BB:W3GPp:TS25141:IFSignal:MODulated:STATE <State>

Enable/disables the modulated interfering signal.

Parameters:

<State> 0 | 1 | OFF | ON
 *RST: 1

Example: see [\[:SOURce\]:BB:W3GPp:TS25141:IFSignal:MODulated:POWer](#) on page 549

Manual operation: See ["Interferer 1 and 2 State - Test Case 7.6"](#) on page 311

[:SOURce]:BB:W3GPp:TS25141:IFSignal:MODulated:TYPE <Type>

Selects the type of modulation for the interfering uplink signal in the second path.

Parameters:

<Type> WCDMa | CW | GMSK | QPSK
 *RST: WCDMa

Example: see [\[:SOURce\]:BB:W3GPp:TS25141:IFSignal:MODulated:POWer](#) on page 549

Manual operation: See ["Interferer 2 Modulation - Test Case 7.6"](#) on page 312

[[:SOURce]:BB:W3GPp:TS25141:IFSIGNAL:POWer <Power>

Sets the RF level of the interfering signal.

Parameters:

<Power> float

Example:

BB:W3GP:TS25141:TCAS TC75

selects test case 7.6.

BB:W3GP:TS25141:EMOD STAN

selects mode "According to Standard". Only settings in compliance with the standard can be made.

BB:W3GP:TS25141:WSIG:BTYP NARR

selects blocking scenario narrowband.

BB:W3GP:TS25141:IFS:POW?

queries the RF level of the CW interferer.

Response: -47

the RF level is -47.00 dBm.

Manual operation: See ["Power Level - Test Case 7.5"](#) on page 303

[[:SOURce]:BB:W3GPp:TS25141:IFSIGNAL:SETTING:TMODEL:BSTation <BStation>

Selects the interfering signal from a list of test models in accordance with TS 25.141. All test models refer to the predefined downlink configurations.

Parameters:

<BStation> TM164 | TM116 | TM132 | TM2 | TM316 | TM332 | TM4 |
TM538 | TM528 | TM58

Example:

BB:W3GP:TS25141:TCAS TC66

selects test case 6.6.

BB:W3GP:TS25141:EMOD USER

selects mode "User Definable".

BB:W3GP:TS25141:IFS:SETT:TMOD:BST TM116

the interfering signal is generated according to test model Test Model 1; 16 Channels.

Manual operation: See ["Interferer Mode - Test Case 6.6"](#) on page 348

[[:SOURce]:BB:W3GPp:TS25141:IFSIGNAL:STATe <State>

Enable/disables the modulated interfering signal.

Parameters:

<State> 0 | 1 | OFF | ON
*RST: 1

Setting Up Test Cases According to TS 25.141

Example: BB:W3GP:TS25141:TCAS TC75
selects test case 7.5.
BB:W3GP:TS25141:EMOD STAN
selects mode "According to Standard". Only settings in compliance with the standard can be made.
BB:W3GP:TS25141:IFS:STAT?
queries the state of the interferer.
Response: 1
the interferer is enabled.

Manual operation: See ["Interferer State - Test Case 7.4"](#) on page 299

[:SOURce]:BB:W3GPP:TS25141:IFSignal:TYPE <Type>

Selects the type of modulation for the interfering signal.

Parameters:

<Type> WCDMa | CW | GMSK | QPSK
*RST: WCDMa

Example: BB:W3GP:TS25141:TCAS TC75
selects test case 7.5.
BB:W3GP:TS25141:EMOD STAN
BB:W3GP:TS25141:IFS:TYPE?
queries the type of the interferer.
Response: CW
the modulation type is CW interferer.

Manual operation: See ["Interferer Modulation - Test Case 7.4"](#) on page 299

[:SOURce]:BB:W3GPP:TS25141:ROUTE <Route>

Selects the signal routing for baseband A signal which in most test cases represents the wanted signal (exception test case 6.6).

The command is only available for two-path-instruments and only for test cases that do not use both paths anyway.

Parameters:

<Route> A | B
*RST: A

Example: BB:W3GP:TS25141:ROUT B
the baseband signal of path A is introduced into path B.

Manual operation: See ["Baseband A Signal Routing"](#) on page 287

[:SOURce]:BB:W3GPP:TS25141:RXDiversity <RxDiversity>

Sets the signal generator according to the base station diversity processing capability.

The command is only available for two-path-instruments and only for test cases that do not use both paths anyway.

Parameters:

<RxDiversity> 0 | 1 | OFF | ON
 *RST: 0

Example:

BB:W3GP:TS25141:RXD ON
 the baseband signal of path A is introduced into both paths.

Manual operation: See ["Diversity"](#) on page 287

[[:SOURce]:BB:W3GPp:TS25141:SCODE <SCode>

Sets the scrambling code. The value range depends on whether the generator is used in uplink or downlink direction (test case 6.6) according to the selected test case.

Parameters:

<SCode> integer
 *RST: #H0

Example:

BB:W3GP:TS25141:SCOD #H5FFF
 sets scrambling code #H5FFF.

Manual operation: See ["Scrambling Code \(hex\)"](#) on page 288

[[:SOURce]:BB:W3GPp:TS25141:SCODE:MODE <Mode>

Sets the type for the scrambling code for the uplink direction. In downlink direction (test case 6.6), the scrambling generator can be switched on and off.

Parameters:

<Mode> OFF | ON | LONG | SHORT

Example:

BB:W3GP:TS25141:SCOD:MODE OFF
 deactivates the scrambling code generator.

Manual operation: See ["Scrambling Mode"](#) on page 288

[[:SOURce]:BB:W3GPp:TS25141:TCASe <TCase>

Selects a test case defined by the standard. The signal generator is preset according to the selected standard.

Depending on the selected test case, the parameters of the TS25141 commands are preset. For most test cases also the parameters of one or more of the subsystems **SOURce:AWGN**, **SOURce:W3GPp**, **SOURce:DM** and **SOURce:FSIM** are preset. The preset parameters are activated with command **:BB:W3GP:TS25141:TCAS:EXEC**

Parameters:

<TCas> TC642 | TC66 | TC72 | TC73 | TC74 | TC75 | TC76 | TC78 |
 TC821 | TC831 | TC832 | TC833 | TC834 | TC84 | TC85 | TC86 |
 TC881 | TC882 | TC883 | TC884 | TC891 | TC892 | TC893 |
 TC894
 *RST: TC642

Example:

BB:W3GP:TS25141:TCAS TC73
 Selects the test case 7.3, Dynamic Range.

Manual operation: See ["Test Case"](#) on page 284

[SOURce]:BB:W3GPp:TS25141:TCASe:EXECute

The command activates the current settings of the test case wizard. Signal generation is started at the first trigger received by the generator. The RF output is not activated / deactivated by this command, so care has to be taken that "RF State" is "On" (OUTPut:STATe ON) at the beginning of the measurement.

The command activates the preset parameters of the TS25141 commands and - for most test cases - also the parameters of one or more of the subsystems

SOURce:AWGN, SOURce:W3GPp, SOURce:DM and SOURce:FSIM.

Example:

BB:W3GP:TS25141:TCAS TC73
 Selects the settings for test case 7.3, Dynamic Range.
 BB:W3GP:TS25141:BSPC MED
 Sets the base station power class Medium Range BS.
 BB:W3GP:TS25141:SCOD #H000FFF
 Sets the uplink scrambling code 'H000FFF'.
 BB:W3GP:TS25141:WSIG:FREQ 1710MHz
 Sets the wanted signal frequency.
 BB:W3GP:TS25141:TCAS:EXEC
 Activates the settings for test case 7.3, Dynamic Range. For all other parameters, the preset values are used.
 OUTP ON
 Activates RF output A.

Usage: Event

Manual operation: See ["Apply"](#) on page 289

[SOURce]:BB:W3GPp:TS25141:TRIGger <Trigger>

Selects the trigger mode. The trigger is used to synchronize the signal generator to the other equipment.

Parameters:

<Trigger> AUTO | PRESet | SINGLE
 *RST: AUTO

Example:

BB:W3GP:TS25141:TRIG AUTO
 selects customization of trigger mode for the selected test case

Manual operation: See ["Trigger Configuration"](#) on page 287

[[:SOURce]:BB:W3GP:TS25141:TRIGger:OUTPut <Output>

Defines the signal for the selected marker output.

Parameters:

<Output> AUTO | PRESet
 *RST: AUTO

Example:

BB:W3GP:TS25141:TRIG:OUTP PRES

Selects that the current marker settings are kept independently of the selected test case.

Manual operation: See ["Marker Configuration"](#) on page 287

[[:SOURce]:BB:W3GP:TS25141:WSIGnal:BTYPe <BType>

Selects the type of blocking scenario and determines the type of interfering signal and its level.

Parameters:

<BType> WIDE | COLocated | NARRow
 *RST: WIDE

Example:

BB:W3GP:TS25141:TCAS TC75

selects the settings for test case 7.5, Blocking Characteristics.

BB:W3GP:TS25141:WSIG:BTYP NARR

selects the GMSK (270.833 kHz) interfering signal

Manual operation: See ["Blocking Scenario - Test Case 7.5"](#) on page 302

[[:SOURce]:BB:W3GP:TS25141:WSIGnal:DCRatio <DcRatio>

Sets channel power ratio of DPCCH to DPDCH.

Parameters:

<DcRatio> float
 Range: -80 to 80
 Increment: 0.01
 *RST: 0

Example:

BB:W3GP:TS25141:TCAS TC642

selects the settings for test case 6.4.2, Power Control Steps.

BB:W3GP:TS25141:WSIG:DCR -3 dB

sets a ratio of -3 dB for DPCCH power/DPDCH power

Manual operation: See ["Power Ratio DPCCH to DPDCH - Test Case 6.4.2"](#) on page 342

[[:SOURce]:BB:W3GP:TS25141:WSIGnal:DPCCh:SFOFormat <SFormat>

Sets the slot format for the DPCCH. The slot format defines the FBI mode and the TFCI status.

Parameters:

<SFormat> integer
 Range: 0 to 5
 *RST: 0

Example: BB:W3GP:TS25141:TCAS TC642
 selects the settings for test case 6.4.2, Power Control Steps.
 BB:W3GP:TS25141:WSIG:DPCC:SFOR 3
 selects slot format 3 for the DPCCH

Manual operation: See ["Slot Format DPCCH - Test Case 6.4.2"](#) on page 342

[[:SOURce]:BB:W3GP:TS25141:WSIGnal:DPCCh:TPC:RDATa <RData>

Sets the TPC repeat pattern for verification of the base stations power control steps.

Parameters:

<RData> SINGle | AGGRegated | ONE | ZERO | PATtern | DLISt
 *RST: SINGle

Example: BB:W3GP:TS25141:TCAS TC642
 selects the settings for test case 6.4.2, Power Control Steps.
 BB:W3GP:TS25141:WSIG:DPCC:TPC:RDAT SING
 selects the 01 pattern

Manual operation: See ["TPC Repeat Pattern - Test Case 6.4.2"](#) on page 344

[[:SOURce]:BB:W3GP:TS25141:WSIGnal:DPCCh:TPC:RDATa:DSElect <DSelect>

Selects the data list when the DLISt data source is selected for the TPC repeat pattern of the DPCCH.

The files are stored with the fixed file extensions *.dm_iqd in a directory of the user's choice. The directory applicable to the commands is defined with the command MMEMoRY:CDIR. To access the files in this directory, only the file name has to be given, without the path and the file extension.

Parameters:

<DSelect> <data_list_name>

Example: BB:W3GP:TS25141:TCAS TC642
 BB:W3GP:TS25141:WSIG:DPCC:TPC:RDAT DLIS
 selects the data source DLIS
 MMEMoRY:CDIR '/var/user/temp/IQData'
 selects the directory for the data lists.
 BB:W3GP:TS25141:WSIG:DPCC:TPC:RDAT:DSEL
 'dpcch_tpc_1'
 selects the data list dpcch_tpc1.

Manual operation: See ["TPC Repeat Pattern - Test Case 6.4.2"](#) on page 344

[[:SOURce]:BB:W3GPP:TS25141:WSIGnal:DPCCh:TPC:RDATa:PATtern <Pattern>, <BitCount>

Determines the bit pattern for the PATtern data source selection.

Parameters:

<Pattern>	numeric
*RST:	#H0
<BitCount>	integer
Range:	1 to 64
*RST:	1

Example:

```
BB:W3GP:TS25141:TCAS TC642
BB:W3GP:TS25141:WSIG:DPCC:TPC:RDAT PATT
selects the data source pattern
BB:W3GP:TS25141:WSIG:DPCC:TPC:RDAT:PATT
#HF0C20,19
defines the TPC pattern
```

Manual operation: See ["TPC Repeat Pattern - Test Case 6.4.2"](#) on page 344

[[:SOURce]:BB:W3GPP:TS25141:WSIGnal:DPCCh:TPC:SDATa <SData>

Sets the TPC pattern for initialization of the base stations power level.

Parameters:

<SData>	PMAX DLISt
PMAX	Maximum Power Less n Steps
DLISt	The TPC start pattern is taken from a data list.
*RST:	PMAX

Setting Up Test Cases According to TS 25.141

Example:

```
BB:W3GP:TS25141:TCAS TC642
selects the settings for test case 6.4.2, Power Control Steps.
BB:W3GP:TS25141:WSIG:DPCC:TPC:SDAT DLIS
selects the data source data list for TPC start pattern.
MMEM:CDIR '/var/user/temp/IQData'
selects the directory for the data lists.
BB:W3GP:TS25141:WSIG:DPCC:TPC:SDAT:DSEL
'dpcch_tpc_s'
selects the data list dpcch_tpcs.
BB:W3GP:TS25141:WSIG:DPCC:TPC:SDAT PMAX
selects the pattern "Max. Pow. Less N Steps"
BB:W3GP:TS25141:WSIG:DPCC:TPC:SDAT:PUST 100
defines 100 power up bits. The base station is (presumably) set
to maximum transmit power.
BB:W3GP:TS25141:WSIG:DPCC:TPC:SDAT:PDST 10
defines 10 power down bits. The base station is set to two power
steps below its maximum transmit power. The TPC start patten is
110 bits long.
```

Manual operation: See ["TPC Start Pattern - Test Case 6.4.2"](#) on page 343

[[:SOURce]:BB:W3GPp:TS25141:WSIGnal:DPCCh:TPC:SDATa:DSElect <DSelect>

Selects the data list when the `DLIS` data source is selected for the TPC start pattern of the DPCCH.

The files are stored with the fixed file extensions `*.dm_iqd` in a directory of the user's choice. The directory applicable to the commands is defined with the command `MMEMory:CDIR`. To access the files in this directory, only the file name has to be given, without the path and the file extension.

Parameters:

<DSelect> <data_list_name>

Example: see [\[:SOURce\]:BB:W3GPp:TS25141:WSIGnal:DPCCh:TPC:SDATa](#) on page 557

Manual operation: See ["TPC Start Pattern - Test Case 6.4.2"](#) on page 343

[[:SOURce]:BB:W3GPp:TS25141:WSIGnal:DPCCh:TPC:SDATa:PDSTeps <PdSteps>

Sets the amount of power down bits in the TPC start pattern.

Parameters:

<PdSteps> integer
 Range: 0 to 1000
 *RST: 1

Example: See [\[:SOURce\]:BB:W3GPp:TS25141:WSIGnal:DPCCh:TPC:SDATa](#) on page 557

Manual operation: See ["TPC Power Down Steps - Test Case 6.4.2"](#) on page 344

[:SOURce]:BB:W3GPp:TS25141:WSIGnal:DPCh:TPC:SDATa:PUSteps
<PuSteps>

Sets the amount of power up bits in the TPC start pattern.

Parameters:

<PuSteps> integer
 Range: 0 to 1000
 *RST: 1

Example: See [\[:SOURce\]:BB:W3GPp:TS25141:WSIGnal:DPCh:TPC:SDATa](#) on page 557

Manual operation: See ["TPC Power Up Steps - Test Case 6.4.2"](#) on page 343

[:SOURce]:BB:W3GPp:TS25141:WSIGnal:DPDCh:CCODing:TYPE <Type>

Selects the channel coding scheme in accordance with the 3GPP specification.

Parameters:

<Type> M12K2 | M64K | M144k | M384k | AMR
M12K2 | M64K | M144K | M384K
 Measurement channel with an input data bit rate of respectively 12.2 kbps, 64 kbps, 144 kbps and 384 kbps
AMR
 Channel coding for the AMR Coder (coding a voice channel)
 *RST: M12K2

Example: BB:W3GP:TS25141:WSIG:DPDC:CCOD:TYPE M144K
 Selects channel coding scheme RMC 144 kbps.

Manual operation: See ["RMC - Receiver Tests"](#) on page 293

[:SOURce]:BB:W3GPp:TS25141:WSIGnal:DPDCh:DERRor:BIT:RATE <Rate>

Sets the bit error rate.

Parameters:

<Rate> float
 Range: 0 to 0.1
 Increment: 0.001
 *RST: 0

Example: BB:W3GP:TS25141:WSIG:DPDC:DERR:BIT:RATE 1E-2
 sets a bit error rate of 0.01.

Manual operation: See ["Bit Error Rate - Test Case 7.8"](#) on page 314

[[:SOURce]:BB:W3GPp:TS25141:WSIGnal:DPDCh:DERRor:BLOCk:RATE <Rate>

Sets the block error rate.

Parameters:

<Rate> float
 Range: 0 to 0.1
 Increment: 0.001
 *RST: 0

Example: BB:W3GP:TS25141:WSIG:DPDC:DERR:BLOC:RATE 1E-2
 sets a bit error rate of 0.01.

Manual operation: See ["Block Error Rate - Test Case 7.8"](#) on page 314

[[:SOURce]:BB:W3GPp:TS25141:WSIGnal:DPDCh:ORATe <ORate>

Sets the overall symbol rate.

Parameters:

<ORate> D15K | D30K | D60K | D120k | D240k | D480k | D960k |
 D1920k | D2880k | D3840k | D4800k | D5760k
 15 ksps ... 6 x 960 ksps
 *RST: D60K

Example: BB:W3GP:TS25141:TCAS TC642
 selects the settings for test case 6.4.2, Power Control Steps.
 BB:W3GP:TS25141:WSIG:DPDC:ORAT D15K
 sets the overall symbol rate to 15 ksps. Only DPDCH1 is active,
 the symbol rate is 15 ksps and the channelization code is 64.

Manual operation: See ["Overall Symbol Rate - Test Case 6.4.2"](#) on page 342

[[:SOURce]:BB:W3GPp:TS25141:WSIGnal:FREQuency <Frequency>

The command sets the RF frequency of the wanted signal.

Parameters:

<Frequency> float
 Range: 100E3 to 6E9
 Increment: 0.01
 *RST: 1.95E9

Example: BB:W3GP:TS25141:WSIG:FREQ 2.5GHz
 sets a frequency of 2.5 GHz for the wanted signal.

Manual operation: See ["Wanted Signal Frequency - Receiver Tests"](#) on page 293

[[:SOURce]:BB:W3GPp:TS25141:WSIGnal:OBAND <OBand>

Selects the operating band of the base station for "Wideband Blocking". The operating band is required for calculation of power levels and interferer modulation.

Setting Up Test Cases According to TS 25.141

Parameters:

<OBand> I | II | III | IV | V | VI
 *RST: I

Example:

BB:W3GP:TS25141:TCAS TC75
 selects the settings for test case 7.5, Blocking Characteristics.
 BB:W3GP:TS25141:EMOD STAN
 BB:W3GP:TS25141:WSIG:BTYP WIDE
 selects blocking scenario wideband.
 BB:W3GP:TS25141:WSIG:OBAN III
 selects operating band III.

Manual operation: See ["Operating Band - Test Case 7.5"](#) on page 302

[[:SOURce]:BB:W3GPp:TS25141:WSIGnal:PCPCh:CCODing:TYPE <Type>

Selects the Transport Block Size, 168 bits or 360 bits.

Parameters:

<Type> TB168 | TB360
 *RST: TB168

Example:

BB:W3GP:TS25141:TCAS TC893
 selects the settings for test case 8.9.3, Demodulation of CPCH
 Message in Static Propagation Conditions.
 BB:W3GP:TS25141:WSIG:PCPC:CCOD:TYPE TB168
 selects transport block size 168 bits.

Manual operation: See ["Transport Block Size \(TB\) - Test Case 8.9.3"](#) on page 338

[[:SOURce]:BB:W3GPp:TS25141:WSIGnal:POWer <Power>

Sets the RF level of the wanted signal.

Parameters:

<Power> float
 Increment: 0.01
 *RST: -110.3

Example:

BB:W3GP:TS25141:WSIG:POW?
 queries the RF level of the wanted signal.
 Response: -103.1
 the RF level is -103.1 dBm

Manual operation: See ["Wanted Signal Level - Receiver Tests"](#) on page 293

[[:SOURce]:BB:W3GPp:TS25141:WSIGnal:PRACH:CCODing:TYPE <Type>

Selects the Transport Block Size to 168 bits or to 360 bits.

Parameters:

<Type> TB168 | TB360
 *RST: TB168

Example:

BB:W3GP:TS25141:TCAS TC883
 selects the settings for test case 8.8.3, Demodulation of RACH Message in Static Propagation Conditions.
 BB:W3GP:TS25141:WSIG:PRAC:CCOD:TYPE TB168
 selects transport block size 168 bits.

Manual operation: See ["Transport Block Size - Test Case 8.8.x"](#) on page 334

[[:SOURce]:BB:W3GPP:TS25141:WSIGnal:STATe <State>

Enables/disables the generation of the wanted signal.

Parameters:

<State> 0 | 1 | OFF | ON
 *RST: 1

Example:

BB:W3GP:TS25141:TCAS TC642
 Selects test case 6.4.2.
 BB:W3GP:TS25141:EMOD USER
 Selects mode "User definable". Also settings that are not in compliance with the standard can be made.
 BB:W3GP:TS25141:WSIG:STAT OFF
 Disables the generation of the wanted signal.

Manual operation: See ["Wanted Signal State - Receiver Tests"](#) on page 292

[[:SOURce]:BB:W3GPP:TS25141:WSIGnal:TRIGger[:EXTErnal]:DELay <Delay>

Sets an additional propagation delay besides the fixed DL-UL timing offset of 1024 chip periods.

The additional propagation delay is obtained by charging the start trigger impulse with the respective delay.

Parameters:

<Delay> float
 Range: 0 chips to 65535 chips
 *RST: 0 chips

Example:

BB:W3GP:TS25141:TCAS TC642
 Selects the settings for test case 6.4.2, Power Control Steps.
 BB:W3GP:TS25141:WSIG:TRIG:EXT:DEL 14
 Sets an additional propagation delay of 14 chips.

Manual operation: See ["Propagation Delay - Test Case 6.4.2"](#) on page 343

Annex

A Reference

Supported channel types

Table A-1: List of supported channel types and their sequence in the 3GPP FDD channel table

Index	Short form	Name	Function	Optional enhanced in BS1
0	P-CPICH	Primary Common Pilot Channel	- Specifies the scrambling code in the scrambling code group (2nd stage of scrambling code detection) - Phase reference for additional downlink channels - Reference for the signal strength	no
1	S-CPICH	Secondary Common Pilot Channel		no
2	P-SCH	Primary Sync Channel	Slot synchronization	no
3	S-SCH	Secondary Sync Channel	- Frame synchronization - Specifies the scrambling code group	no
4	P-CCPCH	Primary Common Control Phys. Channel	- Transfers the system frame number (SFN) - Timing reference for additional downlink channels - Contains the BCH transport channel	yes
5	S-CCPCH	Secondary Common Control Phys. Channel		no
6	PICH	Page Indication Channel	Transfers the paging indicator	no
7	AICH	Acquisition Indication Channel		no
8	AP-AICH	Access Preamble Acquisition Indication Channel		no
9 / 10	PDSCH	Phys. Downlink Shared Channel		no
	DL-DPCCH	Dedicated Physical Control Channel		
	HS-SCCH	High-Speed Shared Control Channel		
	E-AGCH	E-DCH Absolute Grant Channel		
	E-RGCH	E-DCH Relative Grant Channel		
	E-HICH	E-DCH Hybrid ARQ Indicator Channel		
11 - 13	DPCH	Dedicated Phys. Channel	Transfers the user data and the control information	yes

Index	Short form	Name	Function	Optional enhanced in BS1
	HS-SCCH	High-Speed Shared Control Channel		no
	HS-PDSCH (QPSK)	High Speed Physical Downlink Shared Channel (QPSK)		no
	HS-PDSCH (16 QAM)	High-Speed Physical Downlink Shared Channel (16 QAM)		no
	HS-PDSCH (64 QAM)	High-Speed Physical Downlink Shared Channel (64 QAM)		no
	HS-PDSCH (MIMO)	High Speed Physical Downlink Shared Channel (MIMO)		no
	E-AGCH	E-DCH Absolute Grant Channel		no
	E-RGCH	E-DCH Relative Grant Channel		no
	E-HICH	E-DCH Hybrid ARQ Indicator Channel		no
	F-DPCH	Fractional Dedicated Phys. Channel		no
14 - 138	DPCH	Dedicated Phys. Channel	Transfers the user data and the control information	no
	HS-SCCH	High-Speed Shared Control Channel		
	HS-PDSCH (QPSK)	High Speed Physical Downlink Shared Channel (QPSK)		
	HS-PDSCH (16 QAM)	High-Speed Physical Downlink Shared Channel (16 QAM)		
	HS-PDSCH (64 QAM)	High-Speed Physical Downlink Shared Channel (64 QAM)		
	HS-PDSCH (MIMO)	High Speed Physical Downlink Shared Channel (MIMO)		
	E-AGCH	E-DCH Absolute Grant Channel		
	E-RGCH	E-DCH Relative Grant Channel		
	E-HICH	E-DCH Hybrid ARQ Indicator Channel		
	F-DPCH	Fractional Dedicated Phys. Channel		

Channel tables of the DPDCH and E-DPDCH

Table A-2: Structure of the DPDCH channel table in conjunction with the overall symbol rate

Overall Symbol Rate	DPDCH 1	DPDCH 2	DPDCH 3	DPDCH 4	DPDCH 5	DPDCH 6
I or Q branch	I	Q	I	Q	I	Q
15 kbps	State: ON S-Rate: 15k Ch. Code: 64	State: OFF	State: OFF	State: OFF	State: OFF	State: OFF
30 kbps	State: ON S-Rate: 30k Ch. Code: 32	State: OFF	State: OFF	State: OFF	State: OFF	State: OFF
60 kbps	State: ON S-Rate: 60k Ch. Code: 16	State: OFF	State: OFF	State: OFF	State: OFF	State: OFF
120 kbps	State: ON S-Rate: 120k Ch. Code: 8	State: OFF	State: OFF	State: OFF	State: OFF	State: OFF
240 kbps	State: ON S-Rate: 240k Ch. Code: 4	State: OFF	State: OFF	State: OFF	State: OFF	State: OFF
480 kbps	State: ON S-Rate: 480k Ch. Code: 2	State: OFF	State: OFF	State: OFF	State: OFF	State: OFF
960 kbps	State: ON S-Rate: 960k Ch. Code: 1	State: OFF	State: OFF	State: OFF	State: OFF	State: OFF
2 x 960 kbps	State: ON S-Rate: 960k Ch. Code: 1	State: ON S-Rate: 960k Ch. Code: 1	State: OFF	State: OFF	State: OFF	State: OFF
3 x 960 kbps	State: ON S-Rate: 960k Ch. Code: 1	State: ON S-Rate: 960k Ch. Code: 1	State: ON S-Rate: 960k Ch. Code: 3	State: OFF	State: OFF	State: OFF

Overall Symbol Rate	DPDCH 1	DPDCH 2	DPDCH 3	DPDCH 4	DPDCH 5	DPDCH 6
4 x 960 ksps	State: ON S-Rate: 960k Ch. Code: 1	State: ON S-Rate: 960k Ch. Code: 1	State: ON S-Rate: 960k Ch. Code: 3	State: ON S-Rate: 960k Ch. Code: 3	State: OFF	State: OFF
5 x 960 ksps	State: ON S-Rate: 960k Ch. Code: 1	State: ON S-Rate: 960k Ch. Code: 1	State: ON S-Rate: 960k Ch. Code: 3	State: ON S-Rate: 960k Ch. Code: 3	State: ON S-Rate: 960k Ch. Code: 2	State: OFF
6 x 960 ksps	State: ON S-Rate: 960k Ch. Code: 1	State: ON S-Rate: 960k Ch. Code: 1	State: ON S-Rate: 960k Ch. Code: 3	State: ON S-Rate: 960k Ch. Code: 3	State: ON S-Rate: 960k Ch. Code: 2	State: ON S-Rate: 960k Ch. Code: 2

Table A-3: Structure of the E-DPDCH channel table in conjunction with the overall symbol rate and no DPDCH active

Overall Symbol Rate	E-DPDCH 1	E-DPDCH 2	E-DPDCH 3	E-DPDCH 4
I or Q branch	I	Q	I	Q
15 Ksps	State: ON S-Rate: 15 k Ch. Code: 64	State: OFF	State: OFF	State: OFF
30 ksps	State: ON S-Rate: 30 k Ch. Code: 32	State: OFF	State: OFF	State: OFF
60 ksps	State: ON S-Rate: 60 k Ch. Code: 16	State: OFF	State: OFF	State: OFF
120 ksps	State: ON S-Rate: 120 k Ch. Code: 8	State: OFF	State: OFF	State: OFF
240 ksps	State: ON S-Rate: 240 k Ch. Code: 4	State: OFF	State: OFF	State: OFF
480 ksps	State: ON S-Rate: 480 k Ch. Code: 2	State: OFF	State: OFF	State: OFF
960 ksps	State: ON S-Rate: 960 k Ch. Code: 1	State: OFF	State: OFF	State: OFF

Overall Symbol Rate	E-DPDCH 1	E-DPDCH 2	E-DPDCH 3	E-DPDCH 4
I or Q branch	I	Q	I	Q
2 x 960 ksps	State: ON S-Rate: 960 k Ch. Code: 1	State: ON S-Rate: 960 k Ch. Code: 1	State: OFF	State: OFF
2 x 1920 ksps	State: ON S-Rate: 1920 k Ch. Code: 1	State: ON S-Rate: 1920 k Ch. Code: 1	State: OFF	State: OFF
2 x 960 ksps + 2 x 1920 ksps	State: ON S-Rate: 1920 k Ch. Code: 1	State: ON S-Rate: 1920 k Ch. Code: 1	State: ON S-Rate: 960 k Ch. Code: 1	State: ON S-Rate: 960 k Ch. Code: 1
2 x 960 ksps, I only	State: ON S-Rate: 960 k Ch. Code: 1	State: OFF	State: OFF	State: OFF
2 x 960 ksps, Q only	State: OFF	State: ON S-Rate: 960 k Ch. Code: 1	State: OFF	State: OFF
2 x 1920 ksps, I only	State: ON S-Rate: 1920 k Ch. Code: 1	State: OFF	State: OFF	State: OFF
2 x 1920 ksps, Q only	State: OFF	State: ON S-Rate: 1920 k Ch. Code: 1	State: OFF	State: OFF
2 x 960 ksps + 2 x 1920 ksps, I only	State: ON S-Rate: 1920 k Ch. Code: 1	State: OFF	State: ON S-Rate: 960 k Ch. Code: 1	State: OFF
2 x 960 ksps + 2 x 1920 ksps, Q only	State: OFF	State: ON S-Rate: 1920 k Ch. Code: 1	State: OFF	State: ON S-Rate: 960 k Ch. Code: 1

Table A-4: Structure of the E-DPDCH channel table in conjunction with the overall symbol rate and one DPDCH active

Overall Symbol Rate	E-DPDCH 1	E-DPDCH 2	E-DPDCH 3	E-DPDCH 4
Active HS-DPCCH? I or Q branch	No Q	No I	Yes I	Yes Q
15 ksps	State: ON S-Rate: 15 k Ch. Code: 128	State: OFF	State: ON S-Rate: 15 k Ch. Code: 128	State: OFF
30 ksps	State: ON S-Rate: 30 k Ch. Code: 64	State: OFF	State: ON S-Rate: 30 k Ch. Code: 64	State: OFF
60 ksps	State: ON S-Rate: 60 k Ch. Code: 32	State: OFF	State: ON S-Rate: 60 k Ch. Code: 32	State: OFF
120 ksps	State: ON S-Rate: 120 k Ch. Code: 16	State: OFF	State: ON S-Rate: 120 k Ch. Code: 16	State: OFF
240 ksps	State: ON S-Rate: 240 k Ch. Code: 8	State: OFF	State: ON S-Rate: 240 k Ch. Code: 8	State: OFF
480 ksps	State: ON S-Rate: 480 k Ch. Code: 4	State: OFF	State: ON S-Rate: 480 k Ch. Code: 4	State: OFF
960 ksps	State: ON S-Rate: 960 k Ch. Code: 2	State: OFF	State: ON S-Rate: 960 k Ch. Code: 2	State: OFF
2 x 960 ksps	State: ON S-Rate: 960 k Ch. Code: 2	State: ON S-Rate: 960 k Ch. Code: 2	State: ON S-Rate: 960 k Ch. Code: 2	State: ON S-Rate: 960 k Ch. Code: 2
2 x 1920 ksps	State: ON S-Rate: 1920 k Ch. Code: 1	State: ON S-Rate: 1920 k Ch. Code: 1	State: ON S-Rate: 1920 k Ch. Code: 1	State: ON S-Rate: 1920 k Ch. Code: 1
2 x 960 ksps, I only	State: OFF	State: ON S-Rate: 960 k Ch. Code: 2	State: ON S-Rate: 960 k Ch. Code: 2	State: OFF
2 x 960 ksps, Q only	State: ON S-Rate: 960 k Ch. Code: 2	State: OFF	State: OFF	State: ON S-Rate: 960 k Ch. Code: 2

Overall Symbol Rate	E-DPDCH 1	E-DPDCH 2	E-DPDCH 3	E-DPDCH 4
Active HS-DPCCH? I or Q branch	No Q	No I	Yes I	Yes Q
2 x 1920 ksps, I only	State: OFF	State: ON S-Rate: 1920 k Ch. Code: 1	State: ON S-Rate: 1920 k Ch. Code: 1	State: OFF
2 x 1920 ksps, Q only	State: ON S-Rate: 1920 k Ch. Code: 1	State: OFF	State: OFF	State: ON S-Rate: 1920 k Ch. Code: 1

List of Commands

[SOURce]:BB:W3GPp:GPP3:VERSion?	355
[SOURce]:BB:W3GPp:TS25141:AWGN:CNRatio	542
[SOURce]:BB:W3GPp:TS25141:AWGN:ENRatio	543
[SOURce]:BB:W3GPp:TS25141:AWGN:POWer:NOISe	543
[SOURce]:BB:W3GPp:TS25141:AWGN:RBLOCK:RATE	544
[SOURce]:BB:W3GPp:TS25141:AWGN:RPDeTection:RATE	544
[SOURce]:BB:W3GPp:TS25141:AWGN:STATe	544
[SOURce]:BB:W3GPp:TS25141:BSPClass	545
[SOURce]:BB:W3GPp:TS25141:BSSignal:FREQuency	545
[SOURce]:BB:W3GPp:TS25141:BSSignal:POWer	545
[SOURce]:BB:W3GPp:TS25141:EMODE	546
[SOURce]:BB:W3GPp:TS25141:FSIMulator:STATe	546
[SOURce]:BB:W3GPp:TS25141:IFSignal:BWIDth	546
[SOURce]:BB:W3GPp:TS25141:IFSignal:CNRatio	547
[SOURce]:BB:W3GPp:TS25141:IFSignal:CW:FOFFset	547
[SOURce]:BB:W3GPp:TS25141:IFSignal:CW:POWer	547
[SOURce]:BB:W3GPp:TS25141:IFSignal:CW:STATe	548
[SOURce]:BB:W3GPp:TS25141:IFSignal:FOFFset	548
[SOURce]:BB:W3GPp:TS25141:IFSignal:MODulated:FOFFset	549
[SOURce]:BB:W3GPp:TS25141:IFSignal:MODulated:POWer	549
[SOURce]:BB:W3GPp:TS25141:IFSignal:MODulated:STATe	550
[SOURce]:BB:W3GPp:TS25141:IFSignal:MODulated:TYPE	550
[SOURce]:BB:W3GPp:TS25141:IFSignal:POWer	551
[SOURce]:BB:W3GPp:TS25141:IFSignal:SETTing:TMODeL:BSTation	551
[SOURce]:BB:W3GPp:TS25141:IFSignal:STATe	551
[SOURce]:BB:W3GPp:TS25141:IFSignal:TYPE	552
[SOURce]:BB:W3GPp:TS25141:ROUTe	552
[SOURce]:BB:W3GPp:TS25141:RXDiversity	552
[SOURce]:BB:W3GPp:TS25141:SCODE	553
[SOURce]:BB:W3GPp:TS25141:SCODE:MODE	553
[SOURce]:BB:W3GPp:TS25141:TCASe	553
[SOURce]:BB:W3GPp:TS25141:TCASe:EXECute	554
[SOURce]:BB:W3GPp:TS25141:TRIGger	554
[SOURce]:BB:W3GPp:TS25141:TRIGger:OUTPut	555
[SOURce]:BB:W3GPp:TS25141:WSIGnal:BTYPe	555
[SOURce]:BB:W3GPp:TS25141:WSIGnal:DCRatio	555
[SOURce]:BB:W3GPp:TS25141:WSIGnal:DPCCh:SFORmat	556
[SOURce]:BB:W3GPp:TS25141:WSIGnal:DPCCh:TPC:RDATa	556
[SOURce]:BB:W3GPp:TS25141:WSIGnal:DPCCh:TPC:RDATa:DSELeCt	556
[SOURce]:BB:W3GPp:TS25141:WSIGnal:DPCCh:TPC:RDATa:PATtern	557
[SOURce]:BB:W3GPp:TS25141:WSIGnal:DPCCh:TPC:SDATa	557
[SOURce]:BB:W3GPp:TS25141:WSIGnal:DPCCh:TPC:SDATa:DSELeCt	558
[SOURce]:BB:W3GPp:TS25141:WSIGnal:DPCCh:TPC:SDATa:PDSTeps	558
[SOURce]:BB:W3GPp:TS25141:WSIGnal:DPCCh:TPC:SDATa:PUSTeps	559
[SOURce]:BB:W3GPp:TS25141:WSIGnal:DPDCh:CCODing:TYPE	559
[SOURce]:BB:W3GPp:TS25141:WSIGnal:DPDCh:DERRor:BIT:RATE	559
[SOURce]:BB:W3GPp:TS25141:WSIGnal:DPDCh:DERRor:BLOCK:RATE	560

[SOURce]:BB:W3GPp:TS25141:WSIGnal:DPDCh:ORate.....	560
[SOURce]:BB:W3GPp:TS25141:WSIGnal:FREQuency.....	560
[SOURce]:BB:W3GPp:TS25141:WSIGnal:OBANd.....	560
[SOURce]:BB:W3GPp:TS25141:WSIGnal:PCPCh:CCODing:TYPE.....	561
[SOURce]:BB:W3GPp:TS25141:WSIGnal:POWer.....	561
[SOURce]:BB:W3GPp:TS25141:WSIGnal:PRACH:CCODing:TYPE.....	561
[SOURce]:BB:W3GPp:TS25141:WSIGnal:STATe.....	562
[SOURce]:BB:W3GPp:TS25141:WSIGnal:TRIGger[:EXTeRnal]:DELay.....	562
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel:DPCH:CCODing:USER:CATalog?.....	427
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel:DPCH:CCODing:USER:DELeTe.....	424
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:CCODing:BPFRame?.....	424
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:CCODing:SFORMat.....	425
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:CCODing:SRATe?.....	425
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:CCODing:STATe.....	426
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:CCODing:TYPE.....	426
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:CCODing:USER:LOAD.....	428
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:CCODing:USER:STORe.....	428
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:DERRor:BIT:LAYer.....	439
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:DERRor:BIT:RATE.....	439
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:DERRor:BIT:STATe.....	440
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:DERRor:BLOCK:RATE.....	440
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:DERRor:BLOCK:STATe.....	441
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:DPControl:CONNector.....	436
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:DPControl:DIRection.....	436
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:DPControl:MODE.....	437
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:DPControl:RANGe:DOWN.....	437
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:DPControl:STATe.....	437
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:DPControl:STEP:MANual.....	437
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:DPControl:STEP[:EXTeRnal].....	438
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:DPControl[:POWer]?.....	438
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:INTerleaver2.....	429
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:STATe.....	422
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:TCHannel<di0>:CRCSize.....	429
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:TCHannel<di0>:DATA.....	430
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:TCHannel<di0>:DATA: DSElect.....	430
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:TCHannel<di0>:DATA:PATTeRn.....	431
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:TCHannel<di0>:DTX.....	431
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:TCHannel<di0>:EPRotectioN.....	432
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:TCHannel<di0>:INTerleaver.....	432
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:TCHannel<di0>:RMATtribute.....	432
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:TCHannel<di0>:STATe.....	433
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:TCHannel<di0>:TBCount.....	433
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:TCHannel<di0>:TBSize.....	433
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:CHANnel<ch0>:DPCH:TCHannel<di0>:TTINteRval.....	434
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:PCCPCh:CCODing:INTerleaver<di>.....	434
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:PCCPCh:CCODing:STATe.....	434
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:PCCPCh:CCODing:TYPE?.....	434
[SOURce<hw>]:BB:W3GPp:BSTation:ENHanced:PCCPCh:STATe.....	422
[SOURce<hw>]:BB:W3GPp:BSTation:OCNS:MODE.....	375

[SOURce<hw>]:BB:W3GPp:BSTation:OCNS:SEED.....	375
[SOURce<hw>]:BB:W3GPp:BSTation:OCNS:STate.....	375
[SOURce<hw>]:BB:W3GPp:BSTation:PRESet.....	355
[SOURce<hw>]:BB:W3GPp:BSTation[:ENHanced]:CHANnel<ch0>:HSDPa:DERRor:BIT:LAYer.....	441
[SOURce<hw>]:BB:W3GPp:BSTation[:ENHanced]:CHANnel<ch0>:HSDPa:DERRor:BIT:RATE.....	441
[SOURce<hw>]:BB:W3GPp:BSTation[:ENHanced]:CHANnel<ch0>:HSDPa:DERRor:BIT:STate.....	442
[SOURce<hw>]:BB:W3GPp:BSTation[:ENHanced]:CHANnel<ch0>:HSDPa:DERRor:BLOCK:RATE.....	442
[SOURce<hw>]:BB:W3GPp:BSTation[:ENHanced]:CHANnel<ch0>:HSDPa:DERRor:BLOCK:STate.....	442
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel:HSDPa:HSET:PRESet.....	376
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel:PRESet.....	376
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:AICH:ASLOt.....	376
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:AICH:SAPattern.....	377
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:APAlch:ASLOt.....	377
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:APAlch:SAPattern.....	377
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:CCODE.....	378
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:DATA.....	378
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:DATA:DSElect.....	379
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:DATA:PATtern.....	379
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:DPCCh:MCODE.....	380
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:DPCCh:PLENgtH.....	380
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:DPCCh:POFFset:PILot.....	381
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:DPCCh:POFFset:TFCI.....	381
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:DPCCh:POFFset:TPC.....	381
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:DPCCh:TFCI.....	382
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:DPCCh:TFCI:STate.....	382
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:DPCCh:TPC:DATA.....	382
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:DPCCh:TPC:DATA:DSElect.....	383
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:DPCCh:TPC:DATA:PATtern.....	384
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:DPCCh:TPC:MISuse.....	384
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:DPCCh:TPC:PSTep.....	384
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:DPCCh:TPC:READ.....	385
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:FDPCh:DPCCh:TPC:DATA.....	385
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:FDPCh:DPCCh:TPC:DATA:DSElect.....	386
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:FDPCh:DPCCh:TPC:DATA:PATtern.....	387
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:FDPCh:DPCCh:TPC:MISuse.....	387
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:FDPCh:DPCCh:TPC:PSTep.....	388
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:FDPCh:DPCCh:TPC:READ.....	388
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:BMODE[:STate].....	389
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:CVPB.....	389
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:ACLength.....	390
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:ALTModulation.....	390
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:AMODE.....	389
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:BCBTti<di>?.....	390
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:BPAYload<di>?.....	391
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:CLENgtH.....	391
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:CRATE<di>?.....	392
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:DATA.....	392
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:DATA:DSElect.....	393
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:DATA:PATtern.....	393
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:HARQ:LENGth.....	394

[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:HARQ:MODE.....	394
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:HSCCode.....	394
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:MODulation<di>.....	395
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:NAIBitrate?.....	395
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:PREDefined.....	396
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:PWPatten.....	396
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:RVParameter<di>.....	396
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:RVPSequen<di>.....	397
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:RVSTate.....	398
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:S64Qam.....	398
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:SCCode.....	399
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:SEED.....	398
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:SLENGth:ADJust.....	400
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:SLENGth?.....	399
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:SPATtern<di>?.....	400
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:STAPatten.....	400
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:TBS:INDeX<di>.....	402
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:TBS:REFeRen<di>.....	402
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:TBS:TABLe<di>.....	402
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:TPOWer.....	401
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:TYPE.....	403
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:UECategory?.....	403
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:UEID.....	404
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:HSET:VIBSize<di>.....	404
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:MIMO:CVPB<di>.....	405
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:MIMO:MODulation<di>.....	405
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:MIMO:PWPatten.....	405
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:MIMO:STAPatten.....	406
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:MODE.....	406
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:HSDPa:TTIDistance.....	406
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:POWer.....	407
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:SFORmat.....	407
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:SRATe.....	408
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:STATe.....	408
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:TOFFset.....	408
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>:TYPE.....	409
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>[:HSUPa]:EAGCh:IFCoding.....	409
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>[:HSUPa]:EAGCh:TTI<di0>:AGSCope.....	410
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>[:HSUPa]:EAGCh:TTI<di0>:AGVIndex.....	410
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>[:HSUPa]:EAGCh:TTI<di0>:UEID.....	410
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>[:HSUPa]:EAGCh:TTICount.....	410
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>[:HSUPa]:EAGCh:TTIEdch.....	411
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>[:HSUPa]:EHICH:CTYPE.....	411
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>[:HSUPa]:EHICH:DTAU.....	412
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>[:HSUPa]:EHICH:ETAU?.....	412
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>[:HSUPa]:EHICH:RGPattern.....	412
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>[:HSUPa]:EHICH:SSIndex.....	413
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>[:HSUPa]:EHICH:TTIEdch.....	413
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>[:HSUPa]:ERGCh:CTYPE.....	413
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>[:HSUPa]:ERGCh:DTAU.....	413

[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>[:HSUPa]:ERGCh:ETAU?	414
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>[:HSUPa]:ERGCh:RGPattern	414
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>[:HSUPa]:ERGCh:SSIndex	414
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CHANnel<ch0>[:HSUPa]:ERGCh:TTIEdch	415
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CMODE:DLFStructure	415
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CMODE:METHod	415
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CMODE:PATtern<ch>:TGD	416
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CMODE:PATtern<ch>:TGL<di>	416
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CMODE:PATtern<ch>:TGPL	416
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CMODE:PATtern<ch>:TGSN	416
[SOURce<hw>]:BB:W3GPp:BSTation<st>:CMODE:STATe	418
[SOURce<hw>]:BB:W3GPp:BSTation<st>:DCONflict:RESolve	418
[SOURce<hw>]:BB:W3GPp:BSTation<st>:DCONflict[:STATe]?	418
[SOURce<hw>]:BB:W3GPp:BSTation<st>:ENHanced:CHANnel<ch0>:DPCH:DPControl:RANGe:UP	437
[SOURce<hw>]:BB:W3GPp:BSTation<st>:ENHanced:PCPich:PATtern	422
[SOURce<hw>]:BB:W3GPp:BSTation<st>:OLTDiversity	418
[SOURce<hw>]:BB:W3GPp:BSTation<st>:PINDicator:COUNt	419
[SOURce<hw>]:BB:W3GPp:BSTation<st>:SCODE	419
[SOURce<hw>]:BB:W3GPp:BSTation<st>:SCODE:STATe	419
[SOURce<hw>]:BB:W3GPp:BSTation<st>:SCPich:PREFerence[:STATe]	420
[SOURce<hw>]:BB:W3GPp:BSTation<st>:SSCG?	420
[SOURce<hw>]:BB:W3GPp:BSTation<st>:STATe	420
[SOURce<hw>]:BB:W3GPp:BSTation<st>:TDElay	421
[SOURce<hw>]:BB:W3GPp:BSTation<st>:TDIVersity	421
[SOURce<hw>]:BB:W3GPp:BSTation<st> MSTation<st>:CMODE:POFFset	417
[SOURce<hw>]:BB:W3GPp:BSTation<st> MSTation<st>:CMODE:POMode	417
[SOURce<hw>]:BB:W3GPp:CLIPping:LEVel	358
[SOURce<hw>]:BB:W3GPp:CLIPping:MODE	359
[SOURce<hw>]:BB:W3GPp:CLIPping:STATe	359
[SOURce<hw>]:BB:W3GPp:CLOCK:MODE	369
[SOURce<hw>]:BB:W3GPp:CLOCK:SOURce	369
[SOURce<hw>]:BB:W3GPp:COPY:COFFset	355
[SOURce<hw>]:BB:W3GPp:COPY:DESTination	356
[SOURce<hw>]:BB:W3GPp:COPY:EXECute	356
[SOURce<hw>]:BB:W3GPp:COPY:SOURce	357
[SOURce<hw>]:BB:W3GPp:CRATe:VARiation	360
[SOURce<hw>]:BB:W3GPp:CRATe?	359
[SOURce<hw>]:BB:W3GPp:FILTer:PARAmeter:APCO25	360
[SOURce<hw>]:BB:W3GPp:FILTer:PARAmeter:COSSine	360
[SOURce<hw>]:BB:W3GPp:FILTer:PARAmeter:GAUSSs	360
[SOURce<hw>]:BB:W3GPp:FILTer:PARAmeter:LPASSs	361
[SOURce<hw>]:BB:W3GPp:FILTer:PARAmeter:LPASSEVM	361
[SOURce<hw>]:BB:W3GPp:FILTer:PARAmeter:RCOSSine	361
[SOURce<hw>]:BB:W3GPp:FILTer:PARAmeter:SPHase	362
[SOURce<hw>]:BB:W3GPp:FILTer:TYPE	362
[SOURce<hw>]:BB:W3GPp:LINK	357
[SOURce<hw>]:BB:W3GPp:LREFerence	447
[SOURce<hw>]:BB:W3GPp:MSTation:ADDitional:COUNt	443
[SOURce<hw>]:BB:W3GPp:MSTation:ADDitional:POWer:OFFSet	444
[SOURce<hw>]:BB:W3GPp:MSTation:ADDitional:SCODE:STEP	444

[SOURce<hw>]:BB:W3GPp:MSTation:ADDITIONal:STATe.....	445
[SOURce<hw>]:BB:W3GPp:MSTation:ADDITIONal:TDElay:STEP.....	445
[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:BPFRame?.....	529
[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:CCODing:STATe.....	530
[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:CCODing:TYPE.....	530
[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:CCODing:USER:CATalog?.....	531
[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:CCODing:USER:DELeTe.....	531
[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:CCODing:USER:LOAD.....	532
[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:CCODing:USER:STORe.....	532
[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:DERRor:BIT:LAYer.....	532
[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:DERRor:BIT:RATE.....	533
[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:DERRor:BIT:STATe.....	533
[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:DERRor:BLOCK:RATE.....	534
[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:DERRor[BLOCK]:STATe.....	534
[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:INTerleaver2.....	534
[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:ORATe.....	535
[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:STATe.....	535
[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:TCHannel<di0>:CRCSiZe.....	537
[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:TCHannel<di0>:DATA.....	537
[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:TCHannel<di0>:DATA:DSELeCt.....	538
[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:TCHannel<di0>:DATA:PATTern.....	538
[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:TCHannel<di0>:EPRotection.....	538
[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:TCHannel<di0>:INTerleaver.....	539
[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:TCHannel<di0>:RMATtribute.....	535
[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:TCHannel<di0>:STATe.....	536
[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:TCHannel<di0>:TBCount.....	536
[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:TCHannel<di0>:TBSize.....	536
[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:DPDCh:TCHannel<di0>:TTINterval.....	536
[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:PCPCh:CCODing:STATe.....	539
[SOURce<hw>]:BB:W3GPp:MSTation:ENHanced:PCPCh:CCODing:TYPE.....	540
[SOURce<hw>]:BB:W3GPp:MSTation:PRESet.....	445
[SOURce<hw>]:BB:W3GPp:MSTation:UDTX:BURSt<ch>.....	522
[SOURce<hw>]:BB:W3GPp:MSTation:UDTX:CYCLe<ch>.....	522
[SOURce<hw>]:BB:W3GPp:MSTation:UDTX:ITHReshold.....	521
[SOURce<hw>]:BB:W3GPp:MSTation:UDTX:LPLength.....	521
[SOURce<hw>]:BB:W3GPp:MSTation:UDTX:MODE.....	520
[SOURce<hw>]:BB:W3GPp:MSTation:UDTX:OFFSet.....	521
[SOURce<hw>]:BB:W3GPp:MSTation:UDTX:POSTamble<ch>?.....	523
[SOURce<hw>]:BB:W3GPp:MSTation:UDTX:PREamble<ch>?.....	522
[SOURce<hw>]:BB:W3GPp:MSTation:UDTX:STATe.....	520
[SOURce<hw>]:BB:W3GPp:MSTation:UDTX:TTIEdch.....	520
[SOURce<hw>]:BB:W3GPp:MSTation:UDTX:USCH:CATalog?.....	523
[SOURce<hw>]:BB:W3GPp:MSTation:UDTX:USCH:DELeTe.....	523
[SOURce<hw>]:BB:W3GPp:MSTation:UDTX:USCH:FSELeCt.....	524
[SOURce<hw>]:BB:W3GPp:MSTation[ENHanced:DPDCh]:DPControl:AOUE.....	528
[SOURce<hw>]:BB:W3GPp:MSTation[ENHanced:DPDCh]:DPControl:ASSignment.....	525
[SOURce<hw>]:BB:W3GPp:MSTation[ENHanced:DPDCh]:DPControl:CONNector.....	526
[SOURce<hw>]:BB:W3GPp:MSTation[ENHanced:DPDCh]:DPControl:DIRection.....	525
[SOURce<hw>]:BB:W3GPp:MSTation[ENHanced:DPDCh]:DPControl:MODE.....	526
[SOURce<hw>]:BB:W3GPp:MSTation[ENHanced:DPDCh]:DPControl:RANGe:DOWN.....	527

[SOURce<hw>]:BB:W3GPp:MSTation[:ENHanced:DPDCh]:DPControl:RANGe:UP	527
[SOURce<hw>]:BB:W3GPp:MSTation[:ENHanced:DPDCh]:DPControl:STATe	527
[SOURce<hw>]:BB:W3GPp:MSTation[:ENHanced:DPDCh]:DPControl:STEP:MANual	527
[SOURce<hw>]:BB:W3GPp:MSTation[:ENHanced:DPDCh]:DPControl:STEP[:EXTerナル]	528
[SOURce<hw>]:BB:W3GPp:MSTation[:ENHanced:DPDCh]:DPControl[:POWer]?	526
[SOURce<hw>]:BB:W3GPp:MSTation<st>:CHANnel<ch>:DPDCh:CCODE?	475
[SOURce<hw>]:BB:W3GPp:MSTation<st>:CHANnel<ch>:DPDCh:DATA	475
[SOURce<hw>]:BB:W3GPp:MSTation<st>:CHANnel<ch>:DPDCh:DATA:DSElect	476
[SOURce<hw>]:BB:W3GPp:MSTation<st>:CHANnel<ch>:DPDCh:DATA:PATTerナル	476
[SOURce<hw>]:BB:W3GPp:MSTation<st>:CHANnel<ch>:DPDCh:SRATE?	477
[SOURce<hw>]:BB:W3GPp:MSTation<st>:CMODE:METhod	448
[SOURce<hw>]:BB:W3GPp:MSTation<st>:CMODE:PATTerナル<ch>:TGD	448
[SOURce<hw>]:BB:W3GPp:MSTation<st>:CMODE:PATTerナル<ch>:TGL<di>	449
[SOURce<hw>]:BB:W3GPp:MSTation<st>:CMODE:PATTerナル<ch>:TGPL	449
[SOURce<hw>]:BB:W3GPp:MSTation<st>:CMODE:PATTerナル<ch>:TGSN	449
[SOURce<hw>]:BB:W3GPp:MSTation<st>:CMODE:STATe	449
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:CCODE?	450
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:FBI:MODE	450
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:FBI:PATTerナル	451
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:CCODE?	458
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:COMPAtibility	457
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:CQI:PLENgtH	460
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:CQI<ch>[:VALues]	461
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:HACK:REPeat	474
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:HACK:ROWS	469
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:HAPATterナル	460
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:MIMO:POAAck	461
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:MIMO:POANAck	462
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:MIMO:POCA	464
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:MIMO:PONAck	463
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:MIMO:PONNAck	463
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:MIMO:TTI<ch0>:CQI<di>	466
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:MIMO:TTI<ch0>:CQIType	465
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:MIMO:TTI<ch0>:HACK	465
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:MIMO:TTI<ch0>:PCI	465
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:MIMO:TTICount	464
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:MIMO[:MODE]	461
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:MMODE	468
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:PCQI:REPeat	474
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:PCQI:ROWS	469
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:POAck	459
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:PONAck	459
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:POWer	457
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:ROW<ch0>:HACK:FROM	470
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:ROW<ch0>:HACK:TO	470
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:ROW<ch0>:HACK<di>	470
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:ROW<ch0>:PCQI:FROM	472
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:ROW<ch0>:PCQI:TO	472
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:ROW<ch0>:PCQI<di>:CQI<us>	473
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:ROW<ch0>:PCQI<di>:PCI	473

[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:ROW<ch0>:PCQI<di>:TYPE.....	472
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:ROW<ch0>:POHAcK.....	471
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:ROW<ch0>:POPCqI.....	473
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:SC:ACTive.....	469
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:SC:ENABled.....	469
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:SDElay.....	458
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:SFORMat?.....	468
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:SLENgth:ADJust.....	474
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:SLENgth?.....	474
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:STATe.....	457
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:HS:TTIDistance.....	458
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:POWEr.....	451
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:SFORMat.....	452
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:TFCI.....	452
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:TFCI:STATe.....	452
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:TOFFset.....	453
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:TPC:DATA.....	453
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:TPC:DATA:DSElect.....	454
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:TPC:DATA:PATtern.....	454
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:TPC:MISe.....	454
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:TPC:MODE.....	455
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:TPC:PSTep.....	455
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPCCh:TPC:READ.....	456
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPDCh:FCIO.....	477
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPDCh:ORATe.....	478
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPDCh:POWEr.....	478
[SOURce<hw>]:BB:W3GPp:MSTation<st>:DPDCh:STATe.....	478
[SOURce<hw>]:BB:W3GPp:MSTation<st>:ENHanced:PRACH:CCODing:STATe.....	540
[SOURce<hw>]:BB:W3GPp:MSTation<st>:ENHanced:PRACH:CCODing:TYPE.....	540
[SOURce<hw>]:BB:W3GPp:MSTation<st>:MODE.....	445
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:CPOWEr.....	479
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:CPSFormat.....	480
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:DATA.....	480
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:DATA:DSElect.....	481
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:DATA:PATtern.....	481
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:DPOWEr.....	481
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:FBI:MODE.....	482
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:FBI:PATtern.....	482
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:MLENgth.....	482
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:PLENgth.....	483
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:PPOWEr.....	483
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:PPOWEr:STEP.....	483
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:PREPetition.....	484
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:RAFTer.....	484
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:RARB.....	484
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:SIGNature.....	485
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:SRATe.....	485
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:TFCI.....	486
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:TIMing:DPOWEr:MPART?.....	486
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:TIMing:DPOWEr:PREamble?.....	486

[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:TIMing:SOFFset.....	487
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:TIMing:SPERiod?.....	487
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:TIMing:TIME:PREMp.....	487
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:TIMing:TIME:PREPre.....	488
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:TPC:DATA.....	488
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:TPC:DATA:DSElect.....	488
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:TPC:DATA:PATtern.....	489
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PCPCh:TPC:READ.....	489
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:ATTiming.....	490
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:CPOwer.....	491
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:DATA.....	491
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:DATA:DSElect.....	492
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:DATA:PATtern.....	492
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:DPOwer.....	492
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:MLEngth.....	493
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:PPOwer.....	493
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:PPOwer:STEP.....	493
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:PREPetition.....	494
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:RAFTer.....	494
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:RARB.....	494
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:SFOrmat.....	495
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:SIGNature.....	495
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:SRATe.....	495
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:TFCI.....	496
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:TIMing:DPOwer:MPARt:CONTRol?.....	497
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:TIMing:DPOwer:MPARt:DATA?.....	497
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:TIMing:DPOwer:MPARt?.....	496
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:TIMing:DPOwer:PREamble?.....	497
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:TIMing:SOFFset.....	498
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:TIMing:SPERiod?.....	498
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:TIMing:TIME:PREMp.....	498
[SOURce<hw>]:BB:W3GPp:MSTation<st>:PRACH:TIMing:TIME:PREPre.....	499
[SOURce<hw>]:BB:W3GPp:MSTation<st>:SCODE.....	446
[SOURce<hw>]:BB:W3GPp:MSTation<st>:SCODE:MODE.....	447
[SOURce<hw>]:BB:W3GPp:MSTation<st>:STATe.....	447
[SOURce<hw>]:BB:W3GPp:MSTation<st>:TDElay.....	447
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:CHANnel<ch>:DPDCh:E:CCODE?.....	500
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:CHANnel<ch>:DPDCh:E:DATA.....	501
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:CHANnel<ch>:DPDCh:E:DATA:DSElect.....	501
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:CHANnel<ch>:DPDCh:E:DATA:PATtern.....	502
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:CHANnel<ch>:DPDCh:E:POwer.....	502
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:CHANnel<ch>:DPDCh:E:SRATe?.....	502
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:CCODE?.....	514
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:CHANnel.....	503
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:CRATe?.....	503
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:DATA.....	503
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:DATA:DSElect.....	504
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:DATA:PATtern.....	504
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:DERRor:BIT:LAYer.....	505
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:DERRor:BIT:RATE.....	505

[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:DERRor:BIT:STATe.....	505
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:DERRor:BLOCK:RATE.....	506
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:DERRor:BLOCK:STATe.....	506
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:DTX:PATtern.....	506
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:DTX:STATe.....	507
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:HARQ:SIMulation:ADEFinition.....	507
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:HARQ:SIMulation:CONNector.....	507
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:HARQ:SIMulation:DELAy:AUSer.....	508
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:HARQ:SIMulation:DELAy: FEEDback?.....	508
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:HARQ:SIMulation:MODE.....	508
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:HARQ:SIMulation: MRETransmissions.....	509
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:HARQ:SIMulation:RVZero.....	509
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:HARQ:SIMulation[:STATe].....	509
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:HARQ[:SIMulation]:PATtern<ch>.....	510
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:HPRocesses?.....	510
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:MIBRate?.....	510
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:MODulation.....	511
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:ORATe.....	511
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:PAYBits?.....	511
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:STATe.....	512
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:TBS:INDEx.....	512
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:TBS:TABLe.....	512
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:TTIBits?.....	513
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:TTIEdch.....	513
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:FRC:UECategory?.....	514
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:HBIT.....	514
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:POWer.....	514
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:RSNumber.....	515
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:STATe.....	515
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPCCh:E:TFCI.....	515
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPDCh:E:FCIO.....	516
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPDCh:E:MODulation.....	516
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPDCh:E:ORATe.....	516
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPDCh:E:STATe.....	517
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:DPDCh:E:TTIEdch.....	517
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:EDCH:REPeat.....	518
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:EDCH:ROW<ch0>:FROM.....	518
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:EDCH:ROW<ch0>:TO.....	518
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:EDCH:ROWCount.....	518
[SOURce<hw>]:BB:W3GPp:MSTation<st>[:HSUPa]:EDCH:TTIEdch.....	517
[SOURce<hw>]:BB:W3GPp:POWer:ADJust.....	357
[SOURce<hw>]:BB:W3GPp:POWer[:TOTal]?.....	358
[SOURce<hw>]:BB:W3GPp:PPARameter:CRESt.....	370
[SOURce<hw>]:BB:W3GPp:PPARameter:DPCH:COUNT.....	371
[SOURce<hw>]:BB:W3GPp:PPARameter:DPCH:SRATe.....	371
[SOURce<hw>]:BB:W3GPp:PPARameter:EXECute.....	371
[SOURce<hw>]:BB:W3GPp:PPARameter:SCCPch:SRATe.....	372
[SOURce<hw>]:BB:W3GPp:PPARameter:SCCPch:STATe.....	372

[SOURce<hw>]:BB:W3GPp:PPARameter:SCHannels.....	372
[SOURce<hw>]:BB:W3GPp:PRESet.....	352
[SOURce<hw>]:BB:W3GPp:SETTing:CATalog?.....	353
[SOURce<hw>]:BB:W3GPp:SETTing:DELeTe.....	353
[SOURce<hw>]:BB:W3GPp:SETTing:LOAD.....	353
[SOURce<hw>]:BB:W3GPp:SETTing:STORe.....	354
[SOURce<hw>]:BB:W3GPp:SETTing:TMODeL:BSTation.....	373
[SOURce<hw>]:BB:W3GPp:SETTing:TMODeL:BSTation:CATalog?.....	373
[SOURce<hw>]:BB:W3GPp:SETTing:TMODeL:MSTation.....	373
[SOURce<hw>]:BB:W3GPp:SETTing:TMODeL:MSTation:CATalog?.....	374
[SOURce<hw>]:BB:W3GPp:SLENgth.....	354
[SOURce<hw>]:BB:W3GPp:STATe.....	354
[SOURce<hw>]:BB:W3GPp:TRIGger:ARM:EXECute.....	364
[SOURce<hw>]:BB:W3GPp:TRIGger:EXECute.....	365
[SOURce<hw>]:BB:W3GPp:TRIGger:EXTernal:SYNChronize:OUTPut.....	365
[SOURce<hw>]:BB:W3GPp:TRIGger:OBASeband:DELay.....	365
[SOURce<hw>]:BB:W3GPp:TRIGger:OBASeband:INHibit.....	365
[SOURce<hw>]:BB:W3GPp:TRIGger:OUTPut<ch>:DELay.....	368
[SOURce<hw>]:BB:W3GPp:TRIGger:OUTPut<ch>:MODE.....	367
[SOURce<hw>]:BB:W3GPp:TRIGger:OUTPut<ch>:OFFTime.....	368
[SOURce<hw>]:BB:W3GPp:TRIGger:OUTPut<ch>:ONTime.....	368
[SOURce<hw>]:BB:W3GPp:TRIGger:OUTPut<ch>:PERiod.....	368
[SOURce<hw>]:BB:W3GPp:TRIGger:RMODe?.....	366
[SOURce<hw>]:BB:W3GPp:TRIGger:SLENgth.....	366
[SOURce<hw>]:BB:W3GPp:TRIGger:SLUNit.....	366
[SOURce<hw>]:BB:W3GPp:TRIGger:SOURce.....	364
[SOURce<hw>]:BB:W3GPp:TRIGger[:EXTernal]:DELay.....	366
[SOURce<hw>]:BB:W3GPp:TRIGger[:EXTernal]:INHibit.....	367
[SOURce<hw>]:BB:W3GPp:WAVEform:CREate.....	355
[SOURce<hw>]:BB:W3GPp[:TRIGger]:SEQuence.....	363

Index

Symbols

(Mis-) use TPC for output power control

DPCCH	146, 181, 384, 454
F-DPCH	387
2nd search code group	79
2nd Search Code Group	420
3GPP Version	57, 355
3i OCNS mode	31
4C-HSDPA Mode	194, 195
4C-HSPDA	
Reference Measurement Channel	274
8C-HSDPA Mode	194, 195

A

Absolute Grant Scope	149
Absolute Grant Value Index	149
Accept	
Multi channel assistant	158
Predefined Settings	76
Accept copy	356
Access Slot	141
ACK Definition (HARQ)	
HSUPA FRC	219, 507
ACK Pattern	
AICH/AP-AICH	140
AP-AICH	377
HSUPA	151
Additional UE	77
Additional User Delay	
HSUPA FRC	219, 508
Adjust	
HSDPA	105
Adjust ARB sequence length	
HS-DPCCH	200, 201
Adjust total power to 0 dB	69
Adjust Total Power to 0 dB	357
Advanced Mode	
HSDPA	104, 389
AICH Settings	140
AICH transmission timing	
PCPCH	252
AICH Transmission Timing	
PCPCH	487
PRACH	490, 498
Alternate HS-PDSCH Modulation	119
Alternate number of HS-PDSCH channelization codes ..	119
Always Use Redundancy Version 0 (HARQ)	
HSUPA FRC	218, 509
AP-AICH Settings	140
Application cards	15
Application notes	15
Apply	289
ARB sequence length	
PCPCH	253
Repeat structure after	242, 253
ARB sequence Length	
PRACH	242
ARB Settings	58
Arm trigger	60
Armed_Auto	59
Armed_Retrigger	59

Assignment Mode for UL-DTX	172
At Slot	96
Auto	59
AWGN C/N	297, 329, 335
AWGN E/N	317
AWGN Power Level	297, 317, 329, 335
AWGN state	296, 329
AWGN State	317

B

Base station default values	66, 355
Base station identification	79
Baseband A signal routing	287
Baseband C/D	
Disabled realtime functions	54
Binary channel bits per TTI	111
Binary Channel Bits per TTI	390
Binary Channel Bits/TTI (Nbin)	
HSUPA FRC	513
Bit error rate	
HSDPA H-Set	117
Bit Error Rate	314, 326
Enhanced DPCHs	133
Enhanced DPDCH UE1	236
HSUPA FRC	220
Bit error state	220
Enhanced DPDCH UE1	236
HSDPA H-Set	117
Bit Error state	
Enhanced DPCHs	132
Bit Error State	
Enhanced DPCHs	440
Enhanced DPDCH	533
HSDPA H-Set	442
HSUPA FRC	505
Bits per Frame	
DPDCH	128, 232, 529
Block Error Rate	314, 326
Enhanced DPCHs	133
Enhanced DPDCH UE1	237
HSDPA H-Set	117, 442
HSUPA FRC	221
Block error state	
Enhanced DPCHs	133
Enhanced DPDCH UE1	237
HSDPA H-Set	117
HSUPA FRC	221
Block Error State	
Enhanced DPCHs	441
Enhanced DPDCH	534
HSDPA H-Set	442
HSUPA FRC	506
Blocking scenario	302
Brochures	15
BS frequency	348
BS power	348
Burst Mode	99, 103
HSDPA	389
BxT	261, 360

C

Channel Coding	
UE1	231
Channel Coding State	
Enhanced P-CCPCH	434
UE1	530
Channel Coding Type	
Enhanced P-CCPCH	123
P-CCPCH	434
Channel graph	88
Channel number	84
Channel Number	
DPDCH	184
E-DPDCH	223
Channel P-CCPCH	121
Channel power	
Multi channel assistant	157
Channel Power	85
DPDCH	182
Channel state	87
Multi channel assistant	158
Channel State	
BS	408
Channel table	
DPCCH	175
DPDCH	182, 184, 565
E-DCH	224
E-DPDCH	221
Channel Table	
E-DPDCH	223, 566, 568
Channel type	
Multi channel assistant	156
Channel Type	84
DPDCH	184
E-DPDCH	223
Channelization code	85
DPCCH	176
HS-DPCCH	191
Multi channel assistant	156
Channelization Code	
DPDCH	184, 475
E-DPCCH	208
E-DPDCH	223
Channelization code HS-SCCH (SF128)	109
Channelization Code Offset	67
Channelization code step	
Multi channel assistant	157
Chip Rate	57, 359
Chip Rate Variation	262
Clipping Level	264, 358
Clipping Mode	264, 359
Clipping Settings	58
Clock Mode	65
Clock Source	65
Code domain conflict	88, 89, 164
Code domain graph	
UE	164
Code domain ideal display	89, 164
Code tree of channelization codes	89
Coding rate	112
Coding Rate	392
Coding rate (Ninf/Nbin)	
HSUPA FRC	214
Coding Rate (Nint/Nbin)	
HSUPA FRC	503

Coding state	
PCPCH	259
PRACH	247
Coding State	
PCPCH	539
PRACH	540
Coding Type	127, 426
Enhanced DPDCH UE1	231
PCPCH	259, 540
PRACH	247, 540
Coding Type Enhanced	
DPDCH	530
Common trigger settings	59
Compatibility Mode	
HS-DPCCH	190
Composite CQI	
HS-DPCCH	200
Compressed Mode	
BS	418
Constellation version parameter b	100, 102
Constellation Version Parameter b	405
Control Power	
PCPCH	255
PRACH	245, 491
Conventions	
SCPI commands	351
Convolution coder	
BS1	131
UE1	235
Convolution Coder	
UE1	538
Copy	
Base Station	67, 356
from Source	67
User Equipment	67, 356
Copy from Source	357
Copying the data of a base or user equipment	356
Coupled trigger settings	59
CQI	
HS-DPCCH	200, 207
CQI Length	
HS-DPCCH	203
CQI Type	
HS-DPCCH	198, 207
CQI Values	
HS-DPCCH	203
CQI1	
HS-DPCCH	200, 207
CQI2	
HS-DPCCH	200, 207
CQIs	
HS-DPCCH	200, 207
Crest factor	76
Clipping	358
Crest factor - timing offset	86
Crest factor - Clipping	262
Current ARB sequence length	
HS-DPCCH	200
Cut Off Frequency Factor	262
CW Frequency Offset	311
CW Interferer Level	312
CW Interferer state	311

D

Data	
BS	86, 378

Data config	86
Data Power	
PCPCH	255
PRACH	245, 492
Data rate matching	
BS1	130
UE1	235
Data sheets	15
Data source	26
DPCCH	144, 180
DPDCH	185
E-DPDCH	224
F-DPCCH	153
HSUPA FRC	212
Multi channel assistant	157
PCPCH	257
PRACH	246
Transport channel	129, 233
Data Source	
DPDCH	475
E-DCH	503
E-DPDCH	501
HS-PDSCH	108
PCPCH	480
PRACH	491
Transport Channel	430
DC-HSDPA Mode	194, 195
DCCH Dedicated Control Channel	125
DCCH On	
Enhanced DPCH	433
DCCH on enhanced DPCH	129
DCCH-Dedicated Control Channel	229
Default settings	56, 66, 355
All channels	83
BS	376
Channel table	83
HSDPA H-Set	83
Default Values User Equipment	67
Delay	
Marker	64
Trigger	62
Delay between HARQ and feedback (HARQ)	
HSUPA FRC	219
Delay Between HARQ And Feedback (HARQ)	
HSUPA FRC	508
Direction	436
Dynamic Power Control	137, 171
Distance	96
Diversity	80, 287
BS	421
DL Frame Structure	94, 415
DL-UL timing offset	
DPCCH	177
Documentation overview	14
Down range	171
Dynamic Power Control	137
Downlink	57
DPCCH + DPDCH	161, 445
DPCCH Burst Length	169
DPCCH Settings	141
DTCH Dedicated Traffic Channel	125
DTCH On	
Enhanced DPCH	433
DTCH on enhanced DPCH	129
DTCH-Dedicated Traffic Channel	229
DTX cycle	
UL-DTX	169

DTX indication bits	
BS1	131
DTX Indication Bits	431
Dynamic Power Control	163, 170
Direction	137, 171
DL	136
Down Range	437, 527
Power Step	438
Step	528
Up Range	437, 527
Dynamic Power Control Direction	525
BS1	436
Dynamic Power Control Mode	136, 170
Dynamic range	
Dynamic Power Control	137, 171, 527

E

E-AGCH Information Filed Coding	149
E-AGCH Settings	148
E-DCH TTI	149, 150, 227
HSUPA FRC	213, 513
E-HICH Settings	150
E-RGCH Settings	150
Edit Mode	286
Enhanced Channels Coding	426
Enhanced DPCHs	422
Enhanced P-CPICH Pattern	120, 422
Enhanced Settings	
BS	84
P-CCPCH	121
P-CPICH	120
Error protection	
UE1	235
Error Protection	
BS1	131
UE1	538
External control signal	
Connector	137, 171
External Power Control	
BS1	136
External Trigger Delay	62

F

F-DPCH Settings	152
Fading state	319, 320, 332
FBI Mode	
DPCCH	179, 450
PCPCH	256, 482
FBI pattern	
PCPCH	256
FBI Pattern	
DPCCH	179
Filter	
Type	261
Filter Parameter	261, 360
Filtering Settings	58
Filtering, Clipping, ARB Settings	260
Fixed reference Channel	211
Fixed Reference Channel	503
Fixed reference Channel (FRC)	
HSUPA FRC	211
Fixed Reference Channel (FRC)	
HSUPA	503
Force Channelization Code to I/O	477
E-DPDCH	516

Force Channelization Code to I/Q	183
E-DPDCH	222
FRC	211, 503
Frequency Offset	299, 303, 348

G

Gap Distance	
BS	96
Gap Length	96
Generate Waveform	57
Getting started	14

H

H-Set	104
Happy Bit	
E-DPCCH	209, 514
HARQ feedback	
connectors	219
HARQ-ACK	
HS-DPCCH	195, 206
HARQ-ACK pattern	
HS-DPCCH	203
HSUPA FRC	218
HARQ-ACK Pattern	
HS-DPCCH	460
Help	14
Higher layer scheduling	94, 415
UE	448
HS-DPCCH Power	188
HS-PDSCH Modulation	111
HS-SCCH Type	105, 403
HSDPA H-Set settings	102
HSDPA Mode	99, 102
BS	406
HSDPA Settings	
BS	98
HSUPA FRC	209
HSUPA settings	148, 150

I

Inactivity threshold	168
Information bit payload	112
HSUPA FRC	214
Information Bit Payload	391
Information Bit Payload (Ninf)	
HSUPA FRC	511
Insert errors	117
HSUPA FRC	220
Insert Errors On	
Enhanced DPCHs	133, 439
Enhanced DPDCH	532
Enhanced DPDCH UE1	236
HSDPA H-Set	441
HSUPA FRC	505
Installation	18
Instrument help	14
Instrument security procedures	15
Inter TTI Distance	100, 113
HSDPA	406
Inter-TTI distance	
HS-DPCCH	191
Interferer Bandwidth Type	311
Interferer Frequency Offset	299, 303, 348
Interferer Level	303

Interferer Level / Wanted Signal Level	349
Interferer Modulation	299, 303, 312
Interferer Signal state	299, 303, 348
Interleaver	
P-CCPCH	434
Interleaver P-CCPCH	123

L

Layer	
Bit error insertion	133, 236
Level reference	
see Power reference	69
Link Direction	57, 357
Long Preamble Length	168
Long scrambling code	162
Long Scrambling Code	
UE	447

M

Marker Configuration	287
Marker delay	64
Maximum information bitrate	
HSUPA FRC	211
Maximum number of retransmissions (HARQ)	
HSUPA FRC	219
Maximum Number Of Retransmissions (HARQ)	
HSUPA FRC	509
Measured external clock	65
Message Length	
PCPCH	256, 482
PRACH	245, 493
Method for compressed mode	94
BS	94, 415
UE	448
MIMO	80
BS	421
MIMO Mode	
HS-DPCCH	194, 204
Mod Frequency Offset	311
Mod Interferer Level	312
Mod Interferer state	311
Mode	
Dynamic Power Control	136, 170
HARQ Simulation	394
UE	161, 445
Mode (HARQ simulation)	115
Mode (HARQ)	
HSUPA FRC	217
Modulation	
BS	101
E-DPDCH	222, 516
HSUPA FRC	212, 511
Modulation data	
BS	86, 378
Multi Channel Assistant	156
Multicode state	
DPCCH	143
Multicode State	
DPCCH	380

N

Nominal average information bitrate	105
Number of additional UE	78, 443
Number of configurable TTIs	149

Number of DPCH	
Predefined Settings	76
Number of H-PDSCH channel codes	109
Number of H-PDSCH Channel Codes	391
Number of HARQ processes	
HSUPA FRC	213
Number of HARQ Processes	114
Number Of HARQ Processes	
HSUPA FRC	510
Number of intervals	
HARQ-ACK	195
PCI / CQI	198
Number of PI per Frame	80, 419
Number of TTIs	
HS-DPCCH	206

O

OCNS	81
OCNS Mode	81
Offset	
UL-DTX	167
Open loop transmit diversity	80
Open Loop Transmit Diversity	418
Open source acknowledgment (OSA)	15
Operating Band	302
Overall Symbol Rate	
DPDCH	183, 478
E-DPDCH	222
UE1	232, 535
Overall Symbol Rate DPDCH	342
Overall Symbol Rate RFC	
HSUPA FRC	212

P

Pattern	
BS	86, 378
Pattern Length	
BS	97
PCI	
HS-DPCCH	200, 207
PCPCH only	161, 248, 445
PCPCH settings	248
Channel coding	259
Graphical display	250
Message part	255
Preamble settings	253
PCPCH structure	250
Pilot Length	
DPCCH	139, 143
S-CCPCH	139, 143
Postamble Length	
UL-DTX	169
Power	
BS	85
DPCCH	451
E-DPCCH	208, 514
E-DPDCH	224, 502
HS-DPCCH	190
Multi channel assistant	157
Power class	288
Power Control	170
BS1	136
Power Control Gap	526
Power Control graph	
Ext. Power Control	172

Power Control Preamble Length	
PCPCH	255, 483
Power down steps	344
Power DPCCH	
DPCCH	176
Power Level	293, 342
Power Offset	
Additional UE	78
BS	95
Pilot DPCCH	147
TFCI DPCCH	148
TPC DPCCH	148
UE	95
Power Offset ACK	
HS-DPCCH	202
Power Offset ACK/ACK	
HS-DPCCH	205
Power Offset ACK/NACK	
HS-DPCCH	205
Power Offset CQI	
HS-DPCCH	199
Power Offset CQI Type A	
HS-DPCCH	206
Power Offset HARQ-ACK	
HS-DPCCH	197
Power Offset Mode	
BS	95, 417
UE	95, 417
Power Offset NACK	
HS-DPCCH	202
Power Offset NACK/ACK	
HS-DPCCH	205
Power Offset NACK/NACK	
HS-DPCCH	205
Power Offset PCI	
HS-DPCCH	199
Power ratio DPCCH/DPDCH	342
Power reference	69
Power step	137, 171
DPCCH	181
Multi channel assistant	157
Power Step	
TPC DPCCH	455
Power step TPC	
F-DPCCH	155
Power Step TPC	
DPCCH	384
F-DPCCH	388
Power step TPC - DPCCH	
DPCCH	146
Power up steps	343
PowMp	
PCPCH	251
PowMP	240
PowMpControl	240
PowMpData	240
PowPre	240
PCPCH	251
PRACH	
PowMP	240
PowMpControl	240
PowMpData	240
PowPre	240
PRACH only	161, 445
PRACH settings	237
Channel coding	246
Graphical display	239

Message part	244
Preamble settings	243
Preamble Length	
UL-DTX	169
Preamble Power	
PCPCH	254
PRACH	243, 493
Preamble Power step	
PCPCH	254
PRACH	243
Preamble Power Step	
PCPCH	483
PRACH	493
Preamble repetition	
PCPCH	254
PRACH	244
Preamble Repetition	
PCPCH	484
PRACH	494
Precoding weight pattern (w2)	101, 107
Precoding Weight Pattern (w2)	396, 405
Predefined H-Set	396
Predefined Settings	
Accept	371
Symbol Rate DPCH	371
Propagation Delay	343
Puncturing	94, 415
UE	448

R

Raised Cosine	
see Cosine	261
Random seed	119
Randomly varying modulation	119
Randomly varying number of codes	119
Rate Matching Attribute	
BS1	130
UE1	235
Read out mode	
DPCCH	145, 180
F-DPCCH	154
Read out Mode	
PCPCH	258
Read Out Mode	
DPCCH	385, 456
F-DPCH	388
Read Out Mode PCPCH	
PCPCH	489
Realtime functions	
Disabled in Baseband C/D	54
Recall	
3GPP FDD settings	56
Redundancy version parameter	115, 116
Redundancy Version Parameter	396
Redundancy Version Parameter Sequence	397
Reference Measurement Channel	293
Reference measurement channel coding types	127, 426
Relative Grant Pattern	151
Release notes	15
Repeat PCPCH structure	253
Repeat PRACH structure	243
Required BLER	317, 334
Required Pd	329
Reset all base stations	66
Reset All Base Stations	355
Reset All User Equipment	67
Retransmission Sequence Number	
E-DPCCH	208, 515
Retrigger	59
RF Frequency	342
RF Power	293, 342
RMSpPower	69
Roll Off	261, 360
RRC filter	
see Root Cosine	261

S

S-CCPCH Settings	138
Safety instructions	15
Save	
3GPP FDD settings	56
Scrambling code	
BS	79
UE	162
Scrambling Code	
UE	446
Scrambling code (hex)	288
Scrambling Code Step	78
Scrambling mode	
UE	162
Scrambling Mode	288
UE	447
Secondary cell	
Active	195
Enabled	194
Security procedures	15
Select Base Station	69
Select User Equipment	69
Sequence Length	
ARB	265
PCPCH	252
Service manual	14
Set to default	56
BS	376
Channel table	83
HSDPA H-Set	83
SF2	94, 415
SFN	122
SFN restart	122
Short scrambling code	162
Short Scrambling Code	
UE	447
Show coding	
PCPCH	260
PRACH	247
Signal duration	
Unit	59
Signal generation status	60
Signaling pattern	114
Signalling Pattern	
BS	400
Signature	
PCPCH	255, 485
PRACH	244, 495
Signature Hopping Pattern Index	151
Single	59
Size of CRC	429
BS1	130
UE1	235, 537
Slot format	85
4C-HSDPA	192
DPCCH	177

Enhanced DPCH	128	Symbol Rate	85
F-DPCCH	152	BS	408
Multi channel assistant	159	DPDCH	184, 477
PCPCH	256	E-DPDCH	223, 502
PRACH	245	Enhanced DPCH	128, 425
Slot format DPCCCH	342	PCPCH	256, 485
Slot Structure		PRACH	245, 495
DPCCH	141	Symbol Rate DPCH	371
F-DPCCH	152	Predefined Settings	76
S-CCPCH	139	System frame number	122
Spreading code generator (search code)	26	System information BCH	122
Spreading code number	85		
Standard settings	56	T	
All channels	83	Tau	
BS	376	DPCH	151
HSDPA H-Set	83	E-HICH	151
Start channel No		E-RGCH	151
Multi channel assistant	156	Test case	284
Start channelization code HS-PDSCH (SF16)	109	Test Model	72, 373
Start Delay m		Test Models (not standardized)	373
HS-DPCCH	190	TFCI	
Start Offset		DPCCH	139, 143, 179
PCPCH	487	PCPCH	257
PRACH	241, 498	PRACH	246
Start Offset PCPCH - UE	251	S-CCPCH	139, 143
State	56, 422	Time	
Bit Error	132	Preamble - message part	241
Block Error	133	Preamble - Preamble	241
BS	79	Time Delay	
Channel Coding	426	BS	80
Channel coding enhanced DPCHs	126	UE	163
Channel Coding Enhanced P-CCPCH	123	Time Delay Step	78
Clipping	262	Time Pre - MP	487, 490, 498
Compressed Mode	449	Time Pre - Pre	488, 499
DPDCH	182, 478	Time Pre->MP	252
Dynamic Power Control	136, 437	Time Pre->Pre	252
E-DPCCH	208, 515	Timing offset	
E-DPDCH	222, 517	DL-UL DPCCCH	177
Enhanced DPCH Channels	124	Multi channel assistant	159
Enhanced P-CCPCH	121	Timing Offset	86
HARQ	509	To Destination	67, 356
HS-DPCCH	189, 457	Total HS-PDSCH Power	109
HSUPA FRC	210, 512	Total power	69
Interleaver 1	131, 235, 432, 539	Total Power	358
Interleaver 2	131, 235, 429, 534	TPC data source	
Multicode	143	DPCCH	144, 180
Transport Channel	433, 536	PCPCH	257
Transport channel enhanced DPCH	129	TPC Data Source	
UE	161, 447	DPCCH	453
State (HARQ)		F-DPCH	385
HSUPA FRC	217	PCPCH	488
Step width power		TPC for output power control	
Multi channel assistant	157	F-DPCCH	154
Stop channel No		TPC Mode	
Multi channel assistant	156	DPCCH	179, 455
Store		TPC read out mode	145
3GPP FDD settings	56	DPCCH	180
Stream 2 active pattern	101, 107	F-DPCCH	154
Stream 2 Active Pattern	400, 406	TPC read out Mode	
Structure Length		PCPCH	258
PRACH	241	TPC Read Out Mode	
Suggested ARB sequence length	105	DPCCH	385, 456
HS-DPCCH	200	F-DPCH	388
Symbol rate		PCPCH	489
Multi channel assistant	159	TPC repeat pattern	344
		TPC start pattern	343

Transmission direction	57, 357
Transmission Time Interval	
E-DPCCH	227
E-DPDCH	227
Transmit Diversity	80, 418
Transport block size	
BS1	130
UE1	234
Transport Block Size	334, 338
Transport block size index	112
HSUPA FRC	214
Transport Block Size Index	402
HSUPA FRC	512
Transport block size reference	112
Transport Block Size Reference	402
Transport block size table	112
HSUPA FRC	213
Transport Block Size Table	402
HSUPA FRC	512
Transport blocks	
BS1	130
Transport Blocks	
UE1	536
Transport Channel	
Enhanced DPCH	129
Transport time interval	
BS1	130
UE1	234
Trigger	
Sync. output	61
Trigger Configuration	287
Trigger Delay	62
Trigger Mode	59
Trigger signal duration	59
Trigger source	60
Turbo coder	
BS1	131
UE1	235
Turbo Coder	
UE1	538
Tutorials	14
Two HARQ feedback lines	
enabling	219
Type of Cell	
HSUPA	150

U

UE category	
BS	403
HSDPA	105
HSUPA FRC	211
UE supports 64QAM	111
UE Supports 64QAM	398
UE_DTX_DRX_Offset	167
UEID	
A-EGCH	149
BS	109, 404
UL DTX	163, 167
Up range	171
Dynamic Power Control	137
Uplink	57
Use Channels needed for Sync of Mobile (UE)	75, 372
Use Compressed Mode	
BS	418
UE	449

Use E-TFCI	
E-DPCCH	209
Use S-CCPCH	75
Use S-CPICH as phase reference	80
Use S-CPICH as Phase Reference	420
Use scrambling code	
BS	79
Use Scrambling Code	
BS	419
Use TFCI	
DPCCH	139, 143, 179, 382, 452
S-CCPCH	139, 143
Use UL-DTX	163, 167
User coding	127
UE1	232
User Coding	531
User Data (DTX pattern)	
HSUPA FRC	215
User Data (DTX Pattern)	
HSUPA FRC	506
User Equipment default values	67
User manual	14

V

Version	57, 355
Virtual IR buffer size (per HARQ process)	112
Visualizing data bits of DPDCH with an oscilloscope	183

W

Wanted Signal / Interferer Level	299
Wanted signal state	292
Wanted Signal state	341
White papers	15