



# Portable Network Performance Analysis System

# SmartBits<sup>®</sup> 200

## Product Overview

The highly-portable Spirent Communications SmartBits 200 (SMB-200) is a 4-port performance analysis system that can be easily dispatched to the test site. With GPS support, the SMB-200 can also be used to create a distributed performance analysis system for measuring end-to-end performance, including one-way latency and latency variation. The SMB-200 is based on the same industry standard as the SMB-2000. The SMB-200 and SMB-2000 also share the same software and SmartCards.

With increasingly complex hybrid networks and deployments of advanced technologies, the SMB-200 is the most compact and powerful performance analyzer on the market for end-to-end testing, with options for testing 10/100/1000 Mbps Ethernet, ATM, and Frame Relay devices. The SMB-200 supports sophisticated automated industry standard performance tests as defined in RFCs 1242, 1944, 2285, and 2432.

## The SMB-200 is Designed for:

- Network Equipment Manufacturers: Test your device, then carry it along with an SMB-200, to your customer site to prove your device's performance.
- Evaluation Labs: Test and certify different devices from various manufacturers to benchmark their performance.
- Telcos and ISPs: Perform end-to-end testing to check for trouble spots and weaknesses.
- Enterprise Users: Test end-to-end performance to monitor throughput and prevent overload.

## SMB-200 Features

- Small, lightweight, and portable.
- Holds up to four SmartCards.
- Bundled with three PC-based software applications for comprehensive performance analysis (SmartWindow<sup>™</sup>, SmartLib<sup>™</sup>, and SmartApplications<sup>™</sup>).
- Supports a 10 Mbps Ethernet connection to a host PC.
- Provides remote control through the Internet. Can also be controlled via an RS-232 port.
- Provides GPS Support. You can remotely synchronize the timing mechanism of multiple chassis by using the external GPS kit. This allows accurate measurement of one-way latency and jitter, 100-ns accuracy time-stamps, and system start/stop.
- Includes RJ-45 expansion-in and expansion-out jacks. Accepts external 10 MHz clock signals.
- Up to 512 chassis can be synchronously connected by using SmartBits multi-chassis extension units.

## Supported Applications

- AST II<sup>™</sup>
- SmartApplications<sup>™</sup>
- SmartCableModem Test<sup>™</sup>
- SmartFlow<sup>™</sup>
- SmartLib<sup>™</sup> Programming Library
- SmartMulticastIP<sup>™</sup>
- SmartSignaling<sup>™</sup>
- SmartTCP<sup>™</sup>
- SmartVoIPQoS<sup>™</sup>
- SmartWindow<sup>™</sup>
- SmartxDSL<sup>™</sup>
- Turn Up Connect<sup>™</sup>
- VAST<sup>™</sup>

### Spirent

#### Communications

27349 Agoura Road  
Calabasas Hills, CA  
91301 USA  
E-mail: productinfo  
@spirentcom.com

#### Sales Contacts:

##### North America

+1 800-927-2660

##### Europe, Middle East,

##### Africa

+33-1-6137-2250


##### Asia Pacific

+852-2166-8382

##### All Other Regions

+1 818-676-2683

www.spirentcom.com

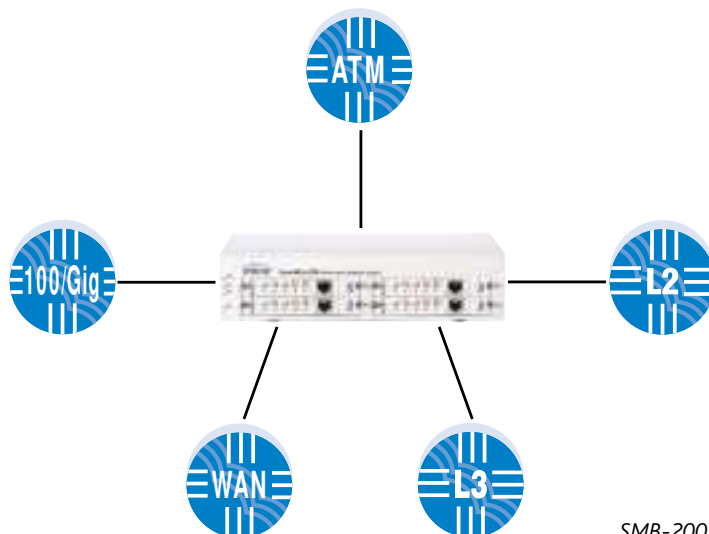

SMB-200 test applications



Analyze | Assure | Accelerate<sup>™</sup>

### Supported SmartCards

SmartCard	Description
AT-9xxx	ATM 1-port SmartCards (OC-3c/STM-1, OC-12c/STM-4, DS3, E1, E3, DS1, 25 Mbps)
GX-1405B	1000Base-SX Ethernet, 1-port, multi-mode, 850nm
GX-1405Bs	1000Base-LX Ethernet, 1-port, single mode, 1310nm
GX-1420B	100/1000Base Ethernet, Copper, 1-port
GX-1421A	100/1000Base-T Ethernet, GMII/MII, 1-port
ML-5710A	10Base-T Ethernet/USB, 2-port, SmartMetrics
ML-7710	10/100Base-TX Ethernet, 1-port, SmartMetrics
ML-7711/7711s	100Base-FX Ethernet, 1-port, multi-mode/single mode, SmartMetrics
SX-7210	10/100Base-TX Ethernet, MII, 1-port
SX-7410B	10/100Base-TX Ethernet, 1-port
SX-7411	100Base-FX Ethernet, 1-port
WN-3405	WAN V.35, 6/8 Mbps, Frame Relay/PPP, 1-port, SmartMetrics
WN-3415	WAN T1/FT1, Frame Relay/PPP, 1-port, SmartMetrics
WN-3420A	WAN E1/FT1, Frame Relay/PPP, 1-port, SmartMetrics
WN-3441A	WAN T1 Frame Relay/PPP, channelized 4-port, SmartMetrics
WN-3442A	WAN E1 Frame Relay/PPP, channelized 4-port, SmartMetrics
WN-3445A	WAN DS3 Frame Relay/PPP, 1-port, SmartMetrics

### Requirements

- One SMB-200 chassis and up to four SmartCards.
- One Ethernet cable and one 10/100 Ethernet card installed in the PC.
- An IBM or compatible Pentium™ PC running Windows 98/2000/NT, with mouse and color monitor.

### Specifications

- SmartBits chassis with four SmartCard slots. Controllable over the Internet or from a PC equipped with SmartWindow.
- Input Power: 90-264 VAC. Nominal 115 or 230 VAC, 47-63 Hz.
- Dimensions: 12.25"W x 3"H x 12"D (31.4W x 7.7H x 30.8D cm).
- Weight: 5 lbs. (2.27 kg) fully loaded. Shipping weight approximately 8 lbs. (3.63 kg).
- Operating environment: 59° to 104° F (15° to 40° C); 20 to 80% relative humidity. Must have space for unimpeded airflow into the fans at the side of the chassis.

### Ordering Information

#### SMB-200

SmartBits 200 (includes SmartWindow, SmartLib, and SmartApplications)

#### SUS-SMB

12-month Software Update Support Service (includes firmware support)



SMB-200

**Spirent Communications**  
 27349 Agoura Road  
 Calabasas Hills, CA  
 91301 USA  
 E-mail: productinfo@spirentcom.com

**Sales Contacts:**  
**North America**  
 +1 800-927-2660  
**Europe, Middle East, Africa**  
 +33-1-6137-2250  
**Asia Pacific**  
 +852-2166-8382  
**All Other Regions**  
 +1 818-676-2683

www.spirentcom.com



©2003 Spirent Communications, Inc. All rights reserved. Specifications subject to change without notice. Spirent Communications and the Spirent logo are trademarks of Spirent plc. All other names are trademarks or registered trademarks of their respective owners and are hereby acknowledged.  
 P/N 360-0027-001 Rev H, 3/03.