



# Highest Port Density Performance Analysis System

# SmartBits® 6000B

## Product Overview

Spirent Communications' SmartBits 6000B (SMB-6000B) chassis is the industry's highest-port-density network performance analysis test system. Each chassis can support up to 96 10/100 Mbps Ethernet ports, 24 Gigabit Ethernet ports, 6 10GbE ports, 24 POS (Packet over SONET) ports, 24 Fibre Channel ports, or a mixture of these port types.

SmartBits 6000B's can be daisy-chained together to achieve ultra high-port density, enabling users to perform automated large scale testing in Quality Control and high-volume production environments. Up to 512 chassis can be synchronously connected by using SmartBits multi-chassis extension units.

The SMB-6000B is easily controlled by a PC through a 10/100 Mbps Ethernet connection and uses a Windows® based interface.

## The SMB-6000B Is Designed for:

- Network Equipment Manufacturers: Perform ultra high-port density for engineering, production, and QA testing.
- Evaluation Labs: Test and certify different devices from various manufacturers to benchmark their performance.
- Telcos/ISPs/Enterprise Users: Perform comparative analysis of network equipment to determine suitability to a specific application prior to deployment.

## SMB-6000B Features

- Holds up to twelve modules.
- Supports up to 96 10/100 Ethernet ports, 24 Gigabit Ethernet ports, 6 10GbE ports, 24 POS ports, 24 Fibre Channel ports, or a combination of these port types.

- Bundled with three PC-based software applications for comprehensive stress testing (SmartWindow™, SmartLib™, and SmartApplications™).
- Supports sophisticated automated industry standard performance tests defined in RFC 1242 and RFC 2544.
- Supports a 10/100 Mbps Ethernet or Telnet connection to the host PC.
- Provides GPS (Global Positioning System) and NTP (Network Timing Protocol) support.
- Supports multi-user operation.
- Provides security through SmartAccess™ software (included with SMB-6000B shipments).
- An optional LockBar™ accessory is available to secure modules within the SMB-6000B chassis.
- Rack-mountable.


## Supported Applications

- AST II™
- FaST Connect™
- SmartApplications™
- SmartCableModem Test™
- SmartFabric™
- SmartFlow™
- SmartLib™ Programming Library
- SmartMulticastIP™
- SmartTCP™
- SmartVoIPQoS™
- SmartWindow™
- SmartxDSL™
- TeraRouting Tester™
- TeraVPN™
- WebSuite™

**Spirent Communications**  
27349 Agoura Road  
Calabasas Hills, CA  
91301 USA  
E-mail: [productinfo@spirentcom.com](mailto:productinfo@spirentcom.com)

**Sales Contacts:**  
**North America**  
+1 800-927-2660  
**Europe, Middle East, Africa**  
+33-1-6137-2250  
**Asia Pacific**  
+852-2166-8382  
**All Other Regions**  
+1 818-676-2683

[www.spirentcom.com](http://www.spirentcom.com)

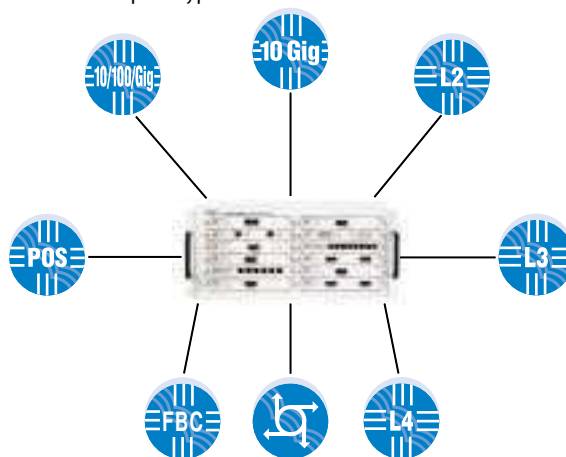

Analyze | Assure | Accelerate™

SMB-6000B test applications

### Supported Modules

Select up to twelve of the following modules, in any combination, to fill the SMB-6000B's twelve chassis slots.

Module	Description
FBC-3601A/3602A	Fibre Channel 1G/1G and 2G, 2-port, SmartMetrics
LAN-3100A	10/100Base-TX Ethernet, 8-port
LAN-3101A	10/100Base-TX Ethernet, 6-port, SmartMetrics
LAN-3102A	10/100Base-TX Ethernet, 2-port, SmartMetrics
LAN-3111A	100Base-FX Ethernet, 6-port, multi-mode, 1300nm, SmartMetrics
LAN-3111As	100Base-FX Ethernet, 6-port, single mode, 1310nm, SmartMetrics
LAN-3150A	10/100Base Ethernet, RMII/SMII, 8-port
LAN-3200A	1000Base-SX Ethernet, 2-port, multi-mode, 850nm
LAN-3200As	1000Base-LX Ethernet, 2-port, single mode, 1310nm
LAN-3201B	1000Base Ethernet, GBIC, 1-port, SmartMetrics
LAN-3300A	10/100/1000Base-T Ethernet, Copper, 2-port, multi-mode, SmartMetrics
LAN-3301A	10/100/1000Base-T Ethernet, Copper, 2-port, TeraMetrics
LAN-3302A	10/100Base-T Ethernet, Copper, 2-port, TeraMetrics
LAN-3310A	1000Base Ethernet, GBIC, 2-port, multi-mode, SmartMetrics
LAN-3311A	1000Base Ethernet, GBIC, 2-port, TeraMetrics
LAN-3710AL/3710AE	10GBase-LR/ER Ethernet, 1-port, 2-slot, single mode, 1310nm/1550nm
POS-3500B/3500Bs	POS OC-3c/OC-12c, 1-port, multi-mode/single mode, SmartMetrics
POS-3502A/3502As	POS OC-3c, 1-port, multi-mode/single mode, SmartMetrics
POS-3504As/3504AR	POS OC-48c, 1-port, single mode, 1310nm/1550nm, SmartMetrics
POS-3505As/3505AR	POS OC-48c, 1-port, single mode, 1310nm/1550nm, TeraMetrics
POS-3510A/3510As	POS OC-3c/OC-12c, 2-port, multi-mode/single mode, SmartMetrics
POS-3511A/3511As	POS OC-3c/OC-12c, 2-port, multi-mode/single mode, 1300nm/1310nm, TeraMetrics
POS-3518As/3518AR	POS OC-192c, 1-port, 2-slot, single mode, 1310nm/1550nm, SmartMetrics
POS-3519As/3519AR	POS OC-192c, 1-port, 2-slot, single mode, 1310nm/1550nm, TeraMetrics
XLW-3720A	10GBase Ethernet Optical, XENPAK, 1-port, 2-slot, SmartMetrics
XLW-3721A	10GBase Ethernet Optical, XENPAK, 1-port, 2-slot, TeraMetrics

### Requirements

- One SMB-6000B chassis and one or more modules.
- One Ethernet cable and one 10/100 Ethernet card installed in the PC.
- An IBM or compatible Pentium™ PC running Windows® 98/2000/NT, with mouse and color monitor.

### Specifications

- SmartBits chassis with 12-module capacity. Controllable over the Internet or from a PC equipped with SmartWindow.
- Input Power: 100-240 VAC. Nominal 115 or 230 VAC, 50-60 Hz.
- Controllable over the Internet or from a PC with SmartWindow.
- Dimensions: 19"W x 8.5"H x 16.5"D (48.3W x 21.6H x 41.9D cm).
- Weight: 45 lbs. (20.4 kg) fully loaded. Shipping Weight approx. 48 lbs. (21.8 kg).
- Operating environment: 59° to 104° F (15° to 40° C); 20 to 80% relative humidity. Must have space for unimpeded airflow into the chassis fans.
- Front panel LEDs: Power, Fan, Link, Status.
- Back panel LEDs: Activity/Collision, Link/Error, Full/Half Duplex, and 10/100 Ethernet.
- Connectors: RS-232 for workstation connection; RJ-45 10 Base-T connector for Ethernet connection; RJ-45 Expansion In/Out connectors for multiple chassis connection; connectors to attach to an optional GPS receiver.


### Ordering Information

#### SMB-6000B

SmartBits 6000B (includes SmartWindow, SmartLib, and SmartApplications)

#### SUS-SMB

12-month Software Update Support Service (includes firmware support)

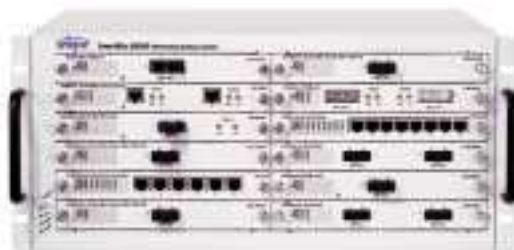

SMB-6000B

**Spirent Communications**  
 27349 Agoura Road  
 Calabasas Hills, CA  
 91301 USA  
 E-mail: productinfo@spirentcom.com

**Sales Contacts:**  
**North America**  
 +1 800-927-2660  
**Europe, Middle East, Africa**  
 +33-1-6137-2250  
**Asia Pacific**  
 +852-2166-8382  
**All Other Regions**  
 +1 818-676-2683

www.spirentcom.com



©2003 Spirent Communications, Inc. All rights reserved. Specifications subject to change without notice. Spirent Communications and the Spirent logo are trademarks of Spirent plc. All other names are trademarks or registered trademarks of their respective owners and are hereby acknowledged.  
 P/N 360-1034-001 Rev C, 3/03.