


Optional Tips for FX-8801



Packing List

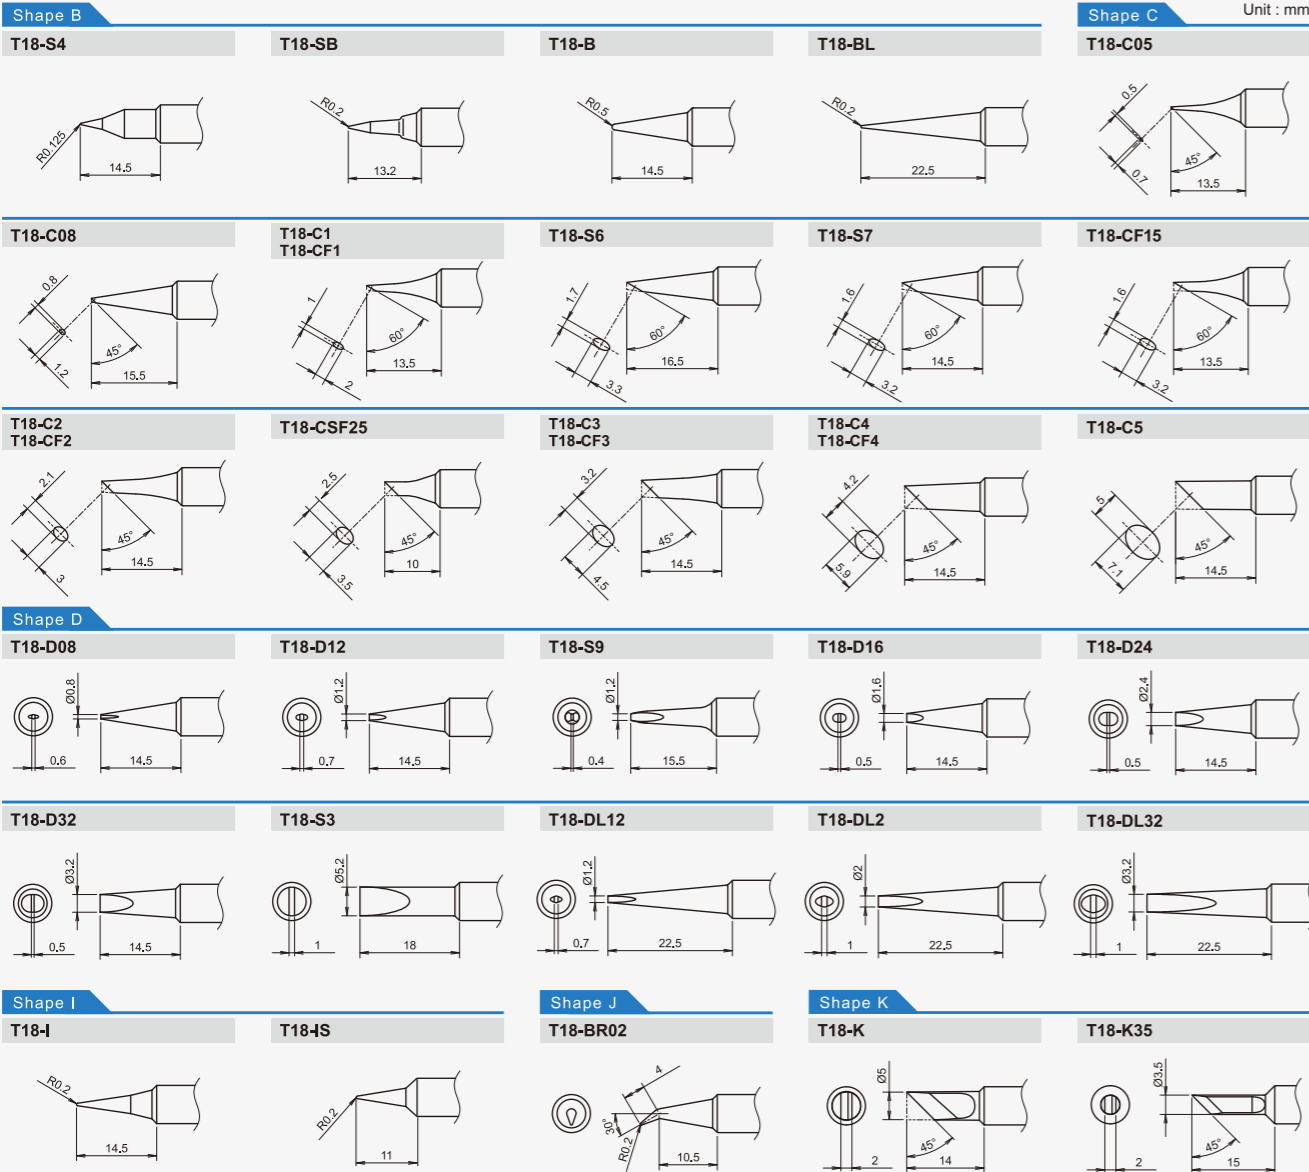

FX-888DX

Station, Handpiece FX-8801, Iron holder (with cleaning sponge and wire), Instruction manual

Standard tip T18-B  
Optional tips T18 series

Specifications

Model No.	FX-888DX
Body color	Titanium Sliver <b>Blue&amp;Yellow</b> <b>Sunflower Yellow</b>
Power consumption	100 W
Temperature range	50 to 480°C
Temperature stability	±1°C (At idle temperature) (When set to 200 to 480°C)
<b>Station</b>	
Output	AC 26 V
Dimensions	100 (W) × 120 (H) × 125 (D) mm
Weight	1.2 kg
<b>Handpiece</b>	
Power consumption	65 W (26 V)
Tip to ground resistance	<2 Ω
Tip to ground potential	<2 mV
Heating element	Ceramic heater
Standard tip	Shape B (T18-B)
Cord length	1.2 m
Total length	217 mm (with T18-B tip)
Weight	46 g (with T18-B tip)
Iron holder	Titanium Sliver

\*Total length and weight are measured without cord.

Option



FX-8806

Handpiece FX-8806, Iron holder (with cleaning sponge and wire), Instruction manual

Standard tip T32-D24  
Optional tips T32 series

FX8806-811 / Conversion kit

FX8806-81 / Handpiece only

Web page for FX-8806



OVERSEAS AFFILIATES  
U.S.A.  
AMERICAN HAKKO PRODUCTS, INC.  
28920 AVENUE WILLIAMS VALENCIA, CA 91355, U.S.A.  
TEL: (661) 294-0090 FAX: (661) 294-0096  
Toll Free (800)88-HAKKO  
4 2 3 3 6  
https://www.HakkoUSA.com  
E-mail:Support@HakkoUSA.com

HEAD OFFICE  
4-5, SHIOKUSA 2-CHOME, NANIWA-KU, OSAKA, 556-0024 JAPAN  
TEL:+81-6-6561-3225 FAX:+81-6-6561-8466  
https://www.hakko.com E-mail:sales@hakko.com

HONG KONG  
HAKKO DEVELOPMENT CO., LTD.  
ROOM 1504, EASTERN HARBOUR CENTRE,  
28 HOI CHAK STREET, QUARRY BAY, HONG KONG.  
TEL: 2811-5588 FAX: 2590-0217  
https://www.hakko.com.cn  
E-mail:info@hakko.com.hk

SINGAPORE  
HAKKO PRODUCTS PTE LTD  
1, GENTING LINK #02-04  
PERFECT ONE, SINGAPORE 349518  
TEL: 6748-2277 FAX: 6744-0033  
https://www.hakko.com.sg  
E-mail:sales@hakko.com.sg

Please access the web address below for other distributors.  
<https://www.hakko.com>

Specifications and design are subject to change without notice. Copyright HAKKO Corporation. All right reserved.



# FX-888DX





PRODUCTION LINE



# FX-8806

95 W Soldering iron  
(optional accessory)

A new accessory for increase of work efficiency.  
95 W superb performance heater and new designed tip adopted soldering iron.



# How do you solder? FX-888DX



HOBBY



EDUCATION



# Adopting rotary encoder

Ideal operability for simple temperature setting by "Turn" and "Push".

